

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930518

Luminaire Tested: DFN2DS-PN3F0-030DS930-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930518
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-PN3F0-030DS930-RLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2078.2 lumens
Efficiency: N/A
Efficacy: 74.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.11' x L: 2.96' x H: 0')
CIE Type: Direct

Input Watts (W): 28.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930518

CATALOG NUMBER: DFN2DS-PN3F0-030DS930-RLL

Luminous Intensity Polar Plot

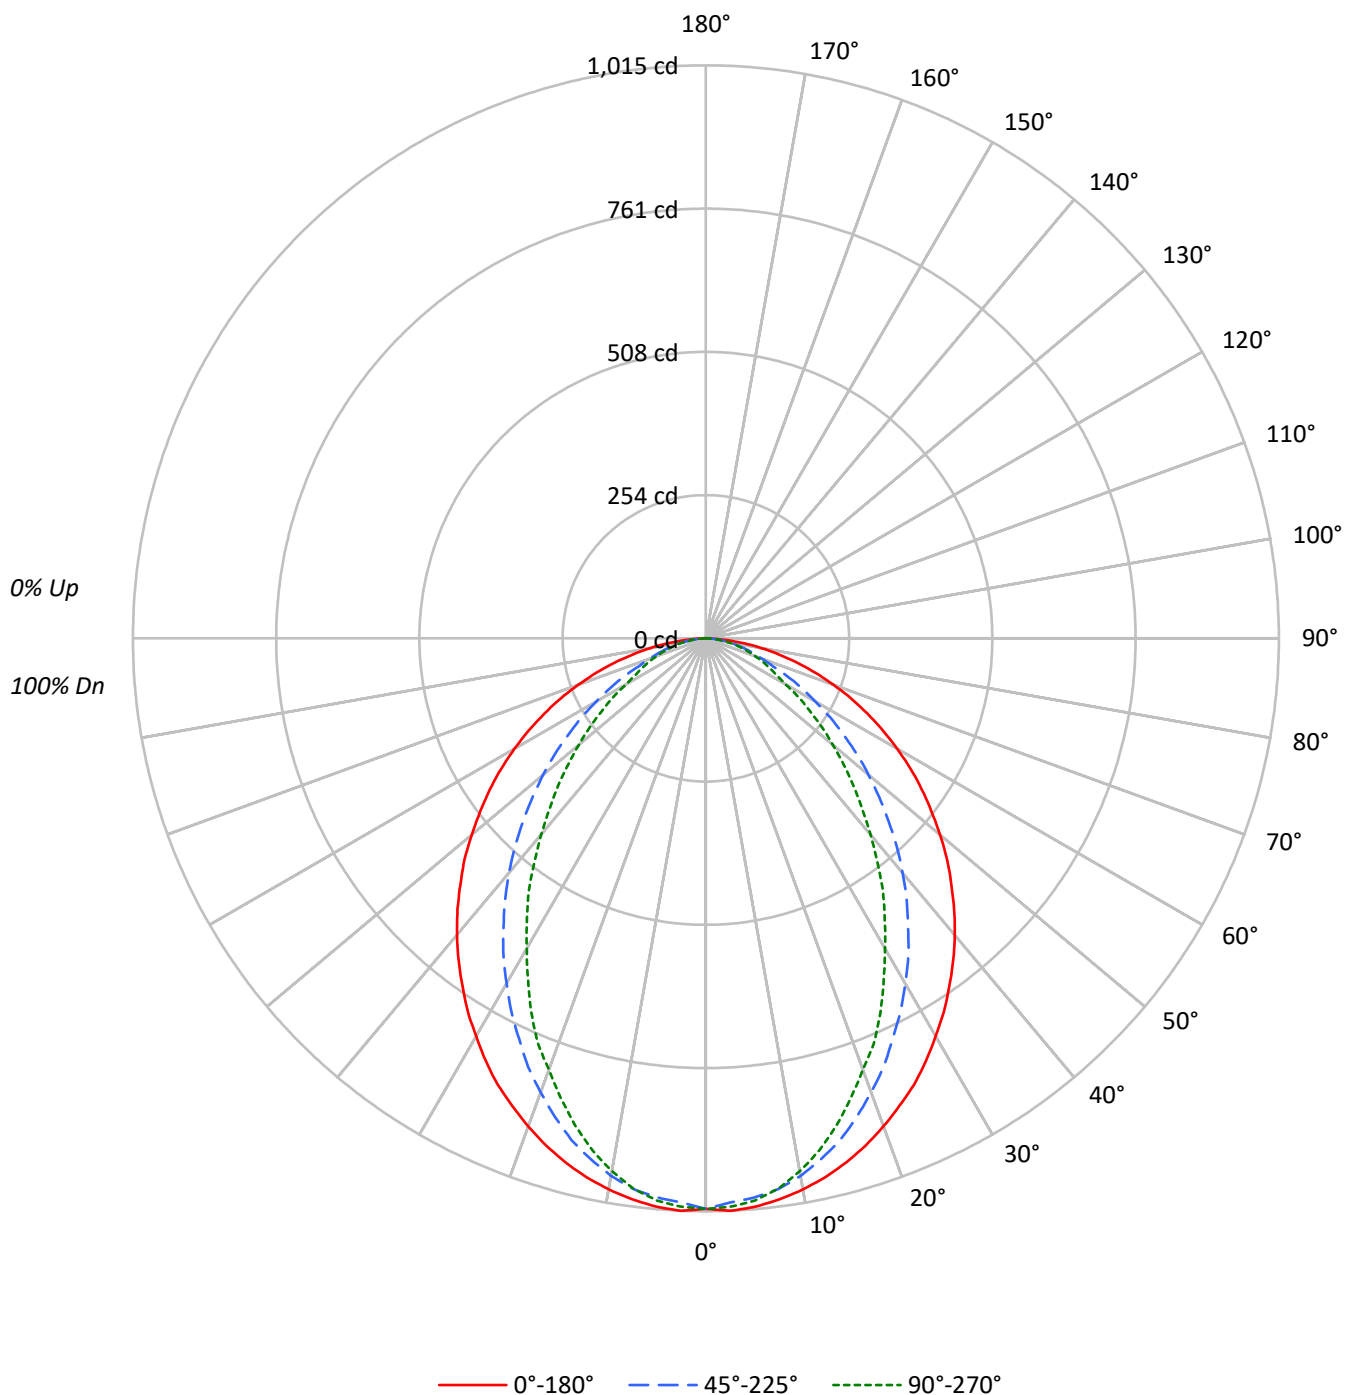

TEST NUMBER: P930518

CATALOG NUMBER: DFN2DS-PN3F0-030DS930-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1181	1181	1181
5°	1186	1167	1173
10°	1177	1147	1138
15°	1163	1113	1081
20°	1144	1065	1011
25°	1125	1010	944
30°	1099	953	857
35°	1073	891	780
40°	1047	828	692
45°	1016	756	612
50°	985	684	534
55°	952	606	459
60°	915	524	381
65°	873	440	347
70°	822	362	319
75°	760	331	298
80°	671	295	271
85°	527	233	233

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1016 cd/sqm

TEST NUMBER: P930518

CATALOG NUMBER: DFN2DS-PN3F0-030DS930-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.7	4.6
10°-20°	260.0	12.5
20°-30°	365.0	17.6
30°-40°	397.9	19.1
40°-50°	365.7	17.6
50°-60°	287.2	13.8
60°-70°	186.9	9.0
70°-80°	96.2	4.6
80°-90°	24.6	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	719.7	34.6
0°-40°	1117.6	53.8
0°-60°	1770.5	85.2
0°-90°	2078.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2078.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1010	1010	1010	1010	1010	
5°	1010	1006	994	1002	1000	96
15°	961	951	920	903	894	271
25°	872	843	783	745	732	401
35°	752	705	625	567	547	471
45°	615	553	457	392	370	475
55°	467	396	297	242	225	418
65°	316	241	159	128	125	313
75°	168	104	73	67	66	178
85°	39	20	17	17	17	47
90°	0	0	0	0	0	

TEST NUMBER: P930518

CATALOG NUMBER: DFN2DS-PN3F0-030DS930-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1010.5	1010.5	1010.5	1010.5	1010.5
2.5°	1015.1	1010.5	1000.4	1009.6	1007.8
5°	1010.5	1006.0	994.1	1002.3	999.5
7.5°	1002.3	996.8	984.0	987.6	983.1
10°	991.3	984.9	966.7	963.8	958.4
12.5°	977.6	969.4	944.7	939.2	929.1
15°	961.1	951.0	920.0	902.6	893.5
17.5°	941.9	927.3	888.8	868.8	854.1
20°	920.0	901.6	855.9	833.2	813.0
22.5°	896.3	875.1	822.1	791.0	777.3
25°	872.5	843.1	782.8	745.3	731.5
27.5°	844.1	813.0	746.2	703.3	682.2
30°	813.9	779.1	706.0	659.4	634.6
32.5°	784.6	742.5	667.6	612.7	589.8
35°	751.8	705.1	624.6	567.0	546.9
37.5°	719.7	669.4	584.4	521.2	498.5
40°	685.9	631.1	542.3	477.3	453.6
42.5°	651.1	592.7	500.2	432.5	409.7
45°	614.6	553.2	457.3	392.3	370.3
47.5°	579.8	514.9	416.1	351.1	331.1
50°	541.4	476.4	375.9	312.7	293.6
52.5°	503.8	435.3	337.5	277.1	259.7
55°	467.2	395.9	297.1	242.4	225.0
57.5°	429.8	356.6	261.6	210.4	195.7
60°	391.4	318.3	224.0	177.4	162.8
62.5°	354.0	280.8	192.0	148.2	140.9
65°	315.5	241.4	159.1	128.0	125.3
67.5°	279.0	204.8	128.0	112.5	109.7
70°	240.5	169.2	106.0	96.9	93.2
72.5°	203.9	136.2	88.7	81.4	79.5
75°	168.2	104.2	73.2	66.7	65.9
77.5°	132.6	74.0	57.6	54.0	52.1
80°	99.7	53.1	43.8	40.3	40.3
82.5°	69.4	35.7	30.2	28.4	28.4
85°	39.3	20.0	17.4	17.4	17.4
87.5°	14.7	7.3	7.3	6.4	6.4
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930518

CATALOG NUMBER: DFN2DS-PN3F0-030DS930-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.81	13.33	12.18	13.65	13.96	7.78	9.30	8.14	9.61	9.93
	3H	13.58	14.94	13.96	15.27	15.63	9.04	10.41	9.42	10.73	11.09
	4H	14.24	15.53	14.64	15.87	16.25	9.54	10.82	9.94	11.17	11.55
	6H	14.73	15.92	15.15	16.28	16.67	9.92	11.11	10.33	11.47	11.86
	8H	14.90	16.03	15.33	16.41	16.82	10.05	11.17	10.47	11.56	11.96
	12H	15.00	16.08	15.43	16.46	16.89	10.13	11.21	10.56	11.59	12.02
4H	2H	11.92	13.20	12.32	13.55	13.92	8.47	9.75	8.87	10.10	10.48
	3H	13.85	14.91	14.26	15.31	15.71	9.91	10.98	10.32	11.38	11.78
	4H	14.60	15.56	15.03	15.97	16.41	10.51	11.47	10.94	11.88	12.32
	6H	15.19	16.02	15.65	16.47	16.93	11.00	11.83	11.46	12.28	12.73
	8H	15.41	16.18	15.87	16.63	17.09	11.16	11.94	11.63	12.38	12.85
	12H	15.56	16.25	16.04	16.73	17.20	11.28	11.98	11.76	12.45	12.93
8H	4H	14.62	15.40	15.09	15.85	16.31	10.87	11.64	11.33	12.09	12.55
	6H	15.26	15.90	15.76	16.40	16.87	11.45	12.10	11.95	12.59	13.06
	8H	15.51	16.09	16.03	16.60	17.09	11.67	12.25	12.19	12.76	13.25
	12H	15.72	16.23	16.22	16.72	17.28	11.85	12.36	12.36	12.86	13.42
12H	4H	14.61	15.30	15.09	15.78	16.25	10.91	11.60	11.39	12.08	12.55
	6H	15.24	15.82	15.76	16.33	16.82	11.52	12.09	12.03	12.60	13.09
	8H	15.53	16.04	16.04	16.53	17.09	11.79	12.30	12.30	12.79	13.36