

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930635

Luminaire Tested: DFN2DS-PN4F0-040DS835-FLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930635
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333812)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-PN4F0-040DS835-FLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3960.0 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular (W 3.94' x L: 3.74' x H: 0')
CIE Type: Direct

Input Watts (W): 38.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930635

CATALOG NUMBER: DFN2DS-PN4F0-040DS835-FLL

Luminous Intensity Polar Plot

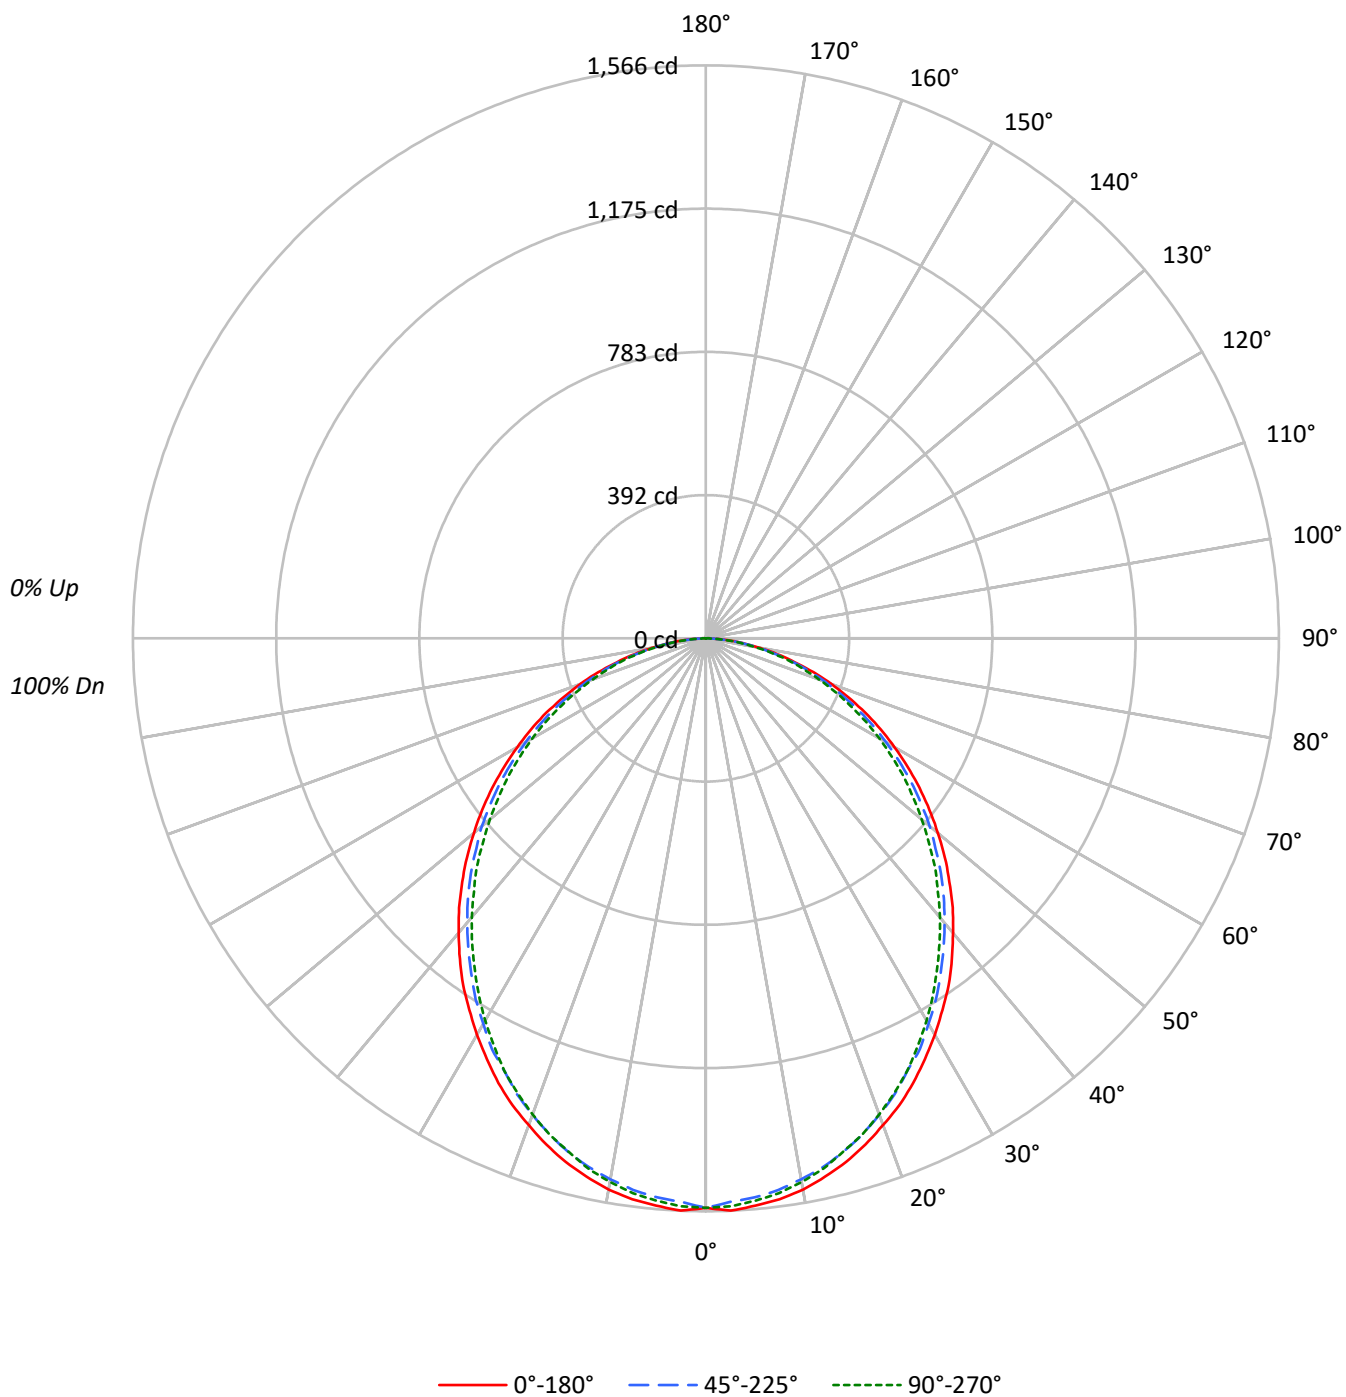

TEST NUMBER: P930635

CATALOG NUMBER: DFN2DS-PN4F0-040DS835-FLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	109	104	100	96	106	102	98	95	98	95	92		94	91	89		90
2	99	91	85	79	97	89	83	78	86	81	76		83	78	74		80
3	91	80	72	66	88	79	71	65	76	69	64		73	68	63		71
4	83	71	63	56	81	70	62	56	68	61	55		65	59	54		63
5	77	64	55	49	75	63	55	48	61	53	48		59	52	47		57
6	71	58	49	43	69	57	48	42	55	48	42		53	47	42		52
7	66	52	44	38	64	52	43	38	50	43	37		49	42	37		47
8	61	48	40	34	60	47	39	34	46	39	33		45	38	33		44
9	57	44	36	30	56	43	36	30	42	35	30		41	35	30		40
10	54	41	33	28	53	40	33	28	39	32	27		38	32	27		37

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1136	1136	1136
5°	1140	1124	1131
10°	1134	1113	1118
15°	1120	1098	1097
20°	1100	1077	1075
25°	1080	1050	1050
30°	1055	1026	1017
35°	1031	996	982
40°	1001	967	948
45°	972	938	915
50°	940	908	875
55°	907	872	840
60°	870	830	800
65°	830	788	752
70°	779	738	703
75°	709	679	663
80°	629	610	579
85°	513	489	439

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 972 cd/sqm

TEST NUMBER: P930635

CATALOG NUMBER: DFN2DS-PN4F0-040DS835-FLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.5	3.7
10°-20°	412.2	10.4
20°-30°	605.7	15.3
30°-40°	703.5	17.8
40°-50°	702.6	17.7
50°-60°	612.7	15.5
60°-70°	452.9	11.4
70°-80°	256.2	6.5
80°-90°	67.6	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1164.4	29.4
0°-40°	1867.9	47.2
0°-60°	3183.2	80.4
0°-90°	3960.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3960.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	72
90°	0	0	0	0	0	

TEST NUMBER: P930635

CATALOG NUMBER: DFN2DS-PN4F0-040DS835-FLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930635

CATALOG NUMBER: DFN2DS-PN4F0-040DS835-FLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.73	13.34	12.09	13.65	13.97	11.28	12.89	11.65	13.21	13.52
	3H	13.48	14.93	13.85	15.26	15.62	12.99	14.44	13.36	14.77	15.13
	4H	14.12	15.49	14.52	15.84	16.22	13.63	15.00	14.03	15.34	15.72
	6H	14.59	15.86	15.00	16.22	16.62	14.09	15.36	14.50	15.72	16.11
	8H	14.73	15.95	15.16	16.33	16.73	14.23	15.44	14.66	15.83	16.23
	12H	14.82	15.98	15.25	16.37	16.80	14.31	15.47	14.74	15.85	16.28
4H	2H	12.29	13.66	12.68	14.00	14.38	11.93	13.30	12.33	13.65	14.03
	3H	14.26	15.41	14.67	15.81	16.21	13.85	15.00	14.26	15.40	15.80
	4H	15.04	16.07	15.47	16.49	16.92	14.61	15.65	15.05	16.06	16.50
	6H	15.63	16.54	16.09	16.98	17.44	15.20	16.11	15.66	16.55	17.00
	8H	15.82	16.67	16.28	17.11	17.58	15.39	16.23	15.85	16.67	17.14
	12H	15.96	16.72	16.44	17.19	17.66	15.50	16.26	15.98	16.74	17.21
8H	4H	15.31	16.16	15.77	16.60	17.07	14.94	15.78	15.40	16.23	16.69
	6H	16.03	16.73	16.52	17.22	17.69	15.64	16.35	16.14	16.84	17.31
	8H	16.28	16.92	16.79	17.42	17.91	15.89	16.52	16.40	17.03	17.52
	12H	16.48	17.04	16.99	17.53	18.09	16.07	16.63	16.58	17.12	17.68
12H	4H	15.34	16.10	15.82	16.57	17.04	14.97	15.73	15.45	16.21	16.68
	6H	16.07	16.70	16.58	17.21	17.70	15.70	16.33	16.21	16.84	17.33
	8H	16.38	16.94	16.89	17.43	17.99	16.01	16.56	16.51	17.06	17.62