

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930643

Luminaire Tested: DFN2DS-PN4F0-040DS930-FLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930643
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333812)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-PN4F0-040DS930-FLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3227.4 lumens
Efficiency: N/A
Efficacy: 84.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular (W 3.94' x L: 3.74' x H: 0')
CIE Type: Direct

Input Watts (W): 38.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930643

CATALOG NUMBER: DFN2DS-PN4F0-040DS930-FLL

Luminous Intensity Polar Plot

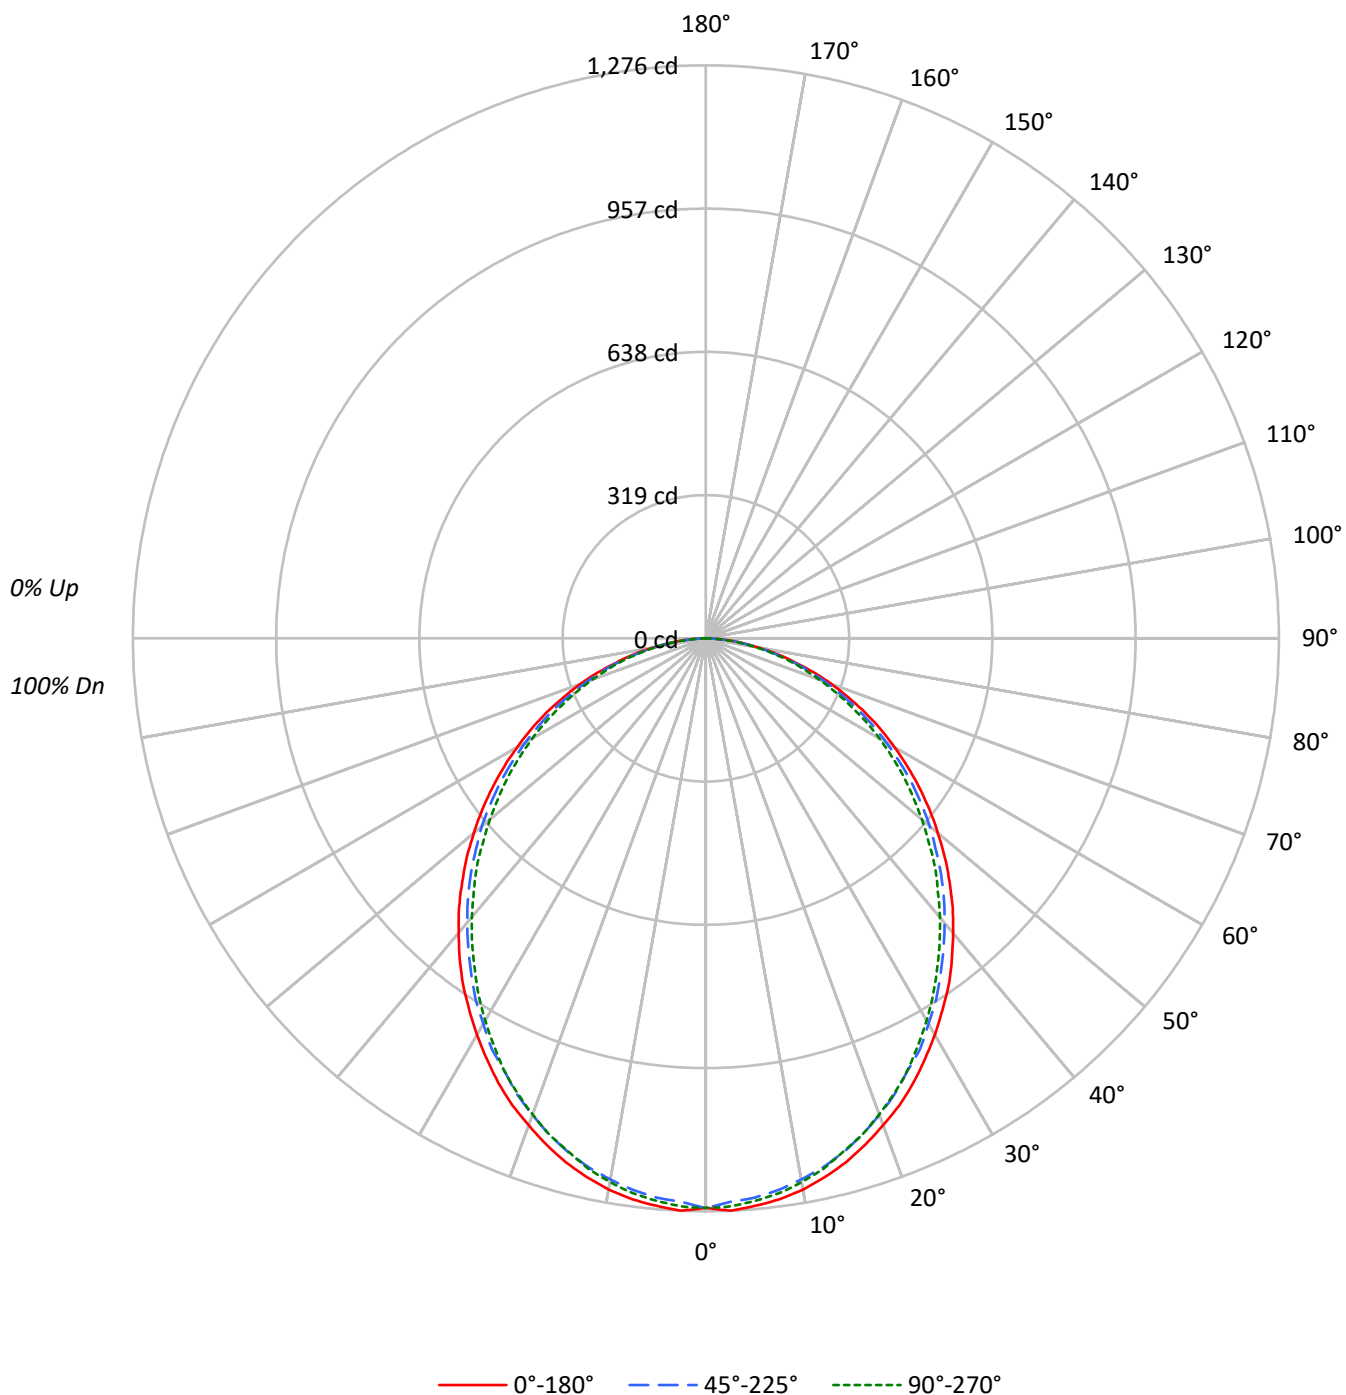

TEST NUMBER: P930643

CATALOG NUMBER: DFN2DS-PN4F0-040DS930-FLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	109	104	100	96	106	102	98	95	98	95	92		94	91	89		90
2	99	91	85	79	97	89	83	78	86	81	76		83	78	74		80
3	91	80	72	66	88	79	71	65	76	69	64		73	68	63		71
4	83	71	63	56	81	70	62	56	68	61	55		65	59	54		63
5	77	64	55	49	75	63	55	48	61	53	48		59	52	47		57
6	71	58	49	43	69	57	48	42	55	48	42		53	47	42		52
7	66	52	44	38	64	52	43	38	50	43	37		49	42	37		47
8	61	48	40	34	60	47	39	34	46	39	33		45	38	33		44
9	57	44	36	30	56	43	36	30	42	35	30		41	35	30		40
10	54	41	33	28	53	40	33	28	39	32	27		38	32	27		37

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	926	926	926
5°	929	916	922
10°	924	907	911
15°	913	895	894
20°	896	877	877
25°	880	856	856
30°	859	836	829
35°	840	812	800
40°	816	788	773
45°	792	764	745
50°	766	740	713
55°	739	711	685
60°	709	677	652
65°	676	643	613
70°	635	601	573
75°	578	554	540
80°	513	497	472
85°	419	399	358

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 792 cd/sqm

TEST NUMBER: P930643

CATALOG NUMBER: DFN2DS-PN4F0-040DS930-FLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.4	3.7
10°-20°	335.9	10.4
20°-30°	493.7	15.3
30°-40°	573.4	17.8
40°-50°	572.7	17.7
50°-60°	499.3	15.5
60°-70°	369.1	11.4
70°-80°	208.8	6.5
80°-90°	55.1	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	949.0	29.4
0°-40°	1522.3	47.2
0°-60°	2594.3	80.4
0°-90°	3227.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3227.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1268	1268	1268	1268	1268	
5°	1268	1264	1250	1260	1258	120
15°	1208	1200	1184	1189	1183	340
25°	1093	1083	1062	1065	1062	503
35°	943	931	911	904	898	589
45°	767	759	740	727	722	592
55°	581	573	559	544	538	519
65°	392	384	372	361	355	387
75°	205	202	196	189	192	219
85°	50	49	48	44	43	59
90°	0	0	0	0	0	

TEST NUMBER: P930643

CATALOG NUMBER: DFN2DS-PN4F0-040DS930-FLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1268.5	1268.5	1268.5	1268.5	1268.5
2.5°	1275.9	1269.8	1256.3	1268.5	1266.2
5°	1268.5	1263.7	1250.2	1259.9	1257.6
7.5°	1259.9	1252.7	1239.2	1249.1	1246.6
10°	1246.6	1238.1	1223.5	1233.2	1229.5
12.5°	1228.2	1221.0	1206.4	1212.5	1209.9
15°	1207.5	1200.3	1184.4	1189.2	1183.2
17.5°	1181.9	1174.7	1158.8	1164.8	1158.8
20°	1153.8	1146.5	1129.5	1133.1	1128.4
22.5°	1125.8	1114.8	1098.9	1098.9	1096.5
25°	1092.8	1083.1	1062.4	1064.8	1062.4
27.5°	1056.2	1047.7	1032.0	1028.3	1022.3
30°	1019.7	1009.9	991.7	988.0	983.1
32.5°	980.7	973.4	953.9	946.5	941.6
35°	942.9	930.7	911.2	903.8	897.7
37.5°	900.2	889.2	869.6	861.1	855.0
40°	856.3	846.5	826.9	816.1	811.2
42.5°	813.6	803.8	784.4	772.0	764.8
45°	767.2	758.8	740.3	727.1	722.1
47.5°	722.1	713.5	694.1	680.6	673.4
50°	674.5	668.4	651.3	634.2	628.1
52.5°	628.1	619.6	603.8	590.4	581.8
55°	580.7	573.3	558.7	544.0	538.0
57.5°	533.0	527.0	511.0	496.4	491.5
60°	485.4	480.6	463.6	450.1	446.5
62.5°	439.1	430.6	418.4	406.2	401.3
65°	391.6	384.2	372.0	361.0	355.0
67.5°	342.8	336.6	325.8	317.2	312.3
70°	297.6	292.7	281.7	273.2	268.4
72.5°	251.3	246.4	240.3	231.8	228.1
75°	204.9	202.5	196.3	189.1	191.5
77.5°	163.4	158.5	156.1	152.4	148.8
80°	122.0	120.7	118.3	114.7	112.2
82.5°	83.0	83.0	81.8	76.9	76.9
85°	50.0	48.8	47.6	43.8	42.7
87.5°	22.0	19.6	17.1	13.4	12.1
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930643

CATALOG NUMBER: DFN2DS-PN4F0-040DS930-FLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.02	12.63	11.38	12.94	13.25	10.57	12.18	10.94	12.50	12.81
	3H	12.77	14.22	13.14	14.55	14.91	12.27	13.73	12.65	14.06	14.42
	4H	13.41	14.78	13.81	15.13	15.50	12.92	14.29	13.32	14.63	15.01
	6H	13.88	15.15	14.29	15.51	15.90	13.38	14.65	13.79	15.01	15.40
	8H	14.02	15.23	14.45	15.62	16.02	13.52	14.73	13.95	15.12	15.52
	12H	14.11	15.27	14.54	15.66	16.08	13.60	14.76	14.03	15.14	15.57
4H	2H	11.58	12.94	11.97	13.29	13.67	11.22	12.59	11.62	12.94	13.32
	3H	13.55	14.70	13.96	15.09	15.49	13.14	14.29	13.55	14.69	15.09
	4H	14.33	15.36	14.76	15.78	16.21	13.90	14.94	14.33	15.35	15.79
	6H	14.92	15.83	15.38	16.27	16.73	14.49	15.40	14.95	15.84	16.29
	8H	15.11	15.96	15.57	16.40	16.87	14.68	15.52	15.14	15.96	16.43
	12H	15.25	16.01	15.73	16.48	16.95	14.79	15.55	15.27	16.03	16.50
8H	4H	14.60	15.45	15.06	15.89	16.35	14.23	15.07	14.69	15.52	15.98
	6H	15.31	16.02	15.81	16.51	16.98	14.93	15.64	15.43	16.12	16.60
	8H	15.57	16.20	16.08	16.71	17.20	15.18	15.81	15.69	16.32	16.81
	12H	15.77	16.33	16.28	16.82	17.38	15.36	15.92	15.87	16.41	16.97
12H	4H	14.63	15.39	15.11	15.86	16.33	14.26	15.02	14.74	15.50	15.97
	6H	15.36	15.99	15.87	16.50	16.98	14.99	15.62	15.50	16.13	16.62
	8H	15.67	16.23	16.18	16.72	17.28	15.30	15.85	15.80	16.34	16.91