

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P931382

Luminaire Tested: DFN2DS-TR3F0-060DS930-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P931382
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-TR3F0-060DS930-RLL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4156.5 lumens
Efficiency: N/A
Efficacy: 67.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.16' x L: 2.74' x H: 0')
CIE Type: Direct

Input Watts (W): 61.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P931382

CATALOG NUMBER: DFN2DS-TR3F0-060DS930-RLL

Luminous Intensity Polar Plot

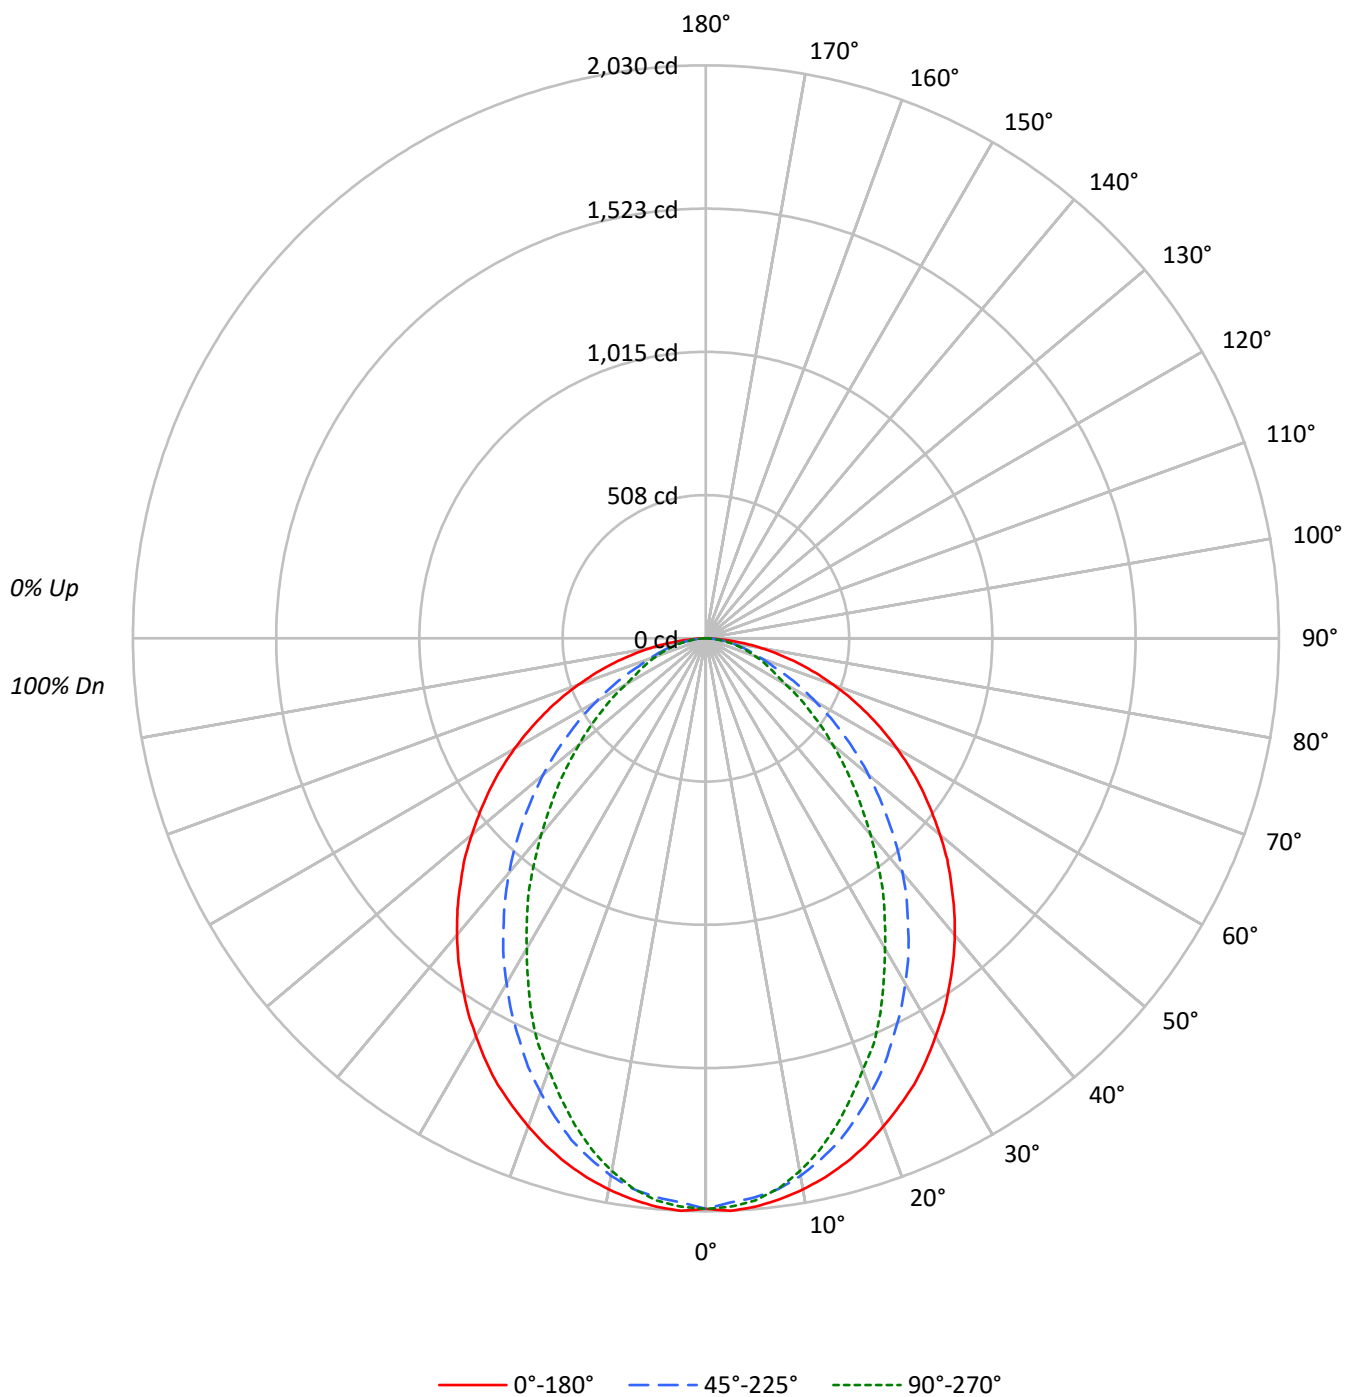

TEST NUMBER: P931382

CATALOG NUMBER: DFN2DS-TR3F0-060DS930-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2518	2518	2518
5°	2528	2487	2501
10°	2509	2446	2425
15°	2480	2374	2305
20°	2440	2270	2156
25°	2399	2153	2012
30°	2342	2032	1826
35°	2287	1900	1664
40°	2231	1764	1476
45°	2166	1612	1305
50°	2099	1457	1138
55°	2030	1291	978
60°	1951	1117	811
65°	1861	939	739
70°	1752	773	679
75°	1620	704	635
80°	1430	629	578
85°	1124	496	496

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2166 cd/sqm

TEST NUMBER: P931382

CATALOG NUMBER: DFN2DS-TR3F0-060DS930-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.4	4.6
10°-20°	520.0	12.5
20°-30°	730.0	17.6
30°-40°	795.8	19.1
40°-50°	731.4	17.6
50°-60°	574.4	13.8
60°-70°	373.9	9.0
70°-80°	192.5	4.6
80°-90°	49.1	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1439.4	34.6
0°-40°	2235.2	53.8
0°-60°	3541.0	85.2
0°-90°	4156.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4156.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2021	2021	2021	2021	2021	
5°	2021	2012	1988	2005	1999	192
15°	1922	1902	1840	1805	1787	542
25°	1745	1686	1566	1491	1463	802
35°	1504	1410	1249	1134	1094	941
45°	1229	1106	915	784	741	949
55°	935	792	594	485	450	835
65°	631	483	318	256	250	626
75°	336	208	146	134	132	356
85°	79	40	35	35	35	94
90°	0	0	0	0	0	

TEST NUMBER: P931382

CATALOG NUMBER: DFN2DS-TR3F0-060DS930-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2021.0	2021.0	2021.0	2021.0	2021.0
2.5°	2030.2	2021.0	2000.8	2019.2	2015.6
5°	2021.0	2011.9	1988.0	2004.6	1999.1
7.5°	2004.6	1993.7	1968.1	1975.2	1966.1
10°	1982.6	1969.8	1933.3	1927.7	1916.8
12.5°	1955.3	1938.7	1889.3	1878.4	1858.2
15°	1922.3	1902.0	1839.9	1805.2	1787.0
17.5°	1883.9	1854.5	1777.7	1737.5	1708.2
20°	1839.9	1803.3	1711.9	1666.3	1625.9
22.5°	1792.4	1750.3	1644.2	1582.1	1554.7
25°	1744.9	1686.3	1565.6	1490.7	1463.2
27.5°	1688.3	1625.9	1492.4	1406.4	1364.4
30°	1627.9	1558.2	1411.9	1318.8	1269.3
32.5°	1569.3	1485.1	1335.3	1225.4	1179.6
35°	1503.5	1410.2	1249.3	1134.0	1093.6
37.5°	1439.5	1338.7	1168.8	1042.5	996.8
40°	1371.7	1262.1	1084.5	954.7	907.2
42.5°	1302.3	1185.3	1000.5	865.0	819.5
45°	1229.1	1106.4	914.6	784.5	740.7
47.5°	1159.7	1029.8	832.3	702.3	662.1
50°	1082.8	953.0	751.8	625.4	587.2
52.5°	1007.7	870.5	674.9	554.2	519.5
55°	934.6	791.9	594.4	484.8	450.0
57.5°	859.7	713.3	523.1	420.7	391.4
60°	782.8	636.5	448.1	354.9	325.6
62.5°	707.9	561.6	384.0	296.3	281.7
65°	631.1	482.8	318.3	256.2	250.5
67.5°	557.9	409.6	256.2	224.9	219.5
70°	481.0	338.4	212.1	193.9	186.5
72.5°	407.9	272.5	177.3	162.8	159.1
75°	336.5	208.4	146.3	133.5	131.8
77.5°	265.3	148.1	115.2	107.9	104.2
80°	199.3	106.1	87.7	80.5	80.5
82.5°	139.0	71.4	60.3	56.6	56.6
85°	78.6	40.2	34.7	34.7	34.7
87.5°	29.3	14.6	14.6	12.8	12.8
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P931382

CATALOG NUMBER: DFN2DS-TR3F0-060DS930-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.44	15.97	14.81	16.28	16.59	10.40	11.93	10.77	12.24	12.55
	3H	16.21	17.57	16.59	17.90	18.26	11.67	13.03	12.05	13.36	13.72
	4H	16.88	18.16	17.27	18.50	18.88	12.17	13.45	12.57	13.80	14.18
	6H	17.36	18.55	17.78	18.91	19.31	12.55	13.74	12.96	14.10	14.49
	8H	17.53	18.66	17.96	19.05	19.45	12.68	13.80	13.10	14.19	14.59
	12H	17.63	18.71	18.06	19.09	19.52	12.76	13.84	13.19	14.22	14.65
4H	2H	14.55	15.83	14.95	16.18	16.56	11.10	12.38	11.50	12.73	13.11
	3H	16.48	17.54	16.89	17.94	18.34	12.54	13.61	12.95	14.01	14.41
	4H	17.23	18.19	17.66	18.60	19.04	13.14	14.10	13.58	14.51	14.95
	6H	17.82	18.65	18.28	19.10	19.56	13.63	14.46	14.09	14.91	15.36
	8H	18.04	18.81	18.50	19.26	19.73	13.79	14.57	14.26	15.01	15.48
	12H	18.19	18.88	18.67	19.36	19.83	13.91	14.60	14.39	15.08	15.55
8H	4H	17.25	18.03	17.72	18.48	18.94	13.50	14.27	13.96	14.72	15.19
	6H	17.89	18.53	18.39	19.03	19.50	14.08	14.73	14.58	15.22	15.69
	8H	18.14	18.72	18.66	19.23	19.72	14.30	14.88	14.82	15.39	15.88
	12H	18.35	18.86	18.86	19.35	19.91	14.48	14.99	14.99	15.48	16.05
12H	4H	17.24	17.93	17.72	18.41	18.88	13.54	14.23	14.02	14.71	15.18
	6H	17.87	18.45	18.39	18.96	19.45	14.15	14.72	14.66	15.23	15.72
	8H	18.16	18.67	18.67	19.16	19.72	14.42	14.93	14.93	15.42	15.99