

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P931486

Luminaire Tested: DFN2DS-TR4F0-060DS850-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P931486
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-TR4F0-060DS850-RLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5655.9 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.96' x L: 3.43' x H: 0')
CIE Type: Direct

Input Watts (W): 59.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P931486

CATALOG NUMBER: DFN2DS-TR4F0-060DS850-RLL

Luminous Intensity Polar Plot

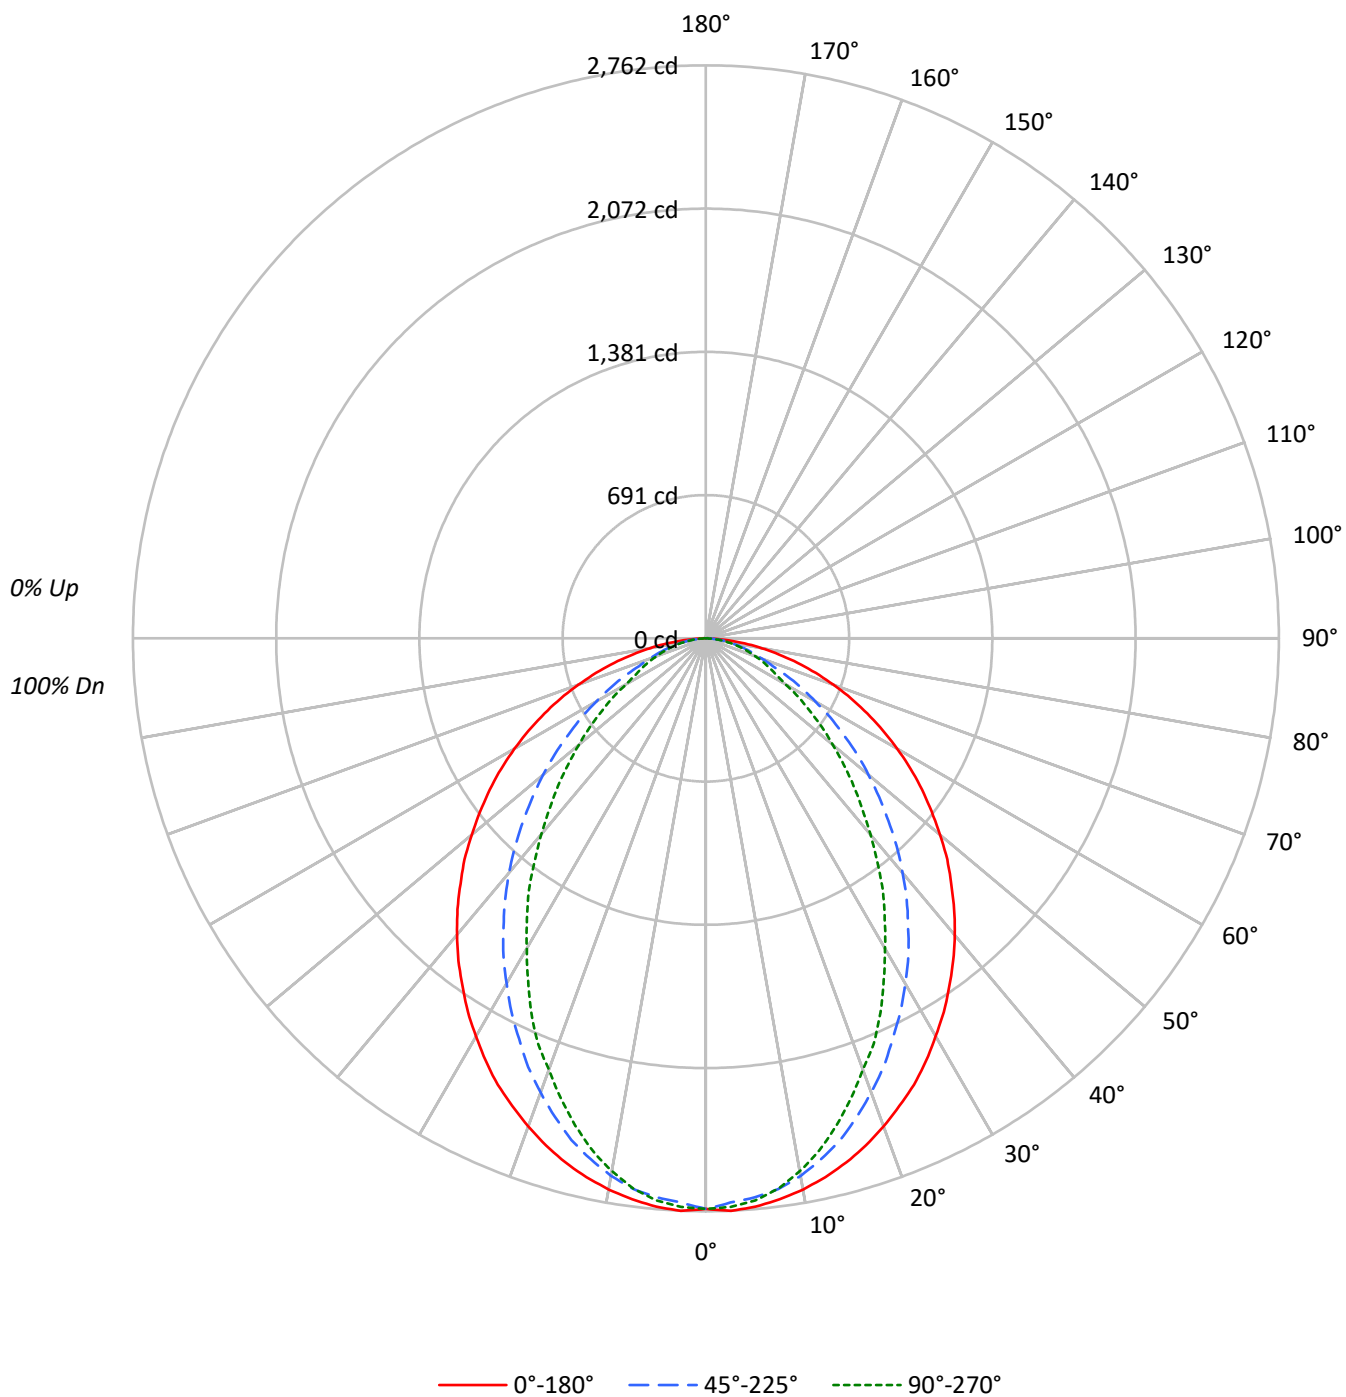

TEST NUMBER: P931486

CATALOG NUMBER: DFN2DS-TR4F0-060DS850-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2185	2185	2185
5°	2193	2157	2169
10°	2176	2122	2104
15°	2151	2059	2000
20°	2117	1969	1870
25°	2081	1867	1745
30°	2032	1762	1584
35°	1984	1649	1443
40°	1936	1530	1280
45°	1879	1398	1132
50°	1821	1264	987
55°	1761	1120	848
60°	1692	969	704
65°	1614	814	641
70°	1520	670	589
75°	1406	611	550
80°	1241	546	501
85°	974	430	430

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1879 cd/sqm

TEST NUMBER: P931486

CATALOG NUMBER: DFN2DS-TR4F0-060DS850-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.7	4.6
10°-20°	707.6	12.5
20°-30°	993.4	17.6
30°-40°	1082.8	19.1
40°-50°	995.2	17.6
50°-60°	781.6	13.8
60°-70°	508.8	9.0
70°-80°	261.9	4.6
80°-90°	66.9	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1958.7	34.6
0°-40°	3041.5	53.8
0°-60°	4818.4	85.2
0°-90°	5655.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5655.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2750	2750	2750	2750	2750	
5°	2750	2738	2705	2728	2720	261
15°	2616	2588	2504	2456	2432	737
25°	2374	2295	2130	2028	1991	1092
35°	2046	1919	1700	1543	1488	1281
45°	1672	1506	1244	1068	1008	1292
55°	1272	1078	809	660	612	1136
65°	859	657	433	349	341	851
75°	458	284	199	182	179	484
85°	107	55	47	47	47	128
90°	0	0	0	0	0	

TEST NUMBER: P931486

CATALOG NUMBER: DFN2DS-TR4F0-060DS850-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2750.1	2750.1	2750.1	2750.1	2750.1
2.5°	2762.5	2750.1	2722.6	2747.7	2742.7
5°	2750.1	2737.7	2705.2	2727.7	2720.3
7.5°	2727.7	2712.8	2678.0	2687.8	2675.4
10°	2697.8	2680.3	2630.8	2623.1	2608.3
12.5°	2660.6	2638.1	2570.8	2556.0	2528.5
15°	2615.7	2588.2	2503.7	2456.4	2431.6
17.5°	2563.5	2523.5	2419.0	2364.3	2324.5
20°	2503.7	2453.8	2329.5	2267.4	2212.5
22.5°	2439.0	2381.7	2237.3	2152.8	2115.5
25°	2374.4	2294.6	2130.4	2028.5	1991.0
27.5°	2297.3	2212.5	2030.8	1913.8	1856.6
30°	2215.1	2120.3	1921.2	1794.5	1727.2
32.5°	2135.4	2020.8	1817.0	1667.5	1605.2
35°	2045.9	1918.9	1700.0	1543.1	1488.2
37.5°	1958.7	1821.6	1590.4	1418.5	1356.4
40°	1866.6	1717.4	1475.7	1299.1	1234.4
42.5°	1772.1	1612.8	1361.4	1177.1	1115.1
45°	1672.5	1505.6	1244.5	1067.5	1007.9
47.5°	1578.0	1401.3	1132.5	955.6	901.0
50°	1473.4	1296.8	1022.9	851.0	799.0
52.5°	1371.2	1184.5	918.4	754.1	706.9
55°	1271.7	1077.6	808.8	659.6	612.3
57.5°	1169.8	970.6	711.9	572.5	532.5
60°	1065.2	866.1	609.7	483.0	443.0
62.5°	963.3	764.2	522.6	403.2	383.4
65°	858.7	657.0	433.1	348.6	340.9
67.5°	759.1	557.4	348.6	306.1	298.7
70°	654.5	460.5	288.6	263.8	253.7
72.5°	555.1	370.7	241.3	221.6	216.5
75°	457.9	283.6	199.1	181.7	179.3
77.5°	361.0	201.5	156.8	146.8	141.8
80°	271.2	144.4	119.3	109.6	109.6
82.5°	189.1	97.1	82.1	77.1	77.1
85°	106.9	54.7	47.2	47.2	47.2
87.5°	39.9	19.9	19.9	17.4	17.4
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P931486

CATALOG NUMBER: DFN2DS-TR4F0-060DS850-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.95	15.47	14.31	15.78	16.10	9.91	11.43	10.28	11.75	12.06
	3H	15.71	17.08	16.09	17.41	17.77	11.18	12.54	11.55	12.87	13.23
	4H	16.38	17.66	16.78	18.01	18.39	11.68	12.96	12.08	13.31	13.69
	6H	16.87	18.05	17.28	18.42	18.81	12.06	13.24	12.47	13.61	14.00
	8H	17.04	18.16	17.46	18.55	18.95	12.18	13.31	12.61	13.70	14.10
	12H	17.14	18.22	17.57	18.60	19.03	12.26	13.34	12.69	13.72	14.15
4H	2H	14.05	15.33	14.45	15.68	16.06	10.61	11.89	11.01	12.24	12.61
	3H	15.99	17.05	16.40	17.45	17.85	12.05	13.11	12.46	13.51	13.91
	4H	16.74	17.69	17.17	18.11	18.55	12.65	13.61	13.08	14.02	14.46
	6H	17.33	18.16	17.79	18.60	19.06	13.14	13.97	13.59	14.41	14.87
	8H	17.54	18.32	18.01	18.76	19.23	13.30	14.08	13.76	14.52	14.99
	12H	17.70	18.39	18.18	18.87	19.34	13.42	14.11	13.90	14.59	15.06
8H	4H	16.76	17.54	17.22	17.98	18.45	13.00	13.78	13.47	14.22	14.69
	6H	17.40	18.04	17.90	18.53	19.01	13.59	14.23	14.09	14.72	15.20
	8H	17.65	18.23	18.16	18.73	19.22	13.81	14.39	14.32	14.90	15.38
	12H	17.85	18.36	18.36	18.85	19.42	13.99	14.50	14.50	14.99	15.56
12H	4H	16.75	17.44	17.23	17.92	18.39	13.05	13.74	13.53	14.22	14.69
	6H	17.38	17.96	17.89	18.47	18.95	13.65	14.23	14.17	14.74	15.23
	8H	17.66	18.17	18.17	18.67	19.23	13.93	14.44	14.44	14.93	15.49