

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P998330

Luminaire Tested: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P998330
REPORT IS A COMBINATION OF REPORTS P984070 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K
Description: Define 2 Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865} {m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4907.0 lumens
Efficiency: N/A
Efficacy: 118.2 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.09 / 1.23
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 41.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

Luminous Intensity Polar Plot

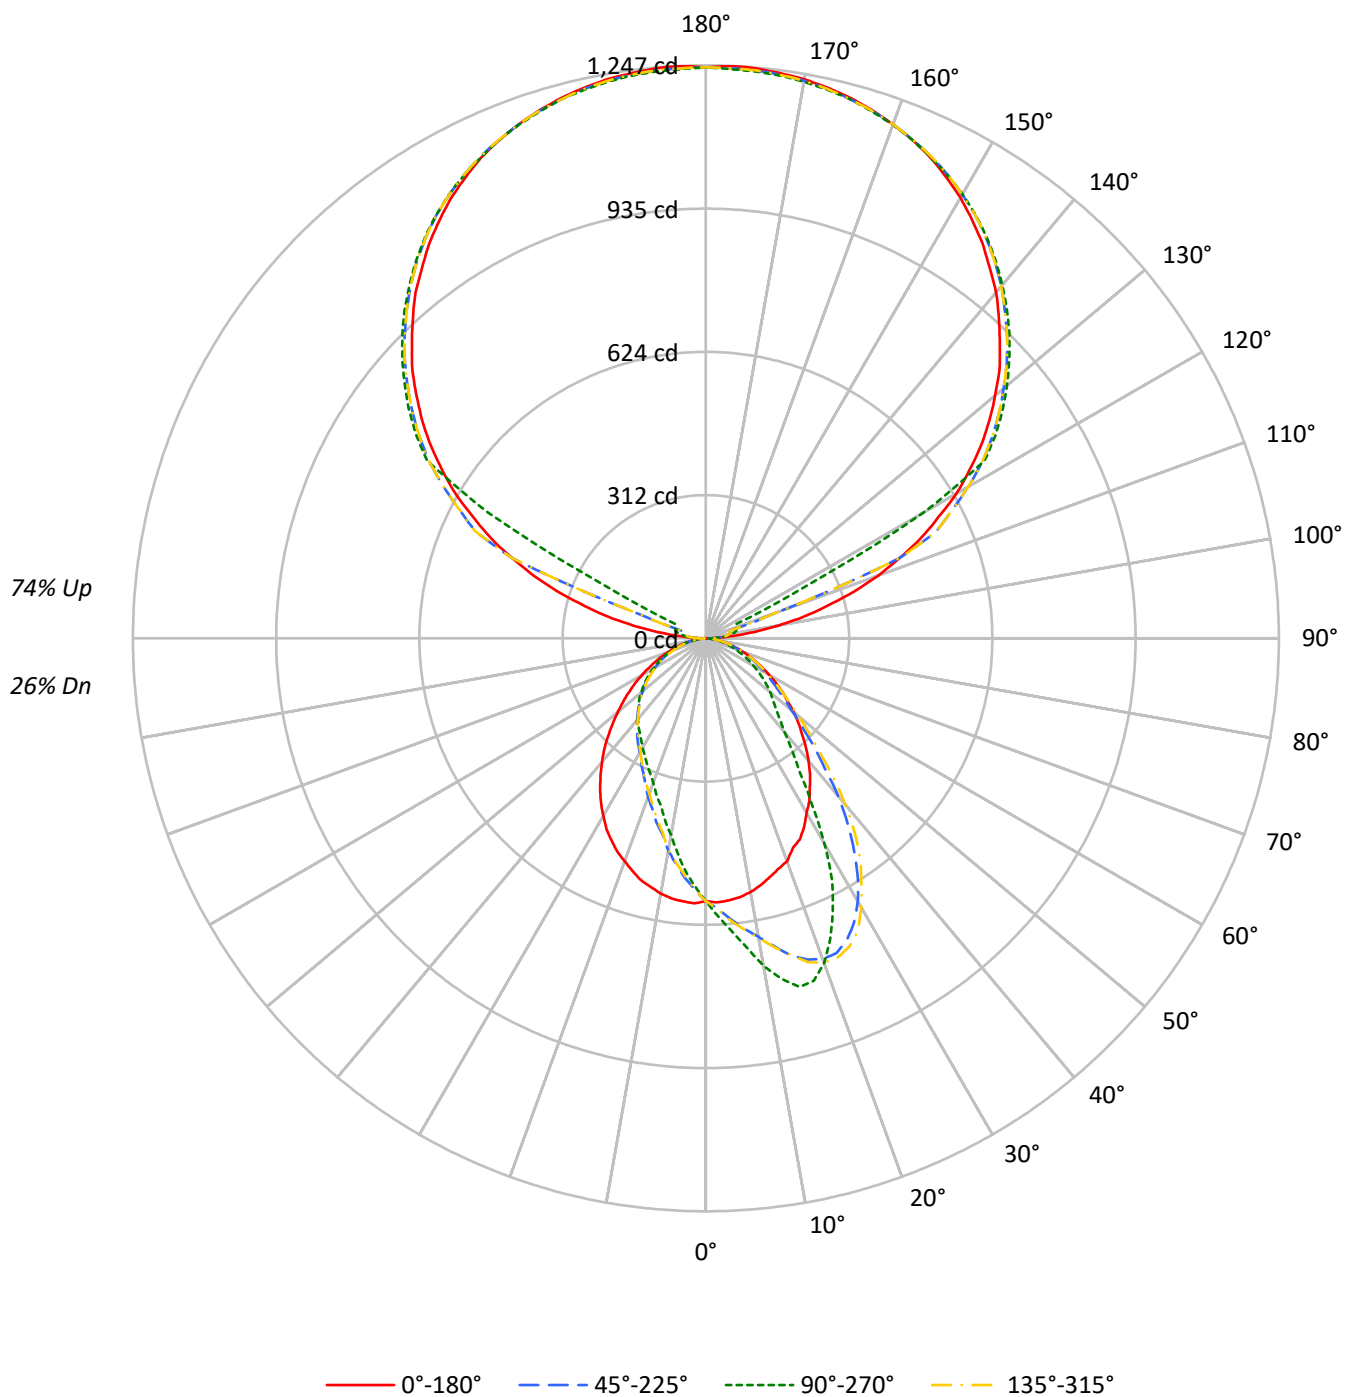

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34
1	93	89	85	82	82	79	76	73	61	59	58	45	44	43	30	30	29
2	84	78	72	67	75	69	65	60	54	51	48	40	38	36	27	26	25
3	77	68	61	56	69	61	55	51	48	44	41	36	33	31	24	23	21
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19
5	65	54	46	41	58	48	42	37	38	33	30	29	25	23	20	18	16
6	60	48	41	35	53	43	37	32	34	30	26	26	23	20	18	16	14
7	55	43	36	31	49	39	33	28	31	26	23	23	20	18	16	14	13
8	51	39	32	27	45	36	29	25	28	24	20	21	18	16	15	13	12
9	47	36	29	24	42	32	26	22	26	21	18	20	17	14	14	12	11
10	44	33	26	21	40	30	24	20	24	19	16	18	15	13	13	11	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9054	9054	9054	9054
5°	9075	9654	9110	7680
10°	8971	10539	9027	6332
15°	8753	11116	8875	5334
20°	8617	10438	8617	4636
25°	8342	8967	8380	4146
30°	7890	7049	8041	3755
35°	7490	4874	7616	3435
40°	7029	3680	7110	3181
45°	6462	3025	6567	2906
50°	5971	2654	5983	2661
55°	5412	2262	5446	2394
60°	4816	1890	4882	2089
65°	4284	1537	4362	1784
70°	3750	1205	3846	1438
75°	3149	875	3273	1043
80°	2459	555	2635	620
85°	1610	280	1737	207

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 157.5°

Vertical Angle: 45°

Luminance: 9360 cd/sqm

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.5	1.1
10°-20°	158.6	3.2
20°-30°	230.1	4.7
30°-40°	242.6	4.9
40°-50°	214.7	4.4
50°-60°	171.4	3.5
60°-70°	116.4	2.4
70°-80°	59.6	1.2
80°-90°	16.3	0.3
90°-100°	41.0	0.8
100°-110°	152.7	3.1
110°-120°	405.1	8.3
120°-130°	671.9	13.7
130°-140°	713.7	14.5
140°-150°	663.3	13.5
150°-160°	533.3	10.9
160°-170°	343.6	7.0
170°-180°	118.3	2.4
0°-30°	443.2	9.0
0°-40°	685.8	14.0
0°-60°	1071.9	21.8
0°-90°	1264.2	25.8
90°-120°	598.8	12.2
90°-150°	2647.7	54.0
90°-180°	3643.0	74.2
0°-180°	4907.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	572	572	572	572	572	
5°	572	639	575	508	572	54
15°	538	785	545	377	538	152
25°	483	654	485	302	483	221
35°	394	356	401	251	394	247
45°	296	215	301	206	296	230
55°	203	151	204	160	203	181
65°	120	93	123	108	120	120
75°	56	46	58	54	56	60
85°	11	12	12	9	11	13
90°	1	24	1	24	1	4
95°	58	39	58	39	58	69
105°	273	68	273	68	273	292
115°	517	74	517	74	517	509
125°	731	769	731	769	731	652
135°	904	934	904	934	904	699
145°	1049	1066	1049	1066	1049	656
155°	1155	1156	1155	1156	1155	532
165°	1217	1215	1217	1215	1217	344
175°	1245	1238	1245	1238	1245	119
180°	1243	1243	1243	1243	1243	

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0
2.5°	575.1	576.4	578.6	579.0	583.4	586.9	590.9	590.9	592.2	591.8	588.3
5°	572.4	576.4	582.1	586.9	594.9	598.4	603.7	607.6	611.1	613.8	613.3
7.5°	568.0	575.1	583.4	592.7	603.2	609.4	616.8	623.9	628.7	633.1	636.2
10°	560.6	572.4	583.9	596.2	609.8	618.2	627.0	636.2	643.7	652.0	659.9
12.5°	550.5	567.6	581.7	597.9	614.6	623.9	637.9	645.0	659.5	680.6	686.3
15°	537.7	561.0	574.2	594.9	616.8	624.3	643.7	655.1	685.0	698.2	714.0
17.5°	525.8	551.8	569.4	593.1	614.6	629.2	648.1	671.4	696.4	715.3	732.9
20°	516.2	541.2	562.3	588.7	616.0	634.4	654.2	682.4	709.6	729.0	742.6
22.5°	494.2	526.3	550.9	580.4	613.3	638.8	657.7	688.5	718.0	729.8	741.7
25°	483.2	510.9	539.5	572.9	611.6	641.9	658.2	692.5	718.4	722.8	725.4
27.5°	463.0	494.2	527.6	565.8	611.1	636.6	657.3	688.5	709.2	706.1	698.2
30°	437.9	476.2	513.1	554.4	605.0	632.7	652.0	680.6	691.1	675.3	661.2
32.5°	419.4	455.5	496.4	544.3	597.9	624.3	643.2	665.6	667.8	639.3	615.5
35°	394.4	434.4	480.5	531.1	586.1	609.8	627.4	641.0	630.5	590.5	562.3
37.5°	372.0	411.5	460.8	512.2	569.8	593.1	607.2	609.4	583.4	548.3	506.9
40°	347.3	388.2	439.7	493.7	551.8	572.0	580.8	574.2	536.8	495.9	448.0
42.5°	322.7	363.2	418.6	474.0	528.9	546.1	549.6	531.5	485.8	437.9	382.5
45°	295.9	338.1	393.5	449.3	502.5	512.2	512.6	486.7	432.6	382.5	331.1
47.5°	273.9	313.0	368.0	423.8	468.7	475.3	472.6	442.7	383.8	327.5	282.7
50°	249.7	287.1	341.6	396.6	434.8	436.6	430.0	387.3	329.7	278.3	242.7
52.5°	223.8	261.6	311.7	364.5	398.8	396.1	383.4	337.7	283.6	240.9	213.7
55°	203.1	236.5	283.6	335.0	359.2	351.7	337.7	291.1	248.4	212.4	188.6
57.5°	180.3	209.7	255.9	300.7	314.8	307.8	293.7	250.2	210.6	183.3	167.5
60°	158.7	185.5	226.0	263.4	274.3	266.9	250.6	211.5	182.9	160.0	148.2
62.5°	138.9	162.2	196.1	230.4	234.8	227.3	213.2	181.6	157.0	138.9	130.1
65°	120.5	142.4	169.7	195.6	199.6	191.7	177.2	154.3	133.7	122.2	113.9
67.5°	102.4	120.0	144.2	163.1	165.3	157.8	146.0	127.5	114.8	102.4	96.3
70°	86.6	99.8	118.7	134.1	135.0	127.9	121.8	105.1	95.4	86.6	81.8
72.5°	71.2	80.5	95.0	106.4	106.8	102.4	96.7	86.2	77.8	71.7	66.8
75°	56.3	64.2	73.0	83.1	82.7	79.1	74.7	68.1	61.1	57.2	55.0
77.5°	43.1	47.9	55.0	61.6	61.6	59.8	57.2	52.3	47.9	44.0	41.8
80°	30.8	33.9	39.6	41.8	42.6	42.2	40.0	36.5	34.7	31.7	30.8
82.5°	19.8	22.0	24.6	26.8	28.1	27.3	26.8	25.1	22.4	21.5	20.7
85°	11.4	12.3	13.6	14.9	15.4	14.9	15.8	14.5	13.2	13.2	12.8
87.5°	4.8	5.3	6.2	6.2	6.6	6.6	6.2	6.6	6.6	6.2	5.7
90°	0.9	3.1	5.3	7.5	9.7	10.8	11.6	13.2	14.8	16.4	18.0
92.5°	22.5	21.7	20.9	20.1	19.3	18.9	19.2	19.8	20.4	21.0	21.6
95°	58.4	51.8	45.2	38.7	32.1	28.8	29.5	30.9	32.3	33.7	35.1
97.5°	105.2	88.8	72.4	56.1	39.7	31.5	33.1	36.3	39.5	42.7	45.9
100°	159.1	131.7	104.4	77.0	49.7	36.0	37.7	41.1	44.4	47.8	51.2
102.5°	218.5	218.1	217.7	217.3	216.9	216.7	198.5	162.1	125.8	89.4	53.0
105°	273.3	279.3	285.3	291.3	297.3	300.3	273.0	218.5	163.9	109.4	54.8
107.5°	337.2	342.2	347.2	352.1	357.1	359.6	325.9	258.6	191.3	123.9	56.6
110°	398.3	402.5	406.7	410.9	415.1	417.2	388.3	330.6	272.8	215.1	157.3

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	455.9	459.5	463.1	466.6	470.2	472.0	470.3	466.9	463.6	460.2	456.8
115°	517.0	520.4	523.8	527.2	530.6	532.3	534.8	539.8	544.8	549.8	554.8
117.5°	570.0	574.0	578.0	582.0	586.0	588.0	589.7	593.1	596.5	599.9	603.3
120°	629.4	632.4	635.4	638.4	641.4	642.9	644.7	648.3	651.9	655.5	659.1
122.5°	679.7	682.9	686.1	689.3	692.5	694.1	696.1	700.1	704.1	708.1	712.1
125°	731.0	733.6	736.2	738.8	741.4	742.7	744.6	748.4	752.2	756.0	759.8
127.5°	777.7	780.5	783.3	786.1	788.9	790.3	791.8	794.8	797.8	800.8	803.8
130°	821.8	825.0	828.2	831.4	834.6	836.2	837.3	839.5	841.7	843.9	846.1
132.5°	866.8	869.4	872.0	874.5	877.1	878.4	879.5	881.7	883.9	886.1	888.3
135°	904.5	907.7	910.9	914.1	917.3	918.9	919.8	921.6	923.4	925.2	927.0
137.5°	944.1	946.5	948.9	951.3	953.7	954.9	955.9	957.9	959.9	961.9	963.9
140°	982.7	984.3	985.9	987.5	989.1	989.9	991.0	993.2	995.4	997.6	999.8
142.5°	1015.1	1016.5	1017.9	1019.3	1020.7	1021.4	1022.7	1025.3	1027.9	1030.5	1033.1
145°	1049.3	1049.1	1048.9	1048.7	1048.5	1048.4	1050.1	1053.5	1056.9	1060.3	1063.7
147.5°	1078.9	1078.3	1077.7	1077.1	1076.5	1076.2	1077.9	1081.3	1084.7	1088.1	1091.5
150°	1107.7	1106.3	1104.9	1103.5	1102.1	1101.4	1103.0	1106.2	1109.4	1112.6	1115.8
152.5°	1132.0	1130.4	1128.8	1127.2	1125.6	1124.8	1126.3	1129.3	1132.3	1135.3	1138.3
155°	1155.4	1153.6	1151.8	1150.0	1148.2	1147.3	1148.5	1150.9	1153.3	1155.7	1158.1
157.5°	1174.2	1172.6	1171.0	1169.5	1167.9	1167.1	1168.0	1169.8	1171.5	1173.3	1175.1
160°	1190.4	1189.2	1188.0	1186.8	1185.6	1185.0	1185.6	1186.8	1188.0	1189.2	1190.4
162.5°	1204.8	1203.6	1202.4	1201.2	1200.0	1199.4	1199.9	1200.9	1201.9	1202.9	1203.9
165°	1217.4	1216.2	1215.0	1213.8	1212.6	1212.0	1212.3	1212.9	1213.5	1214.1	1214.7
167.5°	1227.3	1226.1	1224.9	1223.7	1222.5	1221.9	1222.2	1222.8	1223.4	1224.0	1224.6
170°	1235.4	1234.2	1233.0	1231.8	1230.6	1230.0	1230.2	1230.6	1231.0	1231.4	1231.8
172.5°	1240.8	1239.6	1238.4	1237.2	1236.0	1235.4	1235.6	1236.0	1236.4	1236.8	1237.2
175°	1245.3	1243.9	1242.5	1241.1	1239.7	1239.0	1239.2	1239.6	1240.0	1240.4	1240.8
177.5°	1247.1	1245.7	1244.3	1242.9	1241.5	1240.8	1240.9	1241.1	1241.3	1241.5	1241.7
180°	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0
2.5°	594.4	594.9	595.7	600.1	602.3	602.8	601.0	605.0	606.3	605.0	604.1
5°	622.6	625.2	630.5	636.2	635.7	636.2	638.8	641.5	642.3	638.8	640.1
7.5°	647.2	652.5	658.2	667.0	667.0	671.4	673.1	675.3	680.6	678.0	677.1
10°	675.3	682.4	692.9	707.0	707.4	711.8	716.2	723.2	725.4	723.7	724.6
12.5°	710.5	724.1	725.0	740.4	747.4	748.3	755.3	754.0	758.4	758.4	765.9
15°	725.9	747.0	758.9	773.8	778.2	772.9	778.6	784.8	785.2	785.2	784.8
17.5°	753.6	761.9	773.8	781.7	783.5	783.5	783.9	786.6	784.8	781.3	783.9
20°	759.3	762.8	767.2	766.3	767.2	762.8	758.4	754.0	754.5	752.3	758.9
22.5°	748.7	747.9	737.7	731.2	731.2	722.4	714.0	710.1	706.1	707.4	709.6
25°	722.4	708.7	696.4	686.7	684.6	670.5	659.0	655.5	648.9	654.2	655.1
27.5°	680.2	664.8	645.0	636.6	625.2	619.5	611.6	601.0	587.4	595.3	594.0
30°	634.9	612.0	595.7	575.5	557.5	556.2	541.2	523.6	516.6	516.6	520.6
32.5°	584.3	554.0	530.2	501.7	484.1	476.6	458.6	441.0	444.9	431.7	436.6
35°	525.4	485.4	455.5	427.8	414.6	405.8	382.5	372.8	362.3	356.1	367.6
37.5°	469.1	423.0	384.7	354.4	349.5	333.7	317.9	311.7	305.6	308.2	307.8
40°	400.5	359.6	325.3	301.6	293.3	285.8	275.2	267.8	263.8	266.0	266.4
42.5°	338.5	304.2	278.7	262.0	255.0	249.7	244.5	238.3	237.0	237.0	238.7
45°	290.6	262.5	245.3	231.7	227.7	223.8	219.8	217.2	216.3	214.6	215.9
47.5°	252.4	229.9	219.4	209.3	204.9	204.0	200.5	199.2	197.4	197.0	197.4
50°	220.3	206.2	196.5	190.8	187.7	186.4	184.7	182.0	181.1	183.3	182.5
52.5°	197.8	184.7	179.4	173.7	171.9	170.1	167.5	167.9	167.5	166.6	166.6
55°	175.4	167.1	161.8	157.4	157.0	155.2	153.0	152.1	151.7	150.8	152.1
57.5°	157.4	150.8	146.0	142.0	140.3	140.3	138.1	136.3	136.3	135.9	136.3
60°	139.4	132.8	129.7	125.7	124.4	124.0	122.7	121.8	120.5	120.5	120.5
62.5°	122.7	117.4	113.9	110.4	110.8	108.6	106.8	106.0	106.0	106.4	106.4
65°	106.8	103.3	98.9	95.8	95.0	94.5	93.6	93.2	91.9	92.8	92.8
67.5°	92.3	87.5	84.9	83.5	82.2	81.8	80.9	80.0	79.6	79.1	80.0
70°	77.8	73.9	71.7	70.8	69.5	69.0	68.6	67.3	67.7	68.1	68.6
72.5°	64.6	61.1	60.7	58.0	58.0	58.0	56.3	57.2	56.7	55.8	56.7
75°	51.0	49.2	48.4	47.0	47.5	47.0	46.6	45.3	45.3	45.7	46.2
77.5°	40.4	38.7	38.3	36.9	36.1	36.9	36.1	35.6	35.6	36.1	36.1
80°	29.9	29.0	27.7	27.7	27.7	27.3	27.3	27.3	26.8	26.4	26.8
82.5°	19.8	19.8	19.3	18.9	19.3	18.5	18.9	18.9	18.9	18.9	18.9
85°	12.8	12.3	12.3	11.9	11.9	11.9	12.3	11.4	11.4	11.9	11.9
87.5°	5.7	5.7	5.7	6.2	5.7	5.7	5.7	6.2	5.7	5.7	5.7
90°	19.0	20.0	21.0	22.0	22.5	22.7	23.1	23.5	23.9	24.3	23.9
92.5°	22.0	22.4	22.8	23.2	23.4	23.5	23.7	23.9	24.1	24.3	24.1
95°	36.1	37.1	38.1	39.1	39.6	39.5	39.3	39.1	38.9	38.7	38.9
97.5°	46.5	47.1	47.7	48.3	48.6	48.7	48.9	49.1	49.3	49.5	49.3
100°	52.8	54.4	56.0	57.6	58.4	58.6	59.0	59.4	59.8	60.2	59.8
102.5°	55.2	57.4	59.6	61.8	62.9	63.2	63.8	64.4	65.0	65.6	65.0
105°	57.0	59.2	61.4	63.6	64.7	65.1	65.9	66.7	67.5	68.3	67.5
107.5°	58.8	61.0	63.2	65.4	66.5	66.9	67.7	68.5	69.3	70.1	69.3
110°	137.3	117.3	97.4	77.4	67.4	67.8	68.6	69.4	70.2	71.0	70.2

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	370.7	284.5	198.4	112.3	69.2	69.5	70.1	70.7	71.3	71.9	71.3
115°	462.3	369.8	277.3	184.8	138.5	131.3	116.9	102.5	88.1	73.7	88.1
117.5°	574.7	546.1	517.6	489.0	474.7	448.5	396.2	343.9	291.5	239.2	291.5
120°	661.5	663.9	666.2	668.6	669.8	656.3	629.4	602.4	575.5	548.5	575.5
122.5°	713.3	714.5	715.7	716.9	717.5	717.6	717.8	718.0	718.2	718.4	718.2
125°	761.2	762.6	763.9	765.3	766.0	766.3	766.9	767.5	768.1	768.7	768.1
127.5°	805.8	807.8	809.8	811.8	812.8	812.9	813.1	813.3	813.5	813.7	813.5
130°	848.3	850.5	852.7	854.9	856.0	855.9	855.7	855.5	855.3	855.1	855.3
132.5°	890.1	891.9	893.7	895.5	896.4	896.3	896.1	895.9	895.7	895.5	895.7
135°	929.0	931.0	933.0	935.0	936.0	935.8	935.4	935.0	934.6	934.2	934.6
137.5°	965.9	967.9	969.8	971.8	972.8	972.5	971.9	971.3	970.7	970.1	970.7
140°	1001.6	1003.4	1005.2	1007.0	1007.9	1007.4	1006.4	1005.4	1004.4	1003.4	1004.4
142.5°	1034.7	1036.3	1037.9	1039.5	1040.3	1039.8	1038.8	1037.8	1036.8	1035.8	1036.8
145°	1065.1	1066.5	1067.9	1069.3	1070.0	1069.5	1068.5	1067.5	1066.5	1065.5	1066.5
147.5°	1092.5	1093.5	1094.5	1095.5	1096.0	1095.6	1094.8	1094.0	1093.2	1092.4	1093.2
150°	1117.0	1118.2	1119.4	1120.6	1121.2	1120.7	1119.7	1118.7	1117.7	1116.7	1117.7
152.5°	1139.5	1140.7	1141.9	1143.1	1143.7	1143.0	1141.6	1140.2	1138.8	1137.4	1138.8
155°	1159.3	1160.5	1161.7	1162.9	1163.5	1162.7	1161.1	1159.5	1157.9	1156.3	1157.9
157.5°	1176.5	1177.9	1179.3	1180.7	1181.4	1180.6	1179.0	1177.4	1175.8	1174.2	1175.8
160°	1191.6	1192.8	1194.0	1195.2	1195.8	1195.1	1193.7	1192.3	1190.9	1189.5	1190.9
162.5°	1205.3	1206.7	1208.1	1209.5	1210.2	1209.3	1207.5	1205.7	1203.9	1202.1	1203.9
165°	1216.1	1217.5	1218.9	1220.3	1221.0	1220.3	1218.9	1217.5	1216.1	1214.7	1216.1
167.5°	1226.0	1227.4	1228.8	1230.2	1230.9	1230.0	1228.2	1226.4	1224.6	1222.8	1224.6
170°	1233.2	1234.6	1236.0	1237.4	1238.1	1237.2	1235.4	1233.6	1231.8	1230.0	1231.8
172.5°	1238.6	1240.0	1241.4	1242.8	1243.5	1242.6	1240.8	1239.0	1237.2	1235.4	1237.2
175°	1242.2	1243.6	1245.0	1246.4	1247.1	1246.1	1244.1	1242.1	1240.1	1238.1	1240.1
177.5°	1243.1	1244.5	1245.9	1247.3	1248.0	1247.1	1245.3	1243.5	1241.7	1239.9	1241.7
180°	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0
2.5°	606.3	603.2	600.6	601.0	603.2	601.5	597.1	591.3	589.1	586.5	589.1
5°	642.8	640.1	634.9	635.3	634.0	632.2	625.2	616.4	616.4	609.4	608.5
7.5°	678.8	674.9	671.4	670.5	665.6	662.1	656.0	643.7	638.8	630.5	625.6
10°	719.3	716.2	712.2	707.4	704.8	698.6	688.5	670.5	661.7	650.3	641.9
12.5°	760.2	759.7	750.9	741.3	740.8	731.2	724.1	699.9	688.1	672.7	652.9
15°	786.1	783.9	779.1	774.2	775.6	765.0	749.2	720.6	712.7	694.2	673.1
17.5°	785.7	785.7	784.4	783.5	782.2	779.1	770.3	751.4	738.6	715.3	695.5
20°	760.6	766.3	767.6	767.2	771.6	773.8	773.4	761.5	751.4	730.7	710.5
22.5°	710.5	723.7	729.4	732.9	742.1	747.0	758.4	754.0	751.4	736.0	718.8
25°	663.9	668.3	685.4	686.3	699.1	710.9	722.4	729.8	739.5	733.8	719.3
27.5°	603.7	613.8	626.1	635.3	637.9	662.1	681.0	695.1	717.1	718.8	714.0
30°	535.5	540.3	560.6	572.9	586.9	604.5	631.8	656.0	675.8	693.8	699.9
32.5°	452.4	472.2	484.1	499.0	511.3	542.5	576.0	607.2	630.0	660.4	673.6
35°	376.3	391.7	412.0	418.1	440.5	466.9	510.4	550.5	585.2	616.0	642.8
37.5°	313.5	325.8	347.3	357.0	370.2	404.0	440.5	490.2	532.0	569.8	603.2
40°	270.4	279.6	295.9	299.0	310.0	340.7	370.2	416.8	472.2	523.2	559.7
42.5°	240.9	245.3	256.3	260.3	267.3	288.0	314.4	358.3	409.8	462.5	514.0
45°	219.8	222.9	229.5	233.0	241.8	251.0	272.6	307.8	348.2	401.4	456.8
47.5°	200.9	204.9	207.5	209.7	214.6	224.7	238.7	264.7	303.4	352.2	405.8
50°	185.1	186.4	191.3	191.7	194.8	201.4	214.6	230.4	261.2	300.7	352.6
52.5°	169.3	170.6	173.7	176.7	178.1	183.3	192.1	205.3	228.2	259.4	305.6
55°	153.4	155.2	158.3	160.5	161.8	166.2	171.5	184.2	202.2	224.2	262.0
57.5°	137.6	141.6	142.4	143.8	146.0	150.8	155.6	163.1	177.2	197.4	225.1
60°	122.7	124.0	127.1	128.4	130.6	133.2	139.4	145.1	155.2	171.0	196.1
62.5°	107.3	110.4	111.7	113.0	114.8	117.8	121.8	127.9	136.7	149.5	169.3
65°	94.1	94.5	97.2	98.9	100.7	102.9	106.8	112.6	117.8	129.7	144.2
67.5°	81.3	82.2	83.1	84.9	87.1	89.3	92.8	95.8	102.4	110.4	121.8
70°	69.0	69.0	71.2	72.5	72.1	74.7	77.4	80.9	85.7	93.2	102.4
72.5°	58.0	57.6	59.4	59.8	60.7	62.4	64.2	67.7	70.3	76.1	83.1
75°	46.2	47.0	47.9	47.9	49.2	50.6	52.3	54.1	57.2	60.7	65.9
77.5°	36.5	36.5	37.4	37.8	39.1	38.7	40.4	42.2	44.4	47.5	51.4
80°	26.8	27.7	27.7	27.7	28.1	28.6	30.3	31.7	33.0	35.2	36.9
82.5°	18.9	18.9	19.8	19.8	19.8	20.7	20.7	21.1	22.0	23.3	24.6
85°	11.9	11.9	11.9	12.3	11.9	12.3	13.2	12.8	13.2	14.1	14.1
87.5°	5.7	5.7	5.7	5.7	5.7	6.2	5.7	6.2	6.6	6.6	6.6
90°	23.5	23.1	22.7	22.5	22.0	21.0	20.0	19.0	18.0	16.4	14.8
92.5°	23.9	23.7	23.5	23.4	23.2	22.8	22.4	22.0	21.6	21.0	20.4
95°	39.1	39.3	39.5	39.6	39.1	38.1	37.1	36.1	35.1	33.7	32.3
97.5°	49.1	48.9	48.7	48.6	48.3	47.7	47.1	46.5	45.9	42.7	39.5
100°	59.4	59.0	58.6	58.4	57.6	56.0	54.4	52.8	51.2	47.8	44.4
102.5°	64.4	63.8	63.2	62.9	61.8	59.6	57.4	55.2	53.0	89.4	125.8
105°	66.7	65.9	65.1	64.7	63.6	61.4	59.2	57.0	54.8	109.4	163.9
107.5°	68.5	67.7	66.9	66.5	65.4	63.2	61.0	58.8	56.6	123.9	191.3
110°	69.4	68.6	67.8	67.4	77.4	97.4	117.3	137.3	157.3	215.1	272.8

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	70.7	70.1	69.5	69.2	112.3	198.4	284.5	370.7	456.8	460.2	463.6
115°	102.5	116.9	131.3	138.5	184.8	277.3	369.8	462.3	554.8	549.8	544.8
117.5°	343.9	396.2	448.5	474.7	489.0	517.6	546.1	574.7	603.3	599.9	596.5
120°	602.4	629.4	656.3	669.8	668.6	666.2	663.9	661.5	659.1	655.5	651.9
122.5°	718.0	717.8	717.6	717.5	716.9	715.7	714.5	713.3	712.1	708.1	704.1
125°	767.5	766.9	766.3	766.0	765.3	763.9	762.6	761.2	759.8	756.0	752.2
127.5°	813.3	813.1	812.9	812.8	811.8	809.8	807.8	805.8	803.8	800.8	797.8
130°	855.5	855.7	855.9	856.0	854.9	852.7	850.5	848.3	846.1	843.9	841.7
132.5°	895.9	896.1	896.3	896.4	895.5	893.7	891.9	890.1	888.3	886.1	883.9
135°	935.0	935.4	935.8	936.0	935.0	933.0	931.0	929.0	927.0	925.2	923.4
137.5°	971.3	971.9	972.5	972.8	971.8	969.8	967.9	965.9	963.9	961.9	959.9
140°	1005.4	1006.4	1007.4	1007.9	1007.0	1005.2	1003.4	1001.6	999.8	997.6	995.4
142.5°	1037.8	1038.8	1039.8	1040.3	1039.5	1037.9	1036.3	1034.7	1033.1	1030.5	1027.9
145°	1067.5	1068.5	1069.5	1070.0	1069.3	1067.9	1066.5	1065.1	1063.7	1060.3	1056.9
147.5°	1094.0	1094.8	1095.6	1096.0	1095.5	1094.5	1093.5	1092.5	1091.5	1088.1	1084.7
150°	1118.7	1119.7	1120.7	1121.2	1120.6	1119.4	1118.2	1117.0	1115.8	1112.6	1109.4
152.5°	1140.2	1141.6	1143.0	1143.7	1143.1	1141.9	1140.7	1139.5	1138.3	1135.3	1132.3
155°	1159.5	1161.1	1162.7	1163.5	1162.9	1161.7	1160.5	1159.3	1158.1	1155.7	1153.3
157.5°	1177.4	1179.0	1180.6	1181.4	1180.7	1179.3	1177.9	1176.5	1175.1	1173.3	1171.5
160°	1192.3	1193.7	1195.1	1195.8	1195.2	1194.0	1192.8	1191.6	1190.4	1189.2	1188.0
162.5°	1205.7	1207.5	1209.3	1210.2	1209.5	1208.1	1206.7	1205.3	1203.9	1202.9	1201.9
165°	1217.5	1218.9	1220.3	1221.0	1220.3	1218.9	1217.5	1216.1	1214.7	1214.1	1213.5
167.5°	1226.4	1228.2	1230.0	1230.9	1230.2	1228.8	1227.4	1226.0	1224.6	1224.0	1223.4
170°	1233.6	1235.4	1237.2	1238.1	1237.4	1236.0	1234.6	1233.2	1231.8	1231.4	1231.0
172.5°	1239.0	1240.8	1242.6	1243.5	1242.8	1241.4	1240.0	1238.6	1237.2	1236.8	1236.4
175°	1242.1	1244.1	1246.1	1247.1	1246.4	1245.0	1243.6	1242.2	1240.8	1240.4	1240.0
177.5°	1243.5	1245.3	1247.1	1248.0	1247.3	1245.9	1244.5	1243.1	1241.7	1241.5	1241.3
180°	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0
2.5°	586.9	584.7	583.4	584.3	581.7	575.1	575.1	577.3	574.6	572.0	568.0
5°	603.2	598.8	596.2	595.7	589.6	579.0	576.8	574.6	568.9	562.8	556.2
7.5°	619.0	611.1	606.7	603.7	594.9	581.2	575.5	570.7	561.4	552.2	543.9
10°	632.2	620.8	615.5	610.7	599.3	582.1	572.9	564.1	552.2	540.3	529.8
12.5°	642.8	629.6	623.0	616.0	601.9	579.5	568.0	554.0	542.1	526.3	515.7
15°	660.4	633.1	627.0	620.4	605.9	575.1	561.0	545.2	528.9	507.8	496.4
17.5°	674.4	637.9	637.5	623.4	604.5	573.3	551.8	531.1	513.5	492.4	474.4
20°	682.8	645.4	638.4	623.9	600.1	561.4	539.0	516.2	497.3	471.8	453.7
22.5°	689.8	656.0	637.5	619.9	590.9	557.5	524.5	503.0	477.0	449.3	432.2
25°	692.5	658.2	638.8	618.6	584.3	546.1	508.7	485.4	456.4	431.3	408.0
27.5°	692.9	657.7	634.0	612.9	575.1	531.1	492.9	468.2	436.1	407.1	383.8
30°	688.5	652.9	631.4	608.5	566.3	517.5	473.5	446.3	412.0	382.9	358.8
32.5°	675.3	643.2	625.6	600.6	554.9	498.6	455.0	424.7	388.7	360.1	336.8
35°	653.3	631.4	612.0	588.7	539.9	481.0	436.6	401.0	364.5	337.2	315.2
37.5°	626.1	614.2	596.2	573.3	522.8	465.2	415.9	376.3	339.9	313.5	291.9
40°	589.1	592.2	574.6	554.0	502.5	443.6	389.1	351.3	317.0	292.4	271.3
42.5°	549.1	561.9	551.8	532.0	480.1	419.9	369.3	327.5	294.1	268.6	251.0
45°	506.0	528.0	521.9	507.4	456.8	394.8	341.2	300.7	271.3	246.6	231.3
47.5°	459.0	490.2	490.2	479.7	430.9	369.8	317.0	275.7	246.6	229.1	214.1
50°	411.1	446.3	452.0	444.9	401.8	341.2	287.5	250.2	225.1	208.0	197.0
52.5°	361.0	401.8	412.4	408.9	371.1	313.9	263.4	226.9	204.0	189.1	179.4
55°	313.0	360.5	372.0	373.3	338.1	284.0	236.5	204.4	182.5	172.3	164.0
57.5°	267.8	313.5	326.2	328.4	304.7	256.8	211.5	183.3	163.6	155.2	148.6
60°	229.1	267.3	284.0	288.9	268.2	225.1	188.2	160.9	146.0	138.1	131.9
62.5°	197.4	228.2	245.8	247.1	237.9	197.4	164.0	141.1	128.4	121.3	118.3
65°	166.6	194.3	204.9	210.2	202.7	171.0	141.6	122.7	112.6	106.4	103.3
67.5°	142.0	159.6	168.4	175.4	167.9	144.2	120.5	105.1	97.6	91.4	89.7
70°	116.5	131.0	137.6	144.6	138.1	120.0	102.9	88.8	82.2	77.4	75.2
72.5°	93.2	104.6	110.8	115.2	111.2	96.3	82.2	72.5	67.7	64.2	62.9
75°	73.9	81.8	85.3	88.4	86.6	75.2	66.4	58.5	54.1	51.0	50.1
77.5°	56.3	62.0	65.9	66.8	64.6	57.2	49.7	44.8	41.3	39.6	38.7
80°	40.0	43.5	45.7	47.0	44.8	41.8	36.5	33.0	29.9	27.7	27.3
82.5°	26.8	28.6	30.3	29.9	29.0	26.4	23.3	21.5	20.2	18.5	18.5
85°	15.4	15.8	16.7	17.1	16.7	14.9	13.2	12.3	11.4	10.1	10.1
87.5°	6.6	7.0	7.0	7.5	6.6	6.6	5.7	4.8	4.8	4.4	4.0
90°	13.2	11.6	10.8	9.7	7.5	5.3	3.1	0.9	3.1	5.3	7.5
92.5°	19.8	19.2	18.9	19.3	20.1	20.9	21.7	22.5	21.7	20.9	20.1
95°	30.9	29.5	28.8	32.1	38.7	45.2	51.8	58.4	51.8	45.2	38.7
97.5°	36.3	33.1	31.5	39.7	56.1	72.4	88.8	105.2	88.8	72.4	56.1
100°	41.1	37.7	36.0	49.7	77.0	104.4	131.7	159.1	131.7	104.4	77.0
102.5°	162.1	198.5	216.7	216.9	217.3	217.7	218.1	218.5	218.1	217.7	217.3
105°	218.5	273.0	300.3	297.3	291.3	285.3	279.3	273.3	279.3	285.3	291.3
107.5°	258.6	325.9	359.6	357.1	352.1	347.2	342.2	337.2	342.2	347.2	352.1
110°	330.6	388.3	417.2	415.1	410.9	406.7	402.5	398.3	402.5	406.7	410.9

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	466.9	470.3	472.0	470.2	466.6	463.1	459.5	455.9	459.5	463.1	466.6
115°	539.8	534.8	532.3	530.6	527.2	523.8	520.4	517.0	520.4	523.8	527.2
117.5°	593.1	589.7	588.0	586.0	582.0	578.0	574.0	570.0	574.0	578.0	582.0
120°	648.3	644.7	642.9	641.4	638.4	635.4	632.4	629.4	632.4	635.4	638.4
122.5°	700.1	696.1	694.1	692.5	689.3	686.1	682.9	679.7	682.9	686.1	689.3
125°	748.4	744.6	742.7	741.4	738.8	736.2	733.6	731.0	733.6	736.2	738.8
127.5°	794.8	791.8	790.3	788.9	786.1	783.3	780.5	777.7	780.5	783.3	786.1
130°	839.5	837.3	836.2	834.6	831.4	828.2	825.0	821.8	825.0	828.2	831.4
132.5°	881.7	879.5	878.4	877.1	874.5	872.0	869.4	866.8	869.4	872.0	874.5
135°	921.6	919.8	918.9	917.3	914.1	910.9	907.7	904.5	907.7	910.9	914.1
137.5°	957.9	955.9	954.9	953.7	951.3	948.9	946.5	944.1	946.5	948.9	951.3
140°	993.2	991.0	989.9	989.1	987.5	985.9	984.3	982.7	984.3	985.9	987.5
142.5°	1025.3	1022.7	1021.4	1020.7	1019.3	1017.9	1016.5	1015.1	1016.5	1017.9	1019.3
145°	1053.5	1050.1	1048.4	1048.5	1048.7	1048.9	1049.1	1049.3	1049.1	1048.9	1048.7
147.5°	1081.3	1077.9	1076.2	1076.5	1077.1	1077.7	1078.3	1078.9	1078.3	1077.7	1077.1
150°	1106.2	1103.0	1101.4	1102.1	1103.5	1104.9	1106.3	1107.7	1106.3	1104.9	1103.5
152.5°	1129.3	1126.3	1124.8	1125.6	1127.2	1128.8	1130.4	1132.0	1130.4	1128.8	1127.2
155°	1150.9	1148.5	1147.3	1148.2	1150.0	1151.8	1153.6	1155.4	1153.6	1151.8	1150.0
157.5°	1169.8	1168.0	1167.1	1167.9	1169.5	1171.0	1172.6	1174.2	1172.6	1171.0	1169.5
160°	1186.8	1185.6	1185.0	1185.6	1186.8	1188.0	1189.2	1190.4	1189.2	1188.0	1186.8
162.5°	1200.9	1199.9	1199.4	1200.0	1201.2	1202.4	1203.6	1204.8	1203.6	1202.4	1201.2
165°	1212.9	1212.3	1212.0	1212.6	1213.8	1215.0	1216.2	1217.4	1216.2	1215.0	1213.8
167.5°	1222.8	1222.2	1221.9	1222.5	1223.7	1224.9	1226.1	1227.3	1226.1	1224.9	1223.7
170°	1230.6	1230.2	1230.0	1230.6	1231.8	1233.0	1234.2	1235.4	1234.2	1233.0	1231.8
172.5°	1236.0	1235.6	1235.4	1236.0	1237.2	1238.4	1239.6	1240.8	1239.6	1238.4	1237.2
175°	1239.6	1239.2	1239.0	1239.7	1241.1	1242.5	1243.9	1245.3	1243.9	1242.5	1241.1
177.5°	1241.1	1240.9	1240.8	1241.5	1242.9	1244.3	1245.7	1247.1	1245.7	1244.3	1242.9
180°	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0
2.5°	565.8	568.0	567.6	563.2	558.4	554.4	546.9	547.8	545.2	545.6	548.3
5°	551.8	551.8	550.0	543.9	535.9	531.5	523.2	521.0	515.7	515.3	514.8
7.5°	536.8	534.6	532.4	523.6	514.0	506.9	495.5	492.9	487.6	484.1	482.3
10°	519.2	516.2	511.8	501.7	489.8	481.0	469.1	465.6	455.5	451.1	448.5
12.5°	499.9	498.1	491.1	482.7	463.4	453.7	436.6	440.1	430.0	421.2	419.9
15°	480.5	474.0	470.0	456.4	433.1	428.7	415.0	408.0	398.8	391.7	391.7
17.5°	461.6	451.5	442.7	428.2	411.1	398.8	388.7	385.1	373.7	366.7	365.4
20°	436.6	425.2	423.0	402.3	390.4	376.8	367.1	358.3	350.0	346.9	344.7
22.5°	412.8	399.7	396.1	378.5	366.7	353.0	343.4	337.2	331.1	328.9	324.9
25°	387.3	379.4	374.2	355.2	342.1	329.3	322.7	318.3	312.6	312.2	309.5
27.5°	362.7	355.2	350.0	331.9	322.3	310.4	305.1	300.3	297.2	295.9	294.6
30°	341.6	333.3	327.1	313.9	302.0	292.4	288.0	284.9	283.1	280.9	280.5
32.5°	318.3	313.5	305.1	295.0	285.8	276.5	273.9	271.7	269.1	268.2	267.8
35°	298.5	291.9	286.7	275.2	271.3	263.4	260.3	258.5	255.0	254.1	253.2
37.5°	279.2	273.0	267.3	260.3	252.8	248.4	246.6	244.0	242.3	242.7	241.8
40°	259.8	255.0	250.6	243.1	238.7	236.5	233.0	230.4	229.5	229.9	229.5
42.5°	240.9	236.5	233.9	228.2	223.8	221.6	219.4	216.8	218.1	218.1	219.4
45°	223.8	219.8	218.1	213.7	211.0	207.5	205.3	204.9	206.6	206.2	206.2
47.5°	206.2	204.9	202.7	198.7	195.2	193.0	192.6	192.6	194.3	195.2	194.8
50°	192.6	189.9	187.3	184.2	181.6	180.7	179.4	180.3	182.0	182.0	182.9
52.5°	175.4	173.7	172.8	170.1	168.4	168.4	168.4	168.8	170.1	171.5	171.0
55°	160.5	159.2	158.3	157.0	154.8	155.2	154.8	155.6	157.0	158.3	159.2
57.5°	144.6	144.2	143.3	141.1	141.1	140.7	142.0	142.4	144.6	145.5	146.8
60°	130.6	129.3	129.3	127.5	127.5	127.5	128.8	130.1	131.9	132.3	133.2
62.5°	115.6	115.6	115.2	113.9	113.9	115.2	115.6	117.4	118.3	118.3	119.6
65°	101.6	101.1	100.7	101.1	101.6	101.6	102.9	103.8	104.6	105.1	105.5
67.5°	87.5	87.1	87.9	87.5	88.4	90.1	89.7	91.0	92.3	92.3	92.8
70°	74.3	75.2	74.7	75.6	75.2	76.1	77.4	77.8	77.8	78.3	79.6
72.5°	62.0	62.0	62.0	61.6	62.0	62.9	63.8	64.2	65.1	65.5	66.8
75°	50.1	50.1	49.2	50.1	50.1	51.0	51.9	51.9	51.9	52.8	54.1
77.5°	37.8	38.3	37.8	38.7	38.7	39.1	40.0	39.6	40.4	40.9	41.3
80°	27.7	27.3	27.3	27.3	27.7	27.7	28.6	29.0	29.0	30.3	29.5
82.5°	17.6	18.0	17.6	18.0	18.0	18.5	18.0	18.5	18.9	19.8	19.3
85°	10.1	9.7	9.7	10.1	9.7	9.7	10.1	9.7	10.1	9.7	10.1
87.5°	4.0	3.5	3.5	3.5	3.5	3.1	3.1	2.6	2.6	2.6	2.2
90°	9.7	10.8	11.6	13.2	14.8	16.4	18.0	19.0	20.0	21.0	22.0
92.5°	19.3	18.9	19.2	19.8	20.4	21.0	21.6	22.0	22.4	22.8	23.2
95°	32.1	28.8	29.5	30.9	32.3	33.7	35.1	36.1	37.1	38.1	39.1
97.5°	39.7	31.5	33.1	36.3	39.5	42.7	45.9	46.5	47.1	47.7	48.3
100°	49.7	36.0	37.7	41.1	44.4	47.8	51.2	52.8	54.4	56.0	57.6
102.5°	216.9	216.7	198.5	162.1	125.8	89.4	53.0	55.2	57.4	59.6	61.8
105°	297.3	300.3	273.0	218.5	163.9	109.4	54.8	57.0	59.2	61.4	63.6
107.5°	357.1	359.6	325.9	258.6	191.3	123.9	56.6	58.8	61.0	63.2	65.4
110°	415.1	417.2	388.3	330.6	272.8	215.1	157.3	137.3	117.3	97.4	77.4

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	470.2	472.0	470.3	466.9	463.6	460.2	456.8	370.7	284.5	198.4	112.3
115°	530.6	532.3	534.8	539.8	544.8	549.8	554.8	462.3	369.8	277.3	184.8
117.5°	586.0	588.0	589.7	593.1	596.5	599.9	603.3	574.7	546.1	517.6	489.0
120°	641.4	642.9	644.7	648.3	651.9	655.5	659.1	661.5	663.9	666.2	668.6
122.5°	692.5	694.1	696.1	700.1	704.1	708.1	712.1	713.3	714.5	715.7	716.9
125°	741.4	742.7	744.6	748.4	752.2	756.0	759.8	761.2	762.6	763.9	765.3
127.5°	788.9	790.3	791.8	794.8	797.8	800.8	803.8	805.8	807.8	809.8	811.8
130°	834.6	836.2	837.3	839.5	841.7	843.9	846.1	848.3	850.5	852.7	854.9
132.5°	877.1	878.4	879.5	881.7	883.9	886.1	888.3	890.1	891.9	893.7	895.5
135°	917.3	918.9	919.8	921.6	923.4	925.2	927.0	929.0	931.0	933.0	935.0
137.5°	953.7	954.9	955.9	957.9	959.9	961.9	963.9	965.9	967.9	969.8	971.8
140°	989.1	989.9	991.0	993.2	995.4	997.6	999.8	1001.6	1003.4	1005.2	1007.0
142.5°	1020.7	1021.4	1022.7	1025.3	1027.9	1030.5	1033.1	1034.7	1036.3	1037.9	1039.5
145°	1048.5	1048.4	1050.1	1053.5	1056.9	1060.3	1063.7	1065.1	1066.5	1067.9	1069.3
147.5°	1076.5	1076.2	1077.9	1081.3	1084.7	1088.1	1091.5	1092.5	1093.5	1094.5	1095.5
150°	1102.1	1101.4	1103.0	1106.2	1109.4	1112.6	1115.8	1117.0	1118.2	1119.4	1120.6
152.5°	1125.6	1124.8	1126.3	1129.3	1132.3	1135.3	1138.3	1139.5	1140.7	1141.9	1143.1
155°	1148.2	1147.3	1148.5	1150.9	1153.3	1155.7	1158.1	1159.3	1160.5	1161.7	1162.9
157.5°	1167.9	1167.1	1168.0	1169.8	1171.5	1173.3	1175.1	1176.5	1177.9	1179.3	1180.7
160°	1185.6	1185.0	1185.6	1186.8	1188.0	1189.2	1190.4	1191.6	1192.8	1194.0	1195.2
162.5°	1200.0	1199.4	1199.9	1200.9	1201.9	1202.9	1203.9	1205.3	1206.7	1208.1	1209.5
165°	1212.6	1212.0	1212.3	1212.9	1213.5	1214.1	1214.7	1216.1	1217.5	1218.9	1220.3
167.5°	1222.5	1221.9	1222.2	1222.8	1223.4	1224.0	1224.6	1226.0	1227.4	1228.8	1230.2
170°	1230.6	1230.0	1230.2	1230.6	1231.0	1231.4	1231.8	1233.2	1234.6	1236.0	1237.4
172.5°	1236.0	1235.4	1235.6	1236.0	1236.4	1236.8	1237.2	1238.6	1240.0	1241.4	1242.8
175°	1239.7	1239.0	1239.2	1239.6	1240.0	1240.4	1240.8	1242.2	1243.6	1245.0	1246.4
177.5°	1241.5	1240.8	1240.9	1241.1	1241.3	1241.5	1241.7	1243.1	1244.5	1245.9	1247.3
180°	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0
2.5°	545.2	546.5	543.4	542.5	543.4	540.3	541.2	542.1	542.1	543.4	544.3
5°	513.5	511.8	508.7	507.8	506.9	508.2	507.4	508.7	509.1	512.2	512.6
7.5°	482.3	479.7	477.0	474.4	473.5	471.3	473.5	473.5	476.6	475.7	477.9
10°	445.4	444.9	441.4	440.1	438.3	434.8	439.7	438.3	440.5	444.5	445.4
12.5°	418.1	413.3	415.5	409.3	411.5	408.0	408.4	408.4	412.0	412.4	411.5
15°	392.2	388.2	382.5	379.9	378.5	376.8	382.5	382.9	380.3	386.5	384.3
17.5°	365.8	365.8	360.5	359.2	355.7	357.4	356.6	357.0	356.1	360.5	362.7
20°	342.9	340.7	339.0	339.4	335.0	334.1	333.3	334.1	337.2	340.3	341.2
22.5°	324.5	323.1	318.8	319.6	316.1	317.4	316.6	318.8	319.2	319.2	322.3
25°	306.9	305.1	305.6	303.8	302.5	302.5	301.2	302.5	304.2	305.1	305.6
27.5°	293.7	292.4	290.2	288.9	289.7	287.5	289.3	290.6	290.6	289.7	290.6
30°	277.9	278.7	278.7	274.3	276.1	275.2	276.5	277.4	277.4	277.9	277.0
32.5°	267.3	264.7	264.2	263.8	263.8	262.0	262.0	263.4	263.8	264.2	265.6
35°	253.2	253.2	251.0	252.4	250.6	251.0	250.6	251.0	251.9	250.6	251.9
37.5°	240.5	240.9	240.1	240.9	241.4	240.5	239.6	241.4	240.5	240.5	239.6
40°	229.5	229.1	229.5	229.5	229.5	229.9	229.1	229.1	229.1	228.2	227.3
42.5°	220.3	217.6	218.5	219.0	217.6	217.6	218.1	217.6	219.0	216.3	216.3
45°	207.1	206.2	206.6	206.6	207.5	206.2	207.1	207.5	206.2	205.8	204.9
47.5°	195.2	196.1	195.2	196.1	196.1	197.0	195.2	195.6	196.1	194.3	193.0
50°	183.3	183.3	184.7	184.2	184.7	183.8	183.8	183.3	183.8	182.9	181.6
52.5°	172.3	171.0	173.2	172.8	172.3	171.9	171.5	171.9	171.0	170.1	170.1
55°	158.7	158.7	160.0	160.5	160.5	159.6	158.7	159.2	158.7	158.3	157.8
57.5°	147.7	146.0	146.8	147.3	147.3	146.0	146.8	146.0	146.0	146.4	145.1
60°	133.7	133.7	132.8	134.1	134.1	133.2	133.2	133.7	132.8	132.3	131.9
62.5°	118.7	119.1	120.5	120.9	121.3	120.5	119.6	120.0	120.0	118.7	119.1
65°	106.0	106.8	108.6	108.2	107.3	107.7	106.8	107.3	106.0	106.4	105.1
67.5°	93.6	93.2	93.6	93.6	94.5	94.1	93.2	93.2	92.8	94.1	92.8
70°	80.5	80.5	80.5	80.5	80.9	81.3	80.5	79.6	80.0	79.1	78.7
72.5°	66.8	67.3	66.8	67.7	66.4	67.3	67.3	66.8	66.4	66.4	66.4
75°	54.1	55.0	53.6	54.1	53.6	54.5	54.1	54.1	53.2	52.8	53.2
77.5°	41.3	41.8	40.9	41.3	40.9	41.3	41.3	40.9	40.9	40.9	40.9
80°	29.5	29.9	29.5	29.0	28.6	29.5	28.6	29.0	29.5	29.0	29.9
82.5°	18.9	18.9	18.5	18.9	18.0	18.0	18.5	18.5	18.0	18.9	18.0
85°	9.2	9.2	10.1	9.2	8.8	8.8	8.8	9.2	8.8	9.7	9.2
87.5°	2.2	1.8	2.2	2.2	1.8	1.8	2.2	1.8	2.2	2.6	1.8
90°	22.5	22.7	23.1	23.5	23.9	24.3	23.9	23.5	23.1	22.7	22.5
92.5°	23.4	23.5	23.7	23.9	24.1	24.3	24.1	23.9	23.7	23.5	23.4
95°	39.6	39.5	39.3	39.1	38.9	38.7	38.9	39.1	39.3	39.5	39.6
97.5°	48.6	48.7	48.9	49.1	49.3	49.5	49.3	49.1	48.9	48.7	48.6
100°	58.4	58.6	59.0	59.4	59.8	60.2	59.8	59.4	59.0	58.6	58.4
102.5°	62.9	63.2	63.8	64.4	65.0	65.6	65.0	64.4	63.8	63.2	62.9
105°	64.7	65.1	65.9	66.7	67.5	68.3	67.5	66.7	65.9	65.1	64.7
107.5°	66.5	66.9	67.7	68.5	69.3	70.1	69.3	68.5	67.7	66.9	66.5
110°	67.4	67.8	68.6	69.4	70.2	71.0	70.2	69.4	68.6	67.8	67.4

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	69.2	69.5	70.1	70.7	71.3	71.9	71.3	70.7	70.1	69.5	69.2
115°	138.5	131.3	116.9	102.5	88.1	73.7	88.1	102.5	116.9	131.3	138.5
117.5°	474.7	448.5	396.2	343.9	291.5	239.2	291.5	343.9	396.2	448.5	474.7
120°	669.8	656.3	629.4	602.4	575.5	548.5	575.5	602.4	629.4	656.3	669.8
122.5°	717.5	717.6	717.8	718.0	718.2	718.4	718.2	718.0	717.8	717.6	717.5
125°	766.0	766.3	766.9	767.5	768.1	768.7	768.1	767.5	766.9	766.3	766.0
127.5°	812.8	812.9	813.1	813.3	813.5	813.7	813.5	813.3	813.1	812.9	812.8
130°	856.0	855.9	855.7	855.5	855.3	855.1	855.3	855.5	855.7	855.9	856.0
132.5°	896.4	896.3	896.1	895.9	895.7	895.5	895.7	895.9	896.1	896.3	896.4
135°	936.0	935.8	935.4	935.0	934.6	934.2	934.6	935.0	935.4	935.8	936.0
137.5°	972.8	972.5	971.9	971.3	970.7	970.1	970.7	971.3	971.9	972.5	972.8
140°	1007.9	1007.4	1006.4	1005.4	1004.4	1003.4	1004.4	1005.4	1006.4	1007.4	1007.9
142.5°	1040.3	1039.8	1038.8	1037.8	1036.8	1035.8	1036.8	1037.8	1038.8	1039.8	1040.3
145°	1070.0	1069.5	1068.5	1067.5	1066.5	1065.5	1066.5	1067.5	1068.5	1069.5	1070.0
147.5°	1096.0	1095.6	1094.8	1094.0	1093.2	1092.4	1093.2	1094.0	1094.8	1095.6	1096.0
150°	1121.2	1120.7	1119.7	1118.7	1117.7	1116.7	1117.7	1118.7	1119.7	1120.7	1121.2
152.5°	1143.7	1143.0	1141.6	1140.2	1138.8	1137.4	1138.8	1140.2	1141.6	1143.0	1143.7
155°	1163.5	1162.7	1161.1	1159.5	1157.9	1156.3	1157.9	1159.5	1161.1	1162.7	1163.5
157.5°	1181.4	1180.6	1179.0	1177.4	1175.8	1174.2	1175.8	1177.4	1179.0	1180.6	1181.4
160°	1195.8	1195.1	1193.7	1192.3	1190.9	1189.5	1190.9	1192.3	1193.7	1195.1	1195.8
162.5°	1210.2	1209.3	1207.5	1205.7	1203.9	1202.1	1203.9	1205.7	1207.5	1209.3	1210.2
165°	1221.0	1220.3	1218.9	1217.5	1216.1	1214.7	1216.1	1217.5	1218.9	1220.3	1221.0
167.5°	1230.9	1230.0	1228.2	1226.4	1224.6	1222.8	1224.6	1226.4	1228.2	1230.0	1230.9
170°	1238.1	1237.2	1235.4	1233.6	1231.8	1230.0	1231.8	1233.6	1235.4	1237.2	1238.1
172.5°	1243.5	1242.6	1240.8	1239.0	1237.2	1235.4	1237.2	1239.0	1240.8	1242.6	1243.5
175°	1247.1	1246.1	1244.1	1242.1	1240.1	1238.1	1240.1	1242.1	1244.1	1246.1	1247.1
177.5°	1248.0	1247.1	1245.3	1243.5	1241.7	1239.9	1241.7	1243.5	1245.3	1247.1	1248.0
180°	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0	572.0
2.5°	543.0	546.5	545.2	540.3	546.1	546.1	550.0	550.0	554.9	556.6	559.2
5°	512.2	514.8	517.0	514.8	518.8	525.0	528.5	531.5	538.1	540.8	544.7
7.5°	479.2	484.1	486.3	486.3	492.9	499.9	506.9	511.3	520.6	524.1	528.0
10°	447.1	452.8	457.2	456.8	467.8	472.2	481.0	491.1	500.3	505.6	511.3
12.5°	413.3	416.4	422.5	431.3	433.9	441.9	452.0	464.7	481.4	486.3	494.6
15°	385.1	393.5	398.3	402.3	408.4	415.9	426.9	439.2	455.9	466.5	475.3
17.5°	361.4	372.4	375.5	374.6	382.5	393.9	406.7	415.9	430.9	443.6	452.0
20°	342.1	346.5	351.7	353.9	360.1	372.4	384.7	395.3	407.6	417.7	427.3
22.5°	322.7	326.2	330.6	334.6	339.4	346.5	358.3	371.5	383.4	393.1	404.0
25°	306.9	309.1	313.0	316.1	321.4	326.2	334.6	349.1	363.2	368.9	378.5
27.5°	291.5	293.3	295.9	299.4	302.0	306.9	314.4	326.2	340.7	346.5	359.6
30°	277.9	279.2	281.8	283.6	284.9	290.6	296.3	305.6	316.6	324.5	334.1
32.5°	265.1	266.4	269.1	269.5	271.3	274.3	279.6	288.0	297.6	304.2	312.6
35°	251.0	251.9	254.6	255.4	256.8	259.4	263.4	269.5	278.3	283.1	290.6
37.5°	240.1	239.6	241.4	242.7	244.5	245.8	247.1	253.2	259.8	264.2	270.0
40°	228.2	227.3	227.7	229.5	230.4	232.1	232.1	238.3	242.7	246.2	250.6
42.5°	216.3	215.9	215.0	215.9	216.8	217.2	217.6	222.0	226.4	229.5	234.3
45°	204.4	204.0	203.1	203.6	203.6	204.4	205.8	207.5	210.6	213.2	215.9
47.5°	193.5	192.6	191.3	190.8	191.7	191.7	191.7	193.5	196.5	197.4	200.0
50°	182.0	180.7	178.9	178.1	178.1	177.6	178.5	178.9	181.6	182.5	184.7
52.5°	169.7	168.8	167.1	165.3	165.8	164.9	165.3	165.8	166.6	167.9	169.3
55°	157.4	155.6	154.3	153.9	152.6	152.6	151.2	153.0	152.6	153.0	154.8
57.5°	145.5	143.8	141.6	140.7	139.4	138.9	138.1	137.6	138.1	139.4	140.7
60°	131.5	130.6	129.3	127.9	127.1	125.7	124.9	124.9	124.4	124.4	124.9
62.5°	117.8	117.4	115.6	115.2	114.3	113.4	112.1	111.2	111.2	112.1	112.6
65°	104.6	104.2	102.9	102.4	100.2	99.4	98.9	98.5	97.6	97.6	97.6
67.5°	92.3	91.0	91.0	88.8	87.1	86.2	85.3	84.9	84.9	84.9	85.3
70°	78.7	78.7	77.4	76.1	74.3	74.7	73.4	72.1	72.1	71.2	71.7
72.5°	65.5	65.1	63.8	63.3	62.0	60.7	59.8	60.7	59.4	58.9	59.4
75°	52.8	52.3	51.4	50.6	51.0	49.7	48.4	47.9	47.9	47.0	47.0
77.5°	40.4	41.3	39.6	39.1	38.3	37.4	36.9	36.5	36.5	36.5	37.4
80°	28.1	28.6	28.6	27.7	28.1	26.8	26.8	26.8	25.5	25.9	26.4
82.5°	18.0	18.0	17.6	18.0	17.6	17.6	17.1	17.1	16.7	16.7	17.1
85°	10.1	9.7	9.2	10.1	9.7	9.7	9.2	9.2	9.2	9.2	9.2
87.5°	2.2	2.6	2.6	2.6	2.6	3.1	3.1	3.1	3.5	3.5	3.5
90°	22.0	21.0	20.0	19.0	18.0	16.4	14.8	13.2	11.6	10.8	9.7
92.5°	23.2	22.8	22.4	22.0	21.6	21.0	20.4	19.8	19.2	18.9	19.3
95°	39.1	38.1	37.1	36.1	35.1	33.7	32.3	30.9	29.5	28.8	32.1
97.5°	48.3	47.7	47.1	46.5	45.9	42.7	39.5	36.3	33.1	31.5	39.7
100°	57.6	56.0	54.4	52.8	51.2	47.8	44.4	41.1	37.7	36.0	49.7
102.5°	61.8	59.6	57.4	55.2	53.0	89.4	125.8	162.1	198.5	216.7	216.9
105°	63.6	61.4	59.2	57.0	54.8	109.4	163.9	218.5	273.0	300.3	297.3
107.5°	65.4	63.2	61.0	58.8	56.6	123.9	191.3	258.6	325.9	359.6	357.1
110°	77.4	97.4	117.3	137.3	157.3	215.1	272.8	330.6	388.3	417.2	415.1

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	112.3	198.4	284.5	370.7	456.8	460.2	463.6	466.9	470.3	472.0	470.2
115°	184.8	277.3	369.8	462.3	554.8	549.8	544.8	539.8	534.8	532.3	530.6
117.5°	489.0	517.6	546.1	574.7	603.3	599.9	596.5	593.1	589.7	588.0	586.0
120°	668.6	666.2	663.9	661.5	659.1	655.5	651.9	648.3	644.7	642.9	641.4
122.5°	716.9	715.7	714.5	713.3	712.1	708.1	704.1	700.1	696.1	694.1	692.5
125°	765.3	763.9	762.6	761.2	759.8	756.0	752.2	748.4	744.6	742.7	741.4
127.5°	811.8	809.8	807.8	805.8	803.8	800.8	797.8	794.8	791.8	790.3	788.9
130°	854.9	852.7	850.5	848.3	846.1	843.9	841.7	839.5	837.3	836.2	834.6
132.5°	895.5	893.7	891.9	890.1	888.3	886.1	883.9	881.7	879.5	878.4	877.1
135°	935.0	933.0	931.0	929.0	927.0	925.2	923.4	921.6	919.8	918.9	917.3
137.5°	971.8	969.8	967.9	965.9	963.9	961.9	959.9	957.9	955.9	954.9	953.7
140°	1007.0	1005.2	1003.4	1001.6	999.8	997.6	995.4	993.2	991.0	989.9	989.1
142.5°	1039.5	1037.9	1036.3	1034.7	1033.1	1030.5	1027.9	1025.3	1022.7	1021.4	1020.7
145°	1069.3	1067.9	1066.5	1065.1	1063.7	1060.3	1056.9	1053.5	1050.1	1048.4	1048.5
147.5°	1095.5	1094.5	1093.5	1092.5	1091.5	1088.1	1084.7	1081.3	1077.9	1076.2	1076.5
150°	1120.6	1119.4	1118.2	1117.0	1115.8	1112.6	1109.4	1106.2	1103.0	1101.4	1102.1
152.5°	1143.1	1141.9	1140.7	1139.5	1138.3	1135.3	1132.3	1129.3	1126.3	1124.8	1125.6
155°	1162.9	1161.7	1160.5	1159.3	1158.1	1155.7	1153.3	1150.9	1148.5	1147.3	1148.2
157.5°	1180.7	1179.3	1177.9	1176.5	1175.1	1173.3	1171.5	1169.8	1168.0	1167.1	1167.9
160°	1195.2	1194.0	1192.8	1191.6	1190.4	1189.2	1188.0	1186.8	1185.6	1185.0	1185.6
162.5°	1209.5	1208.1	1206.7	1205.3	1203.9	1202.9	1201.9	1200.9	1199.9	1199.4	1200.0
165°	1220.3	1218.9	1217.5	1216.1	1214.7	1214.1	1213.5	1212.9	1212.3	1212.0	1212.6
167.5°	1230.2	1228.8	1227.4	1226.0	1224.6	1224.0	1223.4	1222.8	1222.2	1221.9	1222.5
170°	1237.4	1236.0	1234.6	1233.2	1231.8	1231.4	1231.0	1230.6	1230.2	1230.0	1230.6
172.5°	1242.8	1241.4	1240.0	1238.6	1237.2	1236.8	1236.4	1236.0	1235.6	1235.4	1236.0
175°	1246.4	1245.0	1243.6	1242.2	1240.8	1240.4	1240.0	1239.6	1239.2	1239.0	1239.7
177.5°	1247.3	1245.9	1244.5	1243.1	1241.7	1241.5	1241.3	1241.1	1240.9	1240.8	1241.5
180°	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	572.0	572.0	572.0	572.0
2.5°	561.4	561.4	568.0	575.1
5°	549.1	552.2	562.8	572.4
7.5°	537.3	542.5	555.7	568.0
10°	522.8	529.8	546.1	560.6
12.5°	508.7	515.3	534.2	550.5
15°	488.9	497.3	517.5	537.7
17.5°	469.1	477.5	502.1	525.8
20°	445.8	456.8	484.5	516.2
22.5°	424.3	437.9	468.7	494.2
25°	400.5	421.6	450.2	483.2
27.5°	379.4	400.5	429.5	463.0
30°	355.7	377.2	407.1	437.9
32.5°	332.8	352.6	381.6	419.4
35°	309.1	328.0	356.1	394.4
37.5°	287.5	306.0	336.8	372.0
40°	266.4	285.8	312.2	347.3
42.5°	246.6	263.8	287.5	322.7
45°	228.6	240.9	262.9	295.9
47.5°	209.7	220.7	240.9	273.9
50°	192.1	201.4	219.0	249.7
52.5°	175.0	182.9	199.2	223.8
55°	159.6	167.1	178.9	203.1
57.5°	143.8	149.5	160.9	180.3
60°	128.4	133.7	142.9	158.7
62.5°	113.0	117.4	126.2	138.9
65°	99.4	102.9	109.5	120.5
67.5°	86.2	88.4	93.6	102.4
70°	73.4	75.2	79.6	86.6
72.5°	59.8	61.6	66.4	71.2
75°	48.4	48.8	52.3	56.3
77.5°	37.8	37.4	40.0	43.1
80°	25.9	27.3	29.5	30.8
82.5°	17.6	18.0	18.9	19.8
85°	9.7	10.1	10.1	11.4
87.5°	4.0	4.4	4.4	4.8
90°	7.5	5.3	3.1	0.9
92.5°	20.1	20.9	21.7	22.5
95°	38.7	45.2	51.8	58.4
97.5°	56.1	72.4	88.8	105.2
100°	77.0	104.4	131.7	159.1
102.5°	217.3	217.7	218.1	218.5
105°	291.3	285.3	279.3	273.3
107.5°	352.1	347.2	342.2	337.2
110°	410.9	406.7	402.5	398.3



TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	466.6	463.1	459.5	455.9
115°	527.2	523.8	520.4	517.0
117.5°	582.0	578.0	574.0	570.0
120°	638.4	635.4	632.4	629.4
122.5°	689.3	686.1	682.9	679.7
125°	738.8	736.2	733.6	731.0
127.5°	786.1	783.3	780.5	777.7
130°	831.4	828.2	825.0	821.8
132.5°	874.5	872.0	869.4	866.8
135°	914.1	910.9	907.7	904.5
137.5°	951.3	948.9	946.5	944.1
140°	987.5	985.9	984.3	982.7
142.5°	1019.3	1017.9	1016.5	1015.1
145°	1048.7	1048.9	1049.1	1049.3
147.5°	1077.1	1077.7	1078.3	1078.9
150°	1103.5	1104.9	1106.3	1107.7
152.5°	1127.2	1128.8	1130.4	1132.0
155°	1150.0	1151.8	1153.6	1155.4
157.5°	1169.5	1171.0	1172.6	1174.2
160°	1186.8	1188.0	1189.2	1190.4
162.5°	1201.2	1202.4	1203.6	1204.8
165°	1213.8	1215.0	1216.2	1217.4
167.5°	1223.7	1224.9	1226.1	1227.3
170°	1231.8	1233.0	1234.2	1235.4
172.5°	1237.2	1238.4	1239.6	1240.8
175°	1241.1	1242.5	1243.9	1245.3
177.5°	1242.9	1244.3	1245.7	1247.1
180°	1242.6	1242.6	1242.6	1242.6

TEST NUMBER: P998330

CATALOG NUMBER: SA2XXDIP-B290D925UB2750-4F0-XX-W2A-A_4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.65	11.31	11.79	12.44	14.02	8.14	8.80	9.29	9.94	11.52
	3H	11.44	12.04	12.60	13.18	14.77	9.47	10.06	10.62	11.20	12.80
	4H	11.60	12.17	12.76	13.31	14.91	9.92	10.49	11.08	11.63	13.23
	6H	11.64	12.16	12.81	13.30	14.91	10.22	10.74	11.39	11.88	13.49
	8H	11.61	12.10	12.78	13.26	14.87	10.30	10.79	11.47	11.95	13.55
	12H	11.57	12.04	12.74	13.19	14.81	10.33	10.80	11.51	11.95	13.58
4H	2H	10.66	11.23	11.83	12.37	13.97	8.56	9.13	9.73	10.27	11.87
	3H	11.63	12.10	12.80	13.26	14.88	10.00	10.47	11.18	11.64	13.25
	4H	11.90	12.33	13.07	13.48	15.11	10.53	10.96	11.71	12.12	13.75
	6H	12.02	12.38	13.20	13.56	15.18	10.90	11.27	12.08	12.45	14.07
	8H	12.01	12.35	13.19	13.52	15.16	11.01	11.35	12.19	12.52	14.16
	12H	11.96	12.28	13.16	13.46	15.10	11.05	11.37	12.25	12.55	14.19
8H	4H	11.89	12.23	13.07	13.40	15.04	10.66	11.00	11.84	12.17	13.81
	6H	12.06	12.35	13.26	13.56	15.19	11.09	11.37	12.29	12.58	14.22
	8H	12.09	12.34	13.29	13.53	15.18	11.24	11.48	12.44	12.67	14.33
	12H	12.07	12.28	13.27	13.47	15.16	11.32	11.54	12.53	12.72	14.41
12H	4H	11.84	12.15	13.03	13.33	14.97	10.62	10.94	11.82	12.12	13.76
	6H	12.04	12.29	13.24	13.47	15.13	11.09	11.33	12.29	12.52	14.18
	8H	12.06	12.28	13.27	13.47	15.15	11.23	11.45	12.44	12.64	14.32