

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P998509

Luminaire Tested: SA2XXDIP-B485D530UB2750-4F0-XX-W2A-D_2700K

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P998509
REPORT IS A COMBINATION OF REPORTS P984252 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-B485D530UB2750-4F0-XX-W2A-D_2700K
Description: Define 2 Direct/Indirect Pendant with 2700K BioUP LEDs {m-DER=0.473} {m-EER=0.52}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4043.0 lumens
Efficiency: N/A
Efficacy: 102.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.31 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 39.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P998509

CATALOG NUMBER: SA2XXDIP-B485D530UB2750-4F0-XX-W2A-D_2700K

Luminous Intensity Polar Plot

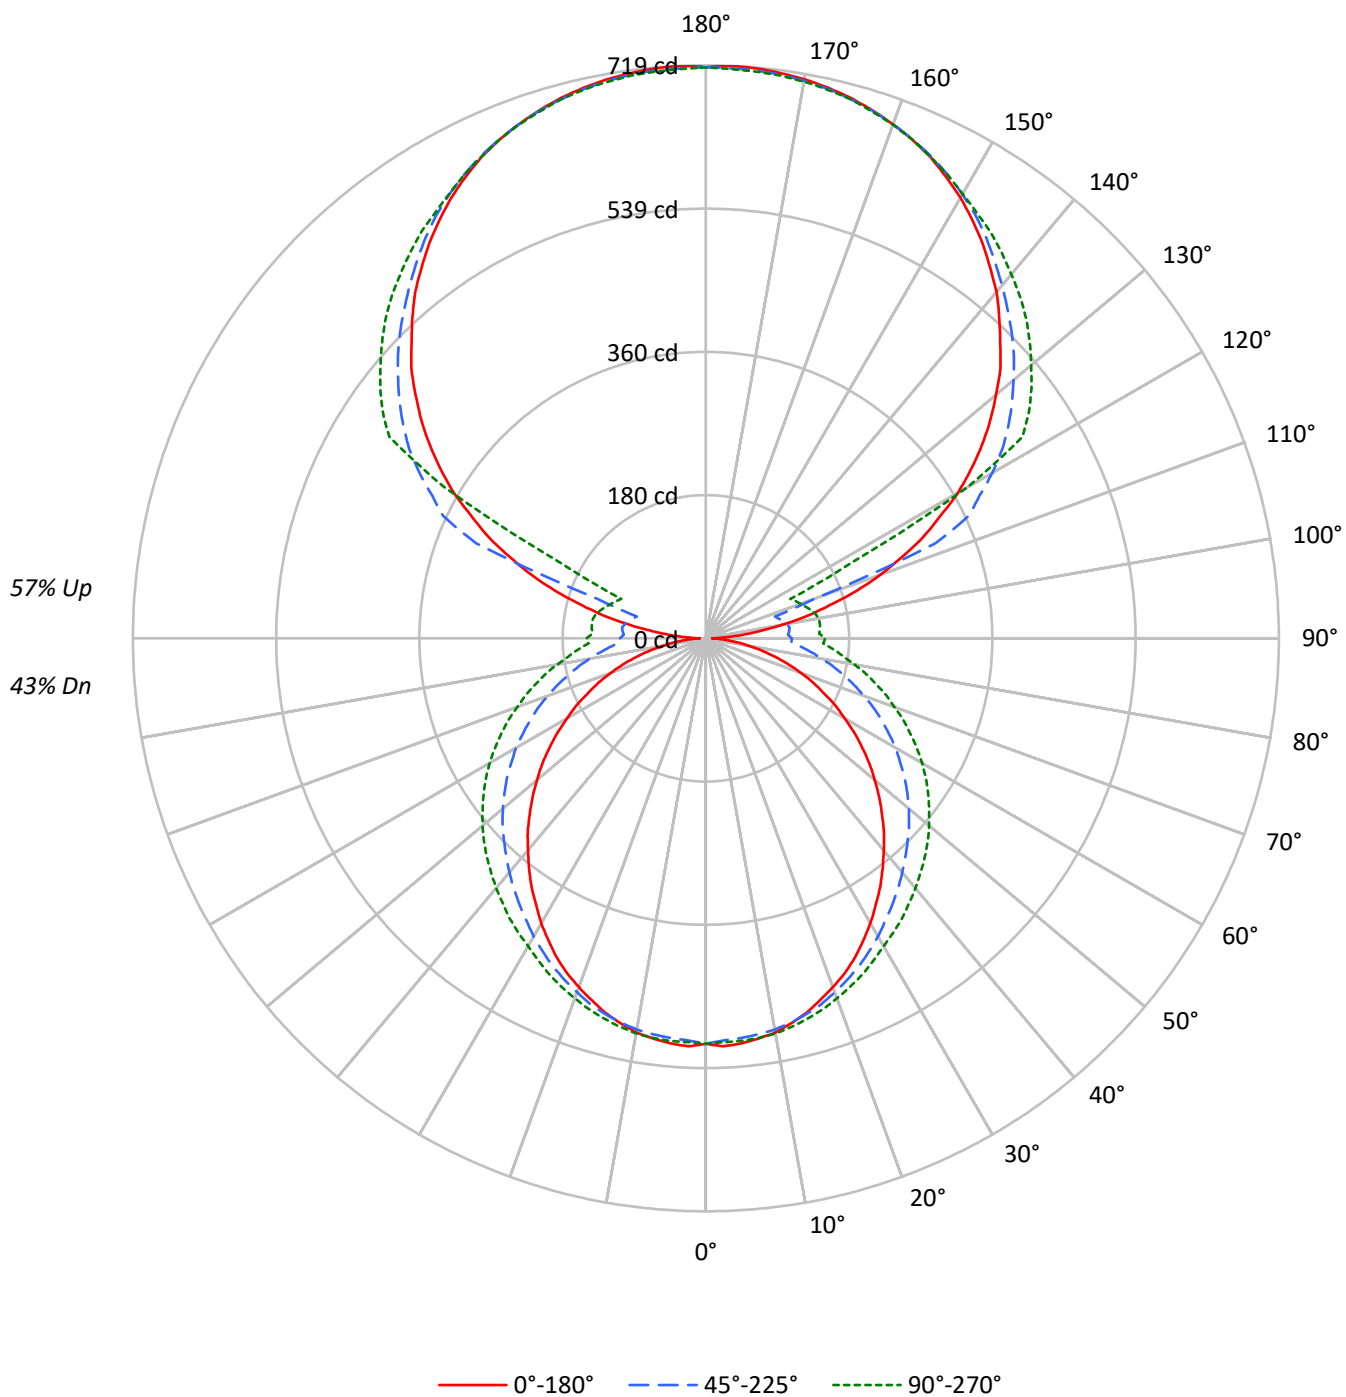

TEST NUMBER: P998509

CATALOG NUMBER: SA2XXDIP-B485D530UB2750-4F0-XX-W2A-D_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	49	49	49
1	95	90	86	82	86	82	78	75	68	65	62	54	52	50	42	40	39	39	39	33
2	86	78	71	66	78	71	65	61	58	54	51	47	44	41	36	34	32	32	32	27
3	78	68	60	54	71	62	55	50	51	46	42	41	37	34	31	29	27	27	27	22
4	71	60	52	45	64	55	48	42	45	40	35	36	32	29	28	25	23	23	23	19
5	65	53	45	39	59	49	41	36	40	34	30	32	28	25	25	22	19	19	19	16
6	60	47	39	33	54	44	36	31	36	30	26	29	25	21	22	19	17	17	17	14
7	55	43	35	29	50	39	32	27	33	27	23	26	22	19	20	17	15	15	15	12
8	51	39	31	25	46	36	28	24	30	24	20	24	20	17	19	16	13	13	13	11
9	48	35	28	22	43	32	26	21	27	22	18	22	18	15	17	14	12	12	12	10
10	44	32	25	20	40	30	23	19	25	20	16	20	16	13	16	13	11	11	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8052	8052	8052
5°	8089	7708	7665
10°	8035	7442	7332
15°	7921	7166	6992
20°	7777	6876	6670
25°	7636	6597	6376
30°	7440	6315	6085
35°	7240	6043	5873
40°	7027	5809	5661
45°	6827	5595	5476
50°	6612	5398	5294
55°	6384	5190	5108
60°	6108	4972	4913
65°	5819	4722	4689
70°	5491	4454	4447
75°	5074	4184	4219
80°	4415	3905	3984
85°	3743	3641	3779

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 6827 cd/sqm

TEST NUMBER: P998509

CATALOG NUMBER: SA2XXDIP-B485D530UB2750-4F0-XX-W2A-D_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.2	1.2
10°-20°	138.3	3.4
20°-30°	209.6	5.2
30°-40°	255.2	6.3
40°-50°	274.6	6.8
50°-60°	266.6	6.6
60°-70°	232.9	5.8
70°-80°	179.2	4.4
80°-90°	121.3	3.0
90°-100°	106.4	2.6
100°-110°	148.6	3.7
110°-120°	273.5	6.8
120°-130°	409.7	10.1
130°-140°	420.9	10.4
140°-150°	384.1	9.5
150°-160°	307.5	7.6
160°-170°	198.2	4.9
170°-180°	68.2	1.7
0°-30°	396.1	9.8
0°-40°	651.3	16.1
0°-60°	1192.5	29.5
0°-90°	1725.9	42.7
90°-120°	528.5	13.1
90°-150°	1743.2	43.1
90°-180°	2317.0	57.3
0°-180°	4043.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	509	509	509	509	509	
5°	510	508	504	508	507	48
15°	487	488	488	495	494	137
25°	442	448	454	463	465	203
35°	381	394	408	424	429	238
45°	313	332	358	381	388	241
55°	240	266	304	331	341	214
65°	164	200	243	274	283	163
75°	91	132	179	211	220	96
85°	26	72	119	150	161	28
90°	8	56	108	140	150	7
95°	40	57	105	136	144	45
105°	161	198	95	126	137	173
115°	301	318	364	146	117	296
125°	423	430	463	487	495	378
135°	522	531	543	563	568	404
145°	605	605	613	621	622	379
155°	666	662	668	671	667	307
165°	702	699	700	704	700	198
175°	718	714	716	719	714	68
180°	717	717	717	717	717	

TEST NUMBER: P998509

CATALOG NUMBER: SA2XXDIP-B485D530UB2750-4F0-XX-W2A-D_2700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	508.7	508.7	508.7	508.7	508.7
2.5°	512.4	510.2	505.0	508.7	507.2
5°	510.2	508.0	503.5	508.0	507.2
7.5°	506.5	505.0	501.3	506.5	505.7
10°	502.1	500.6	498.4	504.3	503.5
12.5°	494.7	495.4	493.9	499.8	499.1
15°	486.6	488.1	488.1	494.7	493.9
17.5°	476.3	479.2	481.4	488.1	488.1
20°	465.9	469.6	472.6	480.7	480.7
22.5°	454.9	459.3	463.7	471.8	473.3
25°	442.3	447.5	454.1	463.0	465.2
27.5°	427.6	435.7	443.1	454.1	455.6
30°	412.9	422.4	432.0	443.8	446.0
32.5°	396.6	407.7	419.5	433.5	437.9
35°	381.2	393.7	407.7	423.9	429.1
37.5°	364.2	378.2	395.9	413.6	418.8
40°	347.2	363.5	383.4	402.5	409.2
42.5°	331.0	347.2	370.8	392.2	398.8
45°	312.6	332.5	358.3	381.2	388.5
47.5°	294.9	316.3	345.8	369.4	377.5
50°	276.5	299.3	332.5	357.6	365.7
52.5°	258.8	283.1	318.5	344.3	353.1
55°	239.6	266.1	304.5	331.0	340.6
57.5°	221.2	250.7	289.0	317.7	327.3
60°	201.3	233.0	275.0	303.0	313.3
62.5°	183.6	216.7	258.8	289.0	298.6
65°	163.7	199.8	243.3	273.5	283.1
67.5°	146.0	183.6	227.8	258.0	268.4
70°	126.8	165.1	210.9	242.6	251.4
72.5°	109.1	148.9	195.4	226.3	237.4
75°	90.7	132.0	179.1	210.9	220.4
77.5°	73.0	115.7	163.7	195.4	205.7
80°	55.3	100.3	148.2	179.1	189.5
82.5°	40.5	84.8	133.4	164.4	174.0
85°	26.5	72.2	119.4	150.4	160.7
87.5°	16.2	60.5	107.6	137.9	147.4
90°	7.9	56.3	107.7	139.8	149.7
92.5°	19.6	56.6	103.1	132.9	142.3
95°	39.6	57.1	105.0	135.6	143.9
97.5°	65.9	55.0	106.0	134.9	144.2
100°	97.0	53.1	103.3	134.7	143.8
102.5°	130.4	153.8	99.2	131.4	141.1
105°	161.3	198.3	95.0	126.5	136.7
107.5°	198.1	228.8	90.9	121.7	131.8
110°	232.6	258.3	144.5	116.3	126.5

TEST NUMBER: P998509

CATALOG NUMBER: SA2XXDIP-B485D530UB2750-4F0-XX-W2A-D_2700K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	265.8	286.9	312.1	112.1	121.9
115°	301.0	318.1	364.1	146.2	117.0
117.5°	330.9	347.2	387.0	335.0	206.5
120°	365.2	375.9	414.8	441.6	379.7
122.5°	394.2	403.2	440.9	463.9	471.1
125°	423.0	429.8	463.2	486.8	494.9
127.5°	450.0	456.5	484.1	507.8	514.9
130°	475.4	482.9	504.1	527.5	532.9
132.5°	501.3	507.3	524.1	545.7	551.1
135°	522.3	530.6	542.7	563.4	568.2
137.5°	545.1	551.4	560.2	579.4	583.1
140°	567.4	570.9	578.1	594.5	596.4
142.5°	586.1	589.0	595.8	608.7	609.8
145°	605.1	604.6	613.4	621.4	622.5
147.5°	622.2	620.6	629.5	632.8	632.9
150°	638.8	635.2	643.5	646.6	644.0
152.5°	652.8	648.6	656.4	659.5	655.9
155°	666.3	661.6	667.8	670.9	666.8
157.5°	677.2	673.0	677.7	681.3	677.2
160°	686.5	683.4	686.5	689.6	686.0
162.5°	694.8	691.7	694.3	697.9	693.2
165°	702.1	698.9	700.5	704.1	700.5
167.5°	707.8	704.6	706.2	709.8	705.2
170°	712.4	709.3	710.4	714.0	709.3
172.5°	715.5	712.4	713.5	717.1	712.4
175°	718.1	714.5	715.5	719.2	714.0
177.5°	719.2	715.5	716.1	719.7	715.0
180°	716.6	716.6	716.6	716.6	716.6

TEST NUMBER: P998509

CATALOG NUMBER: SA2XXDIP-B485D530UB2750-4F0-XX-W2A-D_2700K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.75	12.59	12.76	13.62	14.98	14.83	15.67	15.83	16.69	18.06
	3H	13.21	13.97	14.23	15.00	16.39	17.41	18.17	18.43	19.21	20.59
	4H	13.69	14.41	14.72	15.44	16.84	18.67	19.39	19.70	20.42	21.82
	6H	13.97	14.64	15.01	15.68	17.08	19.96	20.63	21.00	21.67	23.08
	8H	14.03	14.67	15.07	15.72	17.12	20.62	21.26	21.67	22.32	23.72
	12H	14.04	14.65	15.09	15.70	17.13	21.35	21.95	22.40	23.00	24.43
4H	2H	12.80	13.52	13.84	14.56	15.95	15.15	15.88	16.19	16.91	18.31
	3H	14.51	15.12	15.55	16.18	17.59	17.94	18.56	18.99	19.62	21.03
	4H	15.13	15.69	16.18	16.75	18.18	19.36	19.92	20.41	20.98	22.41
	6H	15.54	16.03	16.60	17.11	18.53	20.83	21.32	21.89	22.39	23.82
	8H	15.65	16.11	16.71	17.18	18.62	21.58	22.04	22.64	23.11	24.55
	12H	15.69	16.11	16.77	17.19	18.64	22.41	22.83	23.49	23.91	25.36
8H	4H	15.92	16.38	16.98	17.45	18.89	19.50	19.96	20.56	21.03	22.47
	6H	16.55	16.93	17.63	18.04	19.48	21.13	21.52	22.21	22.63	24.06
	8H	16.77	17.11	17.86	18.20	19.66	22.02	22.36	23.11	23.46	24.91
	12H	16.90	17.20	18.00	18.29	19.79	23.01	23.32	24.11	24.41	25.90
12H	4H	16.11	16.53	17.19	17.61	19.06	19.48	19.89	20.55	20.98	22.42
	6H	16.88	17.22	17.97	18.32	19.77	21.16	21.50	22.24	22.59	24.05
	8H	17.19	17.49	18.28	18.58	20.07	22.08	22.39	23.18	23.48	24.97