

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P998749

Luminaire Tested: SA2XXDIP-B675D330UB2750-4F0-XX-W2A-D_4000K

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P998749
REPORT IS A COMBINATION OF REPORTS P984495 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-B675D330UB2750-4F0-XX-W2A-D_4000K
Description: Define 2 Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865} {m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3997.9 lumens
Efficiency: N/A
Efficacy: 88.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.31 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 45.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P998749

CATALOG NUMBER: SA2XXDIP-B675D330UB2750-4F0-XX-W2A-D_4000K

Luminous Intensity Polar Plot

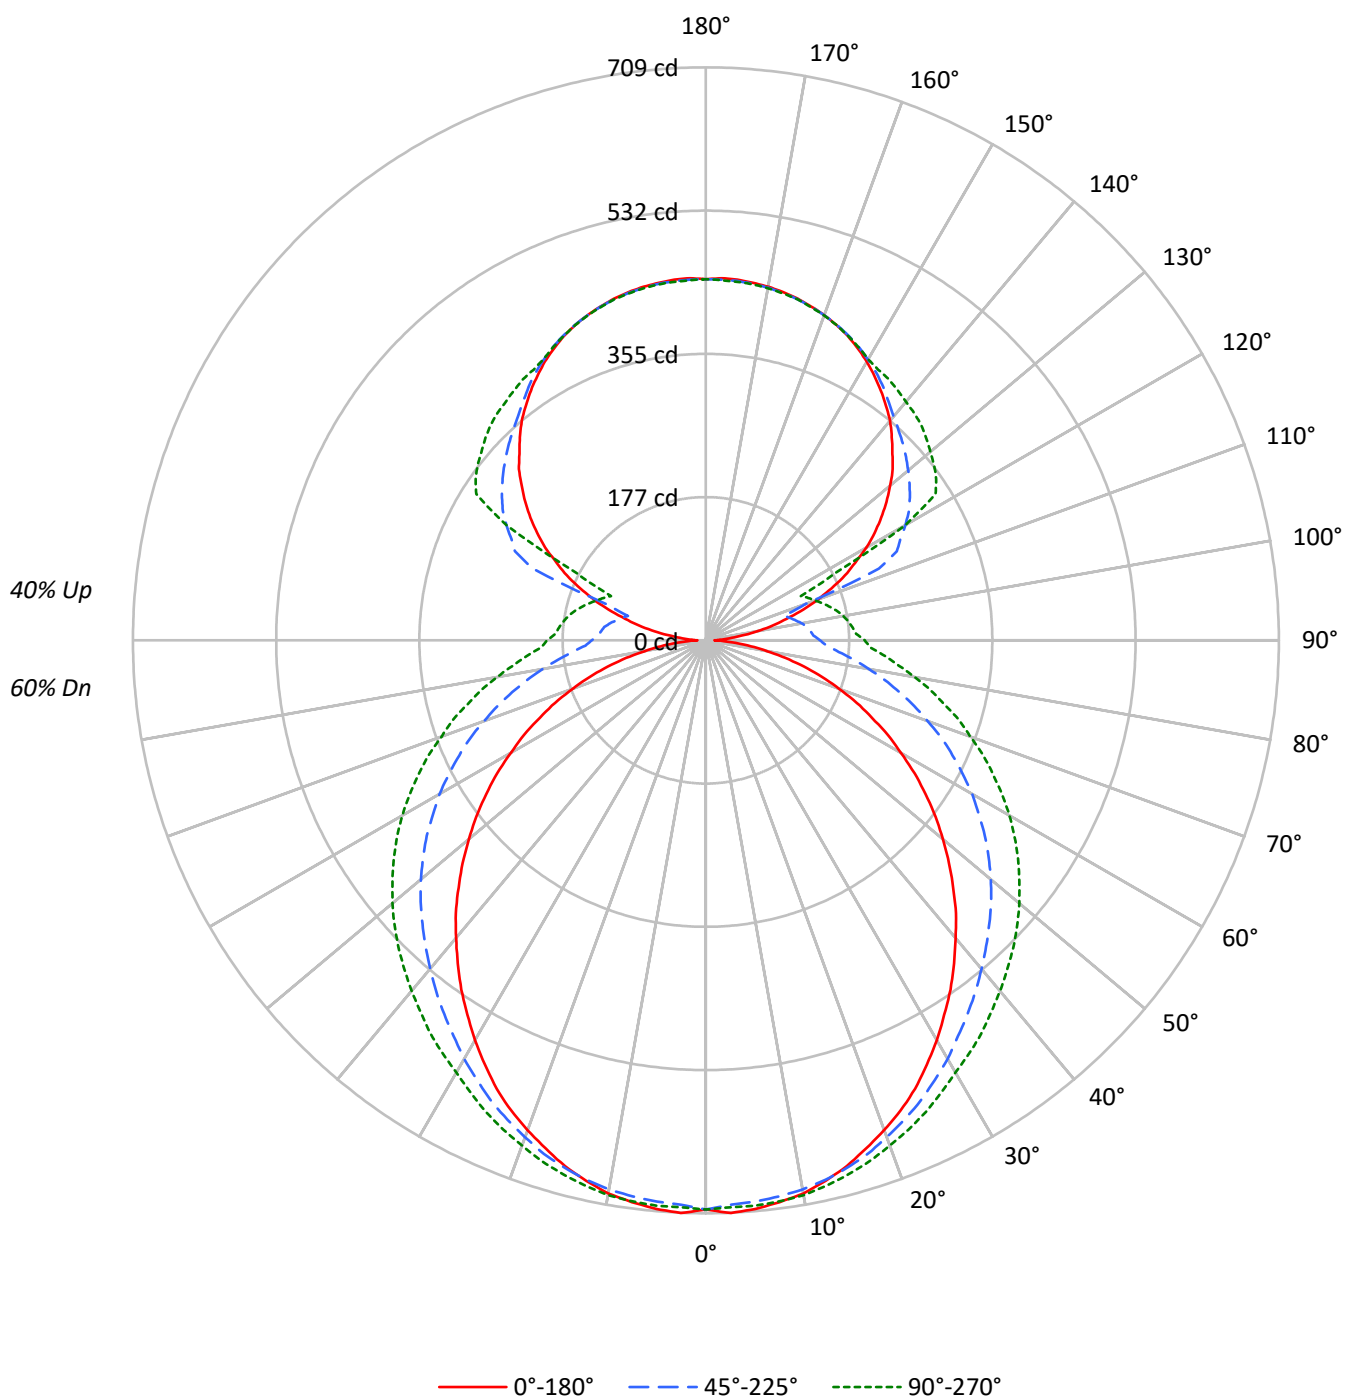

TEST NUMBER: P998749

CATALOG NUMBER: SA2XXDIP-B675D330UB2750-4F0-XX-W2A-D_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	89	89	89	76	76	76	65	65	65
1	98	93	88	84	91	87	83	79	75	72	69	65	62	60	55	53	51
2	89	80	73	67	82	75	69	63	65	60	56	56	52	49	47	44	42
3	80	70	62	55	75	65	58	52	57	51	46	49	44	40	41	38	35
4	73	62	53	46	68	58	50	44	50	44	39	43	38	34	36	33	30
5	67	55	46	39	62	51	43	37	45	38	33	38	33	29	33	29	25
6	62	49	40	34	57	46	38	32	40	34	29	35	29	26	30	25	22
7	57	44	36	30	53	41	34	28	36	30	25	31	26	22	27	23	20
8	53	40	32	26	49	38	30	25	33	27	22	29	24	20	25	21	17
9	49	36	29	23	46	34	27	22	30	24	20	26	21	18	23	19	16
10	46	33	26	21	43	32	25	20	28	22	18	24	20	16	21	17	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11147	11147	11147
5°	11197	10672	10612
10°	11122	10301	10152
15°	10965	9919	9680
20°	10767	9518	9232
25°	10573	9134	8827
30°	10297	8743	8425
35°	10020	8366	8130
40°	9729	8041	7836
45°	9450	7745	7580
50°	9152	7473	7328
55°	8839	7184	7072
60°	8454	6883	6801
65°	8055	6537	6491
70°	7600	6165	6156
75°	7021	5793	5842
80°	6108	5405	5514
85°	5184	5040	5232

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 9450 cd/sqm

TEST NUMBER: P998749

CATALOG NUMBER: SA2XXDIP-B675D330UB2750-4F0-XX-W2A-D_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.8	1.7
10°-20°	191.5	4.8
20°-30°	290.1	7.3
30°-40°	353.3	8.8
40°-50°	380.1	9.5
50°-60°	369.1	9.2
60°-70°	322.4	8.1
70°-80°	248.1	6.2
80°-90°	166.9	4.2
90°-100°	129.4	3.2
100°-110°	138.7	3.5
110°-120°	201.0	5.0
120°-130°	272.4	6.8
130°-140°	269.6	6.7
140°-150°	240.7	6.0
150°-160°	191.8	4.8
160°-170°	123.6	3.1
170°-180°	42.5	1.1
0°-30°	548.3	13.7
0°-40°	901.6	22.6
0°-60°	1650.8	41.3
0°-90°	2388.2	59.7
90°-120°	469.0	11.7
90°-150°	1251.8	31.3
90°-180°	1610.0	40.3
0°-180°	3997.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	704	704	704	704	704	
5°	706	703	697	703	702	67
15°	674	676	676	685	684	190
25°	612	620	629	641	644	282
35°	528	545	564	587	594	330
45°	433	460	496	528	538	334
55°	332	368	422	458	472	297
65°	227	277	337	379	392	225
75°	126	183	248	292	305	133
85°	37	100	165	208	222	39
90°	10	73	141	184	196	8
95°	29	66	130	170	182	31
105°	103	143	108	147	159	111
115°	190	207	261	142	130	187
125°	265	269	308	338	348	237
135°	326	332	345	369	377	252
145°	377	377	383	391	394	236
155°	416	413	416	418	416	191
165°	438	436	437	439	437	124
175°	448	446	446	448	445	43
180°	447	447	447	447	447	

TEST NUMBER: P998749

CATALOG NUMBER: SA2XXDIP-B675D330UB2750-4F0-XX-W2A-D_4000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	704.2	704.2	704.2	704.2	704.2
2.5°	709.3	706.2	699.1	704.2	702.2
5°	706.2	703.2	697.1	703.2	702.2
7.5°	701.1	699.1	694.0	701.1	700.1
10°	695.0	693.0	689.9	698.1	697.1
12.5°	684.8	685.8	683.8	692.0	690.9
15°	673.6	675.6	675.6	684.8	683.8
17.5°	659.3	663.4	666.4	675.6	675.6
20°	645.0	650.1	654.2	665.4	665.4
22.5°	629.7	635.8	641.9	653.2	655.2
25°	612.4	619.5	628.7	640.9	644.0
27.5°	591.9	603.2	613.4	628.7	630.7
30°	571.5	584.8	598.1	614.4	617.5
32.5°	549.1	564.4	580.7	600.1	606.2
35°	527.6	545.0	564.4	586.8	594.0
37.5°	504.2	523.6	548.1	572.5	579.7
40°	480.7	503.1	530.7	557.2	566.4
42.5°	458.2	480.7	513.4	543.0	552.1
45°	432.7	460.3	496.0	527.6	537.8
47.5°	408.2	437.8	478.7	511.3	522.5
50°	382.7	414.4	460.3	495.0	506.2
52.5°	358.2	391.9	440.9	476.6	488.9
55°	331.7	368.4	421.5	458.2	471.5
57.5°	306.2	347.0	400.1	439.9	453.1
60°	278.6	322.5	380.7	419.5	433.7
62.5°	254.1	300.1	358.2	400.1	413.3
65°	226.6	276.6	336.8	378.6	391.9
67.5°	202.1	254.1	315.4	357.2	371.5
70°	175.5	228.6	291.9	335.8	348.0
72.5°	151.0	206.2	270.5	313.3	328.6
75°	125.5	182.7	248.0	291.9	305.2
77.5°	101.0	160.2	226.6	270.5	284.7
80°	76.5	138.8	205.1	248.0	262.3
82.5°	56.1	117.4	184.7	227.6	240.9
85°	36.7	100.0	165.3	208.2	222.5
87.5°	22.5	83.7	149.0	190.8	204.1
90°	10.5	73.3	141.2	183.6	196.5
92.5°	17.3	70.1	133.3	173.7	186.3
95°	29.2	66.4	130.0	170.3	182.3
97.5°	44.9	62.3	126.7	165.5	178.0
100°	64.3	57.8	120.5	160.8	172.7
102.5°	84.7	117.7	114.0	154.3	166.5
105°	103.4	142.7	107.5	146.8	159.3
107.5°	126.4	159.0	101.0	139.2	151.8
110°	147.4	174.6	131.1	131.5	143.9

TEST NUMBER: P998749

CATALOG NUMBER: SA2XXDIP-B675D330UB2750-4F0-XX-W2A-D_4000K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	168.1	190.2	231.7	124.9	137.1
115°	190.0	206.7	260.7	141.7	129.6
117.5°	208.1	222.7	271.1	255.4	180.9
120°	229.5	238.3	285.0	317.4	285.1
122.5°	247.6	253.8	297.9	327.5	337.0
125°	264.9	269.1	308.0	337.8	347.9
127.5°	281.7	285.3	317.7	346.4	356.0
130°	297.6	301.7	326.8	354.8	362.6
132.5°	313.7	316.9	335.8	362.2	370.1
135°	326.3	331.5	344.6	369.3	376.8
137.5°	340.6	344.4	352.8	375.4	381.6
140°	354.5	356.0	361.6	380.9	385.4
142.5°	366.1	367.4	371.6	386.4	389.8
145°	377.4	377.1	382.6	390.9	394.4
147.5°	388.1	387.1	392.6	395.2	397.0
150°	398.4	396.1	401.3	403.3	401.6
152.5°	407.1	404.6	409.4	411.3	409.1
155°	415.6	412.6	416.5	418.5	415.9
157.5°	422.3	419.8	422.7	424.9	422.3
160°	428.2	426.2	428.2	430.1	427.8
162.5°	433.3	431.4	433.0	435.3	432.4
165°	437.9	435.9	436.9	439.2	436.9
167.5°	441.4	439.5	440.5	442.7	439.8
170°	444.3	442.4	443.0	445.3	442.4
172.5°	446.3	444.3	445.0	447.2	444.3
175°	447.9	445.6	446.3	448.5	445.3
177.5°	448.5	446.3	446.6	448.9	446.0
180°	446.9	446.9	446.9	446.9	446.9

TEST NUMBER: P998749

CATALOG NUMBER: SA2XXDIP-B675D330UB2750-4F0-XX-W2A-D_4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.42	15.44	15.28	16.33	17.45	17.50	18.52	18.35	19.40	20.53
	3H	15.89	16.82	16.76	17.71	18.86	20.10	21.02	20.96	21.92	23.06
	4H	16.37	17.25	17.26	18.16	19.31	21.36	22.23	22.24	23.14	24.29
	6H	16.67	17.48	17.56	18.39	19.56	22.66	23.47	23.56	24.38	25.55
	8H	16.73	17.51	17.63	18.44	19.60	23.32	24.10	24.23	25.03	26.20
	12H	16.75	17.49	17.66	18.42	19.61	24.05	24.80	24.96	25.72	26.92
4H	2H	15.49	16.37	16.38	17.27	18.42	17.84	18.72	18.73	19.62	20.78
	3H	17.21	17.95	18.11	18.89	20.06	20.65	21.39	21.55	22.33	23.50
	4H	17.84	18.52	18.75	19.45	20.65	22.07	22.76	22.98	23.68	24.88
	6H	18.26	18.86	19.18	19.81	21.01	23.54	24.15	24.47	25.10	26.29
	8H	18.37	18.94	19.30	19.88	21.09	24.31	24.87	25.23	25.82	27.03
	12H	18.42	18.94	19.37	19.90	21.12	25.14	25.66	26.09	26.62	27.84
8H	4H	18.64	19.20	19.56	20.15	21.36	22.23	22.79	23.15	23.74	24.95
	6H	19.28	19.75	20.23	20.74	21.95	23.86	24.34	24.81	25.32	26.53
	8H	19.50	19.93	20.46	20.90	22.13	24.75	25.18	25.71	26.16	27.38
	12H	19.64	20.02	20.61	20.99	22.26	25.76	26.13	26.72	27.10	28.38
12H	4H	18.84	19.36	19.79	20.32	21.54	22.21	22.72	23.15	23.69	24.90
	6H	19.61	20.04	20.57	21.02	22.24	23.89	24.31	24.85	25.29	26.52
	8H	19.93	20.30	20.89	21.28	22.55	24.83	25.20	25.79	26.17	27.45