

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P998235

Luminaire Tested: SA2XXDIP-B290D530UB35-4F0-XX-W2A-D1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P998235
REPORT IS A COMBINATION OF REPORTS P983975 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-B290D530UB35-4F0-XX-W2A-D1
Description: Define 2 Direct/Indirect Pendant with 3500K BioUP LEDs {m-DER=0.721} {m-EER=0.792}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3072.0 lumens
Efficiency: N/A
Efficacy: 108.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.31 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 28.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P998235

CATALOG NUMBER: SA2XXDIP-B290D530UB35-4F0-XX-W2A-D1

Luminous Intensity Polar Plot

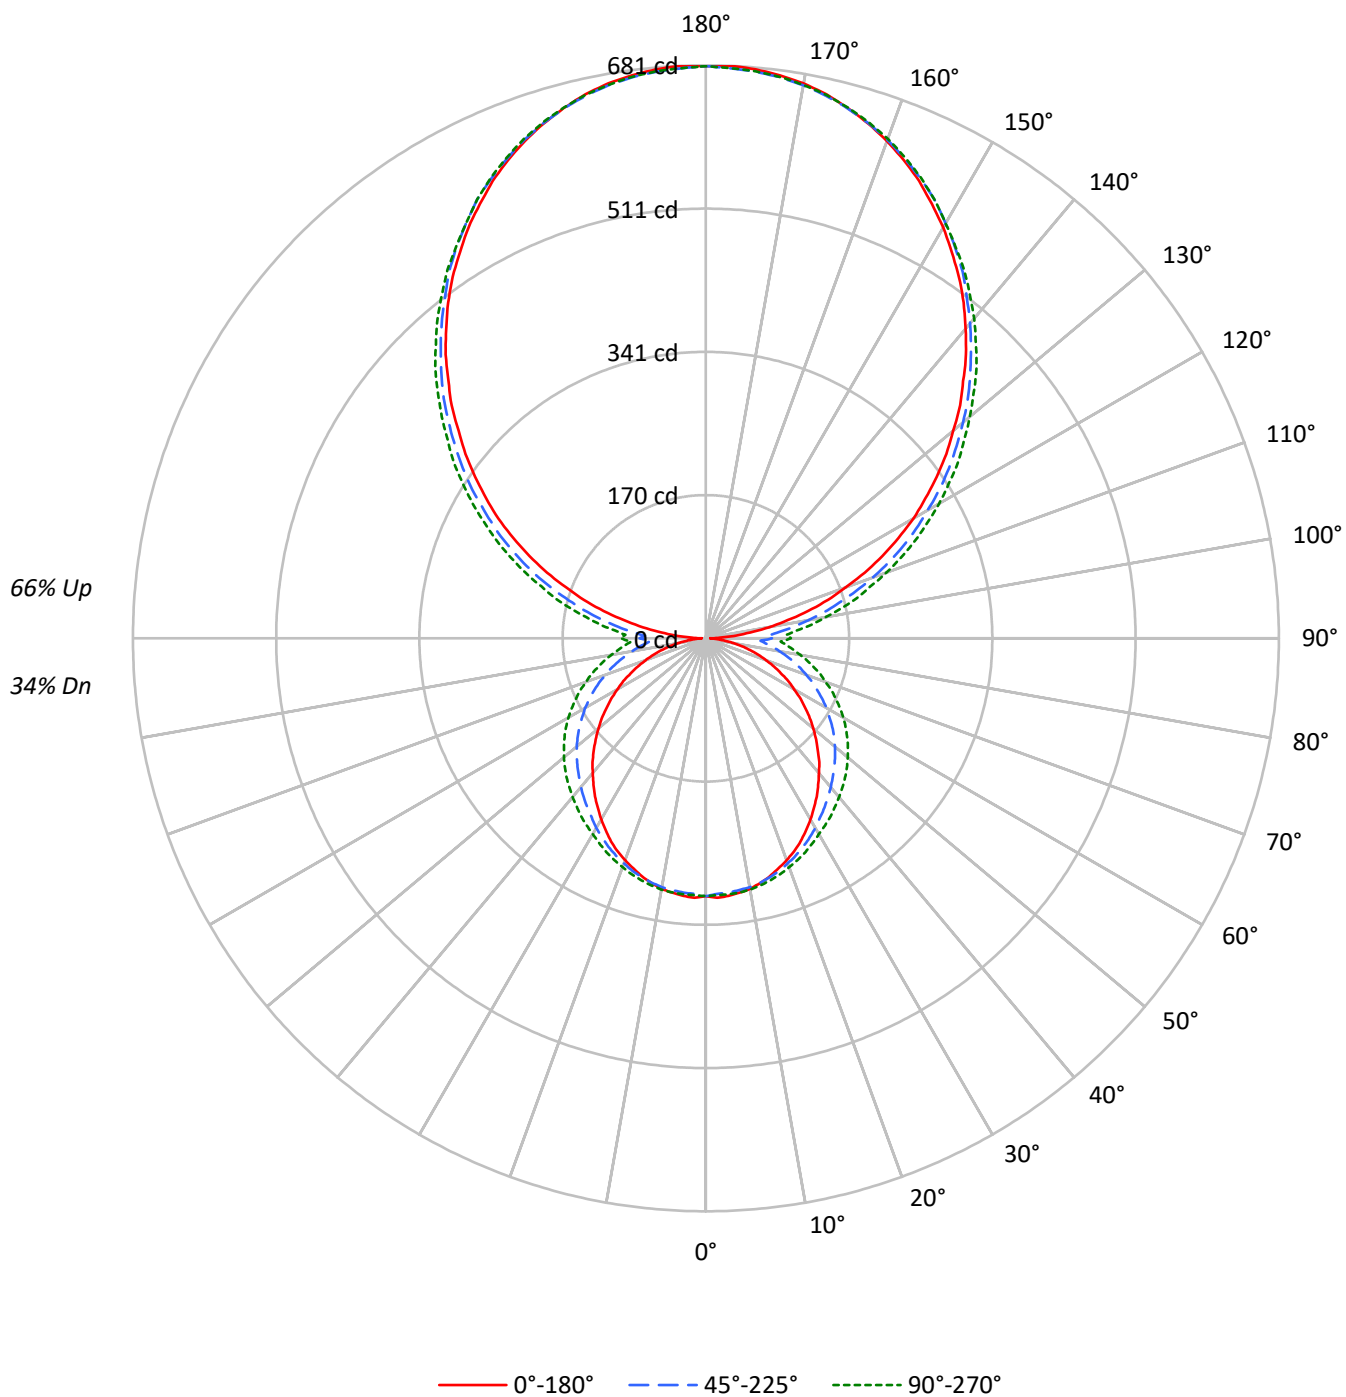

TEST NUMBER: P998235

CATALOG NUMBER: SA2XXDIP-B290D530UB35-4F0-XX-W2A-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	93	88	84	81	84	80	76	73	64	61	59	49	47	45	35	34	33
2	84	77	70	65	76	69	64	59	55	51	48	42	39	37	30	28	27
3	77	67	59	54	69	60	54	49	48	44	40	37	34	31	26	24	22
4	70	59	51	45	63	53	46	41	43	37	33	33	29	26	23	21	19
5	64	52	44	38	57	47	40	35	38	33	29	29	25	22	21	18	16
6	59	47	39	33	53	42	35	30	34	29	25	26	22	19	19	16	14
7	54	42	34	28	49	38	31	26	31	25	22	24	20	17	17	15	13
8	50	38	30	25	45	34	28	23	28	23	19	22	18	15	16	13	11
9	47	34	27	22	42	31	25	20	25	20	17	20	16	13	14	12	10
10	43	31	24	20	39	29	22	18	23	18	15	18	15	12	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4850	4850	4850
5°	4872	4643	4617
10°	4839	4483	4417
15°	4770	4315	4212
20°	4684	4141	4017
25°	4599	3973	3840
30°	4479	3804	3665
35°	4360	3639	3537
40°	4232	3498	3409
45°	4112	3370	3298
50°	3982	3252	3188
55°	3845	3126	3076
60°	3678	2994	2959
65°	3505	2843	2824
70°	3309	2682	2678
75°	3054	2520	2542
80°	2659	2351	2399
85°	2260	2192	2276

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4112 cd/sqm

TEST NUMBER: P998235

CATALOG NUMBER: SA2XXDIP-B290D530UB35-4F0-XX-W2A-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.0	0.9
10°-20°	83.3	2.7
20°-30°	126.2	4.1
30°-40°	153.7	5.0
40°-50°	165.4	5.4
50°-60°	160.6	5.2
60°-70°	140.2	4.6
70°-80°	108.0	3.5
80°-90°	74.2	2.4
90°-100°	91.9	3.0
100°-110°	170.2	5.5
110°-120°	252.9	8.2
120°-130°	314.3	10.2
130°-140°	343.4	11.2
140°-150°	332.2	10.8
150°-160°	277.9	9.0
160°-170°	184.3	6.0
170°-180°	64.4	2.1
0°-30°	238.5	7.8
0°-40°	392.2	12.8
0°-60°	718.2	23.4
0°-90°	1040.6	33.9
90°-120°	515.0	16.8
90°-150°	1504.9	49.0
90°-180°	2031.0	66.1
0°-180°	3072.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	306	306	306	306	306	
5°	307	306	303	306	306	29
15°	293	294	294	298	298	83
25°	266	270	274	279	280	123
35°	230	237	246	255	258	143
45°	188	200	216	230	234	145
55°	144	160	183	199	205	129
65°	99	120	146	165	170	98
75°	55	80	108	127	133	58
85°	16	44	72	91	97	17
90°	5	38	79	95	101	5
95°	33	60	88	105	109	36
105°	126	140	164	181	186	133
115°	231	240	258	271	274	229
125°	335	340	352	363	366	299
135°	432	439	444	453	455	334
145°	524	528	532	535	535	328
155°	600	601	603	606	604	276
165°	652	652	652	656	653	184
175°	679	677	676	680	676	64
180°	680	680	680	680	680	

TEST NUMBER: P998235

CATALOG NUMBER: SA2XXDIP-B290D530UB35-4F0-XX-W2A-D1

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	306.4	306.4	306.4	306.4	306.4
2.5°	308.6	307.3	304.1	306.4	305.5
5°	307.3	305.9	303.3	305.9	305.5
7.5°	305.0	304.1	301.9	305.0	304.6
10°	302.4	301.5	300.2	303.7	303.3
12.5°	297.9	298.4	297.5	301.0	300.6
15°	293.0	293.9	293.9	297.9	297.5
17.5°	286.8	288.6	289.9	293.9	293.9
20°	280.6	282.8	284.6	289.5	289.5
22.5°	274.0	276.6	279.3	284.2	285.1
25°	266.4	269.5	273.5	278.8	280.2
27.5°	257.5	262.4	266.9	273.5	274.4
30°	248.6	254.4	260.2	267.3	268.6
32.5°	238.9	245.5	252.6	261.1	263.7
35°	229.6	237.1	245.5	255.3	258.4
37.5°	219.3	227.8	238.4	249.1	252.2
40°	209.1	218.9	230.9	242.4	246.4
42.5°	199.4	209.1	223.3	236.2	240.2
45°	188.3	200.3	215.8	229.6	234.0
47.5°	177.6	190.5	208.2	222.5	227.3
50°	166.5	180.3	200.3	215.3	220.2
52.5°	155.8	170.5	191.8	207.4	212.7
55°	144.3	160.3	183.4	199.4	205.1
57.5°	133.2	151.0	174.1	191.4	197.1
60°	121.2	140.3	165.6	182.5	188.7
62.5°	110.6	130.5	155.8	174.1	179.8
65°	98.6	120.3	146.5	164.7	170.5
67.5°	87.9	110.6	137.2	155.4	161.6
70°	76.4	99.5	127.0	146.1	151.4
72.5°	65.7	89.7	117.7	136.3	143.0
75°	54.6	79.5	107.9	127.0	132.8
77.5°	44.0	69.7	98.6	117.7	123.9
80°	33.3	60.4	89.2	107.9	114.1
82.5°	24.4	51.1	80.4	99.0	104.8
85°	16.0	43.5	71.9	90.6	96.8
87.5°	9.8	36.4	64.8	83.0	88.8
90°	5.0	37.7	78.7	95.3	101.2
92.5°	16.6	44.7	72.4	90.3	95.7
95°	33.4	60.0	87.8	104.6	108.9
97.5°	53.0	77.3	105.4	121.8	127.1
100°	76.0	97.0	123.6	140.0	144.3
102.5°	99.7	117.7	144.0	160.6	164.9
105°	125.6	140.2	164.4	181.1	186.0
107.5°	152.0	165.0	187.2	202.8	204.9
110°	176.8	189.2	210.9	225.1	228.2

TEST NUMBER: P998235

CATALOG NUMBER: SA2XXDIP-B290D530UB35-4F0-XX-W2A-D1

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	204.4	214.9	234.7	247.2	251.0
115°	231.3	239.7	258.4	271.2	274.3
117.5°	257.8	266.0	281.7	293.4	296.1
120°	284.8	291.2	304.4	316.8	319.9
122.5°	309.4	315.7	329.2	339.5	342.3
125°	334.9	340.0	352.5	362.8	366.2
127.5°	360.1	365.9	375.6	384.4	386.7
130°	383.6	390.6	398.8	408.3	409.6
132.5°	410.0	415.3	422.5	429.9	431.8
135°	432.5	438.8	444.4	453.2	455.0
137.5°	457.7	462.9	466.3	474.2	475.0
140°	480.1	484.9	488.6	495.7	496.1
142.5°	503.1	507.8	509.5	515.4	515.3
145°	524.5	528.5	531.9	535.2	535.1
147.5°	544.0	549.1	551.4	553.0	552.1
150°	564.1	567.5	569.8	571.5	569.8
152.5°	581.8	585.3	588.2	590.5	588.2
155°	599.6	601.4	603.1	605.9	604.2
157.5°	615.1	616.3	617.4	621.4	618.6
160°	628.9	630.0	630.6	634.1	631.8
162.5°	641.5	641.5	642.1	646.1	643.2
165°	652.4	651.9	651.9	655.9	653.0
167.5°	662.2	660.5	660.5	664.5	661.6
170°	669.6	667.9	667.3	671.4	667.9
172.5°	674.8	673.1	672.5	676.5	673.1
175°	678.8	677.1	676.0	680.0	676.5
177.5°	681.1	679.4	678.2	681.7	678.2
180°	680.0	680.0	680.0	680.0	680.0

TEST NUMBER: P998235

CATALOG NUMBER: SA2XXDIP-B290D530UB35-4F0-XX-W2A-D1

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.01	9.77	10.08	10.85	12.33	12.08	12.84	13.16	13.93	15.41
	3H	10.46	11.15	11.54	12.24	13.74	14.66	15.35	15.75	16.44	17.94
	4H	10.93	11.59	12.03	12.68	14.18	15.91	16.57	17.01	17.66	19.16
	6H	11.21	11.82	12.32	12.91	14.43	17.20	17.81	18.31	18.91	20.42
	8H	11.27	11.85	12.38	12.96	14.47	17.86	18.44	18.97	19.55	21.06
	12H	11.28	11.83	12.39	12.94	14.47	18.58	19.13	19.70	20.24	21.77
4H	2H	10.05	10.70	11.15	11.79	13.30	12.40	13.06	13.50	14.15	15.65
	3H	11.75	12.30	12.85	13.42	14.93	15.18	15.74	16.29	16.86	18.37
	4H	12.36	12.88	13.48	13.98	15.52	16.60	17.11	17.71	18.22	19.75
	6H	12.78	13.22	13.89	14.35	15.88	18.06	18.50	19.18	19.63	21.16
	8H	12.88	13.30	14.00	14.42	15.96	18.81	19.23	19.93	20.35	21.90
	12H	12.92	13.30	14.06	14.43	15.98	19.64	20.02	20.78	21.15	22.70
8H	4H	13.15	13.56	14.27	14.68	16.23	16.73	17.15	17.85	18.27	19.82
	6H	13.78	14.12	14.92	15.29	16.83	18.36	18.71	19.50	19.87	21.41
	8H	14.00	14.30	15.14	15.45	17.01	19.25	19.55	20.39	20.70	22.26
	12H	14.13	14.40	15.28	15.54	17.13	20.24	20.51	21.39	21.65	23.24
12H	4H	13.34	13.72	14.48	14.85	16.40	16.70	17.08	17.84	18.21	19.77
	6H	14.11	14.41	15.25	15.56	17.12	18.38	18.69	19.53	19.83	21.39
	8H	14.41	14.68	15.56	15.82	17.42	19.31	19.58	20.46	20.72	22.31