

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P998483

Luminaire Tested: SA2XXDIP-B485D330UB40-4F0-XX-W2A-F

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P998483
REPORT IS A COMBINATION OF REPORTS P984226 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-B485D330UB40-4F0-XX-W2A-F
Description: Define 2 Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865} {m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3268.0 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 33.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P998483

CATALOG NUMBER: SA2XXDIP-B485D330UB40-4F0-XX-W2A-F

Luminous Intensity Polar Plot

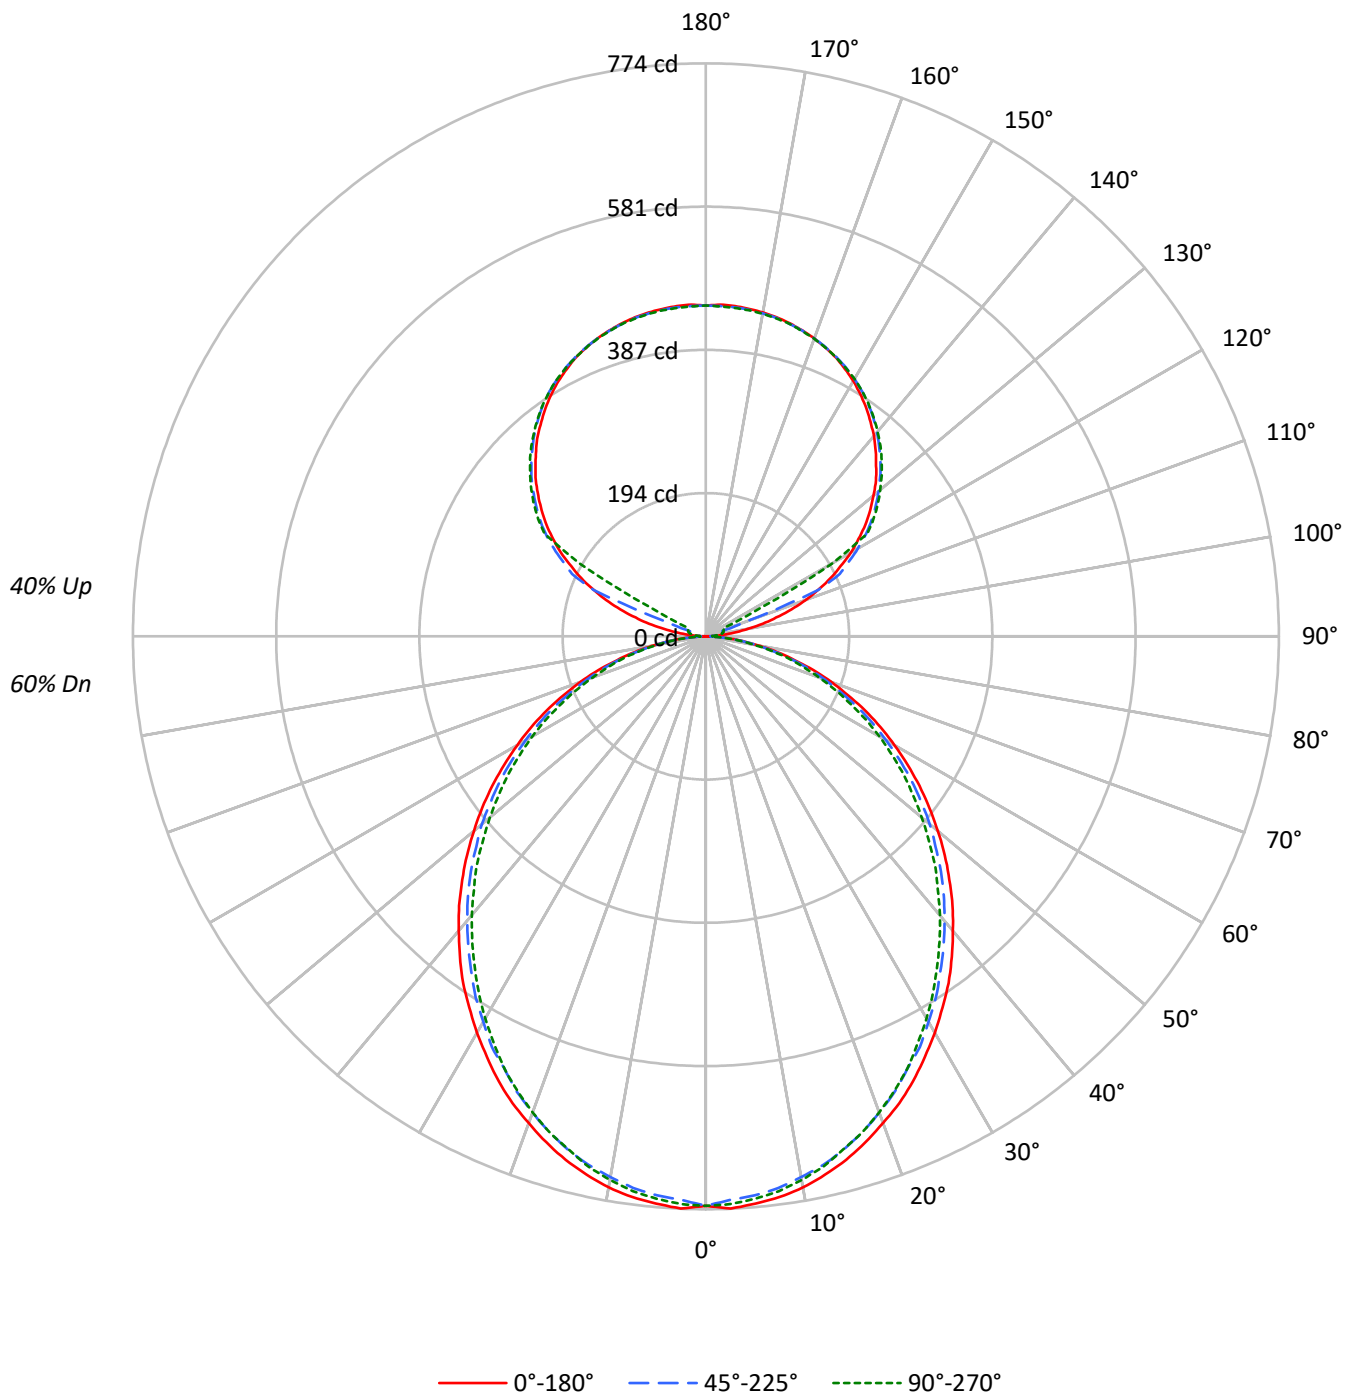

TEST NUMBER: P998483

CATALOG NUMBER: SA2XXDIP-B485D330UB40-4F0-XX-W2A-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65
1	100	96	92	88	93	89	86	83	78	75	73	67	66	64	58	56	55
2	91	84	77	72	85	78	73	68	68	64	61	59	56	53	51	48	46
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	40
4	76	65	57	51	71	61	54	48	54	48	43	47	42	39	40	37	34
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30
6	64	52	44	38	60	49	42	36	43	37	33	38	33	29	33	29	26
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12176	12176	12176
5°	12196	11606	11524
10°	12097	11076	10857
15°	11919	10544	10156
20°	11680	9965	9493
25°	11441	9359	8829
30°	11141	8790	8133
35°	10857	8190	7451
40°	10508	7598	6805
45°	10160	7011	6172
50°	9781	6413	5514
55°	9382	5772	4892
60°	8933	5082	4245
65°	8439	4378	3564
70°	7817	3609	2878
75°	6953	2782	2222
80°	5908	1889	1430
85°	4280	878	609

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10160 cd/sqm

TEST NUMBER: P998483

CATALOG NUMBER: SA2XXDIP-B485D330UB40-4F0-XX-W2A-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.4	2.2
10°-20°	203.7	6.2
20°-30°	299.3	9.2
30°-40°	347.7	10.6
40°-50°	347.2	10.6
50°-60°	302.8	9.3
60°-70°	223.8	6.8
70°-80°	126.6	3.9
80°-90°	34.2	1.0
90°-100°	14.7	0.5
100°-110°	54.9	1.7
110°-120°	145.7	4.5
120°-130°	241.7	7.4
130°-140°	256.7	7.9
140°-150°	238.6	7.3
150°-160°	191.8	5.9
160°-170°	123.6	3.8
170°-180°	42.5	1.3
0°-30°	575.4	17.6
0°-40°	923.1	28.2
0°-60°	1573.1	48.1
0°-90°	1957.8	59.9
90°-120°	215.4	6.6
90°-150°	952.3	29.1
90°-180°	1310.0	40.1
0°-180°	3268.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	769	769	769	769	769	
5°	769	766	758	764	763	73
15°	732	728	718	721	717	206
25°	663	657	644	646	644	305
35°	572	564	552	548	544	357
45°	465	460	449	441	438	359
55°	352	348	339	330	326	315
65°	237	233	226	219	215	235
75°	124	123	119	115	116	133
85°	30	30	29	27	26	34
90°	0	4	6	8	9	3
95°	21	10	13	14	14	25
105°	98	108	20	23	25	105
115°	186	191	200	50	26	183
125°	263	267	273	276	276	234
135°	325	330	333	337	336	251
145°	377	377	383	385	383	236
155°	416	413	416	418	416	191
165°	438	436	437	439	437	124
175°	448	446	446	448	445	43
180°	447	447	447	447	447	

TEST NUMBER: P998483

CATALOG NUMBER: SA2XXDIP-B485D330UB40-4F0-XX-W2A-F

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	769.2	769.2	769.2	769.2	769.2
2.5°	773.7	770.0	761.8	769.2	767.7
5°	769.2	766.3	758.1	764.0	762.6
7.5°	764.0	759.6	751.5	757.4	755.9
10°	755.9	750.7	741.8	747.8	745.5
12.5°	744.8	740.4	731.5	735.2	733.7
15°	732.2	727.8	718.2	721.1	717.4
17.5°	716.7	712.3	702.6	706.3	702.6
20°	699.7	695.2	684.9	687.1	684.2
22.5°	682.7	676.0	666.4	666.4	664.9
25°	662.7	656.8	644.2	645.7	644.2
27.5°	640.5	635.3	625.7	623.5	619.8
30°	618.3	612.4	601.3	599.1	596.1
32.5°	594.7	590.2	578.4	574.0	571.0
35°	571.7	564.3	552.5	548.1	544.4
37.5°	545.8	539.2	527.4	522.2	518.5
40°	519.2	513.3	501.5	494.8	491.9
42.5°	493.3	487.4	475.6	468.2	463.7
45°	465.2	460.0	449.0	440.8	437.9
47.5°	437.9	432.7	420.8	412.7	408.3
50°	409.0	405.3	395.0	384.6	380.9
52.5°	380.9	375.7	366.1	358.0	352.8
55°	352.1	347.6	338.7	329.9	326.2
57.5°	323.2	319.5	309.9	301.0	298.1
60°	294.4	291.4	281.1	272.9	270.7
62.5°	266.3	261.1	253.7	246.3	243.3
65°	237.4	233.0	225.6	218.9	215.2
67.5°	207.8	204.1	197.5	192.3	189.3
70°	180.5	177.5	170.9	165.7	162.7
72.5°	152.4	149.4	145.7	140.5	138.3
75°	124.3	122.8	119.1	114.6	116.1
77.5°	99.1	96.2	94.7	92.5	90.2
80°	74.0	73.2	71.7	69.5	68.0
82.5°	50.3	50.3	49.6	46.6	46.6
85°	30.3	29.6	28.8	26.6	25.9
87.5°	13.3	11.8	10.4	8.1	7.4
90°	0.3	3.9	6.5	8.1	8.7
92.5°	8.1	6.8	7.8	8.4	8.7
95°	21.0	10.3	12.6	14.2	13.9
97.5°	37.8	11.3	16.5	17.5	17.8
100°	57.2	12.9	18.4	21.0	21.7
102.5°	78.6	77.9	19.1	22.6	23.6
105°	98.3	108.0	19.7	23.3	24.6
107.5°	121.3	129.4	20.4	23.9	25.2
110°	143.3	150.1	56.6	24.3	25.5



TEST NUMBER: P998483

CATALOG NUMBER: SA2XXDIP-B485D330UB40-4F0-XX-W2A-F

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	164.0	169.8	164.3	24.9	25.9
115°	185.9	191.4	199.5	49.8	26.5
117.5°	205.0	211.5	217.0	170.7	86.0
120°	226.4	231.2	237.0	240.9	197.3
122.5°	244.5	249.7	256.1	258.1	258.4
125°	262.9	267.1	273.3	275.5	276.5
127.5°	279.7	284.3	289.1	292.3	292.7
130°	295.6	300.7	304.3	307.9	307.5
132.5°	311.7	315.9	319.5	322.4	322.1
135°	325.3	330.5	333.4	336.6	336.0
137.5°	339.6	343.4	346.7	349.9	348.9
140°	353.5	356.0	359.6	362.5	360.9
142.5°	365.1	367.4	371.6	374.2	372.5
145°	377.4	377.1	382.6	384.8	383.2
147.5°	388.1	387.1	392.6	394.2	392.9
150°	398.4	396.1	401.3	403.3	401.6
152.5°	407.1	404.6	409.4	411.3	409.1
155°	415.6	412.6	416.5	418.5	415.9
157.5°	422.3	419.8	422.7	424.9	422.3
160°	428.2	426.2	428.2	430.1	427.8
162.5°	433.3	431.4	433.0	435.3	432.4
165°	437.9	435.9	436.9	439.2	436.9
167.5°	441.4	439.5	440.5	442.7	439.8
170°	444.3	442.4	443.0	445.3	442.4
172.5°	446.3	444.3	445.0	447.2	444.3
175°	447.9	445.6	446.3	448.5	445.3
177.5°	448.5	446.3	446.6	448.9	446.0
180°	446.9	446.9	446.9	446.9	446.9

TEST NUMBER: P998483

CATALOG NUMBER: SA2XXDIP-B485D330UB40-4F0-XX-W2A-F

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.79	15.75	15.65	16.63	17.76	15.57	16.53	16.44	17.42	18.54
	3H	16.13	16.99	17.01	17.89	19.04	17.20	18.06	18.08	18.96	20.11
	4H	16.54	17.35	17.44	18.26	19.42	17.80	18.61	18.69	19.51	20.67
	6H	16.77	17.52	17.67	18.43	19.60	18.21	18.96	19.11	19.87	21.04
	8H	16.80	17.51	17.71	18.44	19.61	18.32	19.03	19.23	19.96	21.13
	12H	16.79	17.47	17.71	18.40	19.59	18.37	19.05	19.29	19.97	21.16
4H	2H	15.27	16.08	16.17	16.98	18.14	15.91	16.72	16.81	17.63	18.79
	3H	16.79	17.47	17.70	18.41	19.58	17.70	18.38	18.61	19.31	20.49
	4H	17.30	17.92	18.23	18.85	20.05	18.39	19.00	19.31	19.93	21.13
	6H	17.61	18.15	18.55	19.10	20.30	18.89	19.42	19.82	20.38	21.57
	8H	17.67	18.17	18.61	19.12	20.33	19.03	19.53	19.97	20.48	21.69
	12H	17.68	18.13	18.63	19.09	20.31	19.10	19.55	20.06	20.51	21.73
8H	4H	17.49	17.99	18.43	18.93	20.15	18.48	18.98	19.42	19.93	21.14
	6H	17.87	18.29	18.84	19.28	20.49	19.05	19.46	20.02	20.46	21.67
	8H	17.98	18.34	18.95	19.32	20.55	19.24	19.61	20.22	20.59	21.82
	12H	18.01	18.34	18.99	19.31	20.59	19.34	19.67	20.32	20.64	21.92
12H	4H	17.47	17.92	18.43	18.89	20.11	18.45	18.90	19.41	19.86	21.08
	6H	17.89	18.26	18.87	19.24	20.47	19.04	19.41	20.02	20.39	21.62
	8H	18.01	18.33	18.99	19.31	20.58	19.24	19.57	20.22	20.54	21.82