

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P999082

Luminaire Tested: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P999082
REPORT IS A COMBINATION OF REPORTS P984831 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4
Description: Define 2 Direct/Indirect Pendant with 5000K BioUP LEDs {m-DER=1.015} {m-EER=1.115}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4879.0 lumens
Efficiency: N/A
Efficacy: 87.0 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.09 / 1.23
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 56.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

Luminous Intensity Polar Plot

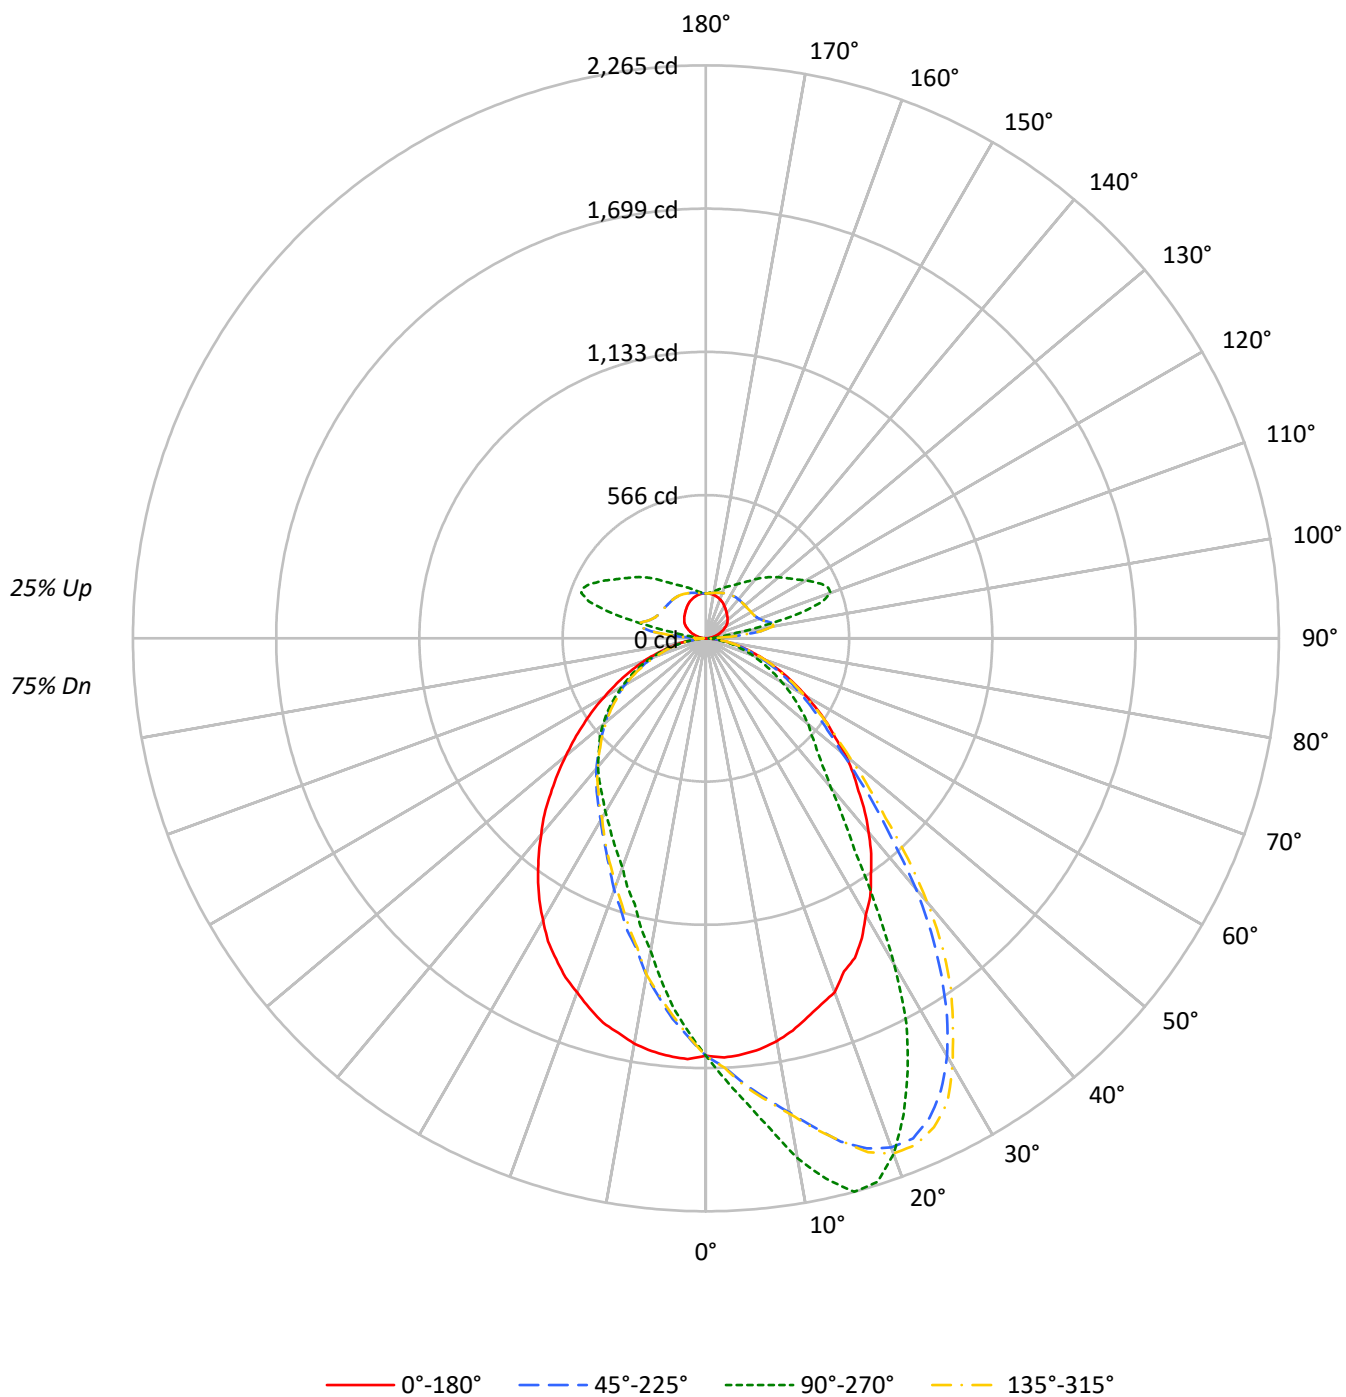

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	113	113	113	113	107	107	107	107	97	97	97	87	87	87	79	79	79
1	104	100	96	93	99	95	92	89	86	84	81	78	76	74	71	69	68
2	95	88	82	77	90	84	79	74	77	72	69	70	66	63	63	61	58
3	87	78	71	65	83	75	68	63	68	63	59	62	58	55	57	53	51
4	81	70	62	56	76	67	60	54	61	55	51	56	51	47	51	47	44
5	74	63	55	49	71	60	53	47	55	49	44	51	46	42	46	42	39
6	69	57	49	43	65	54	47	42	50	44	39	46	41	37	42	38	35
7	64	52	44	38	61	50	42	37	46	40	35	42	37	33	39	35	31
8	60	47	39	34	57	45	38	33	42	36	32	39	34	30	36	32	28
9	56	43	36	31	53	42	35	30	39	33	29	36	31	27	33	29	26
10	52	40	33	28	50	39	32	27	36	30	26	33	28	25	31	27	24

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	26115	26115	26115	26115
5°	26178	27845	26278	22153
10°	25874	30397	26037	18265
15°	25247	32063	25598	15385
20°	24853	30104	24853	13372
25°	24061	25863	24170	11959
30°	22757	20330	23191	10831
35°	21603	14059	21964	9910
40°	20276	10614	20506	9175
45°	18638	8722	18944	8382
50°	17225	7655	17256	7674
55°	15612	6524	15713	6904
60°	13892	5449	14083	6025
65°	12353	4432	12577	5146
70°	10818	3478	11095	4150
75°	9079	2525	9437	3009
80°	7090	1600	7593	1787
85°	4661	804	5015	597

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 157.5°

Vertical Angle: 45°

Luminance: 26997 cd/sqm

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.1	3.2
10°-20°	457.4	9.4
20°-30°	663.8	13.6
30°-40°	699.8	14.3
40°-50°	619.2	12.7
50°-60°	494.4	10.1
60°-70°	335.8	6.9
70°-80°	171.8	3.5
80°-90°	41.7	0.9
90°-100°	69.3	1.4
100°-110°	244.0	5.0
110°-120°	256.3	5.3
120°-130°	210.8	4.3
130°-140°	169.4	3.5
140°-150°	127.9	2.6
150°-160°	89.9	1.8
160°-170°	52.9	1.1
170°-180°	17.2	0.4
0°-30°	1278.3	26.2
0°-40°	1978.1	40.5
0°-60°	3091.7	63.4
0°-90°	3641.1	74.6
90°-120°	569.6	11.7
90°-150°	1077.7	22.1
90°-180°	1238.0	25.4
0°-180°	4879.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1650	1650	1650	1650	1650	
5°	1651	1843	1657	1466	1651	157
15°	1551	2265	1572	1087	1551	438
25°	1394	1887	1400	872	1394	637
35°	1138	1027	1156	724	1138	712
45°	853	619	867	595	853	662
55°	586	435	590	460	586	523
65°	348	268	354	311	348	345
75°	162	132	169	157	162	174
85°	33	34	36	25	33	38
90°	0	11	0	11	0	3
95°	12	39	12	39	12	12
105°	42	385	42	385	42	44
115°	74	507	74	507	74	73
125°	102	411	102	411	102	91
135°	120	341	120	341	120	93
145°	137	272	137	272	137	86
155°	156	229	156	229	156	72
165°	170	201	170	201	170	48
175°	177	181	177	181	177	17
180°	178	178	178	178	178	

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8
2.5°	1658.7	1662.5	1668.8	1670.1	1682.8	1692.9	1704.3	1704.3	1708.2	1706.9	1696.7
5°	1651.1	1662.5	1679.0	1692.9	1715.8	1725.9	1741.1	1752.5	1762.7	1770.3	1769.0
7.5°	1638.4	1658.7	1682.8	1709.4	1739.9	1757.6	1779.2	1799.5	1813.4	1826.1	1835.0
10°	1616.8	1651.1	1684.1	1719.6	1758.9	1783.0	1808.3	1835.0	1856.5	1880.6	1903.4
12.5°	1587.7	1637.1	1677.7	1724.6	1772.8	1799.5	1840.0	1860.3	1902.2	1963.0	1979.5
15°	1550.9	1618.1	1656.2	1715.8	1779.2	1800.7	1856.5	1889.5	1975.7	2013.8	2059.4
17.5°	1516.7	1591.5	1642.2	1710.7	1772.8	1814.7	1869.2	1936.4	2008.7	2063.2	2113.9
20°	1488.8	1561.0	1621.9	1698.0	1776.6	1829.9	1887.0	1968.1	2046.7	2102.5	2141.8
22.5°	1425.4	1517.9	1588.9	1673.9	1769.0	1842.6	1897.1	1985.9	2070.8	2105.1	2139.3
25°	1393.7	1473.5	1556.0	1652.4	1763.9	1851.4	1898.4	1997.3	2072.1	2084.8	2092.4
27.5°	1335.3	1425.4	1521.7	1632.1	1762.7	1836.2	1895.8	1985.9	2045.5	2036.6	2013.8
30°	1263.0	1373.4	1479.9	1599.1	1744.9	1824.8	1880.6	1963.0	1993.5	1947.8	1907.2
32.5°	1209.8	1313.8	1431.7	1569.9	1724.6	1800.7	1855.3	1919.9	1926.3	1843.8	1775.4
35°	1137.5	1252.9	1386.0	1531.9	1690.4	1758.9	1809.6	1848.9	1818.5	1703.1	1621.9
37.5°	1072.8	1187.0	1329.0	1477.4	1643.5	1710.7	1751.3	1757.6	1682.8	1581.3	1462.1
40°	1001.8	1119.7	1268.1	1424.1	1591.5	1649.8	1675.2	1656.2	1548.4	1430.4	1292.2
42.5°	930.8	1047.5	1207.2	1367.0	1525.5	1575.0	1585.1	1533.2	1401.3	1263.0	1103.3
45°	853.4	975.2	1135.0	1296.0	1449.5	1477.4	1478.6	1403.8	1247.8	1103.3	954.9
47.5°	790.0	902.9	1061.4	1222.5	1351.8	1370.8	1363.2	1277.0	1107.1	944.7	815.4
50°	720.3	828.1	985.3	1143.8	1254.2	1259.2	1240.2	1117.2	951.1	802.7	700.0
52.5°	645.5	754.5	899.1	1051.3	1150.2	1142.6	1105.8	973.9	817.9	694.9	616.3
55°	585.9	682.2	817.9	966.3	1036.0	1014.5	973.9	839.5	716.5	612.5	544.0
57.5°	519.9	604.9	738.0	867.4	908.0	887.7	847.1	721.6	607.4	528.8	483.2
60°	457.8	535.1	651.8	759.6	791.3	769.7	722.8	610.0	527.5	461.6	427.4
62.5°	400.7	467.9	565.6	664.5	677.2	655.6	615.0	523.7	452.7	400.7	375.4
65°	347.5	410.9	489.5	564.3	575.7	552.9	511.1	445.1	385.5	352.5	328.4
67.5°	295.5	346.2	415.9	470.5	476.8	455.3	421.0	367.8	331.0	295.5	277.7
70°	249.8	287.9	342.4	386.8	389.3	369.0	351.3	303.1	275.2	249.8	235.9
72.5°	205.4	232.1	273.9	306.9	308.2	295.5	279.0	248.6	224.5	206.7	192.8
75°	162.3	185.1	210.5	239.7	238.4	228.3	215.6	196.6	176.3	164.9	158.5
77.5°	124.3	138.2	158.5	177.5	177.5	172.5	164.9	150.9	138.2	126.8	120.5
80°	88.8	97.6	114.1	120.5	123.0	121.7	115.4	105.3	100.2	91.3	88.8
82.5°	57.1	63.4	71.0	77.4	81.2	78.6	77.4	72.3	64.7	62.1	59.6
85°	33.0	35.5	39.3	43.1	44.4	43.1	45.7	41.8	38.0	38.0	36.8
87.5°	13.9	15.2	17.8	17.8	19.0	19.0	17.8	19.0	19.0	17.8	16.5
90°	0.3	1.4	2.7	3.4	4.1	4.6	5.1	6.8	9.2	11.3	11.6
92.5°	5.1	7.2	9.9	11.6	14.4	16.2	18.1	27.3	40.3	52.0	52.6
95°	12.0	13.3	16.7	19.8	25.3	29.4	33.5	49.2	79.0	118.6	134.0
97.5°	17.8	19.8	23.6	28.0	34.2	38.8	43.4	63.6	104.9	168.9	218.4
100°	26.3	27.3	30.4	35.9	42.7	47.5	52.3	70.4	112.1	186.0	270.0
102.5°	34.2	34.9	37.9	43.4	50.6	55.4	60.2	76.6	112.5	179.5	271.8
105°	41.7	43.1	45.5	50.6	58.1	62.9	67.7	83.7	114.2	170.6	253.3
107.5°	49.9	50.9	53.3	58.1	65.6	70.4	75.2	90.9	117.9	165.8	236.2
110°	58.1	59.5	61.5	66.0	73.2	78.2	83.1	98.1	122.7	164.4	224.6

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	65.6	67.0	69.4	73.5	80.3	85.4	90.6	104.9	127.8	164.8	217.1
115°	73.5	75.2	77.3	81.4	88.2	92.8	97.4	112.1	133.0	166.1	211.9
117.5°	81.7	83.1	85.1	88.9	95.4	100.2	104.9	118.6	138.4	168.2	209.2
120°	89.2	90.6	92.6	95.7	102.5	107.3	112.1	125.5	143.9	170.2	206.8
122.5°	96.4	97.4	99.5	102.9	109.7	114.6	119.6	131.9	148.7	172.6	205.4
125°	102.5	103.6	105.6	109.7	116.6	121.4	126.1	138.4	153.8	175.0	203.7
127.5°	107.7	109.0	111.8	116.2	122.7	127.6	132.6	144.6	158.6	177.4	202.7
130°	112.1	113.5	116.9	121.7	128.5	133.3	138.1	150.1	163.1	180.1	202.0
132.5°	116.2	117.9	121.7	126.8	134.0	138.8	143.6	154.8	167.5	182.9	201.7
135°	120.3	121.7	125.8	130.9	138.8	143.6	148.4	159.3	171.3	184.9	201.3
137.5°	124.1	125.8	129.9	135.4	143.2	147.6	152.1	163.1	174.3	187.0	201.3
140°	128.5	129.9	134.0	139.5	147.0	151.4	155.9	166.1	176.7	188.3	201.0
142.5°	133.0	134.0	137.8	143.2	150.4	154.5	158.6	168.5	178.8	189.4	201.0
145°	137.4	138.8	142.2	147.3	154.2	158.0	161.7	170.9	180.5	190.1	200.3
147.5°	142.2	143.2	146.6	151.4	157.2	160.6	164.1	173.0	181.5	190.4	199.3
150°	147.0	148.0	150.7	155.2	160.3	163.4	166.5	174.3	182.2	190.1	198.3
152.5°	151.8	152.1	154.8	158.6	163.4	166.2	168.9	175.7	182.5	189.4	196.6
155°	156.2	156.6	158.6	162.4	166.1	168.7	171.3	177.1	182.9	188.7	194.5
157.5°	160.0	160.3	162.0	165.4	168.5	170.8	173.0	178.1	182.9	187.3	192.4
160°	163.7	164.1	165.4	168.2	170.9	172.8	174.7	178.8	182.9	186.3	190.4
162.5°	167.5	167.2	168.5	170.6	173.0	174.4	175.7	179.1	182.5	185.3	188.7
165°	170.2	169.9	170.6	172.6	174.3	175.4	176.4	179.5	181.9	183.9	186.3
167.5°	172.6	172.3	173.0	174.3	175.7	176.4	177.1	179.5	181.5	182.5	184.2
170°	175.0	174.3	174.7	175.7	176.4	176.9	177.4	179.1	180.8	181.5	182.5
172.5°	176.4	176.0	175.7	176.7	177.1	177.4	177.8	178.8	179.8	180.1	180.5
175°	177.4	177.1	176.7	177.4	177.4	177.6	177.8	178.4	179.1	178.8	179.1
177.5°	178.1	177.4	177.1	177.8	177.8	177.8	177.8	178.1	178.8	178.1	177.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8
2.5°	1714.5	1715.8	1718.3	1731.0	1737.3	1738.6	1733.5	1744.9	1748.7	1744.9	1742.4
5°	1795.7	1803.3	1818.5	1835.0	1833.7	1835.0	1842.6	1850.2	1852.7	1842.6	1846.4
7.5°	1866.7	1881.9	1898.4	1923.7	1923.7	1936.4	1941.5	1947.8	1963.0	1955.4	1952.9
10°	1947.8	1968.1	1998.5	2039.1	2040.4	2053.1	2065.8	2086.0	2092.4	2087.3	2089.9
12.5°	2049.3	2088.6	2091.1	2135.5	2155.8	2158.3	2178.6	2174.8	2187.5	2187.5	2209.1
15°	2093.7	2154.5	2188.8	2231.9	2244.6	2229.3	2245.8	2263.6	2264.9	2264.9	2263.6
17.5°	2173.5	2197.6	2231.9	2254.7	2259.8	2259.8	2261.0	2268.7	2263.6	2253.4	2261.0
20°	2190.0	2200.2	2212.9	2210.3	2212.9	2200.2	2187.5	2174.8	2176.1	2169.7	2188.8
22.5°	2159.6	2157.1	2127.9	2108.9	2108.9	2083.5	2059.4	2048.0	2036.6	2040.4	2046.7
25°	2083.5	2044.2	2008.7	1980.8	1974.5	1933.9	1900.9	1890.8	1871.7	1887.0	1889.5
27.5°	1961.8	1917.4	1860.3	1836.2	1803.3	1786.8	1763.9	1733.5	1694.2	1717.0	1713.2
30°	1831.2	1765.2	1718.3	1660.0	1608.0	1604.2	1561.0	1510.3	1490.0	1490.0	1501.4
32.5°	1685.3	1597.8	1529.3	1446.9	1396.2	1374.6	1322.6	1271.9	1283.3	1245.3	1259.2
35°	1515.4	1400.0	1313.8	1233.9	1195.8	1170.5	1103.3	1075.4	1044.9	1027.2	1060.1
37.5°	1353.1	1219.9	1109.6	1022.1	1008.2	962.5	916.8	899.1	881.3	888.9	887.7
40°	1155.3	1037.3	938.4	869.9	845.8	824.3	793.8	772.3	760.9	767.2	768.5
42.5°	976.4	877.5	804.0	755.8	735.5	720.3	705.1	687.3	683.5	683.5	688.6
45°	838.2	757.1	707.6	668.3	656.9	645.5	634.1	626.4	623.9	618.8	622.6
47.5°	727.9	663.2	632.8	603.6	590.9	588.4	578.3	574.5	569.4	568.1	569.4
50°	635.3	594.7	566.8	550.4	541.5	537.7	532.6	525.0	522.5	528.8	526.3
52.5°	570.7	532.6	517.4	500.9	495.8	490.8	483.2	484.4	483.2	480.6	480.6
55°	506.0	481.9	466.7	454.0	452.7	447.6	441.3	438.8	437.5	435.0	438.8
57.5°	454.0	435.0	421.0	409.6	404.5	404.5	398.2	393.1	393.1	391.8	393.1
60°	402.0	383.0	374.1	362.7	358.9	357.6	353.8	351.3	347.5	347.5	347.5
62.5°	353.8	338.6	328.4	318.3	319.6	313.2	308.2	305.6	305.6	306.9	306.9
65°	308.2	298.0	285.3	276.4	273.9	272.6	270.1	268.8	265.0	267.6	267.6
67.5°	266.3	252.4	244.7	240.9	237.1	235.9	233.3	230.8	229.5	228.3	230.8
70°	224.5	213.0	206.7	204.2	200.4	199.1	197.8	194.0	195.3	196.6	197.8
72.5°	186.4	176.3	175.0	167.4	167.4	167.4	162.3	164.9	163.6	161.1	163.6
75°	147.1	142.0	139.5	135.7	137.0	135.7	134.4	130.6	130.6	131.9	133.2
77.5°	116.7	111.6	110.3	106.5	104.0	106.5	104.0	102.7	102.7	104.0	104.0
80°	86.2	83.7	79.9	79.9	79.9	78.6	78.6	78.6	77.4	76.1	77.4
82.5°	57.1	57.1	55.8	54.5	55.8	53.3	54.5	54.5	54.5	54.5	54.5
85°	36.8	35.5	35.5	34.2	34.2	34.2	35.5	33.0	33.0	34.2	34.2
87.5°	16.5	16.5	16.5	17.8	16.5	16.5	16.5	17.8	16.5	16.5	16.5
90°	11.3	10.9	10.3	10.9	11.1	11.3	11.3	11.3	11.3	11.3	11.3
92.5°	44.1	34.5	29.4	25.6	24.2	22.9	22.6	21.2	21.5	20.9	21.5
95°	117.2	89.6	68.7	54.4	50.6	46.8	42.4	39.7	38.6	39.0	38.6
97.5°	220.1	183.2	146.3	111.8	101.6	91.3	77.9	71.1	67.3	65.3	67.3
100°	319.3	312.1	269.7	222.9	202.2	181.5	153.1	138.4	128.5	122.4	128.5
102.5°	356.2	396.5	395.2	364.0	341.8	319.6	288.2	260.5	247.5	238.6	247.5
105°	344.2	415.3	453.9	458.4	452.8	447.1	425.9	404.7	390.0	385.2	390.0
107.5°	318.9	395.2	452.6	486.1	493.0	499.8	499.4	496.3	491.9	484.0	491.9
110°	295.3	367.5	428.7	472.4	486.4	500.4	515.1	521.6	524.7	524.4	524.7

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	278.9	342.2	400.3	447.8	464.4	481.0	502.8	514.8	521.3	523.7	521.3
115°	265.9	322.3	375.0	419.8	437.4	455.0	479.2	495.0	503.9	506.9	503.9
117.5°	257.1	305.9	353.1	394.8	411.6	428.3	453.3	470.0	479.2	481.6	479.2
120°	250.2	294.3	336.7	372.9	388.4	404.0	428.0	444.0	453.9	457.4	453.9
122.5°	244.4	285.1	323.0	356.9	370.5	384.2	405.1	420.8	429.3	432.1	429.3
125°	238.9	276.2	311.4	341.5	354.3	367.1	386.9	399.9	408.5	411.2	408.5
127.5°	233.8	267.3	299.8	328.5	340.4	352.4	369.9	382.2	389.7	391.7	389.7
130°	228.7	258.8	288.2	315.2	326.4	337.7	354.5	366.1	372.9	375.7	372.9
132.5°	224.6	250.6	277.2	301.5	311.9	322.3	338.8	350.4	356.5	358.9	356.5
135°	220.8	243.0	265.6	288.2	297.8	307.3	322.0	333.3	339.4	340.8	339.4
137.5°	218.1	236.9	256.4	274.8	283.4	291.9	305.9	315.8	321.3	323.4	321.3
140°	215.7	231.1	247.5	263.2	270.7	278.2	289.2	298.1	303.2	305.3	303.2
142.5°	213.3	226.3	239.6	252.6	258.6	264.6	274.8	282.7	287.1	287.1	287.1
145°	211.2	221.8	233.1	243.7	248.6	253.6	261.8	267.7	271.1	272.1	271.1
147.5°	209.2	218.4	227.7	236.2	240.0	243.7	250.9	255.7	258.1	258.8	258.1
150°	206.5	214.7	222.2	229.4	232.4	235.5	240.6	244.7	246.8	247.1	246.8
152.5°	204.1	210.9	217.7	223.6	226.2	228.7	232.4	235.9	237.2	237.2	237.2
155°	201.0	207.5	213.0	218.1	220.0	221.8	225.6	228.0	229.4	228.7	229.4
157.5°	198.3	203.4	208.2	212.6	214.2	215.7	218.4	220.5	221.2	221.2	221.2
160°	195.2	199.6	203.4	207.1	208.3	209.5	211.9	213.6	214.0	214.0	214.0
162.5°	192.4	195.9	198.9	202.0	202.8	203.7	206.1	207.1	207.5	207.1	207.5
165°	189.4	192.1	194.5	196.9	197.6	198.3	199.6	201.0	201.0	200.7	201.0
167.5°	186.3	188.3	190.4	192.1	192.8	193.5	194.2	194.8	194.8	194.5	194.8
170°	183.9	185.6	186.6	188.0	188.4	188.7	189.0	190.1	189.7	189.0	189.7
172.5°	181.5	182.5	183.2	184.2	184.4	184.6	184.9	185.3	184.9	184.6	184.9
175°	179.5	180.5	180.8	181.2	181.4	181.5	181.5	181.9	181.5	180.8	181.5
177.5°	178.1	178.8	178.8	179.1	179.1	179.1	179.1	179.1	178.8	178.1	178.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8
2.5°	1748.7	1739.9	1732.2	1733.5	1739.9	1734.8	1722.1	1705.6	1699.3	1691.7	1699.3
5°	1854.0	1846.4	1831.2	1832.4	1828.6	1823.5	1803.3	1777.9	1777.9	1757.6	1755.1
7.5°	1958.0	1946.6	1936.4	1933.9	1919.9	1909.8	1892.0	1856.5	1842.6	1818.5	1804.5
10°	2074.6	2065.8	2054.3	2040.4	2032.8	2015.0	1985.9	1933.9	1908.5	1875.5	1851.4
12.5°	2192.6	2191.3	2165.9	2138.0	2136.8	2108.9	2088.6	2018.8	1984.6	1940.2	1883.2
15°	2267.4	2261.0	2247.1	2233.2	2237.0	2206.5	2160.9	2078.4	2055.6	2002.4	1941.5
17.5°	2266.1	2266.1	2262.3	2259.8	2256.0	2247.1	2221.7	2167.2	2130.4	2063.2	2006.2
20°	2193.8	2210.3	2214.1	2212.9	2225.5	2231.9	2230.6	2196.4	2167.2	2107.6	2049.3
22.5°	2049.3	2087.3	2103.8	2113.9	2140.6	2154.5	2187.5	2174.8	2167.2	2122.8	2073.4
25°	1914.9	1927.5	1977.0	1979.5	2016.3	2050.5	2083.5	2105.1	2133.0	2116.5	2074.6
27.5°	1741.1	1770.3	1805.8	1832.4	1840.0	1909.8	1964.3	2004.9	2068.3	2073.4	2059.4
30°	1544.6	1558.5	1616.8	1652.4	1692.9	1743.7	1822.3	1892.0	1949.1	2001.1	2018.8
32.5°	1304.9	1362.0	1396.2	1439.3	1474.8	1564.9	1661.2	1751.3	1817.2	1904.7	1942.8
35°	1085.5	1129.9	1188.2	1206.0	1270.7	1346.7	1472.3	1587.7	1687.9	1776.6	1854.0
37.5°	904.2	939.7	1001.8	1029.7	1067.8	1165.4	1270.7	1413.9	1534.4	1643.5	1739.9
40°	779.9	806.5	853.4	862.3	894.0	982.8	1067.8	1202.2	1362.0	1509.1	1614.3
42.5°	694.9	707.6	739.3	750.7	771.0	830.6	906.7	1033.5	1181.9	1334.1	1482.4
45°	634.1	642.9	662.0	672.1	697.5	724.1	786.2	887.7	1004.3	1157.8	1317.6
47.5°	579.5	590.9	598.6	604.9	618.8	648.0	688.6	763.4	875.0	1015.8	1170.5
50°	533.9	537.7	551.6	552.9	561.8	580.8	618.8	664.5	753.3	867.4	1017.0
52.5°	488.2	492.0	500.9	509.8	513.6	528.8	554.2	592.2	658.2	748.2	881.3
55°	442.6	447.6	456.5	462.9	466.7	479.3	494.6	531.3	583.3	646.7	755.8
57.5°	396.9	408.3	410.9	414.7	421.0	435.0	448.9	470.5	511.1	569.4	649.3
60°	353.8	357.6	366.5	370.3	376.6	384.2	402.0	418.5	447.6	493.3	565.6
62.5°	309.4	318.3	322.1	325.9	331.0	339.9	351.3	369.0	394.4	431.2	488.2
65°	271.4	272.6	280.3	285.3	290.4	296.7	308.2	324.6	339.9	374.1	415.9
67.5°	234.6	237.1	239.7	244.7	251.1	257.4	267.6	276.4	295.5	318.3	351.3
70°	199.1	199.1	205.4	209.2	208.0	215.6	223.2	233.3	247.3	268.8	295.5
72.5°	167.4	166.1	171.2	172.5	175.0	180.1	185.1	195.3	202.9	219.4	239.7
75°	133.2	135.7	138.2	138.2	142.0	145.8	150.9	156.0	164.9	175.0	190.2
77.5°	105.3	105.3	107.8	109.1	112.9	111.6	116.7	121.7	128.1	137.0	148.4
80°	77.4	79.9	79.9	79.9	81.2	82.4	87.5	91.3	95.1	101.4	106.5
82.5°	54.5	54.5	57.1	57.1	57.1	59.6	59.6	60.9	63.4	67.2	71.0
85°	34.2	34.2	34.2	35.5	34.2	35.5	38.0	36.8	38.0	40.6	40.6
87.5°	16.5	16.5	16.5	16.5	16.5	17.8	16.5	17.8	19.0	19.0	19.0
90°	11.3	11.3	11.3	11.1	10.9	10.3	10.9	11.3	11.6	11.3	9.2
92.5°	21.2	22.6	22.9	24.2	25.6	29.4	34.5	44.1	52.6	52.0	40.3
95°	39.7	42.4	46.8	50.6	54.4	68.7	89.6	117.2	134.0	118.6	79.0
97.5°	71.1	77.9	91.3	101.6	111.8	146.3	183.2	220.1	218.4	168.9	104.9
100°	138.4	153.1	181.5	202.2	222.9	269.7	312.1	319.3	270.0	186.0	112.1
102.5°	260.5	288.2	319.6	341.8	364.0	395.2	396.5	356.2	271.8	179.5	112.5
105°	404.7	425.9	447.1	452.8	458.4	453.9	415.3	344.2	253.3	170.6	114.2
107.5°	496.3	499.4	499.8	493.0	486.1	452.6	395.2	318.9	236.2	165.8	117.9
110°	521.6	515.1	500.4	486.4	472.4	428.7	367.5	295.3	224.6	164.4	122.7

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	514.8	502.8	481.0	464.4	447.8	400.3	342.2	278.9	217.1	164.8	127.8
115°	495.0	479.2	455.0	437.4	419.8	375.0	322.3	265.9	211.9	166.1	133.0
117.5°	470.0	453.3	428.3	411.6	394.8	353.1	305.9	257.1	209.2	168.2	138.4
120°	444.0	428.0	404.0	388.4	372.9	336.7	294.3	250.2	206.8	170.2	143.9
122.5°	420.8	405.1	384.2	370.5	356.9	323.0	285.1	244.4	205.4	172.6	148.7
125°	399.9	386.9	367.1	354.3	341.5	311.4	276.2	238.9	203.7	175.0	153.8
127.5°	382.2	369.9	352.4	340.4	328.5	299.8	267.3	233.8	202.7	177.4	158.6
130°	366.1	354.5	337.7	326.4	315.2	288.2	258.8	228.7	202.0	180.1	163.1
132.5°	350.4	338.8	322.3	311.9	301.5	277.2	250.6	224.6	201.7	182.9	167.5
135°	333.3	322.0	307.3	297.8	288.2	265.6	243.0	220.8	201.3	184.9	171.3
137.5°	315.8	305.9	291.9	283.4	274.8	256.4	236.9	218.1	201.3	187.0	174.3
140°	298.1	289.2	278.2	270.7	263.2	247.5	231.1	215.7	201.0	188.3	176.7
142.5°	282.7	274.8	264.6	258.6	252.6	239.6	226.3	213.3	201.0	189.4	178.8
145°	267.7	261.8	253.6	248.6	243.7	233.1	221.8	211.2	200.3	190.1	180.5
147.5°	255.7	250.9	243.7	240.0	236.2	227.7	218.4	209.2	199.3	190.4	181.5
150°	244.7	240.6	235.5	232.4	229.4	222.2	214.7	206.5	198.3	190.1	182.2
152.5°	235.9	232.4	228.7	226.2	223.6	217.7	210.9	204.1	196.6	189.4	182.5
155°	228.0	225.6	221.8	220.0	218.1	213.0	207.5	201.0	194.5	188.7	182.9
157.5°	220.5	218.4	215.7	214.2	212.6	208.2	203.4	198.3	192.4	187.3	182.9
160°	213.6	211.9	209.5	208.3	207.1	203.4	199.6	195.2	190.4	186.3	182.9
162.5°	207.1	206.1	203.7	202.8	202.0	198.9	195.9	192.4	188.7	185.3	182.5
165°	201.0	199.6	198.3	197.6	196.9	194.5	192.1	189.4	186.3	183.9	181.9
167.5°	194.8	194.2	193.5	192.8	192.1	190.4	188.3	186.3	184.2	182.5	181.5
170°	190.1	189.0	188.7	188.4	188.0	186.6	185.6	183.9	182.5	181.5	180.8
172.5°	185.3	184.9	184.6	184.4	184.2	183.2	182.5	181.5	180.5	180.1	179.8
175°	181.9	181.5	181.5	181.4	181.2	180.8	180.5	179.5	179.1	178.8	179.1
177.5°	179.1	179.1	179.1	179.1	179.1	178.8	178.8	178.1	177.8	178.1	178.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8
2.5°	1692.9	1686.6	1682.8	1685.3	1677.7	1658.7	1658.7	1665.0	1657.4	1649.8	1638.4
5°	1739.9	1727.2	1719.6	1718.3	1700.5	1670.1	1663.8	1657.4	1640.9	1623.2	1604.2
7.5°	1785.5	1762.7	1750.0	1741.1	1715.8	1676.4	1660.0	1646.0	1619.4	1592.8	1568.7
10°	1823.5	1790.6	1775.4	1761.4	1728.4	1679.0	1652.4	1627.0	1592.8	1558.5	1528.1
12.5°	1854.0	1815.9	1796.9	1776.6	1736.0	1671.4	1638.4	1597.8	1563.6	1517.9	1487.5
15°	1904.7	1826.1	1808.3	1789.3	1747.5	1658.7	1618.1	1572.5	1525.5	1464.7	1431.7
17.5°	1945.3	1840.0	1838.8	1798.2	1743.7	1653.6	1591.5	1531.9	1481.2	1420.3	1368.3
20°	1969.4	1861.6	1841.3	1799.5	1731.0	1619.4	1554.7	1488.8	1434.2	1360.7	1308.7
22.5°	1989.7	1892.0	1838.8	1788.0	1704.3	1608.0	1512.9	1450.7	1375.9	1296.0	1246.6
25°	1997.3	1898.4	1842.6	1784.2	1685.3	1575.0	1467.2	1400.0	1316.3	1244.0	1176.8
27.5°	1998.5	1897.1	1828.6	1767.8	1658.7	1531.9	1421.6	1350.5	1258.0	1174.3	1107.1
30°	1985.9	1883.2	1821.0	1755.1	1633.3	1492.6	1365.8	1287.1	1188.2	1104.5	1034.8
32.5°	1947.8	1855.3	1804.5	1732.2	1600.4	1438.0	1312.5	1225.0	1121.0	1038.6	971.4
35°	1884.4	1821.0	1765.2	1698.0	1557.2	1387.3	1259.2	1156.5	1051.3	972.6	909.2
37.5°	1805.8	1771.6	1719.6	1653.6	1507.8	1341.7	1199.6	1085.5	980.3	904.2	842.0
40°	1699.3	1708.2	1657.4	1597.8	1449.5	1279.5	1122.3	1013.2	914.3	843.3	782.4
42.5°	1583.9	1620.7	1591.5	1534.4	1384.8	1211.0	1065.2	944.7	848.4	774.8	724.1
45°	1459.6	1523.0	1505.3	1463.4	1317.6	1138.8	984.1	867.4	782.4	711.4	667.0
47.5°	1323.9	1413.9	1413.9	1383.5	1242.8	1066.5	914.3	795.1	711.4	660.7	617.6
50°	1185.7	1287.1	1303.6	1283.3	1159.1	984.1	829.3	721.6	649.3	599.8	568.1
52.5°	1041.1	1159.1	1189.5	1179.3	1070.3	905.4	759.6	654.3	588.4	545.3	517.4
55°	902.9	1039.9	1072.8	1076.6	975.2	819.2	682.2	589.7	526.3	497.1	473.0
57.5°	772.3	904.2	940.9	947.3	878.8	740.6	610.0	528.8	471.7	447.6	428.6
60°	660.7	771.0	819.2	833.2	773.6	649.3	542.8	464.1	421.0	398.2	380.4
62.5°	569.4	658.2	708.9	712.7	686.1	569.4	473.0	407.1	370.3	350.0	341.1
65°	480.6	560.5	590.9	606.2	584.6	493.3	408.3	353.8	324.6	306.9	298.0
67.5°	409.6	460.3	485.7	506.0	484.4	415.9	347.5	303.1	281.5	263.8	258.7
70°	336.1	377.9	396.9	417.2	398.2	346.2	296.7	256.2	237.1	223.2	216.8
72.5°	268.8	301.8	319.6	332.2	320.8	277.7	237.1	209.2	195.3	185.1	181.3
75°	213.0	235.9	246.0	254.9	249.8	216.8	191.5	168.7	156.0	147.1	144.6
77.5°	162.3	178.8	190.2	192.8	186.4	164.9	143.3	129.3	119.2	114.1	111.6
80°	115.4	125.5	131.9	135.7	129.3	120.5	105.3	95.1	86.2	79.9	78.6
82.5°	77.4	82.4	87.5	86.2	83.7	76.1	67.2	62.1	58.3	53.3	53.3
85°	44.4	45.7	48.2	49.5	48.2	43.1	38.0	35.5	33.0	29.2	29.2
87.5°	19.0	20.3	20.3	21.6	19.0	19.0	16.5	13.9	13.9	12.7	11.4
90°	6.8	5.1	4.6	4.1	3.4	2.7	1.4	0.3	1.4	2.7	3.4
92.5°	27.3	18.1	16.2	14.4	11.6	9.9	7.2	5.1	7.2	9.9	11.6
95°	49.2	33.5	29.4	25.3	19.8	16.7	13.3	12.0	13.3	16.7	19.8
97.5°	63.6	43.4	38.8	34.2	28.0	23.6	19.8	17.8	19.8	23.6	28.0
100°	70.4	52.3	47.5	42.7	35.9	30.4	27.3	26.3	27.3	30.4	35.9
102.5°	76.6	60.2	55.4	50.6	43.4	37.9	34.9	34.2	34.9	37.9	43.4
105°	83.7	67.7	62.9	58.1	50.6	45.5	43.1	41.7	43.1	45.5	50.6
107.5°	90.9	75.2	70.4	65.6	58.1	53.3	50.9	49.9	50.9	53.3	58.1
110°	98.1	83.1	78.2	73.2	66.0	61.5	59.5	58.1	59.5	61.5	66.0

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	104.9	90.6	85.4	80.3	73.5	69.4	67.0	65.6	67.0	69.4	73.5
115°	112.1	97.4	92.8	88.2	81.4	77.3	75.2	73.5	75.2	77.3	81.4
117.5°	118.6	104.9	100.2	95.4	88.9	85.1	83.1	81.7	83.1	85.1	88.9
120°	125.5	112.1	107.3	102.5	95.7	92.6	90.6	89.2	90.6	92.6	95.7
122.5°	131.9	119.6	114.6	109.7	102.9	99.5	97.4	96.4	97.4	99.5	102.9
125°	138.4	126.1	121.4	116.6	109.7	105.6	103.6	102.5	103.6	105.6	109.7
127.5°	144.6	132.6	127.6	122.7	116.2	111.8	109.0	107.7	109.0	111.8	116.2
130°	150.1	138.1	133.3	128.5	121.7	116.9	113.5	112.1	113.5	116.9	121.7
132.5°	154.8	143.6	138.8	134.0	126.8	121.7	117.9	116.2	117.9	121.7	126.8
135°	159.3	148.4	143.6	138.8	130.9	125.8	121.7	120.3	121.7	125.8	130.9
137.5°	163.1	152.1	147.6	143.2	135.4	129.9	125.8	124.1	125.8	129.9	135.4
140°	166.1	155.9	151.4	147.0	139.5	134.0	129.9	128.5	129.9	134.0	139.5
142.5°	168.5	158.6	154.5	150.4	143.2	137.8	134.0	133.0	134.0	137.8	143.2
145°	170.9	161.7	158.0	154.2	147.3	142.2	138.8	137.4	138.8	142.2	147.3
147.5°	173.0	164.1	160.6	157.2	151.4	146.6	143.2	142.2	143.2	146.6	151.4
150°	174.3	166.5	163.4	160.3	155.2	150.7	148.0	147.0	148.0	150.7	155.2
152.5°	175.7	168.9	166.2	163.4	158.6	154.8	152.1	151.8	152.1	154.8	158.6
155°	177.1	171.3	168.7	166.1	162.4	158.6	156.6	156.2	156.6	158.6	162.4
157.5°	178.1	173.0	170.8	168.5	165.4	162.0	160.3	160.0	160.3	162.0	165.4
160°	178.8	174.7	172.8	170.9	168.2	165.4	164.1	163.7	164.1	165.4	168.2
162.5°	179.1	175.7	174.4	173.0	170.6	168.5	167.2	167.5	167.2	168.5	170.6
165°	179.5	176.4	175.4	174.3	172.6	170.6	169.9	170.2	169.9	170.6	172.6
167.5°	179.5	177.1	176.4	175.7	174.3	173.0	172.3	172.6	172.3	173.0	174.3
170°	179.1	177.4	176.9	176.4	175.7	174.7	174.3	175.0	174.3	174.7	175.7
172.5°	178.8	177.8	177.4	177.1	176.7	175.7	176.0	176.4	176.0	175.7	176.7
175°	178.4	177.8	177.6	177.4	177.4	176.7	177.1	177.4	177.1	176.7	177.4
177.5°	178.1	177.8	177.8	177.8	177.8	177.1	177.4	178.1	177.4	177.1	177.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8
2.5°	1632.1	1638.4	1637.1	1624.5	1610.5	1599.1	1577.5	1580.1	1572.5	1573.7	1581.3
5°	1591.5	1591.5	1586.4	1568.7	1545.8	1533.2	1509.1	1502.7	1487.5	1486.2	1485.0
7.5°	1548.4	1542.0	1535.7	1510.3	1482.4	1462.1	1429.2	1421.6	1406.3	1396.2	1391.1
10°	1497.6	1488.8	1476.1	1446.9	1412.7	1387.3	1353.1	1342.9	1313.8	1301.1	1293.5
12.5°	1441.8	1436.8	1416.5	1392.4	1336.6	1308.7	1259.2	1269.4	1240.2	1214.9	1211.0
15°	1386.0	1367.0	1355.6	1316.3	1249.1	1236.4	1197.1	1176.8	1150.2	1129.9	1129.9
17.5°	1331.5	1302.4	1277.0	1235.1	1185.7	1150.2	1121.0	1110.9	1077.9	1057.6	1053.8
20°	1259.2	1226.3	1219.9	1160.3	1126.1	1086.8	1058.9	1033.5	1009.4	1000.5	994.2
22.5°	1190.8	1152.7	1142.6	1091.8	1057.6	1018.3	990.4	972.6	954.9	948.5	937.1
25°	1117.2	1094.4	1079.2	1024.6	986.6	949.8	930.8	918.1	901.6	900.4	892.8
27.5°	1046.2	1024.6	1009.4	957.4	929.5	895.3	880.1	866.1	857.2	853.4	849.6
30°	985.3	961.2	943.5	905.4	871.2	843.3	830.6	821.7	816.7	810.3	809.1
32.5°	918.1	904.2	880.1	850.9	824.3	797.6	790.0	783.7	776.1	773.6	772.3
35°	861.1	842.0	826.8	793.8	782.4	759.6	750.7	745.7	735.5	733.0	730.4
37.5°	805.3	787.5	771.0	750.7	729.2	716.5	711.4	703.8	698.7	700.0	697.5
40°	749.5	735.5	722.8	701.3	688.6	682.2	672.1	664.5	662.0	663.2	662.0
42.5°	694.9	682.2	674.6	658.2	645.5	639.1	632.8	625.2	629.0	629.0	632.8
45°	645.5	634.1	629.0	616.3	608.7	598.6	592.2	590.9	596.0	594.7	594.7
47.5°	594.7	590.9	584.6	573.2	563.0	556.7	555.4	555.4	560.5	563.0	561.8
50°	555.4	547.8	540.2	531.3	523.7	521.2	517.4	519.9	525.0	525.0	527.5
52.5°	506.0	500.9	498.4	490.8	485.7	485.7	485.7	487.0	490.8	494.6	493.3
55°	462.9	459.1	456.5	452.7	446.4	447.6	446.4	448.9	452.7	456.5	459.1
57.5°	417.2	415.9	413.4	407.1	407.1	405.8	409.6	410.9	417.2	419.7	423.6
60°	376.6	372.8	372.8	367.8	367.8	367.8	371.6	375.4	380.4	381.7	384.2
62.5°	333.5	333.5	332.2	328.4	328.4	332.2	333.5	338.6	341.1	341.1	344.9
65°	292.9	291.7	290.4	291.7	292.9	292.9	296.7	299.3	301.8	303.1	304.3
67.5°	252.4	251.1	253.6	252.4	254.9	260.0	258.7	262.5	266.3	266.3	267.6
70°	214.3	216.8	215.6	218.1	216.8	219.4	223.2	224.5	224.5	225.7	229.5
72.5°	178.8	178.8	178.8	177.5	178.8	181.3	183.9	185.1	187.7	188.9	192.8
75°	144.6	144.6	142.0	144.6	144.6	147.1	149.6	149.6	149.6	152.2	156.0
77.5°	109.1	110.3	109.1	111.6	111.6	112.9	115.4	114.1	116.7	117.9	119.2
80°	79.9	78.6	78.6	78.6	79.9	79.9	82.4	83.7	83.7	87.5	85.0
82.5°	50.7	52.0	50.7	52.0	52.0	53.3	52.0	53.3	54.5	57.1	55.8
85°	29.2	27.9	27.9	29.2	27.9	27.9	29.2	27.9	29.2	27.9	29.2
87.5°	11.4	10.1	10.1	10.1	10.1	8.9	8.9	7.6	7.6	7.6	6.3
90°	4.1	4.6	5.1	6.8	9.2	11.3	11.6	11.3	10.9	10.3	10.9
92.5°	14.4	16.2	18.1	27.3	40.3	52.0	52.6	44.1	34.5	29.4	25.6
95°	25.3	29.4	33.5	49.2	79.0	118.6	134.0	117.2	89.6	68.7	54.4
97.5°	34.2	38.8	43.4	63.6	104.9	168.9	218.4	220.1	183.2	146.3	111.8
100°	42.7	47.5	52.3	70.4	112.1	186.0	270.0	319.3	312.1	269.7	222.9
102.5°	50.6	55.4	60.2	76.6	112.5	179.5	271.8	356.2	396.5	395.2	364.0
105°	58.1	62.9	67.7	83.7	114.2	170.6	253.3	344.2	415.3	453.9	458.4
107.5°	65.6	70.4	75.2	90.9	117.9	165.8	236.2	318.9	395.2	452.6	486.1
110°	73.2	78.2	83.1	98.1	122.7	164.4	224.6	295.3	367.5	428.7	472.4

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	80.3	85.4	90.6	104.9	127.8	164.8	217.1	278.9	342.2	400.3	447.8
115°	88.2	92.8	97.4	112.1	133.0	166.1	211.9	265.9	322.3	375.0	419.8
117.5°	95.4	100.2	104.9	118.6	138.4	168.2	209.2	257.1	305.9	353.1	394.8
120°	102.5	107.3	112.1	125.5	143.9	170.2	206.8	250.2	294.3	336.7	372.9
122.5°	109.7	114.6	119.6	131.9	148.7	172.6	205.4	244.4	285.1	323.0	356.9
125°	116.6	121.4	126.1	138.4	153.8	175.0	203.7	238.9	276.2	311.4	341.5
127.5°	122.7	127.6	132.6	144.6	158.6	177.4	202.7	233.8	267.3	299.8	328.5
130°	128.5	133.3	138.1	150.1	163.1	180.1	202.0	228.7	258.8	288.2	315.2
132.5°	134.0	138.8	143.6	154.8	167.5	182.9	201.7	224.6	250.6	277.2	301.5
135°	138.8	143.6	148.4	159.3	171.3	184.9	201.3	220.8	243.0	265.6	288.2
137.5°	143.2	147.6	152.1	163.1	174.3	187.0	201.3	218.1	236.9	256.4	274.8
140°	147.0	151.4	155.9	166.1	176.7	188.3	201.0	215.7	231.1	247.5	263.2
142.5°	150.4	154.5	158.6	168.5	178.8	189.4	201.0	213.3	226.3	239.6	252.6
145°	154.2	158.0	161.7	170.9	180.5	190.1	200.3	211.2	221.8	233.1	243.7
147.5°	157.2	160.6	164.1	173.0	181.5	190.4	199.3	209.2	218.4	227.7	236.2
150°	160.3	163.4	166.5	174.3	182.2	190.1	198.3	206.5	214.7	222.2	229.4
152.5°	163.4	166.2	168.9	175.7	182.5	189.4	196.6	204.1	210.9	217.7	223.6
155°	166.1	168.7	171.3	177.1	182.9	188.7	194.5	201.0	207.5	213.0	218.1
157.5°	168.5	170.8	173.0	178.1	182.9	187.3	192.4	198.3	203.4	208.2	212.6
160°	170.9	172.8	174.7	178.8	182.9	186.3	190.4	195.2	199.6	203.4	207.1
162.5°	173.0	174.4	175.7	179.1	182.5	185.3	188.7	192.4	195.9	198.9	202.0
165°	174.3	175.4	176.4	179.5	181.9	183.9	186.3	189.4	192.1	194.5	196.9
167.5°	175.7	176.4	177.1	179.5	181.5	182.5	184.2	186.3	188.3	190.4	192.1
170°	176.4	176.9	177.4	179.1	180.8	181.5	182.5	183.9	185.6	186.6	188.0
172.5°	177.1	177.4	177.8	178.8	179.8	180.1	180.5	181.5	182.5	183.2	184.2
175°	177.4	177.6	177.8	178.4	179.1	178.8	179.1	179.5	180.5	180.8	181.2
177.5°	177.8	177.8	177.8	178.1	178.8	178.1	177.8	178.1	178.8	178.8	179.1
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8
2.5°	1572.5	1576.3	1567.4	1564.9	1567.4	1558.5	1561.0	1563.6	1563.6	1567.4	1569.9
5°	1481.2	1476.1	1467.2	1464.7	1462.1	1465.9	1463.4	1467.2	1468.5	1477.4	1478.6
7.5°	1391.1	1383.5	1375.9	1368.3	1365.8	1359.4	1365.8	1365.8	1374.6	1372.1	1378.4
10°	1284.6	1283.3	1273.2	1269.4	1264.3	1254.2	1268.1	1264.3	1270.7	1282.1	1284.6
12.5°	1206.0	1192.0	1198.4	1180.6	1187.0	1176.8	1178.1	1178.1	1188.2	1189.5	1187.0
15°	1131.2	1119.7	1103.3	1095.7	1091.8	1086.8	1103.3	1104.5	1096.9	1114.7	1108.3
17.5°	1055.1	1055.1	1039.9	1036.0	1025.9	1031.0	1028.4	1029.7	1027.2	1039.9	1046.2
20°	989.1	982.8	977.7	979.0	966.3	963.8	961.2	963.8	972.6	981.5	984.1
22.5°	935.9	932.1	919.4	921.9	911.8	915.6	913.0	919.4	920.7	920.7	929.5
25°	885.1	880.1	881.3	876.3	872.5	872.5	868.7	872.5	877.5	880.1	881.3
27.5°	847.1	843.3	837.0	833.2	835.7	829.3	834.4	838.2	838.2	835.7	838.2
30°	801.4	804.0	804.0	791.3	796.4	793.8	797.6	800.2	800.2	801.4	798.9
32.5°	771.0	763.4	762.1	760.9	760.9	755.8	755.8	759.6	760.9	762.1	765.9
35°	730.4	730.4	724.1	727.9	722.8	724.1	722.8	724.1	726.6	722.8	726.6
37.5°	693.7	694.9	692.4	694.9	696.2	693.7	691.1	696.2	693.7	693.7	691.1
40°	662.0	660.7	662.0	662.0	662.0	663.2	660.7	660.7	660.7	658.2	655.6
42.5°	635.3	627.7	630.3	631.5	627.7	627.7	629.0	627.7	631.5	623.9	623.9
45°	597.3	594.7	596.0	596.0	598.6	594.7	597.3	598.6	594.7	593.5	590.9
47.5°	563.0	565.6	563.0	565.6	565.6	568.1	563.0	564.3	565.6	560.5	556.7
50°	528.8	528.8	532.6	531.3	532.6	530.1	530.1	528.8	530.1	527.5	523.7
52.5°	497.1	493.3	499.6	498.4	497.1	495.8	494.6	495.8	493.3	490.8	490.8
55°	457.8	457.8	461.6	462.9	462.9	460.3	457.8	459.1	457.8	456.5	455.3
57.5°	426.1	421.0	423.6	424.8	424.8	421.0	423.6	421.0	421.0	422.3	418.5
60°	385.5	385.5	383.0	386.8	386.8	384.2	384.2	385.5	383.0	381.7	380.4
62.5°	342.4	343.7	347.5	348.7	350.0	347.5	344.9	346.2	346.2	342.4	343.7
65°	305.6	308.2	313.2	312.0	309.4	310.7	308.2	309.4	305.6	306.9	303.1
67.5°	270.1	268.8	270.1	270.1	272.6	271.4	268.8	268.8	267.6	271.4	267.6
70°	232.1	232.1	232.1	232.1	233.3	234.6	232.1	229.5	230.8	228.3	227.0
72.5°	192.8	194.0	192.8	195.3	191.5	194.0	194.0	192.8	191.5	191.5	191.5
75°	156.0	158.5	154.7	156.0	154.7	157.2	156.0	156.0	153.4	152.2	153.4
77.5°	119.2	120.5	117.9	119.2	117.9	119.2	119.2	117.9	117.9	117.9	117.9
80°	85.0	86.2	85.0	83.7	82.4	85.0	82.4	83.7	85.0	83.7	86.2
82.5°	54.5	54.5	53.3	54.5	52.0	52.0	53.3	53.3	52.0	54.5	52.0
85°	26.6	26.6	29.2	26.6	25.4	25.4	25.4	26.6	25.4	27.9	26.6
87.5°	6.3	5.1	6.3	6.3	5.1	5.1	6.3	5.1	6.3	7.6	5.1
90°	11.1	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.1
92.5°	24.2	22.9	22.6	21.2	21.5	20.9	21.5	21.2	22.6	22.9	24.2
95°	50.6	46.8	42.4	39.7	38.6	39.0	38.6	39.7	42.4	46.8	50.6
97.5°	101.6	91.3	77.9	71.1	67.3	65.3	67.3	71.1	77.9	91.3	101.6
100°	202.2	181.5	153.1	138.4	128.5	122.4	128.5	138.4	153.1	181.5	202.2
102.5°	341.8	319.6	288.2	260.5	247.5	238.6	247.5	260.5	288.2	319.6	341.8
105°	452.8	447.1	425.9	404.7	390.0	385.2	390.0	404.7	425.9	447.1	452.8
107.5°	493.0	499.8	499.4	496.3	491.9	484.0	491.9	496.3	499.4	499.8	493.0
110°	486.4	500.4	515.1	521.6	524.7	524.4	524.7	521.6	515.1	500.4	486.4

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	464.4	481.0	502.8	514.8	521.3	523.7	521.3	514.8	502.8	481.0	464.4
115°	437.4	455.0	479.2	495.0	503.9	506.9	503.9	495.0	479.2	455.0	437.4
117.5°	411.6	428.3	453.3	470.0	479.2	481.6	479.2	470.0	453.3	428.3	411.6
120°	388.4	404.0	428.0	444.0	453.9	457.4	453.9	444.0	428.0	404.0	388.4
122.5°	370.5	384.2	405.1	420.8	429.3	432.1	429.3	420.8	405.1	384.2	370.5
125°	354.3	367.1	386.9	399.9	408.5	411.2	408.5	399.9	386.9	367.1	354.3
127.5°	340.4	352.4	369.9	382.2	389.7	391.7	389.7	382.2	369.9	352.4	340.4
130°	326.4	337.7	354.5	366.1	372.9	375.7	372.9	366.1	354.5	337.7	326.4
132.5°	311.9	322.3	338.8	350.4	356.5	358.9	356.5	350.4	338.8	322.3	311.9
135°	297.8	307.3	322.0	333.3	339.4	340.8	339.4	333.3	322.0	307.3	297.8
137.5°	283.4	291.9	305.9	315.8	321.3	323.4	321.3	315.8	305.9	291.9	283.4
140°	270.7	278.2	289.2	298.1	303.2	305.3	303.2	298.1	289.2	278.2	270.7
142.5°	258.6	264.6	274.8	282.7	287.1	287.1	287.1	282.7	274.8	264.6	258.6
145°	248.6	253.6	261.8	267.7	271.1	272.1	271.1	267.7	261.8	253.6	248.6
147.5°	240.0	243.7	250.9	255.7	258.1	258.8	258.1	255.7	250.9	243.7	240.0
150°	232.4	235.5	240.6	244.7	246.8	247.1	246.8	244.7	240.6	235.5	232.4
152.5°	226.2	228.7	232.4	235.9	237.2	237.2	237.2	235.9	232.4	228.7	226.2
155°	220.0	221.8	225.6	228.0	229.4	228.7	229.4	228.0	225.6	221.8	220.0
157.5°	214.2	215.7	218.4	220.5	221.2	221.2	221.2	220.5	218.4	215.7	214.2
160°	208.3	209.5	211.9	213.6	214.0	214.0	214.0	213.6	211.9	209.5	208.3
162.5°	202.8	203.7	206.1	207.1	207.5	207.1	207.5	207.1	206.1	203.7	202.8
165°	197.6	198.3	199.6	201.0	201.0	200.7	201.0	201.0	199.6	198.3	197.6
167.5°	192.8	193.5	194.2	194.8	194.8	194.5	194.8	194.8	194.2	193.5	192.8
170°	188.4	188.7	189.0	190.1	189.7	189.0	189.7	190.1	189.0	188.7	188.4
172.5°	184.4	184.6	184.9	185.3	184.9	184.6	184.9	185.3	184.9	184.6	184.4
175°	181.4	181.5	181.5	181.9	181.5	180.8	181.5	181.9	181.5	181.5	181.4
177.5°	179.1	179.1	179.1	179.1	178.8	178.1	178.8	179.1	179.1	179.1	179.1
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8	1649.8
2.5°	1566.1	1576.3	1572.5	1558.5	1575.0	1575.0	1586.4	1586.4	1600.4	1605.4	1613.0
5°	1477.4	1485.0	1491.3	1485.0	1496.4	1514.1	1524.3	1533.2	1552.2	1559.8	1571.2
7.5°	1382.2	1396.2	1402.5	1402.5	1421.6	1441.8	1462.1	1474.8	1501.4	1511.6	1523.0
10°	1289.7	1306.2	1318.8	1317.6	1349.3	1362.0	1387.3	1416.5	1443.1	1458.3	1474.8
12.5°	1192.0	1200.9	1218.7	1244.0	1251.6	1274.5	1303.6	1340.4	1388.6	1402.5	1426.6
15°	1110.9	1135.0	1148.9	1160.3	1178.1	1199.6	1231.3	1266.8	1315.0	1345.5	1370.8
17.5°	1042.4	1074.1	1083.0	1080.4	1103.3	1136.2	1173.0	1199.6	1242.8	1279.5	1303.6
20°	986.6	999.3	1014.5	1020.8	1038.6	1074.1	1109.6	1140.0	1175.5	1204.7	1232.6
22.5°	930.8	940.9	953.6	965.0	979.0	999.3	1033.5	1071.6	1105.8	1133.7	1165.4
25°	885.1	891.5	902.9	911.8	927.0	940.9	965.0	1006.9	1047.5	1063.9	1091.8
27.5°	840.8	845.8	853.4	863.6	871.2	885.1	906.7	940.9	982.8	999.3	1037.3
30°	801.4	805.3	812.9	817.9	821.7	838.2	854.7	881.3	913.0	935.9	963.8
32.5°	764.7	768.5	776.1	777.4	782.4	791.3	806.5	830.6	858.5	877.5	901.6
35°	724.1	726.6	734.2	736.8	740.6	748.2	759.6	777.4	802.7	816.7	838.2
37.5°	692.4	691.1	696.2	700.0	705.1	708.9	712.7	730.4	749.5	762.1	778.6
40°	658.2	655.6	656.9	662.0	664.5	669.6	669.6	687.3	700.0	710.1	722.8
42.5°	623.9	622.6	620.1	622.6	625.2	626.4	627.7	640.4	653.1	662.0	675.9
45°	589.7	588.4	585.9	587.1	587.1	589.7	593.5	598.6	607.4	615.0	622.6
47.5°	558.0	555.4	551.6	550.4	552.9	552.9	552.9	558.0	566.8	569.4	577.0
50°	525.0	521.2	516.1	513.6	513.6	512.3	514.9	516.1	523.7	526.3	532.6
52.5°	489.5	487.0	481.9	476.8	478.1	475.5	476.8	478.1	480.6	484.4	488.2
55°	454.0	448.9	445.1	443.8	440.0	440.0	436.2	441.3	440.0	441.3	446.4
57.5°	419.7	414.7	408.3	405.8	402.0	400.7	398.2	396.9	398.2	402.0	405.8
60°	379.2	376.6	372.8	369.0	366.5	362.7	360.1	360.1	358.9	358.9	360.1
62.5°	339.9	338.6	333.5	332.2	329.7	327.2	323.4	320.8	320.8	323.4	324.6
65°	301.8	300.5	296.7	295.5	289.1	286.6	285.3	284.1	281.5	281.5	281.5
67.5°	266.3	262.5	262.5	256.2	251.1	248.6	246.0	244.7	244.7	244.7	246.0
70°	227.0	227.0	223.2	219.4	214.3	215.6	211.8	208.0	208.0	205.4	206.7
72.5°	188.9	187.7	183.9	182.6	178.8	175.0	172.5	175.0	171.2	169.9	171.2
75°	152.2	150.9	148.4	145.8	147.1	143.3	139.5	138.2	138.2	135.7	135.7
77.5°	116.7	119.2	114.1	112.9	110.3	107.8	106.5	105.3	105.3	105.3	107.8
80°	81.2	82.4	82.4	79.9	81.2	77.4	77.4	77.4	73.6	74.8	76.1
82.5°	52.0	52.0	50.7	52.0	50.7	50.7	49.5	49.5	48.2	48.2	49.5
85°	29.2	27.9	26.6	29.2	27.9	27.9	26.6	26.6	26.6	26.6	26.6
87.5°	6.3	7.6	7.6	7.6	7.6	8.9	8.9	8.9	10.1	10.1	10.1
90°	10.9	10.3	10.9	11.3	11.6	11.3	9.2	6.8	5.1	4.6	4.1
92.5°	25.6	29.4	34.5	44.1	52.6	52.0	40.3	27.3	18.1	16.2	14.4
95°	54.4	68.7	89.6	117.2	134.0	118.6	79.0	49.2	33.5	29.4	25.3
97.5°	111.8	146.3	183.2	220.1	218.4	168.9	104.9	63.6	43.4	38.8	34.2
100°	222.9	269.7	312.1	319.3	270.0	186.0	112.1	70.4	52.3	47.5	42.7
102.5°	364.0	395.2	396.5	356.2	271.8	179.5	112.5	76.6	60.2	55.4	50.6
105°	458.4	453.9	415.3	344.2	253.3	170.6	114.2	83.7	67.7	62.9	58.1
107.5°	486.1	452.6	395.2	318.9	236.2	165.8	117.9	90.9	75.2	70.4	65.6
110°	472.4	428.7	367.5	295.3	224.6	164.4	122.7	98.1	83.1	78.2	73.2

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	447.8	400.3	342.2	278.9	217.1	164.8	127.8	104.9	90.6	85.4	80.3
115°	419.8	375.0	322.3	265.9	211.9	166.1	133.0	112.1	97.4	92.8	88.2
117.5°	394.8	353.1	305.9	257.1	209.2	168.2	138.4	118.6	104.9	100.2	95.4
120°	372.9	336.7	294.3	250.2	206.8	170.2	143.9	125.5	112.1	107.3	102.5
122.5°	356.9	323.0	285.1	244.4	205.4	172.6	148.7	131.9	119.6	114.6	109.7
125°	341.5	311.4	276.2	238.9	203.7	175.0	153.8	138.4	126.1	121.4	116.6
127.5°	328.5	299.8	267.3	233.8	202.7	177.4	158.6	144.6	132.6	127.6	122.7
130°	315.2	288.2	258.8	228.7	202.0	180.1	163.1	150.1	138.1	133.3	128.5
132.5°	301.5	277.2	250.6	224.6	201.7	182.9	167.5	154.8	143.6	138.8	134.0
135°	288.2	265.6	243.0	220.8	201.3	184.9	171.3	159.3	148.4	143.6	138.8
137.5°	274.8	256.4	236.9	218.1	201.3	187.0	174.3	163.1	152.1	147.6	143.2
140°	263.2	247.5	231.1	215.7	201.0	188.3	176.7	166.1	155.9	151.4	147.0
142.5°	252.6	239.6	226.3	213.3	201.0	189.4	178.8	168.5	158.6	154.5	150.4
145°	243.7	233.1	221.8	211.2	200.3	190.1	180.5	170.9	161.7	158.0	154.2
147.5°	236.2	227.7	218.4	209.2	199.3	190.4	181.5	173.0	164.1	160.6	157.2
150°	229.4	222.2	214.7	206.5	198.3	190.1	182.2	174.3	166.5	163.4	160.3
152.5°	223.6	217.7	210.9	204.1	196.6	189.4	182.5	175.7	168.9	166.2	163.4
155°	218.1	213.0	207.5	201.0	194.5	188.7	182.9	177.1	171.3	168.7	166.1
157.5°	212.6	208.2	203.4	198.3	192.4	187.3	182.9	178.1	173.0	170.8	168.5
160°	207.1	203.4	199.6	195.2	190.4	186.3	182.9	178.8	174.7	172.8	170.9
162.5°	202.0	198.9	195.9	192.4	188.7	185.3	182.5	179.1	175.7	174.4	173.0
165°	196.9	194.5	192.1	189.4	186.3	183.9	181.9	179.5	176.4	175.4	174.3
167.5°	192.1	190.4	188.3	186.3	184.2	182.5	181.5	179.5	177.1	176.4	175.7
170°	188.0	186.6	185.6	183.9	182.5	181.5	180.8	179.1	177.4	176.9	176.4
172.5°	184.2	183.2	182.5	181.5	180.5	180.1	179.8	178.8	177.8	177.4	177.1
175°	181.2	180.8	180.5	179.5	179.1	178.8	179.1	178.4	177.8	177.6	177.4
177.5°	179.1	178.8	178.8	178.1	177.8	178.1	178.8	178.1	177.8	177.8	177.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1649.8	1649.8	1649.8	1649.8
2.5°	1619.4	1619.4	1638.4	1658.7
5°	1583.9	1592.8	1623.2	1651.1
7.5°	1549.6	1564.9	1602.9	1638.4
10°	1507.8	1528.1	1575.0	1616.8
12.5°	1467.2	1486.2	1540.8	1587.7
15°	1410.1	1434.2	1492.6	1550.9
17.5°	1353.1	1377.2	1448.2	1516.7
20°	1285.9	1317.6	1397.5	1488.8
22.5°	1223.7	1263.0	1351.8	1425.4
25°	1155.3	1216.1	1298.5	1393.7
27.5°	1094.4	1155.3	1238.9	1335.3
30°	1025.9	1088.0	1174.3	1263.0
32.5°	960.0	1017.0	1100.7	1209.8
35°	891.5	946.0	1027.2	1137.5
37.5°	829.3	882.6	971.4	1072.8
40°	768.5	824.3	900.4	1001.8
42.5°	711.4	760.9	829.3	930.8
45°	659.4	694.9	758.3	853.4
47.5°	604.9	636.6	694.9	790.0
50°	554.2	580.8	631.5	720.3
52.5°	504.7	527.5	574.5	645.5
55°	460.3	481.9	516.1	585.9
57.5°	414.7	431.2	464.1	519.9
60°	370.3	385.5	412.1	457.8
62.5°	325.9	338.6	363.9	400.7
65°	286.6	296.7	315.8	347.5
67.5°	248.6	254.9	270.1	295.5
70°	211.8	216.8	229.5	249.8
72.5°	172.5	177.5	191.5	205.4
75°	139.5	140.8	150.9	162.3
77.5°	109.1	107.8	115.4	124.3
80°	74.8	78.6	85.0	88.8
82.5°	50.7	52.0	54.5	57.1
85°	27.9	29.2	29.2	33.0
87.5°	11.4	12.7	12.7	13.9
90°	3.4	2.7	1.4	0.3
92.5°	11.6	9.9	7.2	5.1
95°	19.8	16.7	13.3	12.0
97.5°	28.0	23.6	19.8	17.8
100°	35.9	30.4	27.3	26.3
102.5°	43.4	37.9	34.9	34.2
105°	50.6	45.5	43.1	41.7
107.5°	58.1	53.3	50.9	49.9
110°	66.0	61.5	59.5	58.1

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	73.5	69.4	67.0	65.6
115°	81.4	77.3	75.2	73.5
117.5°	88.9	85.1	83.1	81.7
120°	95.7	92.6	90.6	89.2
122.5°	102.9	99.5	97.4	96.4
125°	109.7	105.6	103.6	102.5
127.5°	116.2	111.8	109.0	107.7
130°	121.7	116.9	113.5	112.1
132.5°	126.8	121.7	117.9	116.2
135°	130.9	125.8	121.7	120.3
137.5°	135.4	129.9	125.8	124.1
140°	139.5	134.0	129.9	128.5
142.5°	143.2	137.8	134.0	133.0
145°	147.3	142.2	138.8	137.4
147.5°	151.4	146.6	143.2	142.2
150°	155.2	150.7	148.0	147.0
152.5°	158.6	154.8	152.1	151.8
155°	162.4	158.6	156.6	156.2
157.5°	165.4	162.0	160.3	160.0
160°	168.2	165.4	164.1	163.7
162.5°	170.6	168.5	167.2	167.5
165°	172.6	170.6	169.9	170.2
167.5°	174.3	173.0	172.3	172.6
170°	175.7	174.7	174.3	175.0
172.5°	176.7	175.7	176.0	176.4
175°	177.4	176.7	177.1	177.4
177.5°	177.8	177.1	177.4	178.1
180°	177.8	177.8	177.8	177.8

TEST NUMBER: P999082

CATALOG NUMBER: SA2XXDIP-B865D330UB50-4F0-XX-W2A-A4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.23	20.31	19.95	21.04	21.91	16.72	17.80	17.44	18.53	19.41
	3H	20.06	21.02	20.79	21.77	22.67	18.08	19.05	18.82	19.79	20.70
	4H	20.24	21.14	20.99	21.90	22.82	18.56	19.46	19.31	20.22	21.14
	6H	20.29	21.13	21.06	21.89	22.82	18.87	19.71	19.64	20.48	21.41
	8H	20.28	21.07	21.05	21.86	22.79	18.96	19.76	19.74	20.54	21.48
	12H	20.25	21.01	21.03	21.78	22.74	19.01	19.77	19.79	20.55	21.51
4H	2H	19.30	20.21	20.05	20.96	21.88	17.19	18.10	17.95	18.86	19.78
	3H	20.30	21.05	21.06	21.84	22.78	18.67	19.43	19.44	20.22	21.15
	4H	20.58	21.27	21.36	22.06	23.02	19.22	19.90	20.00	20.69	21.66
	6H	20.72	21.31	21.52	22.13	23.10	19.61	20.20	20.41	21.01	21.99
	8H	20.73	21.28	21.53	22.09	23.07	19.72	20.28	20.53	21.09	22.07
	12H	20.70	21.20	21.52	22.03	23.02	19.79	20.28	20.61	21.12	22.10
8H	4H	20.61	21.16	21.41	21.97	22.95	19.37	19.93	20.18	20.74	21.72
	6H	20.79	21.25	21.63	22.10	23.09	19.82	20.27	20.65	21.13	22.11
	8H	20.82	21.23	21.67	22.08	23.08	19.97	20.37	20.81	21.22	22.22
	12H	20.82	21.17	21.66	22.02	23.07	20.07	20.43	20.92	21.27	22.32
12H	4H	20.57	21.07	21.40	21.90	22.89	19.36	19.85	20.18	20.69	21.67
	6H	20.77	21.18	21.62	22.03	23.03	19.82	20.22	20.66	21.07	22.07
	8H	20.81	21.17	21.66	22.01	23.07	19.99	20.34	20.83	21.18	22.24