

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P999154

Luminaire Tested: SA2XXDIP-B865D725UB27-4F0-XX-W2A-D4

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P999154
REPORT IS A COMBINATION OF REPORTS P984903 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-B865D725UB27-4F0-XX-W2A-D4
Description: Define 2 Direct/Indirect Pendant with 2700K BioUP LEDs {m-DER=0.473} {m-EER=0.52}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6189.1 lumens
Efficiency: N/A
Efficacy: 91.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.31 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 67.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P999154

CATALOG NUMBER: SA2XXDIP-B865D725UB27-4F0-XX-W2A-D4

Luminous Intensity Polar Plot

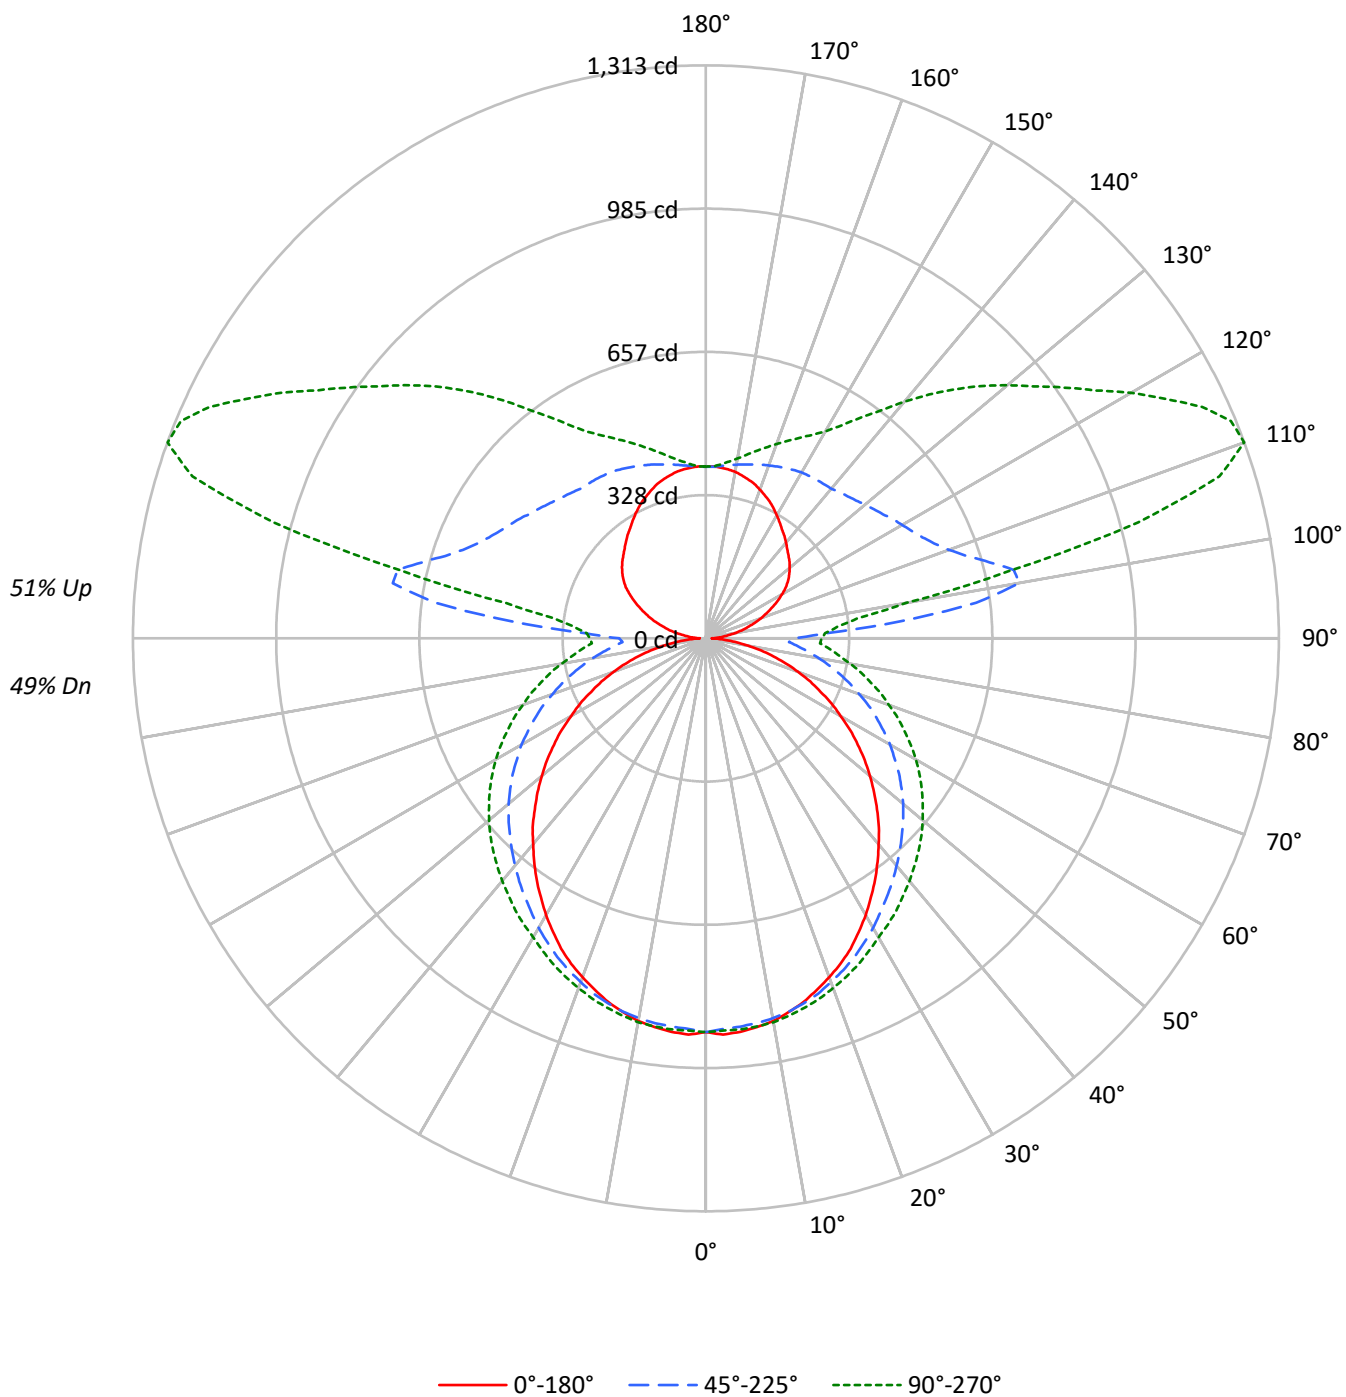

TEST NUMBER: P999154

CATALOG NUMBER: SA2XXDIP-B865D725UB27-4F0-XX-W2A-D4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56
1	96	91	87	83	88	84	80	77	71	68	65	58	56	54	47	45	44
2	87	79	72	66	80	73	67	62	61	57	53	50	47	44	40	38	36
3	79	69	61	55	72	63	56	51	53	48	44	44	40	37	35	32	30
4	72	61	52	46	66	56	48	43	47	41	37	39	35	31	31	28	25
5	66	54	45	39	60	50	42	36	42	36	31	35	30	27	28	25	22
6	61	48	40	33	55	44	37	31	38	32	27	31	27	23	25	22	19
7	56	43	35	29	51	40	33	27	34	28	24	28	24	20	23	19	17
8	52	39	31	26	48	36	29	24	31	25	21	26	21	18	21	18	15
9	48	36	28	23	44	33	26	21	28	23	19	24	19	16	19	16	13
10	45	33	25	20	41	30	24	19	26	21	17	22	18	14	18	15	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14283	14283	14283
5°	14349	13674	13596
10°	14252	13200	13008
15°	14050	12710	12404
20°	13797	12196	11829
25°	13546	11704	11310
30°	13195	11202	10795
35°	12840	10720	10417
40°	12465	10303	10041
45°	12110	9925	9714
50°	11727	9576	9390
55°	11325	9205	9062
60°	10833	8819	8716
65°	10320	8376	8318
70°	9740	7899	7888
75°	9001	7423	7484
80°	7832	6928	7066
85°	6653	6461	6704

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12110 cd/sqm

TEST NUMBER: P999154

CATALOG NUMBER: SA2XXDIP-B865D725UB27-4F0-XX-W2A-D4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.5	1.4
10°-20°	245.3	4.0
20°-30°	371.7	6.0
30°-40°	452.7	7.3
40°-50°	487.0	7.9
50°-60°	473.0	7.6
60°-70°	413.1	6.7
70°-80°	317.9	5.1
80°-90°	215.4	3.5
90°-100°	306.4	5.0
100°-110°	646.6	10.4
110°-120°	637.7	10.3
120°-130°	505.6	8.2
130°-140°	391.2	6.3
140°-150°	285.8	4.6
150°-160°	198.9	3.2
160°-170°	117.1	1.9
170°-180°	38.1	0.6
0°-30°	702.6	11.4
0°-40°	1155.3	18.7
0°-60°	2115.3	34.2
0°-90°	3061.7	49.5
90°-120°	1590.7	25.7
90°-150°	2773.3	44.8
90°-180°	3127.0	50.5
0°-180°	6189.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	902	902	902	902	902	
5°	905	901	893	901	900	86
15°	863	866	866	878	876	243
25°	785	794	806	821	825	361
35°	676	698	723	752	761	423
45°	554	590	636	676	689	428
55°	425	472	540	587	604	380
65°	290	354	432	485	502	288
75°	161	234	318	374	391	170
85°	47	128	212	267	285	50
90°	14	99	198	250	266	11
95°	37	137	447	312	302	36
105°	99	184	673	1160	1026	106
115°	168	225	548	1086	1254	166
125°	230	271	496	864	1002	205
135°	268	319	460	701	807	207
145°	304	350	444	558	617	191
155°	346	374	431	487	506	159
165°	377	388	412	437	444	106
175°	393	393	396	402	400	37
180°	394	394	394	394	394	

TEST NUMBER: P999154

CATALOG NUMBER: SA2XXDIP-B865D725UB27-4F0-XX-W2A-D4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	902.3	902.3	902.3	902.3	902.3
2.5°	908.9	905.0	895.8	902.3	899.7
5°	905.0	901.0	893.2	901.0	899.7
7.5°	898.4	895.8	889.3	898.4	897.1
10°	890.6	888.0	884.0	894.5	893.2
12.5°	877.5	878.8	876.2	886.6	885.3
15°	863.1	865.7	865.7	877.5	876.2
17.5°	844.8	850.0	854.0	865.7	865.7
20°	826.5	833.0	838.3	852.6	852.6
22.5°	806.9	814.7	822.6	836.9	839.6
25°	784.6	793.8	805.6	821.3	825.2
27.5°	758.5	772.9	785.9	805.6	808.2
30°	732.3	749.3	766.3	787.3	791.2
32.5°	703.6	723.2	744.1	768.9	776.8
35°	676.1	698.3	723.2	751.9	761.1
37.5°	646.0	670.9	702.3	733.6	742.8
40°	615.9	644.7	680.0	714.0	725.8
42.5°	587.2	615.9	657.8	695.7	707.5
45°	554.5	589.8	635.6	676.1	689.2
47.5°	523.1	561.0	613.3	655.2	669.6
50°	490.4	530.9	589.8	634.3	648.6
52.5°	459.0	502.2	564.9	610.7	626.4
55°	425.0	472.1	540.1	587.2	604.2
57.5°	392.3	444.6	512.6	563.6	580.6
60°	357.0	413.2	487.8	537.5	555.8
62.5°	325.6	384.5	459.0	512.6	529.6
65°	290.3	354.4	431.6	485.2	502.2
67.5°	258.9	325.6	404.1	457.7	476.0
70°	224.9	292.9	374.0	430.2	445.9
72.5°	193.5	264.2	346.5	401.5	421.1
75°	160.9	234.1	317.8	374.0	391.0
77.5°	129.5	205.3	290.3	346.5	364.9
80°	98.1	177.9	262.9	317.8	336.1
82.5°	71.9	150.4	236.7	291.6	308.6
85°	47.1	128.2	211.9	266.8	285.1
87.5°	28.8	107.2	190.9	244.5	261.5
90°	13.9	99.2	198.3	249.5	265.6
92.5°	23.2	117.0	277.4	265.6	273.7
95°	37.0	137.0	447.1	312.1	302.1
97.5°	48.6	151.3	624.8	414.4	349.8
100°	67.5	162.7	728.6	626.8	464.4
102.5°	83.5	173.6	723.2	925.5	711.3
105°	98.8	183.8	673.3	1160.5	1025.5
107.5°	117.0	193.8	626.2	1239.0	1233.8
110°	133.9	204.3	592.7	1214.2	1312.6

TEST NUMBER: P999154

CATALOG NUMBER: SA2XXDIP-B865D725UB27-4F0-XX-W2A-D4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	150.5	215.4	566.8	1156.3	1301.9
115°	167.9	225.0	547.7	1086.0	1254.4
117.5°	184.8	236.1	532.4	1019.6	1187.9
120°	201.4	246.8	519.3	958.2	1125.1
122.5°	217.3	259.1	508.4	909.2	1057.3
125°	229.6	271.2	495.5	864.2	1001.9
127.5°	241.0	284.0	485.4	823.0	948.4
130°	250.8	296.4	476.0	782.9	902.3
132.5°	259.9	308.6	467.4	741.6	856.1
135°	267.7	319.1	460.1	700.9	806.8
137.5°	276.0	328.3	453.5	660.0	757.7
140°	285.8	335.2	447.6	622.8	707.2
142.5°	295.7	342.0	445.0	588.2	657.9
145°	304.2	349.6	443.5	558.3	616.8
147.5°	314.8	355.6	441.2	532.6	578.1
150°	325.4	361.7	438.9	514.6	547.1
152.5°	336.0	367.8	435.1	500.6	525.2
155°	345.8	373.5	430.6	487.0	506.3
157.5°	354.2	378.0	426.1	474.1	489.6
160°	362.5	382.5	421.5	461.2	473.7
162.5°	370.8	386.0	417.7	449.1	458.6
165°	376.9	388.2	412.4	437.4	444.2
167.5°	382.2	390.5	407.9	426.8	430.6
170°	387.5	391.6	404.1	417.0	418.5
172.5°	390.5	392.8	399.6	408.3	408.7
175°	392.8	393.2	396.5	401.5	400.3
177.5°	394.3	393.5	393.5	396.5	394.3
180°	393.5	393.5	393.5	393.5	393.5

TEST NUMBER: P999154

CATALOG NUMBER: SA2XXDIP-B865D725UB27-4F0-XX-W2A-D4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.40	15.30	15.35	16.28	17.55	17.47	18.38	18.42	19.35	20.63
	3H	15.86	16.68	16.82	17.66	18.96	20.06	20.88	21.03	21.87	23.16
	4H	16.34	17.12	17.31	18.10	19.41	21.32	22.10	22.29	23.09	24.39
	6H	16.62	17.35	17.61	18.34	19.66	22.62	23.34	23.60	24.33	25.65
	8H	16.68	17.37	17.68	18.38	19.70	23.28	23.97	24.27	24.98	26.29
	12H	16.70	17.36	17.70	18.36	19.70	24.01	24.66	25.00	25.67	27.01
4H	2H	15.45	16.23	16.43	17.22	18.52	17.81	18.59	18.79	19.57	20.88
	3H	17.16	17.82	18.15	18.84	20.16	20.60	21.26	21.59	22.28	23.60
	4H	17.79	18.40	18.78	19.40	20.75	22.02	22.63	23.02	23.64	24.98
	6H	18.21	18.74	19.21	19.77	21.10	23.49	24.02	24.50	25.05	26.39
	8H	18.32	18.81	19.32	19.84	21.19	24.25	24.75	25.26	25.77	27.13
	12H	18.36	18.81	19.39	19.85	21.21	25.08	25.53	26.11	26.57	27.93
8H	4H	18.58	19.08	19.59	20.10	21.46	22.17	22.67	23.18	23.69	25.04
	6H	19.22	19.63	20.25	20.70	22.05	23.80	24.22	24.83	25.28	26.63
	8H	19.44	19.81	20.48	20.86	22.23	24.69	25.06	25.73	26.11	27.48
	12H	19.57	19.90	20.62	20.95	22.36	25.69	26.02	26.73	27.06	28.47
12H	4H	18.78	19.23	19.81	20.27	21.63	22.14	22.60	23.17	23.64	25.00
	6H	19.55	19.92	20.59	20.97	22.34	23.82	24.20	24.87	25.25	26.62
	8H	19.86	20.19	20.90	21.23	22.64	24.76	25.09	25.80	26.13	27.54