

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P999343

Luminaire Tested: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P999343
REPORT IS A COMBINATION OF REPORTS P987894 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4
Description: Define 2 Regressed Direct/Indirect Pendant with 5000K BioUP LEDs {m-DER=1.015}
{m-EER=1.115}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4912.0 lumens
Efficiency: N/A
Efficacy: 69.6 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 0.85 / 1.01
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 70.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

Luminous Intensity Polar Plot

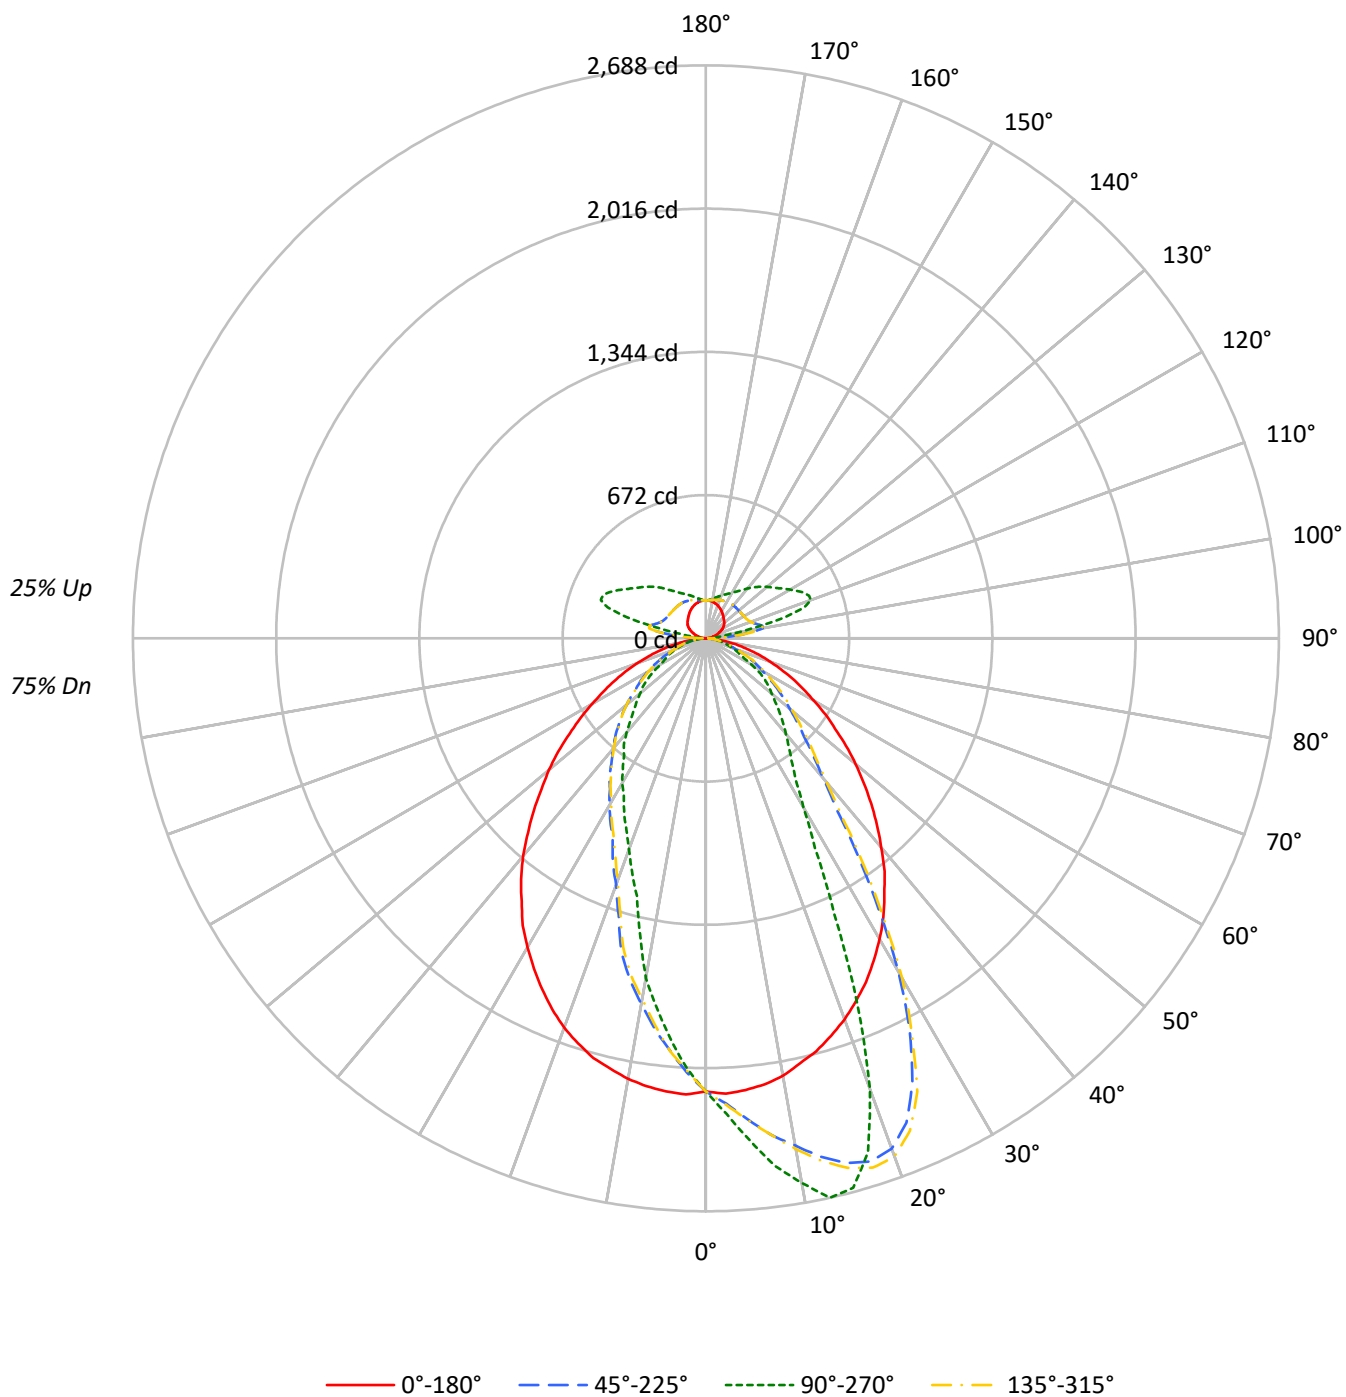

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	113	113	113	113	107	107	107	107	97	97	97	88	88	88	79	79	79
1	104	100	97	94	99	96	93	90	87	85	82	79	77	75	72	70	69
2	96	89	83	79	91	85	80	76	78	74	70	71	68	65	65	62	60
3	89	80	73	67	84	76	70	65	70	65	61	64	60	57	58	55	53
4	82	72	64	58	78	69	62	56	63	57	53	58	53	50	53	49	47
5	76	65	57	51	72	62	55	50	57	51	47	53	48	44	49	45	42
6	70	59	51	45	67	57	49	44	52	46	42	48	43	40	45	41	37
7	66	54	46	41	63	52	45	40	48	42	38	45	39	36	41	37	34
8	61	49	42	37	59	48	41	36	44	38	34	41	36	32	38	34	31
9	58	46	38	33	55	44	37	33	41	35	31	38	33	30	36	31	28
10	54	42	35	30	52	41	34	30	38	32	29	36	31	27	33	29	26

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	33644	33644	33644	33644
5°	33722	35735	33839	28548
10°	33352	37771	33587	23575
15°	32627	37783	33181	17710
20°	31757	31232	32448	14611
25°	30701	19515	31364	12430
30°	29353	12494	30153	10701
35°	27714	9603	28613	9158
40°	25888	8071	26993	8010
45°	23934	6870	24935	6725
50°	21933	5837	22959	5815
55°	19718	5072	20781	5006
60°	17749	3869	18689	3822
65°	15908	2912	16854	3303
70°	13880	2326	14967	2691
75°	11731	1782	12805	2035
80°	9317	1211	10020	1335
85°	6470	626	7091	661

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 165°

Vertical Angle: 45°

Luminance: 30776 cd/sqm

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	201.6	4.1
10°-20°	562.7	11.5
20°-30°	724.2	14.7
30°-40°	687.1	14.0
40°-50°	588.8	12.0
50°-60°	448.4	9.1
60°-70°	282.8	5.8
70°-80°	141.1	2.9
80°-90°	37.4	0.8
90°-100°	69.3	1.4
100°-110°	244.0	5.0
110°-120°	256.3	5.2
120°-130°	210.8	4.3
130°-140°	169.4	3.4
140°-150°	127.9	2.6
150°-160°	89.9	1.8
160°-170°	52.9	1.1
170°-180°	17.2	0.4
0°-30°	1488.5	30.3
0°-40°	2175.6	44.3
0°-60°	3212.9	65.4
0°-90°	3674.1	74.8
90°-120°	569.6	11.6
90°-150°	1077.7	21.9
90°-180°	1238.0	25.2
0°-180°	4912.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2125	2125	2125	2125	2125	
5°	2127	2365	2134	1889	2127	202
15°	2004	2669	2038	1251	2004	564
25°	1778	1424	1817	907	1778	817
35°	1459	702	1507	669	1459	913
45°	1096	487	1142	477	1096	846
55°	740	338	780	334	740	667
65°	448	176	474	199	448	444
75°	210	93	229	106	210	227
85°	46	27	50	28	46	52
90°	0	11	0	11	0	4
95°	12	39	12	39	12	12
105°	42	385	42	385	42	44
115°	74	507	74	507	74	73
125°	102	411	102	411	102	91
135°	120	341	120	341	120	93
145°	137	272	137	272	137	86
155°	156	229	156	229	156	72
165°	170	201	170	201	170	48
175°	177	181	177	181	177	17
180°	178	178	178	178	178	

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4
2.5°	2138.7	2147.6	2152.0	2157.9	2171.2	2180.1	2193.4	2196.3	2194.8	2200.8	2184.5
5°	2126.9	2146.1	2163.8	2178.6	2202.2	2217.0	2233.2	2252.4	2256.9	2279.0	2265.7
7.5°	2110.7	2138.7	2163.8	2193.4	2228.8	2248.0	2273.1	2302.7	2316.0	2342.5	2349.9
10°	2084.1	2123.9	2166.8	2197.8	2246.5	2280.5	2304.1	2351.4	2382.4	2422.3	2416.4
12.5°	2041.2	2092.9	2150.5	2202.2	2265.7	2287.9	2332.2	2380.9	2420.8	2457.8	2490.2
15°	2004.3	2063.4	2126.9	2190.4	2262.8	2304.1	2348.5	2412.0	2454.8	2519.8	2547.9
17.5°	1954.1	2029.4	2104.7	2175.6	2261.3	2308.6	2363.2	2425.3	2488.8	2550.8	2573.0
20°	1902.4	1983.6	2064.9	2160.9	2258.4	2304.1	2360.3	2437.1	2499.1	2547.9	2547.9
22.5°	1840.4	1939.3	2032.4	2123.9	2230.3	2296.8	2354.4	2444.5	2488.8	2499.1	2459.2
25°	1778.3	1877.3	1979.2	2092.9	2214.0	2273.1	2338.1	2422.3	2437.1	2395.7	2292.3
27.5°	1704.5	1815.3	1930.5	2053.1	2180.1	2253.9	2313.0	2369.1	2341.1	2230.3	2069.3
30°	1629.1	1748.8	1878.8	1995.4	2149.1	2217.0	2267.2	2283.5	2194.8	2014.6	1806.4
32.5°	1550.9	1667.6	1804.9	1945.2	2100.3	2165.3	2197.8	2155.0	1992.5	1765.0	1511.0
35°	1459.3	1590.7	1734.0	1880.2	2033.9	2082.6	2101.8	1996.9	1788.7	1494.7	1242.2
37.5°	1376.6	1508.0	1661.6	1810.8	1960.0	1986.6	1967.4	1803.4	1539.1	1248.1	1001.4
40°	1279.1	1419.4	1570.1	1737.0	1859.6	1866.9	1819.7	1607.0	1279.1	1005.8	853.7
42.5°	1189.0	1330.8	1481.4	1651.3	1744.4	1719.2	1655.7	1376.6	1067.9	867.0	744.4
45°	1095.9	1230.4	1392.8	1543.5	1609.9	1550.9	1454.9	1158.0	896.5	745.9	651.4
47.5°	1005.8	1131.4	1292.4	1437.1	1449.0	1382.5	1268.8	970.4	776.9	655.8	579.0
50°	917.2	1042.8	1193.4	1313.1	1301.3	1209.7	1081.2	843.4	675.0	579.0	515.5
52.5°	828.6	942.3	1088.6	1183.1	1132.9	1044.3	917.2	714.9	589.3	505.1	456.4
55°	740.0	846.3	971.9	1050.2	970.4	868.5	778.4	613.0	511.0	443.1	406.2
57.5°	666.1	750.3	865.5	912.8	816.8	737.0	658.7	527.3	443.1	394.4	351.5
60°	584.9	661.7	756.2	784.3	685.3	620.3	553.9	446.1	379.6	336.8	308.7
62.5°	515.5	579.0	651.4	651.4	564.2	515.5	465.3	373.7	319.0	285.1	271.8
65°	447.5	493.3	545.0	539.1	465.3	422.4	382.5	308.7	267.3	243.7	230.4
67.5°	381.1	416.5	450.5	429.8	376.6	339.7	302.8	249.6	221.6	205.3	187.6
70°	320.5	348.6	366.3	347.1	293.9	262.9	236.3	200.9	178.7	158.0	147.7
72.5°	268.8	280.6	286.5	262.9	218.6	200.9	181.7	156.6	137.4	127.0	124.1
75°	209.7	220.1	215.6	197.9	161.0	147.7	132.9	115.2	110.8	104.9	101.9
77.5°	163.9	163.9	156.6	140.3	115.2	104.9	99.0	90.1	85.7	84.2	81.2
80°	116.7	115.2	110.8	93.1	78.3	72.4	72.4	66.5	65.0	62.0	62.0
82.5°	76.8	76.8	70.9	56.1	51.7	50.2	48.7	45.8	45.8	44.3	44.3
85°	45.8	42.8	35.4	31.0	29.5	29.5	28.1	26.6	28.1	26.6	26.6
87.5°	20.7	16.2	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8
90°	0.3	1.4	2.7	3.4	4.1	4.6	5.1	6.8	9.2	11.3	11.6
92.5°	5.1	7.2	9.9	11.6	14.4	16.2	18.1	27.3	40.3	52.0	52.6
95°	12.0	13.3	16.7	19.8	25.3	29.4	33.5	49.2	79.0	118.6	134.0
97.5°	17.8	19.8	23.6	28.0	34.2	38.8	43.4	63.6	104.9	168.9	218.4
100°	26.3	27.3	30.4	35.9	42.7	47.5	52.3	70.4	112.1	186.0	270.0
102.5°	34.2	34.9	37.9	43.4	50.6	55.4	60.2	76.6	112.5	179.5	271.8
105°	41.7	43.1	45.5	50.6	58.1	62.9	67.7	83.7	114.2	170.6	253.3
107.5°	49.9	50.9	53.3	58.1	65.6	70.4	75.2	90.9	117.9	165.8	236.2
110°	58.1	59.5	61.5	66.0	73.2	78.2	83.1	98.1	122.7	164.4	224.6

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	65.6	67.0	69.4	73.5	80.3	85.4	90.6	104.9	127.8	164.8	217.1
115°	73.5	75.2	77.3	81.4	88.2	92.8	97.4	112.1	133.0	166.1	211.9
117.5°	81.7	83.1	85.1	88.9	95.4	100.2	104.9	118.6	138.4	168.2	209.2
120°	89.2	90.6	92.6	95.7	102.5	107.3	112.1	125.5	143.9	170.2	206.8
122.5°	96.4	97.4	99.5	102.9	109.7	114.6	119.6	131.9	148.7	172.6	205.4
125°	102.5	103.6	105.6	109.7	116.6	121.4	126.1	138.4	153.8	175.0	203.7
127.5°	107.7	109.0	111.8	116.2	122.7	127.6	132.6	144.6	158.6	177.4	202.7
130°	112.1	113.5	116.9	121.7	128.5	133.3	138.1	150.1	163.1	180.1	202.0
132.5°	116.2	117.9	121.7	126.8	134.0	138.8	143.6	154.8	167.5	182.9	201.7
135°	120.3	121.7	125.8	130.9	138.8	143.6	148.4	159.3	171.3	184.9	201.3
137.5°	124.1	125.8	129.9	135.4	143.2	147.6	152.1	163.1	174.3	187.0	201.3
140°	128.5	129.9	134.0	139.5	147.0	151.4	155.9	166.1	176.7	188.3	201.0
142.5°	133.0	134.0	137.8	143.2	150.4	154.5	158.6	168.5	178.8	189.4	201.0
145°	137.4	138.8	142.2	147.3	154.2	158.0	161.7	170.9	180.5	190.1	200.3
147.5°	142.2	143.2	146.6	151.4	157.2	160.6	164.1	173.0	181.5	190.4	199.3
150°	147.0	148.0	150.7	155.2	160.3	163.4	166.5	174.3	182.2	190.1	198.3
152.5°	151.8	152.1	154.8	158.6	163.4	166.2	168.9	175.7	182.5	189.4	196.6
155°	156.2	156.6	158.6	162.4	166.1	168.7	171.3	177.1	182.9	188.7	194.5
157.5°	160.0	160.3	162.0	165.4	168.5	170.8	173.0	178.1	182.9	187.3	192.4
160°	163.7	164.1	165.4	168.2	170.9	172.8	174.7	178.8	182.9	186.3	190.4
162.5°	167.5	167.2	168.5	170.6	173.0	174.4	175.7	179.1	182.5	185.3	188.7
165°	170.2	169.9	170.6	172.6	174.3	175.4	176.4	179.5	181.9	183.9	186.3
167.5°	172.6	172.3	173.0	174.3	175.7	176.4	177.1	179.5	181.5	182.5	184.2
170°	175.0	174.3	174.7	175.7	176.4	176.9	177.4	179.1	180.8	181.5	182.5
172.5°	176.4	176.0	175.7	176.7	177.1	177.4	177.8	178.8	179.8	180.1	180.5
175°	177.4	177.1	176.7	177.4	177.4	177.6	177.8	178.4	179.1	178.8	179.1
177.5°	178.1	177.4	177.1	177.8	177.8	177.8	177.8	178.1	178.8	178.1	177.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4
2.5°	2200.8	2203.7	2208.1	2228.8	2231.8	2237.7	2234.7	2234.7	2236.2	2233.2	2234.7
5°	2295.3	2299.7	2321.9	2347.0	2352.9	2347.0	2354.4	2364.7	2364.7	2364.7	2361.7
7.5°	2383.9	2400.2	2425.3	2462.2	2469.6	2477.0	2490.2	2481.4	2484.3	2497.6	2493.2
10°	2469.6	2493.2	2521.3	2552.3	2568.5	2578.9	2584.8	2598.1	2629.1	2593.6	2606.9
12.5°	2550.8	2584.8	2614.3	2648.3	2660.1	2673.4	2677.8	2689.6	2689.6	2688.2	2698.5
15°	2604.0	2635.0	2661.6	2683.7	2686.7	2683.7	2680.8	2682.3	2686.7	2669.0	2679.3
17.5°	2615.8	2618.7	2627.6	2618.7	2620.2	2589.2	2571.5	2567.1	2525.7	2527.2	2561.1
20°	2558.2	2508.0	2494.7	2445.9	2416.4	2336.6	2333.7	2311.5	2224.4	2251.0	2245.1
22.5°	2400.2	2314.5	2200.8	2144.6	2116.6	2032.4	1967.4	1921.6	1890.6	1859.6	1846.3
25°	2191.9	2053.1	1892.1	1781.3	1765.0	1686.8	1567.1	1511.0	1444.5	1423.8	1459.3
27.5°	1923.1	1742.9	1561.2	1391.3	1360.3	1289.4	1228.9	1189.0	1112.2	1107.8	1110.7
30°	1558.3	1376.6	1224.4	1113.7	1036.9	1004.4	964.5	935.0	903.9	915.7	918.7
32.5°	1280.6	1107.8	966.0	906.9	871.4	850.8	816.8	797.6	784.3	779.9	778.4
35°	1017.7	902.5	838.9	781.3	760.7	745.9	720.8	711.9	700.1	701.6	701.6
37.5°	871.4	775.4	728.2	698.6	679.4	672.0	655.8	646.9	639.5	636.6	641.0
40°	751.8	685.3	655.8	629.2	613.0	610.0	601.1	590.8	581.9	583.4	587.9
42.5°	664.7	626.3	590.8	570.1	558.3	553.9	546.5	539.1	539.1	534.7	533.2
45°	595.2	564.2	534.7	515.5	508.1	502.2	493.3	491.8	485.9	487.4	488.9
47.5°	533.2	508.1	485.9	466.7	459.4	457.9	449.0	443.1	443.1	441.6	440.2
50°	477.1	452.0	432.8	422.4	412.1	409.1	407.7	406.2	403.2	403.2	404.7
52.5°	431.3	406.2	391.4	382.5	376.6	373.7	373.7	372.2	372.2	372.2	370.7
55°	381.1	360.4	348.6	345.6	342.7	341.2	339.7	336.8	335.3	338.2	335.3
57.5°	333.8	326.4	316.1	313.1	305.7	305.7	301.3	298.4	295.4	298.4	298.4
60°	296.9	286.5	280.6	271.8	265.9	260.0	252.6	251.1	248.1	246.7	245.2
62.5°	258.5	249.6	234.8	221.6	212.7	206.8	203.8	202.4	202.4	200.9	200.9
65°	215.6	195.0	187.6	183.1	181.7	180.2	177.2	175.8	177.2	175.8	177.2
67.5°	168.4	165.4	161.0	158.0	156.6	155.1	155.1	153.6	153.6	153.6	153.6
70°	146.2	138.8	137.4	134.4	134.4	132.9	132.9	132.9	132.9	131.5	134.4
72.5°	121.1	116.7	115.2	113.7	113.7	113.7	112.3	112.3	112.3	110.8	112.3
75°	99.0	97.5	94.5	94.5	93.1	94.5	93.1	93.1	91.6	93.1	93.1
77.5°	79.8	78.3	76.8	76.8	75.3	75.3	75.3	75.3	75.3	75.3	76.8
80°	60.6	59.1	57.6	59.1	57.6	59.1	57.6	57.6	59.1	57.6	57.6
82.5°	44.3	42.8	42.8	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4
85°	26.6	25.1	25.1	26.6	25.1	26.6	25.1	25.1	25.1	26.6	26.6
87.5°	11.8	13.3	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	13.3
90°	11.3	10.9	10.3	10.9	11.1	11.3	11.3	11.3	11.3	11.3	11.3
92.5°	44.1	34.5	29.4	25.6	24.2	22.9	22.6	21.2	21.5	20.9	21.5
95°	117.2	89.6	68.7	54.4	50.6	46.8	42.4	39.7	38.6	39.0	38.6
97.5°	220.1	183.2	146.3	111.8	101.6	91.3	77.9	71.1	67.3	65.3	67.3
100°	319.3	312.1	269.7	222.9	202.2	181.5	153.1	138.4	128.5	122.4	128.5
102.5°	356.2	396.5	395.2	364.0	341.8	319.6	288.2	260.5	247.5	238.6	247.5
105°	344.2	415.3	453.9	458.4	452.8	447.1	425.9	404.7	390.0	385.2	390.0
107.5°	318.9	395.2	452.6	486.1	493.0	499.8	499.4	496.3	491.9	484.0	491.9
110°	295.3	367.5	428.7	472.4	486.4	500.4	515.1	521.6	524.7	524.4	524.7

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	278.9	342.2	400.3	447.8	464.4	481.0	502.8	514.8	521.3	523.7	521.3
115°	265.9	322.3	375.0	419.8	437.4	455.0	479.2	495.0	503.9	506.9	503.9
117.5°	257.1	305.9	353.1	394.8	411.6	428.3	453.3	470.0	479.2	481.6	479.2
120°	250.2	294.3	336.7	372.9	388.4	404.0	428.0	444.0	453.9	457.4	453.9
122.5°	244.4	285.1	323.0	356.9	370.5	384.2	405.1	420.8	429.3	432.1	429.3
125°	238.9	276.2	311.4	341.5	354.3	367.1	386.9	399.9	408.5	411.2	408.5
127.5°	233.8	267.3	299.8	328.5	340.4	352.4	369.9	382.2	389.7	391.7	389.7
130°	228.7	258.8	288.2	315.2	326.4	337.7	354.5	366.1	372.9	375.7	372.9
132.5°	224.6	250.6	277.2	301.5	311.9	322.3	338.8	350.4	356.5	358.9	356.5
135°	220.8	243.0	265.6	288.2	297.8	307.3	322.0	333.3	339.4	340.8	339.4
137.5°	218.1	236.9	256.4	274.8	283.4	291.9	305.9	315.8	321.3	323.4	321.3
140°	215.7	231.1	247.5	263.2	270.7	278.2	289.2	298.1	303.2	305.3	303.2
142.5°	213.3	226.3	239.6	252.6	258.6	264.6	274.8	282.7	287.1	287.1	287.1
145°	211.2	221.8	233.1	243.7	248.6	253.6	261.8	267.7	271.1	272.1	271.1
147.5°	209.2	218.4	227.7	236.2	240.0	243.7	250.9	255.7	258.1	258.8	258.1
150°	206.5	214.7	222.2	229.4	232.4	235.5	240.6	244.7	246.8	247.1	246.8
152.5°	204.1	210.9	217.7	223.6	226.2	228.7	232.4	235.9	237.2	237.2	237.2
155°	201.0	207.5	213.0	218.1	220.0	221.8	225.6	228.0	229.4	228.7	229.4
157.5°	198.3	203.4	208.2	212.6	214.2	215.7	218.4	220.5	221.2	221.2	221.2
160°	195.2	199.6	203.4	207.1	208.3	209.5	211.9	213.6	214.0	214.0	214.0
162.5°	192.4	195.9	198.9	202.0	202.8	203.7	206.1	207.1	207.5	207.1	207.5
165°	189.4	192.1	194.5	196.9	197.6	198.3	199.6	201.0	201.0	200.7	201.0
167.5°	186.3	188.3	190.4	192.1	192.8	193.5	194.2	194.8	194.8	194.5	194.8
170°	183.9	185.6	186.6	188.0	188.4	188.7	189.0	190.1	189.7	189.0	189.7
172.5°	181.5	182.5	183.2	184.2	184.4	184.6	184.9	185.3	184.9	184.6	184.9
175°	179.5	180.5	180.8	181.2	181.4	181.5	181.5	181.9	181.5	180.8	181.5
177.5°	178.1	178.8	178.8	179.1	179.1	179.1	179.1	179.1	178.8	178.1	178.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4
2.5°	2240.6	2230.3	2227.3	2230.3	2227.3	2228.8	2218.5	2180.1	2190.4	2174.2	2183.0
5°	2367.7	2358.8	2339.6	2336.6	2333.7	2330.7	2316.0	2282.0	2268.7	2246.5	2245.1
7.5°	2488.8	2488.8	2474.0	2463.7	2450.4	2440.0	2420.8	2370.6	2349.9	2323.3	2308.6
10°	2608.4	2570.0	2586.3	2575.9	2543.4	2537.5	2502.1	2472.5	2432.6	2406.1	2382.4
12.5°	2694.1	2682.3	2667.5	2658.6	2649.8	2630.6	2606.9	2531.6	2510.9	2457.8	2431.2
15°	2691.1	2683.7	2688.2	2688.2	2685.2	2680.8	2661.6	2606.9	2571.5	2519.8	2474.0
17.5°	2546.4	2565.6	2584.8	2598.1	2627.6	2640.9	2658.6	2626.1	2604.0	2559.7	2510.9
20°	2293.8	2341.1	2397.2	2409.0	2435.6	2513.9	2549.3	2577.4	2586.3	2571.5	2531.6
22.5°	1942.3	1982.2	2118.0	2115.1	2153.5	2246.5	2349.9	2434.1	2500.6	2537.5	2522.7
25°	1521.3	1577.5	1649.8	1704.5	1830.0	1968.9	2097.4	2231.8	2347.0	2448.9	2474.0
27.5°	1150.6	1224.4	1282.0	1354.4	1417.9	1581.9	1747.3	1957.0	2091.5	2284.9	2385.4
30°	930.5	964.5	1022.1	1056.1	1087.1	1212.6	1400.2	1607.0	1843.3	2066.3	2239.2
32.5°	794.6	818.3	861.1	875.9	908.4	992.6	1110.7	1299.8	1543.5	1813.8	2041.2
35°	713.4	738.5	747.4	760.7	787.2	840.4	921.7	1059.0	1279.1	1543.5	1815.3
37.5°	644.0	657.3	682.4	691.2	700.1	740.0	794.6	890.6	1036.9	1254.0	1555.3
40°	595.2	602.6	615.9	623.3	629.2	657.3	706.0	771.0	878.8	1044.3	1321.9
42.5°	543.5	552.4	561.3	570.1	577.5	599.7	629.2	691.2	763.6	889.2	1090.0
45°	493.3	499.2	509.6	515.5	525.8	543.5	570.1	613.0	678.0	757.7	920.2
47.5°	447.5	454.9	459.4	466.7	474.1	493.3	518.4	546.5	599.7	678.0	796.1
50°	406.2	415.0	420.9	422.4	428.3	446.1	466.7	497.8	531.7	592.3	695.7
52.5°	376.6	378.1	382.5	388.5	387.0	397.3	416.5	440.2	475.6	524.3	599.7
55°	342.7	347.1	350.1	351.5	351.5	360.4	370.7	392.9	420.9	460.8	524.3
57.5°	299.8	304.3	313.1	316.1	320.5	324.9	329.4	344.1	367.8	406.2	457.9
60°	255.5	258.5	267.3	273.2	276.2	288.0	293.9	305.7	319.0	347.1	395.8
62.5°	205.3	208.3	212.7	218.6	224.5	242.2	257.0	268.8	279.2	298.4	338.2
65°	178.7	180.2	183.1	184.6	186.1	193.5	206.8	223.0	242.2	257.0	280.6
67.5°	155.1	156.6	158.0	161.0	162.5	163.9	169.9	174.3	193.5	214.2	231.9
70°	132.9	135.9	137.4	137.4	138.8	141.8	144.7	150.7	156.6	166.9	189.1
72.5°	112.3	113.7	116.7	116.7	116.7	119.6	122.6	125.5	128.5	134.4	143.3
75°	93.1	96.0	96.0	96.0	97.5	97.5	100.4	103.4	106.3	110.8	113.7
77.5°	76.8	76.8	76.8	76.8	78.3	78.3	79.8	82.7	84.2	85.7	88.6
80°	57.6	59.1	59.1	59.1	60.6	60.6	60.6	63.5	65.0	65.0	67.9
82.5°	42.8	42.8	42.8	44.3	42.8	44.3	44.3	45.8	44.3	45.8	47.3
85°	26.6	26.6	26.6	28.1	28.1	28.1	28.1	28.1	28.1	28.1	29.5
87.5°	13.3	13.3	13.3	13.3	13.3	13.3	13.3	13.3	14.8	13.3	13.3
90°	11.3	11.3	11.3	11.1	10.9	10.3	10.9	11.3	11.6	11.3	9.2
92.5°	21.2	22.6	22.9	24.2	25.6	29.4	34.5	44.1	52.6	52.0	40.3
95°	39.7	42.4	46.8	50.6	54.4	68.7	89.6	117.2	134.0	118.6	79.0
97.5°	71.1	77.9	91.3	101.6	111.8	146.3	183.2	220.1	218.4	168.9	104.9
100°	138.4	153.1	181.5	202.2	222.9	269.7	312.1	319.3	270.0	186.0	112.1
102.5°	260.5	288.2	319.6	341.8	364.0	395.2	396.5	356.2	271.8	179.5	112.5
105°	404.7	425.9	447.1	452.8	458.4	453.9	415.3	344.2	253.3	170.6	114.2
107.5°	496.3	499.4	499.8	493.0	486.1	452.6	395.2	318.9	236.2	165.8	117.9
110°	521.6	515.1	500.4	486.4	472.4	428.7	367.5	295.3	224.6	164.4	122.7

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	514.8	502.8	481.0	464.4	447.8	400.3	342.2	278.9	217.1	164.8	127.8
115°	495.0	479.2	455.0	437.4	419.8	375.0	322.3	265.9	211.9	166.1	133.0
117.5°	470.0	453.3	428.3	411.6	394.8	353.1	305.9	257.1	209.2	168.2	138.4
120°	444.0	428.0	404.0	388.4	372.9	336.7	294.3	250.2	206.8	170.2	143.9
122.5°	420.8	405.1	384.2	370.5	356.9	323.0	285.1	244.4	205.4	172.6	148.7
125°	399.9	386.9	367.1	354.3	341.5	311.4	276.2	238.9	203.7	175.0	153.8
127.5°	382.2	369.9	352.4	340.4	328.5	299.8	267.3	233.8	202.7	177.4	158.6
130°	366.1	354.5	337.7	326.4	315.2	288.2	258.8	228.7	202.0	180.1	163.1
132.5°	350.4	338.8	322.3	311.9	301.5	277.2	250.6	224.6	201.7	182.9	167.5
135°	333.3	322.0	307.3	297.8	288.2	265.6	243.0	220.8	201.3	184.9	171.3
137.5°	315.8	305.9	291.9	283.4	274.8	256.4	236.9	218.1	201.3	187.0	174.3
140°	298.1	289.2	278.2	270.7	263.2	247.5	231.1	215.7	201.0	188.3	176.7
142.5°	282.7	274.8	264.6	258.6	252.6	239.6	226.3	213.3	201.0	189.4	178.8
145°	267.7	261.8	253.6	248.6	243.7	233.1	221.8	211.2	200.3	190.1	180.5
147.5°	255.7	250.9	243.7	240.0	236.2	227.7	218.4	209.2	199.3	190.4	181.5
150°	244.7	240.6	235.5	232.4	229.4	222.2	214.7	206.5	198.3	190.1	182.2
152.5°	235.9	232.4	228.7	226.2	223.6	217.7	210.9	204.1	196.6	189.4	182.5
155°	228.0	225.6	221.8	220.0	218.1	213.0	207.5	201.0	194.5	188.7	182.9
157.5°	220.5	218.4	215.7	214.2	212.6	208.2	203.4	198.3	192.4	187.3	182.9
160°	213.6	211.9	209.5	208.3	207.1	203.4	199.6	195.2	190.4	186.3	182.9
162.5°	207.1	206.1	203.7	202.8	202.0	198.9	195.9	192.4	188.7	185.3	182.5
165°	201.0	199.6	198.3	197.6	196.9	194.5	192.1	189.4	186.3	183.9	181.9
167.5°	194.8	194.2	193.5	192.8	192.1	190.4	188.3	186.3	184.2	182.5	181.5
170°	190.1	189.0	188.7	188.4	188.0	186.6	185.6	183.9	182.5	181.5	180.8
172.5°	185.3	184.9	184.6	184.4	184.2	183.2	182.5	181.5	180.5	180.1	179.8
175°	181.9	181.5	181.5	181.4	181.2	180.8	180.5	179.5	179.1	178.8	179.1
177.5°	179.1	179.1	179.1	179.1	179.1	178.8	178.8	178.1	177.8	178.1	178.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4
2.5°	2169.7	2162.4	2162.4	2157.9	2157.9	2134.3	2134.3	2141.7	2132.8	2122.5	2107.7
5°	2225.9	2209.6	2205.2	2199.3	2180.1	2150.5	2138.7	2134.3	2116.6	2094.4	2069.3
7.5°	2279.0	2252.4	2239.2	2225.9	2200.8	2159.4	2135.8	2119.5	2092.9	2059.0	2026.5
10°	2330.7	2296.8	2262.8	2246.5	2211.1	2159.4	2125.4	2098.8	2060.4	2014.6	1968.9
12.5°	2378.0	2307.1	2301.2	2268.7	2217.0	2157.9	2106.2	2067.8	2019.1	1965.9	1912.7
15°	2419.4	2347.0	2311.5	2282.0	2214.0	2140.2	2085.5	2038.3	1973.3	1912.7	1847.7
17.5°	2440.0	2361.7	2338.1	2289.4	2220.0	2123.9	2050.1	1992.5	1921.6	1849.2	1775.4
20°	2460.7	2369.1	2330.7	2296.8	2202.2	2092.9	2010.2	1943.8	1865.5	1779.8	1698.6
22.5°	2471.0	2369.1	2323.3	2276.1	2184.5	2059.0	1961.5	1883.2	1791.6	1704.5	1607.0
25°	2453.3	2360.3	2305.6	2256.9	2153.5	2017.6	1905.4	1816.7	1719.2	1620.3	1521.3
27.5°	2409.0	2339.6	2276.1	2225.9	2110.7	1964.4	1846.3	1745.8	1645.4	1534.6	1434.2
30°	2326.3	2295.3	2245.1	2188.9	2063.4	1917.2	1776.9	1673.5	1562.7	1451.9	1347.0
32.5°	2197.8	2224.4	2191.9	2143.2	2007.3	1852.2	1703.0	1598.1	1477.0	1357.4	1261.4
35°	2041.2	2135.8	2118.0	2084.1	1948.2	1782.8	1633.6	1506.6	1385.4	1264.3	1168.3
37.5°	1869.9	2013.2	2027.9	2007.3	1880.2	1711.9	1547.9	1423.8	1299.8	1177.2	1079.7
40°	1635.1	1855.1	1902.4	1911.3	1809.3	1626.2	1454.9	1333.7	1211.2	1091.5	973.4
42.5°	1419.4	1697.1	1756.2	1793.1	1719.2	1542.0	1369.2	1234.8	1113.7	1005.8	887.7
45°	1217.1	1506.6	1602.6	1649.8	1617.3	1446.0	1267.3	1141.7	1031.0	932.0	818.3
47.5°	1008.8	1299.8	1434.2	1509.5	1509.5	1348.5	1169.8	1045.7	939.4	855.2	754.8
50°	870.0	1112.2	1251.0	1350.0	1376.6	1249.6	1081.2	960.1	859.6	768.0	691.2
52.5°	741.5	958.6	1073.8	1177.2	1254.0	1143.2	982.2	872.9	774.0	688.3	627.7
55°	641.0	803.5	908.4	1022.1	1107.8	1035.4	886.2	779.9	694.2	623.3	571.6
57.5°	545.0	686.8	772.5	872.9	964.5	909.8	790.2	698.6	623.3	561.3	515.5
60°	463.8	579.0	645.5	723.7	837.5	799.1	700.1	615.9	555.4	499.2	460.8
62.5°	394.4	485.9	542.1	598.2	701.6	683.9	607.1	542.1	490.4	443.1	410.6
65°	323.5	398.8	443.1	491.8	574.6	581.9	519.9	474.1	426.9	385.5	356.0
67.5°	261.4	320.5	360.4	401.7	468.2	488.9	446.1	407.7	367.8	333.8	307.2
70°	211.2	252.6	282.1	314.6	369.3	394.4	372.2	345.6	313.1	285.1	261.4
72.5°	166.9	193.5	211.2	236.3	280.6	305.7	304.3	280.6	257.0	237.8	218.6
75°	122.6	143.3	158.0	174.3	209.7	233.4	239.3	228.9	205.3	190.5	175.8
77.5°	93.1	104.9	112.3	124.1	149.2	169.9	178.7	175.8	159.5	147.7	137.4
80°	70.9	73.9	76.8	81.2	101.9	121.1	127.0	125.5	116.7	112.3	100.4
82.5°	50.2	51.7	53.2	54.6	62.0	78.3	84.2	87.1	79.8	75.3	65.0
85°	29.5	31.0	31.0	34.0	35.4	39.9	50.2	50.2	48.7	42.8	41.4
87.5°	14.8	14.8	13.3	13.3	14.8	16.2	19.2	22.2	19.2	17.7	16.2
90°	6.8	5.1	4.6	4.1	3.4	2.7	1.4	0.3	1.4	2.7	3.4
92.5°	27.3	18.1	16.2	14.4	11.6	9.9	7.2	5.1	7.2	9.9	11.6
95°	49.2	33.5	29.4	25.3	19.8	16.7	13.3	12.0	13.3	16.7	19.8
97.5°	63.6	43.4	38.8	34.2	28.0	23.6	19.8	17.8	19.8	23.6	28.0
100°	70.4	52.3	47.5	42.7	35.9	30.4	27.3	26.3	27.3	30.4	35.9
102.5°	76.6	60.2	55.4	50.6	43.4	37.9	34.9	34.2	34.9	37.9	43.4
105°	83.7	67.7	62.9	58.1	50.6	45.5	43.1	41.7	43.1	45.5	50.6
107.5°	90.9	75.2	70.4	65.6	58.1	53.3	50.9	49.9	50.9	53.3	58.1
110°	98.1	83.1	78.2	73.2	66.0	61.5	59.5	58.1	59.5	61.5	66.0

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	104.9	90.6	85.4	80.3	73.5	69.4	67.0	65.6	67.0	69.4	73.5
115°	112.1	97.4	92.8	88.2	81.4	77.3	75.2	73.5	75.2	77.3	81.4
117.5°	118.6	104.9	100.2	95.4	88.9	85.1	83.1	81.7	83.1	85.1	88.9
120°	125.5	112.1	107.3	102.5	95.7	92.6	90.6	89.2	90.6	92.6	95.7
122.5°	131.9	119.6	114.6	109.7	102.9	99.5	97.4	96.4	97.4	99.5	102.9
125°	138.4	126.1	121.4	116.6	109.7	105.6	103.6	102.5	103.6	105.6	109.7
127.5°	144.6	132.6	127.6	122.7	116.2	111.8	109.0	107.7	109.0	111.8	116.2
130°	150.1	138.1	133.3	128.5	121.7	116.9	113.5	112.1	113.5	116.9	121.7
132.5°	154.8	143.6	138.8	134.0	126.8	121.7	117.9	116.2	117.9	121.7	126.8
135°	159.3	148.4	143.6	138.8	130.9	125.8	121.7	120.3	121.7	125.8	130.9
137.5°	163.1	152.1	147.6	143.2	135.4	129.9	125.8	124.1	125.8	129.9	135.4
140°	166.1	155.9	151.4	147.0	139.5	134.0	129.9	128.5	129.9	134.0	139.5
142.5°	168.5	158.6	154.5	150.4	143.2	137.8	134.0	133.0	134.0	137.8	143.2
145°	170.9	161.7	158.0	154.2	147.3	142.2	138.8	137.4	138.8	142.2	147.3
147.5°	173.0	164.1	160.6	157.2	151.4	146.6	143.2	142.2	143.2	146.6	151.4
150°	174.3	166.5	163.4	160.3	155.2	150.7	148.0	147.0	148.0	150.7	155.2
152.5°	175.7	168.9	166.2	163.4	158.6	154.8	152.1	151.8	152.1	154.8	158.6
155°	177.1	171.3	168.7	166.1	162.4	158.6	156.6	156.2	156.6	158.6	162.4
157.5°	178.1	173.0	170.8	168.5	165.4	162.0	160.3	160.0	160.3	162.0	165.4
160°	178.8	174.7	172.8	170.9	168.2	165.4	164.1	163.7	164.1	165.4	168.2
162.5°	179.1	175.7	174.4	173.0	170.6	168.5	167.2	167.5	167.2	168.5	170.6
165°	179.5	176.4	175.4	174.3	172.6	170.6	169.9	170.2	169.9	170.6	172.6
167.5°	179.5	177.1	176.4	175.7	174.3	173.0	172.3	172.6	172.3	173.0	174.3
170°	179.1	177.4	176.9	176.4	175.7	174.7	174.3	175.0	174.3	174.7	175.7
172.5°	178.8	177.8	177.4	177.1	176.7	175.7	176.0	176.4	176.0	175.7	176.7
175°	178.4	177.8	177.6	177.4	177.4	176.7	177.1	177.4	177.1	176.7	177.4
177.5°	178.1	177.8	177.8	177.8	177.8	177.1	177.4	178.1	177.4	177.1	177.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4
2.5°	2101.8	2103.3	2107.7	2094.4	2073.7	2064.9	2038.3	2033.9	2029.4	2029.4	2033.9
5°	2054.5	2048.6	2050.1	2025.0	1995.4	1977.7	1940.8	1946.7	1927.5	1915.7	1918.6
7.5°	2002.8	1986.6	1985.1	1952.6	1915.7	1883.2	1844.8	1835.9	1818.2	1797.5	1788.7
10°	1937.8	1926.0	1903.9	1866.9	1819.7	1793.1	1741.4	1710.4	1706.0	1674.9	1663.1
12.5°	1871.4	1850.7	1828.5	1776.9	1723.7	1680.8	1642.4	1608.5	1584.8	1558.3	1540.5
15°	1794.6	1769.5	1744.4	1689.7	1627.7	1584.8	1527.2	1477.0	1407.6	1352.9	1321.9
17.5°	1710.4	1682.3	1648.3	1587.8	1527.2	1468.2	1361.8	1302.7	1254.0	1221.5	1202.3
20°	1623.2	1592.2	1558.3	1497.7	1392.8	1289.4	1230.4	1184.6	1155.0	1122.5	1098.9
22.5°	1531.7	1499.2	1462.2	1367.7	1256.9	1184.6	1138.8	1095.9	1053.1	1035.4	1023.6
25°	1446.0	1416.5	1369.2	1240.7	1153.5	1087.1	1035.4	1007.3	985.2	961.5	939.4
27.5°	1357.4	1302.7	1236.3	1128.4	1073.8	1005.8	968.9	948.2	909.8	893.6	883.3
30°	1251.0	1190.5	1127.0	1050.2	986.6	939.4	905.4	871.4	849.3	833.0	815.3
32.5°	1143.2	1085.6	1045.7	966.0	918.7	870.0	837.5	816.8	784.3	774.0	766.6
35°	1050.2	1001.4	966.0	901.0	856.7	812.4	788.7	757.7	737.0	717.8	706.0
37.5°	958.6	932.0	895.1	840.4	793.2	757.7	725.2	714.9	686.8	676.5	664.7
40°	895.1	855.2	824.2	776.9	737.0	698.6	678.0	654.3	635.1	618.9	614.4
42.5°	818.3	788.7	771.0	719.3	678.0	655.8	630.7	604.1	589.3	576.0	559.8
45°	760.7	734.1	709.0	667.6	630.7	602.6	580.5	562.7	537.6	531.7	506.6
47.5°	700.1	673.5	654.3	613.0	579.0	552.4	536.2	512.5	491.8	478.6	466.7
50°	639.5	617.4	599.7	564.2	534.7	506.6	484.5	460.8	452.0	429.8	422.4
52.5°	581.9	567.2	548.0	514.0	484.5	460.8	437.2	418.0	404.7	392.9	384.0
55°	533.2	509.6	500.7	463.8	438.7	413.6	392.9	381.1	364.8	357.4	350.1
57.5°	478.6	465.3	450.5	422.4	394.4	370.7	356.0	338.2	329.4	320.5	314.6
60°	431.3	412.1	400.3	376.6	351.5	329.4	316.1	302.8	291.0	283.6	271.8
62.5°	376.6	361.9	354.5	329.4	308.7	288.0	276.2	262.9	254.0	240.8	226.0
65°	329.4	317.6	308.7	288.0	268.8	249.6	237.8	221.6	209.7	202.4	200.9
67.5°	288.0	279.2	265.9	246.7	227.5	212.7	199.4	186.1	184.6	181.7	181.7
70°	242.2	233.4	226.0	205.3	189.1	172.8	169.9	165.4	161.0	159.5	156.6
72.5°	202.4	195.0	186.1	168.4	152.1	147.7	144.7	141.8	137.4	135.9	134.4
75°	163.9	153.6	147.7	131.5	127.0	124.1	121.1	116.7	113.7	112.3	109.3
77.5°	125.5	115.2	115.2	106.3	103.4	99.0	96.0	93.1	91.6	88.6	88.6
80°	88.6	88.6	85.7	81.2	76.8	75.3	70.9	69.4	67.9	69.4	66.5
82.5°	65.0	59.1	59.1	56.1	53.2	51.7	48.7	48.7	47.3	47.3	47.3
85°	36.9	36.9	35.4	32.5	31.0	31.0	29.5	29.5	28.1	28.1	26.6
87.5°	14.8	13.3	14.8	13.3	13.3	11.8	11.8	11.8	10.3	11.8	10.3
90°	4.1	4.6	5.1	6.8	9.2	11.3	11.6	11.3	10.9	10.3	10.9
92.5°	14.4	16.2	18.1	27.3	40.3	52.0	52.6	44.1	34.5	29.4	25.6
95°	25.3	29.4	33.5	49.2	79.0	118.6	134.0	117.2	89.6	68.7	54.4
97.5°	34.2	38.8	43.4	63.6	104.9	168.9	218.4	220.1	183.2	146.3	111.8
100°	42.7	47.5	52.3	70.4	112.1	186.0	270.0	319.3	312.1	269.7	222.9
102.5°	50.6	55.4	60.2	76.6	112.5	179.5	271.8	356.2	396.5	395.2	364.0
105°	58.1	62.9	67.7	83.7	114.2	170.6	253.3	344.2	415.3	453.9	458.4
107.5°	65.6	70.4	75.2	90.9	117.9	165.8	236.2	318.9	395.2	452.6	486.1
110°	73.2	78.2	83.1	98.1	122.7	164.4	224.6	295.3	367.5	428.7	472.4

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	80.3	85.4	90.6	104.9	127.8	164.8	217.1	278.9	342.2	400.3	447.8
115°	88.2	92.8	97.4	112.1	133.0	166.1	211.9	265.9	322.3	375.0	419.8
117.5°	95.4	100.2	104.9	118.6	138.4	168.2	209.2	257.1	305.9	353.1	394.8
120°	102.5	107.3	112.1	125.5	143.9	170.2	206.8	250.2	294.3	336.7	372.9
122.5°	109.7	114.6	119.6	131.9	148.7	172.6	205.4	244.4	285.1	323.0	356.9
125°	116.6	121.4	126.1	138.4	153.8	175.0	203.7	238.9	276.2	311.4	341.5
127.5°	122.7	127.6	132.6	144.6	158.6	177.4	202.7	233.8	267.3	299.8	328.5
130°	128.5	133.3	138.1	150.1	163.1	180.1	202.0	228.7	258.8	288.2	315.2
132.5°	134.0	138.8	143.6	154.8	167.5	182.9	201.7	224.6	250.6	277.2	301.5
135°	138.8	143.6	148.4	159.3	171.3	184.9	201.3	220.8	243.0	265.6	288.2
137.5°	143.2	147.6	152.1	163.1	174.3	187.0	201.3	218.1	236.9	256.4	274.8
140°	147.0	151.4	155.9	166.1	176.7	188.3	201.0	215.7	231.1	247.5	263.2
142.5°	150.4	154.5	158.6	168.5	178.8	189.4	201.0	213.3	226.3	239.6	252.6
145°	154.2	158.0	161.7	170.9	180.5	190.1	200.3	211.2	221.8	233.1	243.7
147.5°	157.2	160.6	164.1	173.0	181.5	190.4	199.3	209.2	218.4	227.7	236.2
150°	160.3	163.4	166.5	174.3	182.2	190.1	198.3	206.5	214.7	222.2	229.4
152.5°	163.4	166.2	168.9	175.7	182.5	189.4	196.6	204.1	210.9	217.7	223.6
155°	166.1	168.7	171.3	177.1	182.9	188.7	194.5	201.0	207.5	213.0	218.1
157.5°	168.5	170.8	173.0	178.1	182.9	187.3	192.4	198.3	203.4	208.2	212.6
160°	170.9	172.8	174.7	178.8	182.9	186.3	190.4	195.2	199.6	203.4	207.1
162.5°	173.0	174.4	175.7	179.1	182.5	185.3	188.7	192.4	195.9	198.9	202.0
165°	174.3	175.4	176.4	179.5	181.9	183.9	186.3	189.4	192.1	194.5	196.9
167.5°	175.7	176.4	177.1	179.5	181.5	182.5	184.2	186.3	188.3	190.4	192.1
170°	176.4	176.9	177.4	179.1	180.8	181.5	182.5	183.9	185.6	186.6	188.0
172.5°	177.1	177.4	177.8	178.8	179.8	180.1	180.5	181.5	182.5	183.2	184.2
175°	177.4	177.6	177.8	178.4	179.1	178.8	179.1	179.5	180.5	180.8	181.2
177.5°	177.8	177.8	177.8	178.1	178.8	178.1	177.8	178.1	178.8	178.8	179.1
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4
2.5°	2033.9	2030.9	2022.0	2025.0	2020.6	2020.6	2017.6	2017.6	2017.6	2025.0	2020.6
5°	1923.1	1912.7	1902.4	1898.0	1893.5	1889.1	1889.1	1887.6	1900.9	1898.0	1909.8
7.5°	1785.7	1782.8	1762.1	1762.1	1754.7	1751.7	1759.1	1760.6	1762.1	1765.0	1772.4
10°	1663.1	1655.7	1626.2	1629.1	1624.7	1618.8	1623.2	1620.3	1630.6	1633.6	1630.6
12.5°	1518.4	1505.1	1472.6	1456.3	1438.6	1425.3	1441.6	1429.8	1471.1	1482.9	1515.4
15°	1326.4	1301.3	1279.1	1279.1	1262.8	1251.0	1258.4	1271.7	1280.6	1293.9	1299.8
17.5°	1197.9	1187.5	1169.8	1159.5	1155.0	1150.6	1150.6	1156.5	1175.7	1174.2	1186.0
20°	1088.6	1082.7	1073.8	1060.5	1056.1	1053.1	1053.1	1053.1	1066.4	1078.2	1085.6
22.5°	1013.2	1008.8	1002.9	985.2	976.3	973.4	980.7	985.2	995.5	1004.4	1011.8
25°	937.9	927.6	917.2	911.3	906.9	906.9	909.8	911.3	915.7	920.2	929.0
27.5°	875.9	868.5	853.7	837.5	837.5	833.0	836.0	838.9	849.3	864.1	871.4
30°	806.5	805.0	799.1	793.2	787.2	784.3	790.2	794.6	796.1	803.5	803.5
32.5°	756.2	745.9	735.6	729.6	726.7	725.2	726.7	732.6	732.6	741.5	751.8
35°	706.0	700.1	689.8	679.4	676.5	669.1	675.0	680.9	691.2	695.7	700.1
37.5°	651.4	644.0	639.5	636.6	630.7	632.2	627.7	636.6	645.5	644.0	646.9
40°	610.0	596.7	583.4	581.9	580.5	579.0	579.0	580.5	586.4	592.3	601.1
42.5°	556.8	552.4	540.6	528.8	525.8	522.9	519.9	525.8	537.6	548.0	552.4
45°	502.2	496.3	493.3	484.5	478.6	477.1	474.1	481.5	491.8	496.3	499.2
47.5°	452.0	450.5	441.6	443.1	438.7	440.2	438.7	443.1	443.1	447.5	450.5
50°	418.0	413.6	409.1	406.2	401.7	401.7	400.3	401.7	407.7	413.6	412.1
52.5°	384.0	376.6	375.2	373.7	370.7	373.7	369.3	370.7	376.6	379.6	378.1
55°	344.1	342.7	339.7	336.8	335.3	333.8	333.8	333.8	339.7	344.1	345.6
57.5°	313.1	305.7	299.8	299.8	293.9	292.4	295.4	296.9	301.3	304.3	307.2
60°	270.3	267.3	258.5	254.0	245.2	243.7	243.7	249.6	257.0	267.3	270.3
62.5°	224.5	220.1	218.6	218.6	218.6	218.6	218.6	218.6	218.6	220.1	220.1
65°	199.4	200.9	199.4	197.9	199.4	199.4	197.9	197.9	197.9	199.4	200.9
67.5°	178.7	177.2	178.7	177.2	175.8	175.8	174.3	175.8	177.2	178.7	178.7
70°	155.1	155.1	153.6	155.1	153.6	152.1	150.7	150.7	153.6	155.1	155.1
72.5°	132.9	132.9	131.5	131.5	128.5	128.5	130.0	128.5	128.5	132.9	132.9
75°	110.8	109.3	107.8	107.8	106.3	106.3	106.3	104.9	107.8	107.8	109.3
77.5°	87.1	87.1	87.1	85.7	85.7	84.2	84.2	85.7	85.7	85.7	87.1
80°	66.5	66.5	66.5	65.0	63.5	63.5	63.5	63.5	63.5	65.0	63.5
82.5°	45.8	45.8	45.8	45.8	45.8	44.3	44.3	44.3	45.8	45.8	44.3
85°	28.1	26.6	28.1	28.1	26.6	28.1	26.6	26.6	25.1	25.1	26.6
87.5°	11.8	10.3	8.9	8.9	10.3	8.9	8.9	8.9	10.3	8.9	8.9
90°	11.1	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.1
92.5°	24.2	22.9	22.6	21.2	21.5	20.9	21.5	21.2	22.6	22.9	24.2
95°	50.6	46.8	42.4	39.7	38.6	39.0	38.6	39.7	42.4	46.8	50.6
97.5°	101.6	91.3	77.9	71.1	67.3	65.3	67.3	71.1	77.9	91.3	101.6
100°	202.2	181.5	153.1	138.4	128.5	122.4	128.5	138.4	153.1	181.5	202.2
102.5°	341.8	319.6	288.2	260.5	247.5	238.6	247.5	260.5	288.2	319.6	341.8
105°	452.8	447.1	425.9	404.7	390.0	385.2	390.0	404.7	425.9	447.1	452.8
107.5°	493.0	499.8	499.4	496.3	491.9	484.0	491.9	496.3	499.4	499.8	493.0
110°	486.4	500.4	515.1	521.6	524.7	524.4	524.7	521.6	515.1	500.4	486.4

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	464.4	481.0	502.8	514.8	521.3	523.7	521.3	514.8	502.8	481.0	464.4
115°	437.4	455.0	479.2	495.0	503.9	506.9	503.9	495.0	479.2	455.0	437.4
117.5°	411.6	428.3	453.3	470.0	479.2	481.6	479.2	470.0	453.3	428.3	411.6
120°	388.4	404.0	428.0	444.0	453.9	457.4	453.9	444.0	428.0	404.0	388.4
122.5°	370.5	384.2	405.1	420.8	429.3	432.1	429.3	420.8	405.1	384.2	370.5
125°	354.3	367.1	386.9	399.9	408.5	411.2	408.5	399.9	386.9	367.1	354.3
127.5°	340.4	352.4	369.9	382.2	389.7	391.7	389.7	382.2	369.9	352.4	340.4
130°	326.4	337.7	354.5	366.1	372.9	375.7	372.9	366.1	354.5	337.7	326.4
132.5°	311.9	322.3	338.8	350.4	356.5	358.9	356.5	350.4	338.8	322.3	311.9
135°	297.8	307.3	322.0	333.3	339.4	340.8	339.4	333.3	322.0	307.3	297.8
137.5°	283.4	291.9	305.9	315.8	321.3	323.4	321.3	315.8	305.9	291.9	283.4
140°	270.7	278.2	289.2	298.1	303.2	305.3	303.2	298.1	289.2	278.2	270.7
142.5°	258.6	264.6	274.8	282.7	287.1	287.1	287.1	282.7	274.8	264.6	258.6
145°	248.6	253.6	261.8	267.7	271.1	272.1	271.1	267.7	261.8	253.6	248.6
147.5°	240.0	243.7	250.9	255.7	258.1	258.8	258.1	255.7	250.9	243.7	240.0
150°	232.4	235.5	240.6	244.7	246.8	247.1	246.8	244.7	240.6	235.5	232.4
152.5°	226.2	228.7	232.4	235.9	237.2	237.2	237.2	235.9	232.4	228.7	226.2
155°	220.0	221.8	225.6	228.0	229.4	228.7	229.4	228.0	225.6	221.8	220.0
157.5°	214.2	215.7	218.4	220.5	221.2	221.2	221.2	220.5	218.4	215.7	214.2
160°	208.3	209.5	211.9	213.6	214.0	214.0	214.0	213.6	211.9	209.5	208.3
162.5°	202.8	203.7	206.1	207.1	207.5	207.1	207.5	207.1	206.1	203.7	202.8
165°	197.6	198.3	199.6	201.0	201.0	200.7	201.0	201.0	199.6	198.3	197.6
167.5°	192.8	193.5	194.2	194.8	194.8	194.5	194.8	194.8	194.2	193.5	192.8
170°	188.4	188.7	189.0	190.1	189.7	189.0	189.7	190.1	189.0	188.7	188.4
172.5°	184.4	184.6	184.9	185.3	184.9	184.6	184.9	185.3	184.9	184.6	184.4
175°	181.4	181.5	181.5	181.9	181.5	180.8	181.5	181.9	181.5	181.5	181.4
177.5°	179.1	179.1	179.1	179.1	178.8	178.1	178.8	179.1	179.1	179.1	179.1
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4	2125.4
2.5°	2025.0	2032.4	2029.4	2013.2	2029.4	2033.9	2042.7	2051.6	2057.5	2066.3	2073.7
5°	1898.0	1912.7	1921.6	1912.7	1942.3	1946.7	1967.4	1979.2	1996.9	2011.7	2023.5
7.5°	1778.3	1790.1	1807.9	1810.8	1828.5	1849.2	1878.8	1908.3	1936.4	1951.1	1964.4
10°	1649.8	1670.5	1697.1	1691.2	1717.8	1750.3	1781.3	1828.5	1852.2	1878.8	1902.4
12.5°	1521.3	1534.6	1570.1	1581.9	1620.3	1645.4	1688.2	1717.8	1776.9	1807.9	1828.5
15°	1296.8	1351.5	1395.8	1449.0	1499.2	1546.4	1584.8	1638.0	1689.7	1713.3	1747.3
17.5°	1194.9	1220.0	1246.6	1273.2	1338.2	1422.4	1490.3	1547.9	1592.2	1623.2	1663.1
20°	1088.6	1113.7	1143.2	1168.3	1208.2	1268.8	1352.9	1451.9	1505.1	1537.6	1576.0
22.5°	1013.2	1036.9	1056.1	1078.2	1109.2	1153.5	1217.1	1339.7	1410.6	1450.4	1484.4
25°	932.0	961.5	982.2	998.5	1023.6	1072.3	1124.0	1193.4	1320.5	1351.5	1398.7
27.5°	875.9	884.7	908.4	933.5	958.6	985.2	1038.3	1097.4	1183.1	1251.0	1308.6
30°	809.4	831.6	853.7	864.1	886.2	924.6	957.1	1020.6	1087.1	1140.3	1209.7
32.5°	759.2	772.5	787.2	812.4	833.0	859.6	892.1	945.3	1001.4	1035.4	1088.6
35°	703.1	711.9	742.9	753.3	774.0	800.5	833.0	874.4	935.0	961.5	999.9
37.5°	649.9	670.6	679.4	703.1	722.3	748.8	772.5	819.7	859.6	890.6	926.1
40°	608.5	617.4	633.6	654.3	670.6	691.2	720.8	754.8	797.6	822.7	853.7
42.5°	558.3	565.7	586.4	598.2	624.8	644.0	661.7	703.1	741.5	760.7	791.7
45°	503.7	521.4	534.7	558.3	573.1	596.7	618.9	648.4	683.9	706.0	723.7
47.5°	456.4	474.1	487.4	509.6	533.2	543.5	567.2	598.2	630.7	648.4	673.5
50°	418.0	423.9	449.0	459.4	484.5	505.1	521.4	548.0	583.4	593.8	614.4
52.5°	381.1	385.5	401.7	415.0	437.2	454.9	475.6	500.7	530.2	546.5	562.7
55°	348.6	351.5	358.9	373.7	388.5	410.6	429.8	453.4	478.6	496.3	511.0
57.5°	311.7	317.6	323.5	332.3	347.1	367.8	388.5	410.6	431.3	443.1	462.3
60°	268.8	277.7	288.0	298.4	308.7	323.5	347.1	367.8	387.0	397.3	412.1
62.5°	223.0	240.8	249.6	261.4	270.3	283.6	301.3	324.9	338.2	351.5	363.3
65°	200.9	202.4	203.8	215.6	231.9	245.2	261.4	279.2	299.8	308.7	317.6
67.5°	178.7	180.2	183.1	184.6	190.5	205.3	223.0	242.2	258.5	264.4	273.2
70°	156.6	156.6	162.5	163.9	165.4	166.9	181.7	200.9	215.6	223.0	233.4
72.5°	132.9	134.4	137.4	138.8	141.8	144.7	149.2	159.5	177.2	184.6	196.4
75°	109.3	110.8	112.3	113.7	118.2	119.6	124.1	130.0	137.4	146.2	153.6
77.5°	87.1	87.1	88.6	91.6	94.5	96.0	100.4	103.4	106.3	110.8	116.7
80°	65.0	66.5	66.5	69.4	69.4	70.9	72.4	76.8	79.8	82.7	85.7
82.5°	44.3	47.3	47.3	47.3	48.7	50.2	51.7	51.7	54.6	56.1	60.6
85°	26.6	28.1	28.1	28.1	26.6	29.5	29.5	31.0	31.0	31.0	32.5
87.5°	10.3	8.9	10.3	10.3	10.3	11.8	10.3	10.3	11.8	13.3	13.3
90°	10.9	10.3	10.9	11.3	11.6	11.3	9.2	6.8	5.1	4.6	4.1
92.5°	25.6	29.4	34.5	44.1	52.6	52.0	40.3	27.3	18.1	16.2	14.4
95°	54.4	68.7	89.6	117.2	134.0	118.6	79.0	49.2	33.5	29.4	25.3
97.5°	111.8	146.3	183.2	220.1	218.4	168.9	104.9	63.6	43.4	38.8	34.2
100°	222.9	269.7	312.1	319.3	270.0	186.0	112.1	70.4	52.3	47.5	42.7
102.5°	364.0	395.2	396.5	356.2	271.8	179.5	112.5	76.6	60.2	55.4	50.6
105°	458.4	453.9	415.3	344.2	253.3	170.6	114.2	83.7	67.7	62.9	58.1
107.5°	486.1	452.6	395.2	318.9	236.2	165.8	117.9	90.9	75.2	70.4	65.6
110°	472.4	428.7	367.5	295.3	224.6	164.4	122.7	98.1	83.1	78.2	73.2

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	447.8	400.3	342.2	278.9	217.1	164.8	127.8	104.9	90.6	85.4	80.3
115°	419.8	375.0	322.3	265.9	211.9	166.1	133.0	112.1	97.4	92.8	88.2
117.5°	394.8	353.1	305.9	257.1	209.2	168.2	138.4	118.6	104.9	100.2	95.4
120°	372.9	336.7	294.3	250.2	206.8	170.2	143.9	125.5	112.1	107.3	102.5
122.5°	356.9	323.0	285.1	244.4	205.4	172.6	148.7	131.9	119.6	114.6	109.7
125°	341.5	311.4	276.2	238.9	203.7	175.0	153.8	138.4	126.1	121.4	116.6
127.5°	328.5	299.8	267.3	233.8	202.7	177.4	158.6	144.6	132.6	127.6	122.7
130°	315.2	288.2	258.8	228.7	202.0	180.1	163.1	150.1	138.1	133.3	128.5
132.5°	301.5	277.2	250.6	224.6	201.7	182.9	167.5	154.8	143.6	138.8	134.0
135°	288.2	265.6	243.0	220.8	201.3	184.9	171.3	159.3	148.4	143.6	138.8
137.5°	274.8	256.4	236.9	218.1	201.3	187.0	174.3	163.1	152.1	147.6	143.2
140°	263.2	247.5	231.1	215.7	201.0	188.3	176.7	166.1	155.9	151.4	147.0
142.5°	252.6	239.6	226.3	213.3	201.0	189.4	178.8	168.5	158.6	154.5	150.4
145°	243.7	233.1	221.8	211.2	200.3	190.1	180.5	170.9	161.7	158.0	154.2
147.5°	236.2	227.7	218.4	209.2	199.3	190.4	181.5	173.0	164.1	160.6	157.2
150°	229.4	222.2	214.7	206.5	198.3	190.1	182.2	174.3	166.5	163.4	160.3
152.5°	223.6	217.7	210.9	204.1	196.6	189.4	182.5	175.7	168.9	166.2	163.4
155°	218.1	213.0	207.5	201.0	194.5	188.7	182.9	177.1	171.3	168.7	166.1
157.5°	212.6	208.2	203.4	198.3	192.4	187.3	182.9	178.1	173.0	170.8	168.5
160°	207.1	203.4	199.6	195.2	190.4	186.3	182.9	178.8	174.7	172.8	170.9
162.5°	202.0	198.9	195.9	192.4	188.7	185.3	182.5	179.1	175.7	174.4	173.0
165°	196.9	194.5	192.1	189.4	186.3	183.9	181.9	179.5	176.4	175.4	174.3
167.5°	192.1	190.4	188.3	186.3	184.2	182.5	181.5	179.5	177.1	176.4	175.7
170°	188.0	186.6	185.6	183.9	182.5	181.5	180.8	179.1	177.4	176.9	176.4
172.5°	184.2	183.2	182.5	181.5	180.5	180.1	179.8	178.8	177.8	177.4	177.1
175°	181.2	180.8	180.5	179.5	179.1	178.8	179.1	178.4	177.8	177.6	177.4
177.5°	179.1	178.8	178.8	178.1	177.8	178.1	178.8	178.1	177.8	177.8	177.8
180°	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8	177.8

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	2125.4	2125.4	2125.4	2125.4
2.5°	2087.0	2082.6	2109.2	2138.7
5°	2044.2	2051.6	2085.5	2126.9
7.5°	1999.9	2016.1	2056.0	2110.7
10°	1937.8	1967.4	2027.9	2084.1
12.5°	1877.3	1917.2	1974.8	2041.2
15°	1809.3	1853.7	1924.6	2004.3
17.5°	1734.0	1784.2	1866.9	1954.1
20°	1654.3	1720.7	1807.9	1902.4
22.5°	1565.6	1645.4	1735.5	1840.4
25°	1480.0	1567.1	1657.2	1778.3
27.5°	1395.8	1481.4	1581.9	1704.5
30°	1311.6	1389.9	1497.7	1629.1
32.5°	1221.5	1302.7	1416.5	1550.9
35°	1138.8	1220.0	1326.4	1459.3
37.5°	1050.2	1137.3	1239.2	1376.6
40°	946.8	1048.7	1147.6	1279.1
42.5°	861.1	968.9	1064.9	1189.0
45°	793.2	895.1	974.8	1095.9
47.5°	729.6	812.4	893.6	1005.8
50°	669.1	732.6	816.8	917.2
52.5°	607.1	661.7	734.1	828.6
55°	550.9	602.6	667.6	740.0
57.5°	499.2	536.2	601.1	666.1
60°	441.6	480.0	530.2	584.9
62.5°	392.9	422.4	469.7	515.5
65°	341.2	369.3	404.7	447.5
67.5°	293.9	319.0	347.1	381.1
70°	251.1	270.3	291.0	320.5
72.5°	205.3	226.0	245.2	268.8
75°	168.4	177.2	193.5	209.7
77.5°	130.0	141.8	150.7	163.9
80°	93.1	103.4	106.3	116.7
82.5°	62.0	67.9	73.9	76.8
85°	35.4	38.4	44.3	45.8
87.5°	13.3	14.8	17.7	20.7
90°	3.4	2.7	1.4	0.3
92.5°	11.6	9.9	7.2	5.1
95°	19.8	16.7	13.3	12.0
97.5°	28.0	23.6	19.8	17.8
100°	35.9	30.4	27.3	26.3
102.5°	43.4	37.9	34.9	34.2
105°	50.6	45.5	43.1	41.7
107.5°	58.1	53.3	50.9	49.9
110°	66.0	61.5	59.5	58.1

TEST NUMBER: P999343

CATALOG NUMBER: SA2XXRDIP-B1005D330UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	73.5	69.4	67.0	65.6
115°	81.4	77.3	75.2	73.5
117.5°	88.9	85.1	83.1	81.7
120°	95.7	92.6	90.6	89.2
122.5°	102.9	99.5	97.4	96.4
125°	109.7	105.6	103.6	102.5
127.5°	116.2	111.8	109.0	107.7
130°	121.7	116.9	113.5	112.1
132.5°	126.8	121.7	117.9	116.2
135°	130.9	125.8	121.7	120.3
137.5°	135.4	129.9	125.8	124.1
140°	139.5	134.0	129.9	128.5
142.5°	143.2	137.8	134.0	133.0
145°	147.3	142.2	138.8	137.4
147.5°	151.4	146.6	143.2	142.2
150°	155.2	150.7	148.0	147.0
152.5°	158.6	154.8	152.1	151.8
155°	162.4	158.6	156.6	156.2
157.5°	165.4	162.0	160.3	160.0
160°	168.2	165.4	164.1	163.7
162.5°	170.6	168.5	167.2	167.5
165°	172.6	170.6	169.9	170.2
167.5°	174.3	173.0	172.3	172.6
170°	175.7	174.7	174.3	175.0
172.5°	176.7	175.7	176.0	176.4
175°	177.4	176.7	177.1	177.4
177.5°	177.8	177.1	177.4	178.1
180°	177.8	177.8	177.8	177.8

(END OF REPORT)