

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P999404

Luminaire Tested: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P999404
REPORT IS A COMBINATION OF REPORTS P987955 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1
Description: Define 2 Regressed Direct/Indirect Pendant with 3000K BioUP LEDs {m-DER=0.589}
{m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6351.0 lumens
Efficiency: N/A
Efficacy: 77.1 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 0.85 / 1.01
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 82.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

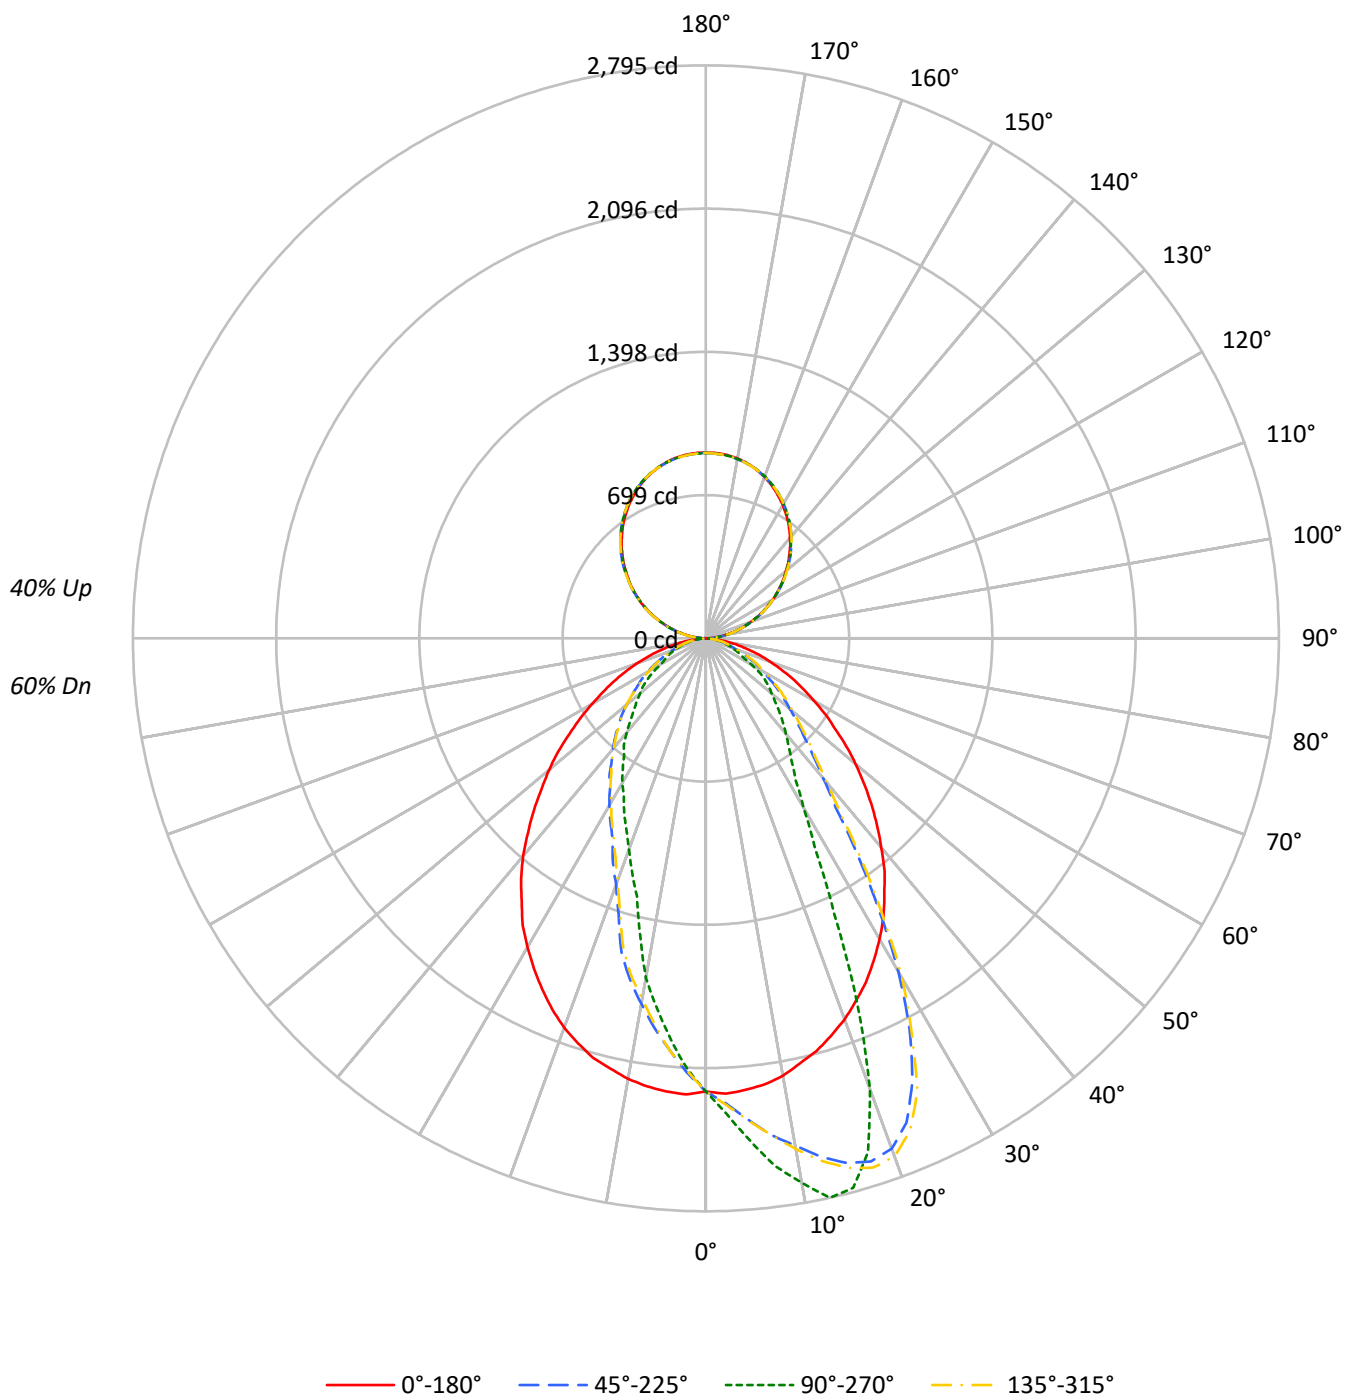

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65	65	65	65	60
1	101	97	93	90	94	91	88	85	79	77	75	69	67	66	59	58	57	57	58	57	53
2	93	86	80	75	87	81	76	71	71	67	64	62	59	57	53	51	50	50	51	50	46
3	85	76	69	64	80	72	66	61	63	59	55	56	52	49	48	46	43	43	46	43	40
4	79	68	61	55	73	64	58	53	57	52	48	50	46	43	44	41	38	38	41	38	35
5	73	62	54	48	68	58	51	46	52	46	42	46	41	38	40	37	34	34	37	34	31
6	67	56	48	42	63	53	46	41	47	42	37	42	37	34	37	33	31	31	33	31	28
7	63	51	43	38	59	48	41	36	43	38	33	38	34	31	34	31	28	28	31	28	25
8	58	47	39	34	55	44	37	33	40	34	30	36	31	28	32	28	25	25	28	25	23
9	55	43	36	31	51	41	34	30	37	31	27	33	29	25	29	26	23	23	26	23	21
10	51	40	33	28	48	38	31	27	34	29	25	31	26	23	27	24	21	21	24	21	20

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	34981	34981	34981	34981
5°	35062	37156	35184	29683
10°	34677	39272	34923	24512
15°	33925	39285	34499	18415
20°	33019	32472	33737	15193
25°	31922	20291	32611	12923
30°	30521	12992	31351	11127
35°	28816	9984	29748	9522
40°	26916	8392	28068	8329
45°	24887	7143	25926	6991
50°	22806	6070	23870	6047
55°	20502	5275	21607	5206
60°	18453	4022	19433	3974
65°	16541	3028	17526	3433
70°	14434	2418	15565	2799
75°	12201	1853	13314	2117
80°	9684	1259	10419	1388
85°	6724	649	7374	687

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 165°

Vertical Angle: 45°

Luminance: 32000 cd/sqm

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.6	3.3
10°-20°	585.1	9.2
20°-30°	753.0	11.9
30°-40°	714.4	11.2
40°-50°	612.2	9.6
50°-60°	466.2	7.3
60°-70°	294.0	4.6
70°-80°	146.7	2.3
80°-90°	40.3	0.6
90°-100°	56.0	0.9
100°-110°	177.9	2.8
110°-120°	304.4	4.8
120°-130°	400.4	6.3
130°-140°	449.4	7.1
140°-150°	440.7	6.9
150°-160°	369.7	5.8
160°-170°	245.2	3.9
170°-180°	85.7	1.3
0°-30°	1547.7	24.4
0°-40°	2262.1	35.6
0°-60°	3340.6	52.6
0°-90°	3821.6	60.2
90°-120°	538.3	8.5
90°-150°	1828.9	28.8
90°-180°	2529.0	39.8
0°-180°	6351.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2210	2210	2210	2210	2210	
5°	2211	2459	2219	1964	2211	210
15°	2084	2775	2119	1301	2084	586
25°	1849	1480	1889	943	1849	849
35°	1517	730	1566	696	1517	949
45°	1140	507	1187	496	1140	880
55°	769	352	811	347	769	693
65°	465	183	493	207	465	462
75°	218	97	238	111	218	236
85°	48	28	52	29	48	54
90°	1	26	1	26	1	5
95°	40	47	40	47	40	44
105°	164	170	164	170	164	173
115°	305	305	305	305	305	302
125°	444	446	444	446	444	397
135°	575	582	575	582	575	444
145°	698	706	698	706	698	436
155°	798	804	798	804	798	367
165°	868	869	868	869	868	245
175°	903	900	903	900	903	86
180°	905	905	905	905	905	

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2223.7	2232.9	2237.6	2243.7	2257.5	2266.7	2280.6	2283.6	2282.1	2288.2	2271.3
5°	2211.4	2231.4	2249.8	2265.2	2289.8	2305.1	2322.0	2342.0	2346.6	2369.6	2355.8
7.5°	2194.6	2223.7	2249.8	2280.6	2317.4	2337.4	2363.5	2394.2	2408.0	2435.7	2443.3
10°	2166.9	2208.4	2252.9	2285.2	2335.8	2371.2	2395.7	2444.9	2477.1	2518.6	2512.4
12.5°	2122.4	2176.1	2236.0	2289.8	2355.8	2378.8	2424.9	2475.6	2517.1	2555.4	2589.2
15°	2084.0	2145.4	2211.4	2277.5	2352.7	2395.7	2441.8	2507.8	2552.4	2619.9	2649.1
17.5°	2031.8	2110.1	2188.4	2262.1	2351.2	2400.3	2457.2	2521.7	2587.7	2652.2	2675.2
20°	1978.0	2062.5	2146.9	2246.8	2348.1	2395.7	2454.1	2533.9	2598.4	2649.1	2649.1
22.5°	1913.5	2016.4	2113.2	2208.4	2318.9	2388.1	2447.9	2541.6	2587.7	2598.4	2557.0
25°	1849.0	1951.9	2057.9	2176.1	2302.1	2363.5	2431.1	2518.6	2533.9	2490.9	2383.4
27.5°	1772.2	1887.4	2007.2	2134.7	2266.7	2343.5	2404.9	2463.3	2434.1	2318.9	2151.6
30°	1693.9	1818.3	1953.4	2074.8	2234.5	2305.1	2357.3	2374.2	2282.1	2094.7	1878.2
32.5°	1612.5	1733.8	1876.7	2022.6	2183.8	2251.4	2285.2	2240.6	2071.7	1835.2	1571.0
35°	1517.3	1654.0	1802.9	1955.0	2114.7	2165.4	2185.3	2076.3	1859.8	1554.2	1291.5
37.5°	1431.3	1568.0	1727.7	1882.8	2037.9	2065.6	2045.6	1875.1	1600.2	1297.7	1041.2
40°	1329.9	1475.8	1632.5	1806.0	1933.5	1941.2	1892.0	1670.9	1329.9	1045.8	887.7
42.5°	1236.3	1383.7	1540.3	1716.9	1813.7	1787.6	1721.5	1431.3	1110.3	901.5	774.0
45°	1139.5	1279.3	1448.2	1604.8	1673.9	1612.5	1512.7	1204.0	932.2	775.5	677.3
47.5°	1045.8	1176.4	1343.8	1494.3	1506.5	1437.4	1319.2	1009.0	807.8	681.9	602.0
50°	953.7	1084.2	1240.9	1365.3	1353.0	1257.8	1124.2	876.9	701.8	602.0	536.0
52.5°	861.5	979.8	1131.8	1230.1	1177.9	1085.8	953.7	743.3	612.8	525.2	474.5
55°	769.4	880.0	1010.5	1091.9	1009.0	903.0	809.3	637.3	531.4	460.7	422.3
57.5°	692.6	780.1	899.9	949.1	849.3	766.3	684.9	548.3	460.7	410.0	365.5
60°	608.1	688.0	786.3	815.5	712.6	645.0	575.9	463.8	394.7	350.1	321.0
62.5°	536.0	602.0	677.3	677.3	586.6	536.0	483.8	388.5	331.7	296.4	282.6
65°	465.3	512.9	566.7	560.5	483.8	439.2	397.8	321.0	278.0	253.4	239.6
67.5°	396.2	433.1	468.4	446.9	391.6	353.2	314.8	259.5	230.4	213.5	195.0
70°	333.3	362.4	380.9	360.9	305.6	273.4	245.7	208.9	185.8	164.3	153.6
72.5°	279.5	291.8	297.9	273.4	227.3	208.9	188.9	162.8	142.8	132.1	129.0
75°	218.1	228.8	224.2	205.8	167.4	153.6	138.2	119.8	115.2	109.0	106.0
77.5°	170.5	170.5	162.8	145.9	119.8	109.0	102.9	93.7	89.1	87.5	84.5
80°	121.3	119.8	115.2	96.8	81.4	75.3	75.3	69.1	67.6	64.5	64.5
82.5°	79.9	79.9	73.7	58.4	53.8	52.2	50.7	47.6	47.6	46.1	46.1
85°	47.6	44.5	36.9	32.3	30.7	30.7	29.2	27.6	29.2	27.6	27.6
87.5°	21.5	16.9	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3
90°	0.8	2.8	4.8	6.9	8.9	9.9	11.8	15.5	19.2	23.0	26.7
92.5°	16.8	18.2	19.5	20.9	22.2	22.9	23.0	23.2	23.3	23.5	23.7
95°	39.7	41.4	43.1	44.8	46.5	47.3	47.5	47.8	48.2	48.5	48.9
97.5°	66.4	67.9	69.5	71.0	72.5	73.3	73.6	74.3	75.0	75.6	76.3
100°	97.0	98.4	99.7	101.1	102.4	103.1	103.4	103.9	104.4	104.9	105.4
102.5°	129.0	130.0	131.0	132.1	133.1	133.6	133.9	134.6	135.3	136.0	136.7
105°	164.1	164.6	165.1	165.6	166.1	166.4	166.6	166.9	167.3	167.6	168.0
107.5°	199.3	200.0	200.6	201.3	202.0	202.3	202.3	202.3	202.3	202.3	202.3
110°	232.9	233.9	234.9	235.9	236.9	237.4	237.4	237.4	237.4	237.4	237.4

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	269.5	270.5	271.5	272.6	273.6	274.1	274.0	273.8	273.7	273.5	273.3
115°	305.4	306.4	307.4	308.5	309.5	310.0	309.8	309.5	309.1	308.8	308.4
117.5°	341.3	342.7	344.0	345.4	346.7	347.4	347.0	346.1	345.3	344.4	343.6
120°	377.2	378.6	379.9	381.3	382.6	383.3	382.6	381.3	379.9	378.6	377.2
122.5°	410.0	411.7	413.4	415.1	416.8	417.6	417.2	416.3	415.5	414.6	413.8
125°	444.3	445.8	447.4	448.9	450.4	451.2	450.9	450.4	449.9	449.4	448.9
127.5°	477.9	479.8	481.6	483.5	485.4	486.3	486.0	485.3	484.6	484.0	483.3
130°	509.2	511.4	513.6	515.9	518.1	519.2	519.0	518.7	518.3	518.0	517.6
132.5°	544.4	546.1	547.8	549.5	551.2	552.0	552.1	552.3	552.4	552.6	552.8
135°	574.9	576.8	578.6	580.5	582.4	583.3	583.5	583.8	584.1	584.5	584.8
137.5°	608.5	610.0	611.6	613.1	614.6	615.4	615.6	615.9	616.2	616.6	616.9
140°	638.3	639.8	641.3	642.8	644.3	645.1	645.5	646.4	647.3	648.1	649.0
142.5°	668.8	670.3	671.9	673.4	674.9	675.7	676.0	676.5	677.0	677.5	678.0
145°	697.8	699.0	700.2	701.4	702.6	703.2	703.7	704.7	705.7	706.7	707.7
147.5°	723.8	725.3	726.8	728.3	729.8	730.6	730.9	731.6	732.3	733.0	733.7
150°	750.5	751.5	752.5	753.6	754.6	755.1	755.4	756.1	756.8	757.4	758.1
152.5°	774.2	775.2	776.2	777.2	778.2	778.7	779.1	780.0	780.9	781.7	782.6
155°	797.8	798.3	798.8	799.3	799.8	800.1	800.4	800.9	801.4	801.9	802.4
157.5°	818.4	818.8	819.1	819.5	819.8	820.0	820.2	820.5	820.8	821.2	821.5
160°	836.8	837.1	837.5	837.8	838.1	838.3	838.4	838.6	838.7	838.9	839.1
162.5°	853.6	853.6	853.6	853.6	853.6	853.6	853.7	853.8	854.0	854.1	854.3
165°	868.1	867.9	867.7	867.6	867.4	867.3	867.3	867.3	867.3	867.3	867.3
167.5°	881.1	880.6	880.1	879.6	879.1	878.8	878.8	878.8	878.8	878.8	878.8
170°	891.0	890.5	890.0	889.5	889.0	888.7	888.6	888.4	888.3	888.1	887.9
172.5°	897.8	897.3	896.8	896.3	895.8	895.6	895.5	895.3	895.2	895.0	894.8
175°	903.2	902.7	902.2	901.7	901.2	900.9	900.7	900.4	900.1	899.7	899.4
177.5°	906.2	905.7	905.2	904.7	904.2	904.0	903.8	903.5	903.1	902.8	902.4
180°	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2288.2	2291.3	2295.9	2317.4	2320.5	2326.6	2323.6	2323.6	2325.1	2322.0	2323.6
5°	2386.5	2391.1	2414.2	2440.3	2446.4	2440.3	2447.9	2458.7	2458.7	2458.7	2455.6
7.5°	2478.7	2495.6	2521.7	2560.1	2567.7	2575.4	2589.2	2580.0	2583.1	2596.9	2592.3
10°	2567.7	2592.3	2621.5	2653.7	2670.6	2681.4	2687.5	2701.3	2733.6	2696.7	2710.6
12.5°	2652.2	2687.5	2718.2	2753.6	2765.8	2779.7	2784.3	2796.6	2796.6	2795.0	2805.8
15°	2707.5	2739.7	2767.4	2790.4	2793.5	2790.4	2787.3	2788.9	2793.5	2775.1	2785.8
17.5°	2719.8	2722.8	2732.1	2722.8	2724.4	2692.1	2673.7	2669.1	2626.1	2627.6	2663.0
20°	2659.9	2607.7	2593.8	2543.2	2512.4	2429.5	2426.4	2403.4	2312.8	2340.4	2334.3
22.5°	2495.6	2406.5	2288.2	2229.9	2200.7	2113.2	2045.6	1998.0	1965.7	1933.5	1919.7
25°	2279.0	2134.7	1967.3	1852.1	1835.2	1753.8	1629.4	1571.0	1501.9	1480.4	1517.3
27.5°	1999.5	1812.2	1623.3	1446.7	1414.4	1340.7	1277.7	1236.3	1156.4	1151.8	1154.9
30°	1620.2	1431.3	1273.1	1157.9	1078.1	1044.3	1002.8	972.1	939.9	952.2	955.2
32.5°	1331.5	1151.8	1004.4	942.9	906.1	884.6	849.3	829.3	815.5	810.9	809.3
35°	1058.1	938.3	872.3	812.4	790.9	775.5	749.4	740.2	727.9	729.5	729.5
37.5°	906.1	806.3	757.1	726.4	706.4	698.8	681.9	672.6	665.0	661.9	666.5
40°	781.7	712.6	681.9	654.2	637.3	634.3	625.0	614.3	605.1	606.6	611.2
42.5°	691.1	651.1	614.3	592.8	580.5	575.9	568.2	560.5	560.5	555.9	554.4
45°	618.9	586.6	555.9	536.0	528.3	522.1	512.9	511.4	505.3	506.8	508.3
47.5°	554.4	528.3	505.3	485.3	477.6	476.1	466.9	460.7	460.7	459.2	457.6
50°	496.0	469.9	450.0	439.2	428.5	425.4	423.9	422.3	419.3	419.3	420.8
52.5°	448.4	422.3	407.0	397.8	391.6	388.5	388.5	387.0	387.0	387.0	385.5
55°	396.2	374.7	362.4	359.4	356.3	354.8	353.2	350.1	348.6	351.7	348.6
57.5°	347.1	339.4	328.6	325.6	317.9	317.9	313.3	310.2	307.1	310.2	310.2
60°	308.7	297.9	291.8	282.6	276.4	270.3	262.6	261.1	258.0	256.5	254.9
62.5°	268.8	259.5	244.2	230.4	221.1	215.0	211.9	210.4	210.4	208.9	208.9
65°	224.2	202.7	195.0	190.4	188.9	187.4	184.3	182.8	184.3	182.8	184.3
67.5°	175.1	172.0	167.4	164.3	162.8	161.3	161.3	159.7	159.7	159.7	159.7
70°	152.0	144.4	142.8	139.8	139.8	138.2	138.2	138.2	138.2	136.7	139.8
72.5°	125.9	121.3	119.8	118.3	118.3	118.3	116.7	116.7	116.7	115.2	116.7
75°	102.9	101.4	98.3	98.3	96.8	98.3	96.8	96.8	95.2	96.8	96.8
77.5°	82.9	81.4	79.9	79.9	78.3	78.3	78.3	78.3	78.3	78.3	79.9
80°	63.0	61.4	59.9	61.4	59.9	61.4	59.9	59.9	61.4	59.9	59.9
82.5°	46.1	44.5	44.5	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
85°	27.6	26.1	26.1	27.6	26.1	27.6	26.1	26.1	26.1	27.6	27.6
87.5°	12.3	13.8	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	13.8
90°	26.4	26.0	25.7	25.4	25.2	25.3	25.5	25.6	25.8	26.0	25.8
92.5°	23.9	24.0	24.2	24.3	24.4	24.4	24.4	24.4	24.4	24.4	24.4
95°	48.9	48.9	48.9	48.9	48.9	48.7	48.4	48.0	47.7	47.3	47.7
97.5°	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
100°	105.4	105.4	105.4	105.4	105.4	105.3	105.1	105.0	104.8	104.6	104.8
102.5°	136.9	137.0	137.2	137.3	137.4	137.3	137.2	137.0	136.9	136.7	136.9
105°	168.3	168.7	169.0	169.3	169.5	169.5	169.5	169.5	169.5	169.5	169.5
107.5°	202.5	202.7	202.8	203.0	203.1	202.7	201.8	201.0	200.1	199.3	200.1
110°	237.4	237.4	237.4	237.4	237.4	237.2	236.7	236.2	235.7	235.2	235.7

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	272.8	272.3	271.8	271.3	271.0	270.8	270.5	270.2	269.8	269.5	269.8
115°	308.2	308.1	307.9	307.8	307.7	307.4	306.9	306.4	305.9	305.4	305.9
117.5°	343.1	342.6	342.1	341.6	341.3	341.0	340.5	340.0	339.5	339.0	339.5
120°	377.2	377.2	377.2	377.2	377.2	376.9	376.4	375.9	375.4	374.9	375.4
122.5°	413.3	412.8	412.3	411.8	411.5	411.3	411.0	410.7	410.3	410.0	410.3
125°	448.4	447.9	447.4	446.9	446.6	446.5	446.4	446.2	446.1	445.9	446.1
127.5°	482.6	481.9	481.2	480.5	480.2	479.9	479.4	478.9	478.4	477.9	478.4
130°	517.3	516.9	516.6	516.3	516.1	515.8	515.1	514.4	513.8	513.1	513.8
132.5°	551.9	551.1	550.2	549.3	548.9	548.6	548.1	547.6	547.1	546.6	547.1
135°	584.6	584.5	584.3	584.2	584.1	583.8	583.3	582.8	582.3	581.8	582.3
137.5°	616.7	616.5	616.4	616.2	616.1	615.8	615.1	614.4	613.8	613.1	613.8
140°	649.0	649.0	649.0	649.0	649.0	648.7	648.0	647.3	646.6	645.9	646.6
142.5°	678.2	678.3	678.5	678.6	678.7	678.4	677.7	677.0	676.4	675.7	676.4
145°	707.9	708.1	708.2	708.4	708.5	708.2	707.5	706.8	706.2	705.5	706.2
147.5°	734.0	734.4	734.7	735.0	735.2	734.9	734.2	733.5	732.9	732.2	732.9
150°	758.6	759.1	759.6	760.1	760.4	760.1	759.6	759.1	758.6	758.1	758.6
152.5°	783.3	783.9	784.6	785.3	785.6	785.3	784.6	783.9	783.3	782.6	783.3
155°	803.2	804.1	804.9	805.8	806.2	805.9	805.4	804.9	804.4	803.9	804.4
157.5°	822.7	823.9	825.0	826.2	826.8	826.4	825.5	824.7	823.8	823.0	823.8
160°	840.1	841.1	842.1	843.1	843.6	843.3	842.6	841.9	841.3	840.6	841.3
162.5°	855.5	856.7	857.9	859.1	859.7	859.3	858.4	857.6	856.7	855.9	856.7
165°	868.5	869.7	870.9	872.1	872.7	872.3	871.4	870.5	869.7	868.8	869.7
167.5°	880.0	881.2	882.3	883.5	884.1	883.7	882.8	882.0	881.1	880.3	881.1
170°	889.1	890.3	891.5	892.7	893.3	892.8	891.8	890.7	889.7	888.7	889.7
172.5°	896.0	897.2	898.3	899.5	900.1	899.6	898.6	897.6	896.6	895.6	896.6
175°	900.6	901.8	902.9	904.1	904.7	904.2	903.2	902.1	901.1	900.1	901.1
177.5°	903.4	904.4	905.5	906.5	907.0	906.5	905.5	904.4	903.4	902.4	903.4
180°	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2329.7	2318.9	2315.9	2318.9	2315.9	2317.4	2306.7	2266.7	2277.5	2260.6	2269.8
5°	2461.8	2452.6	2432.6	2429.5	2426.4	2423.4	2408.0	2372.7	2358.9	2335.8	2334.3
7.5°	2587.7	2587.7	2572.3	2561.6	2547.8	2537.0	2517.1	2464.8	2443.3	2415.7	2400.3
10°	2712.1	2672.2	2689.1	2678.3	2644.5	2638.4	2601.5	2570.8	2529.3	2501.7	2477.1
12.5°	2801.2	2788.9	2773.5	2764.3	2755.1	2735.1	2710.6	2632.2	2610.7	2555.4	2527.8
15°	2798.1	2790.4	2795.0	2795.0	2792.0	2787.3	2767.4	2710.6	2673.7	2619.9	2572.3
17.5°	2647.6	2667.6	2687.5	2701.3	2732.1	2745.9	2764.3	2730.5	2707.5	2661.4	2610.7
20°	2385.0	2434.1	2492.5	2504.8	2532.4	2613.8	2650.7	2679.8	2689.1	2673.7	2632.2
22.5°	2019.5	2060.9	2202.2	2199.2	2239.1	2335.8	2443.3	2530.9	2600.0	2638.4	2623.0
25°	1581.8	1640.2	1715.4	1772.2	1902.8	2047.1	2180.7	2320.5	2440.3	2546.2	2572.3
27.5°	1196.3	1273.1	1333.0	1408.3	1474.3	1644.8	1816.8	2034.8	2174.6	2375.8	2480.2
30°	967.5	1002.8	1062.7	1098.0	1130.3	1260.8	1455.9	1670.9	1916.6	2148.5	2328.2
32.5°	826.2	850.8	895.3	910.7	944.5	1032.0	1154.9	1351.4	1604.8	1885.9	2122.4
35°	741.8	767.9	777.1	790.9	818.5	873.8	958.3	1101.1	1329.9	1604.8	1887.4
37.5°	669.6	683.4	709.5	718.7	727.9	769.4	826.2	926.0	1078.1	1303.8	1617.1
40°	618.9	626.6	640.4	648.1	654.2	683.4	734.1	801.6	913.8	1085.8	1374.5
42.5°	565.1	574.4	583.6	592.8	600.5	623.5	654.2	718.7	794.0	924.5	1133.4
45°	512.9	519.1	529.8	536.0	546.7	565.1	592.8	637.3	704.9	787.8	956.8
47.5°	465.3	473.0	477.6	485.3	493.0	512.9	539.0	568.2	623.5	704.9	827.8
50°	422.3	431.5	437.7	439.2	445.4	463.8	485.3	517.5	552.9	615.8	723.3
52.5°	391.6	393.1	397.8	403.9	402.4	413.1	433.1	457.6	494.5	545.2	623.5
55°	356.3	360.9	364.0	365.5	365.5	374.7	385.5	408.5	437.7	479.1	545.2
57.5°	311.8	316.4	325.6	328.6	333.3	337.9	342.5	357.8	382.4	422.3	476.1
60°	265.7	268.8	278.0	284.1	287.2	299.5	305.6	317.9	331.7	360.9	411.6
62.5°	213.5	216.5	221.1	227.3	233.4	251.9	267.2	279.5	290.3	310.2	351.7
65°	185.8	187.4	190.4	192.0	193.5	201.2	215.0	231.9	251.9	267.2	291.8
67.5°	161.3	162.8	164.3	167.4	168.9	170.5	176.6	181.2	201.2	222.7	241.1
70°	138.2	141.3	142.8	142.8	144.4	147.4	150.5	156.6	162.8	173.5	196.6
72.5°	116.7	118.3	121.3	121.3	121.3	124.4	127.5	130.5	133.6	139.8	149.0
75°	96.8	99.8	99.8	99.8	101.4	101.4	104.4	107.5	110.6	115.2	118.3
77.5°	79.9	79.9	79.9	79.9	81.4	81.4	82.9	86.0	87.5	89.1	92.1
80°	59.9	61.4	61.4	61.4	63.0	63.0	63.0	66.0	67.6	67.6	70.6
82.5°	44.5	44.5	44.5	46.1	44.5	46.1	46.1	47.6	46.1	47.6	49.1
85°	27.6	27.6	27.6	29.2	29.2	29.2	29.2	29.2	29.2	29.2	30.7
87.5°	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	15.4	13.8	13.8
90°	25.6	25.5	25.3	25.2	25.4	25.7	26.0	26.4	26.7	23.0	19.2
92.5°	24.4	24.4	24.4	24.4	24.3	24.2	24.0	23.9	23.7	23.5	23.3
95°	48.0	48.4	48.7	48.9	48.9	48.9	48.9	48.9	48.9	48.5	48.2
97.5°	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	75.6	75.0
100°	105.0	105.1	105.3	105.4	105.4	105.4	105.4	105.4	105.4	104.9	104.4
102.5°	137.0	137.2	137.3	137.4	137.3	137.2	137.0	136.9	136.7	136.0	135.3
105°	169.5	169.5	169.5	169.5	169.3	169.0	168.7	168.3	168.0	167.6	167.3
107.5°	201.0	201.8	202.7	203.1	203.0	202.8	202.7	202.5	202.3	202.3	202.3
110°	236.2	236.7	237.2	237.4	237.4	237.4	237.4	237.4	237.4	237.4	237.4

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	270.2	270.5	270.8	271.0	271.3	271.8	272.3	272.8	273.3	273.5	273.7
115°	306.4	306.9	307.4	307.7	307.8	307.9	308.1	308.2	308.4	308.8	309.1
117.5°	340.0	340.5	341.0	341.3	341.6	342.1	342.6	343.1	343.6	344.4	345.3
120°	375.9	376.4	376.9	377.2	377.2	377.2	377.2	377.2	377.2	378.6	379.9
122.5°	410.7	411.0	411.3	411.5	411.8	412.3	412.8	413.3	413.8	414.6	415.5
125°	446.2	446.4	446.5	446.6	446.9	447.4	447.9	448.4	448.9	449.4	449.9
127.5°	478.9	479.4	479.9	480.2	480.5	481.2	481.9	482.6	483.3	484.0	484.6
130°	514.4	515.1	515.8	516.1	516.3	516.6	516.9	517.3	517.6	518.0	518.3
132.5°	547.6	548.1	548.6	548.9	549.3	550.2	551.1	551.9	552.8	552.6	552.4
135°	582.8	583.3	583.8	584.1	584.2	584.3	584.5	584.6	584.8	584.5	584.1
137.5°	614.4	615.1	615.8	616.1	616.2	616.4	616.5	616.7	616.9	616.6	616.2
140°	647.3	648.0	648.7	649.0	649.0	649.0	649.0	649.0	649.0	648.1	647.3
142.5°	677.0	677.7	678.4	678.7	678.6	678.5	678.3	678.2	678.0	677.5	677.0
145°	706.8	707.5	708.2	708.5	708.4	708.2	708.1	707.9	707.7	706.7	705.7
147.5°	733.5	734.2	734.9	735.2	735.0	734.7	734.4	734.0	733.7	733.0	732.3
150°	759.1	759.6	760.1	760.4	760.1	759.6	759.1	758.6	758.1	757.4	756.8
152.5°	783.9	784.6	785.3	785.6	785.3	784.6	783.9	783.3	782.6	781.7	780.9
155°	804.9	805.4	805.9	806.2	805.8	804.9	804.1	803.2	802.4	801.9	801.4
157.5°	824.7	825.5	826.4	826.8	826.2	825.0	823.9	822.7	821.5	821.2	820.8
160°	841.9	842.6	843.3	843.6	843.1	842.1	841.1	840.1	839.1	838.9	838.7
162.5°	857.6	858.4	859.3	859.7	859.1	857.9	856.7	855.5	854.3	854.1	854.0
165°	870.5	871.4	872.3	872.7	872.1	870.9	869.7	868.5	867.3	867.3	867.3
167.5°	882.0	882.8	883.7	884.1	883.5	882.3	881.2	880.0	878.8	878.8	878.8
170°	890.7	891.8	892.8	893.3	892.7	891.5	890.3	889.1	887.9	888.1	888.3
172.5°	897.6	898.6	899.6	900.1	899.5	898.3	897.2	896.0	894.8	895.0	895.2
175°	902.1	903.2	904.2	904.7	904.1	902.9	901.8	900.6	899.4	899.7	900.1
177.5°	904.4	905.5	906.5	907.0	906.5	905.5	904.4	903.4	902.4	902.8	903.1
180°	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2256.0	2248.3	2248.3	2243.7	2243.7	2219.1	2219.1	2226.8	2217.6	2206.8	2191.5
5°	2314.3	2297.4	2292.8	2286.7	2266.7	2236.0	2223.7	2219.1	2200.7	2177.7	2151.6
7.5°	2369.6	2342.0	2328.2	2314.3	2288.2	2245.2	2220.7	2203.8	2176.1	2140.8	2107.0
10°	2423.4	2388.1	2352.7	2335.8	2299.0	2245.2	2209.9	2182.3	2142.3	2094.7	2047.1
12.5°	2472.5	2398.8	2392.7	2358.9	2305.1	2243.7	2189.9	2150.0	2099.3	2044.1	1988.8
15°	2515.5	2440.3	2403.4	2372.7	2302.1	2225.3	2168.4	2119.3	2051.7	1988.8	1921.2
17.5°	2537.0	2455.6	2431.1	2380.4	2308.2	2208.4	2131.6	2071.7	1998.0	1922.7	1845.9
20°	2558.5	2463.3	2423.4	2388.1	2289.8	2176.1	2090.1	2021.0	1939.6	1850.6	1766.1
22.5°	2569.3	2463.3	2415.7	2366.6	2271.3	2140.8	2039.4	1958.1	1862.8	1772.2	1670.9
25°	2550.8	2454.1	2397.3	2346.6	2239.1	2097.8	1981.1	1888.9	1787.6	1684.7	1581.8
27.5°	2504.8	2432.6	2366.6	2314.3	2194.6	2042.5	1919.7	1815.2	1710.8	1595.6	1491.2
30°	2418.8	2386.5	2334.3	2275.9	2145.4	1993.4	1847.5	1740.0	1624.8	1509.6	1400.6
32.5°	2285.2	2312.8	2279.0	2228.3	2087.1	1925.8	1770.7	1661.7	1535.7	1411.3	1311.5
35°	2122.4	2220.7	2202.2	2166.9	2025.6	1853.6	1698.5	1566.4	1440.5	1314.6	1214.8
37.5°	1944.2	2093.2	2108.6	2087.1	1955.0	1779.9	1609.4	1480.4	1351.4	1224.0	1122.6
40°	1700.0	1928.9	1978.0	1987.2	1881.3	1690.8	1512.7	1386.8	1259.3	1134.9	1012.0
42.5°	1475.8	1764.5	1826.0	1864.4	1787.6	1603.3	1423.6	1283.9	1157.9	1045.8	923.0
45°	1265.4	1566.4	1666.3	1715.4	1681.6	1503.5	1317.7	1187.1	1071.9	969.0	850.8
47.5°	1048.9	1351.4	1491.2	1569.5	1569.5	1402.1	1216.3	1087.3	976.7	889.2	784.8
50°	904.5	1156.4	1300.8	1403.7	1431.3	1299.2	1124.2	998.2	893.8	798.6	718.7
52.5°	770.9	996.7	1116.5	1224.0	1303.8	1188.7	1021.3	907.6	804.7	715.6	652.7
55°	666.5	835.4	944.5	1062.7	1151.8	1076.5	921.4	810.9	721.8	648.1	594.3
57.5°	566.7	714.1	803.2	907.6	1002.8	946.0	821.6	726.4	648.1	583.6	536.0
60°	482.2	602.0	671.1	752.5	870.8	830.8	727.9	640.4	577.4	519.1	479.1
62.5°	410.0	505.3	563.6	622.0	729.5	711.0	631.2	563.6	509.9	460.7	426.9
65°	336.3	414.6	460.7	511.4	597.4	605.1	540.6	493.0	443.8	400.8	370.1
67.5°	271.8	333.3	374.7	417.7	486.8	508.3	463.8	423.9	382.4	347.1	319.4
70°	219.6	262.6	293.3	327.1	383.9	410.0	387.0	359.4	325.6	296.4	271.8
72.5°	173.5	201.2	219.6	245.7	291.8	317.9	316.4	291.8	267.2	247.3	227.3
75°	127.5	149.0	164.3	181.2	218.1	242.6	248.8	238.0	213.5	198.1	182.8
77.5°	96.8	109.0	116.7	129.0	155.1	176.6	185.8	182.8	165.9	153.6	142.8
80°	73.7	76.8	79.9	84.5	106.0	125.9	132.1	130.5	121.3	116.7	104.4
82.5°	52.2	53.8	55.3	56.8	64.5	81.4	87.5	90.6	82.9	78.3	67.6
85°	30.7	32.3	32.3	35.3	36.9	41.5	52.2	52.2	50.7	44.5	43.0
87.5°	15.4	15.4	13.8	13.8	15.4	16.9	20.0	23.0	20.0	18.4	16.9
90°	15.5	11.8	9.9	8.9	6.9	4.8	2.8	0.8	2.8	4.8	6.9
92.5°	23.2	23.0	22.9	22.2	20.9	19.5	18.2	16.8	18.2	19.5	20.9
95°	47.8	47.5	47.3	46.5	44.8	43.1	41.4	39.7	41.4	43.1	44.8
97.5°	74.3	73.6	73.3	72.5	71.0	69.5	67.9	66.4	67.9	69.5	71.0
100°	103.9	103.4	103.1	102.4	101.1	99.7	98.4	97.0	98.4	99.7	101.1
102.5°	134.6	133.9	133.6	133.1	132.1	131.0	130.0	129.0	130.0	131.0	132.1
105°	166.9	166.6	166.4	166.1	165.6	165.1	164.6	164.1	164.6	165.1	165.6
107.5°	202.3	202.3	202.3	202.0	201.3	200.6	200.0	199.3	200.0	200.6	201.3
110°	237.4	237.4	237.4	236.9	235.9	234.9	233.9	232.9	233.9	234.9	235.9

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	273.8	274.0	274.1	273.6	272.6	271.5	270.5	269.5	270.5	271.5	272.6
115°	309.5	309.8	310.0	309.5	308.5	307.4	306.4	305.4	306.4	307.4	308.5
117.5°	346.1	347.0	347.4	346.7	345.4	344.0	342.7	341.3	342.7	344.0	345.4
120°	381.3	382.6	383.3	382.6	381.3	379.9	378.6	377.2	378.6	379.9	381.3
122.5°	416.3	417.2	417.6	416.8	415.1	413.4	411.7	410.0	411.7	413.4	415.1
125°	450.4	450.9	451.2	450.4	448.9	447.4	445.8	444.3	445.8	447.4	448.9
127.5°	485.3	486.0	486.3	485.4	483.5	481.6	479.8	477.9	479.8	481.6	483.5
130°	518.7	519.0	519.2	518.1	515.9	513.6	511.4	509.2	511.4	513.6	515.9
132.5°	552.3	552.1	552.0	551.2	549.5	547.8	546.1	544.4	546.1	547.8	549.5
135°	583.8	583.5	583.3	582.4	580.5	578.6	576.8	574.9	576.8	578.6	580.5
137.5°	615.9	615.6	615.4	614.6	613.1	611.6	610.0	608.5	610.0	611.6	613.1
140°	646.4	645.5	645.1	644.3	642.8	641.3	639.8	638.3	639.8	641.3	642.8
142.5°	676.5	676.0	675.7	674.9	673.4	671.9	670.3	668.8	670.3	671.9	673.4
145°	704.7	703.7	703.2	702.6	701.4	700.2	699.0	697.8	699.0	700.2	701.4
147.5°	731.6	730.9	730.6	729.8	728.3	726.8	725.3	723.8	725.3	726.8	728.3
150°	756.1	755.4	755.1	754.6	753.6	752.5	751.5	750.5	751.5	752.5	753.6
152.5°	780.0	779.1	778.7	778.2	777.2	776.2	775.2	774.2	775.2	776.2	777.2
155°	800.9	800.4	800.1	799.8	799.3	798.8	798.3	797.8	798.3	798.8	799.3
157.5°	820.5	820.2	820.0	819.8	819.5	819.1	818.8	818.4	818.8	819.1	819.5
160°	838.6	838.4	838.3	838.1	837.8	837.5	837.1	836.8	837.1	837.5	837.8
162.5°	853.8	853.7	853.6	853.6	853.6	853.6	853.6	853.6	853.6	853.6	853.6
165°	867.3	867.3	867.3	867.4	867.6	867.7	867.9	868.1	867.9	867.7	867.6
167.5°	878.8	878.8	878.8	879.1	879.6	880.1	880.6	881.1	880.6	880.1	879.6
170°	888.4	888.6	888.7	889.0	889.5	890.0	890.5	891.0	890.5	890.0	889.5
172.5°	895.3	895.5	895.6	895.8	896.3	896.8	897.3	897.8	897.3	896.8	896.3
175°	900.4	900.7	900.9	901.2	901.7	902.2	902.7	903.2	902.7	902.2	901.7
177.5°	903.5	903.8	904.0	904.2	904.7	905.2	905.7	906.2	905.7	905.2	904.7
180°	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2185.3	2186.9	2191.5	2177.7	2156.2	2146.9	2119.3	2114.7	2110.1	2110.1	2114.7
5°	2136.2	2130.1	2131.6	2105.5	2074.8	2056.3	2017.9	2024.1	2004.1	1991.8	1994.9
7.5°	2082.4	2065.6	2064.0	2030.2	1991.8	1958.1	1918.1	1908.9	1890.5	1869.0	1859.8
10°	2014.9	2002.6	1979.6	1941.2	1892.0	1864.4	1810.6	1778.4	1773.8	1741.5	1729.2
12.5°	1945.8	1924.3	1901.2	1847.5	1792.2	1747.7	1707.7	1672.4	1647.8	1620.2	1601.8
15°	1865.9	1839.8	1813.7	1756.9	1692.4	1647.8	1587.9	1535.7	1463.5	1406.7	1374.5
17.5°	1778.4	1749.2	1713.9	1650.9	1587.9	1526.5	1415.9	1354.5	1303.8	1270.0	1250.1
20°	1687.8	1655.5	1620.2	1557.2	1448.2	1340.7	1279.3	1231.7	1200.9	1167.2	1142.6
22.5°	1592.5	1558.8	1520.4	1422.1	1306.9	1231.7	1184.0	1139.5	1095.0	1076.5	1064.3
25°	1503.5	1472.8	1423.6	1290.0	1199.4	1130.3	1076.5	1047.4	1024.3	999.8	976.7
27.5°	1411.3	1354.5	1285.4	1173.3	1116.5	1045.8	1007.4	985.9	946.0	929.1	918.4
30°	1300.8	1237.8	1171.8	1091.9	1025.9	976.7	941.4	906.1	883.0	866.1	847.7
32.5°	1188.7	1128.8	1087.3	1004.4	955.2	904.5	870.8	849.3	815.5	804.7	797.0
35°	1091.9	1041.2	1004.4	936.8	890.7	844.6	820.1	787.8	766.3	746.4	734.1
37.5°	996.7	969.0	930.7	873.8	824.7	787.8	754.0	743.3	714.1	703.4	691.1
40°	930.7	889.2	856.9	807.8	766.3	726.4	704.9	680.3	660.4	643.5	638.9
42.5°	850.8	820.1	801.6	747.9	704.9	681.9	655.8	628.1	612.8	598.9	582.0
45°	790.9	763.3	737.1	694.1	655.8	626.6	603.5	585.1	559.0	552.9	526.8
47.5°	727.9	700.3	680.3	637.3	602.0	574.4	557.5	532.9	511.4	497.6	485.3
50°	665.0	641.9	623.5	586.6	555.9	526.8	503.7	479.1	469.9	446.9	439.2
52.5°	605.1	589.7	569.8	534.4	503.7	479.1	454.6	434.6	420.8	408.5	399.3
55°	554.4	529.8	520.6	482.2	456.1	430.0	408.5	396.2	379.3	371.6	364.0
57.5°	497.6	483.8	468.4	439.2	410.0	385.5	370.1	351.7	342.5	333.3	327.1
60°	448.4	428.5	416.2	391.6	365.5	342.5	328.6	314.8	302.5	294.9	282.6
62.5°	391.6	376.3	368.6	342.5	321.0	299.5	287.2	273.4	264.1	250.3	235.0
65°	342.5	330.2	321.0	299.5	279.5	259.5	247.3	230.4	218.1	210.4	208.9
67.5°	299.5	290.3	276.4	256.5	236.5	221.1	207.3	193.5	192.0	188.9	188.9
70°	251.9	242.6	235.0	213.5	196.6	179.7	176.6	172.0	167.4	165.9	162.8
72.5°	210.4	202.7	193.5	175.1	158.2	153.6	150.5	147.4	142.8	141.3	139.8
75°	170.5	159.7	153.6	136.7	132.1	129.0	125.9	121.3	118.3	116.7	113.6
77.5°	130.5	119.8	119.8	110.6	107.5	102.9	99.8	96.8	95.2	92.1	92.1
80°	92.1	92.1	89.1	84.5	79.9	78.3	73.7	72.2	70.6	72.2	69.1
82.5°	67.6	61.4	61.4	58.4	55.3	53.8	50.7	50.7	49.1	49.1	49.1
85°	38.4	38.4	36.9	33.8	32.3	32.3	30.7	30.7	29.2	29.2	27.6
87.5°	15.4	13.8	15.4	13.8	13.8	12.3	12.3	12.3	10.8	12.3	10.8
90°	8.9	9.9	11.8	15.5	19.2	23.0	26.7	26.4	26.0	25.7	25.4
92.5°	22.2	22.9	23.0	23.2	23.3	23.5	23.7	23.9	24.0	24.2	24.3
95°	46.5	47.3	47.5	47.8	48.2	48.5	48.9	48.9	48.9	48.9	48.9
97.5°	72.5	73.3	73.6	74.3	75.0	75.6	76.3	76.3	76.3	76.3	76.3
100°	102.4	103.1	103.4	103.9	104.4	104.9	105.4	105.4	105.4	105.4	105.4
102.5°	133.1	133.6	133.9	134.6	135.3	136.0	136.7	136.9	137.0	137.2	137.3
105°	166.1	166.4	166.6	166.9	167.3	167.6	168.0	168.3	168.7	169.0	169.3
107.5°	202.0	202.3	202.3	202.3	202.3	202.3	202.3	202.5	202.7	202.8	203.0
110°	236.9	237.4	237.4	237.4	237.4	237.4	237.4	237.4	237.4	237.4	237.4

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	273.6	274.1	274.0	273.8	273.7	273.5	273.3	272.8	272.3	271.8	271.3
115°	309.5	310.0	309.8	309.5	309.1	308.8	308.4	308.2	308.1	307.9	307.8
117.5°	346.7	347.4	347.0	346.1	345.3	344.4	343.6	343.1	342.6	342.1	341.6
120°	382.6	383.3	382.6	381.3	379.9	378.6	377.2	377.2	377.2	377.2	377.2
122.5°	416.8	417.6	417.2	416.3	415.5	414.6	413.8	413.3	412.8	412.3	411.8
125°	450.4	451.2	450.9	450.4	449.9	449.4	448.9	448.4	447.9	447.4	446.9
127.5°	485.4	486.3	486.0	485.3	484.6	484.0	483.3	482.6	481.9	481.2	480.5
130°	518.1	519.2	519.0	518.7	518.3	518.0	517.6	517.3	516.9	516.6	516.3
132.5°	551.2	552.0	552.1	552.3	552.4	552.6	552.8	551.9	551.1	550.2	549.3
135°	582.4	583.3	583.5	583.8	584.1	584.5	584.8	584.6	584.5	584.3	584.2
137.5°	614.6	615.4	615.6	615.9	616.2	616.6	616.9	616.7	616.5	616.4	616.2
140°	644.3	645.1	645.5	646.4	647.3	648.1	649.0	649.0	649.0	649.0	649.0
142.5°	674.9	675.7	676.0	676.5	677.0	677.5	678.0	678.2	678.3	678.5	678.6
145°	702.6	703.2	703.7	704.7	705.7	706.7	707.7	707.9	708.1	708.2	708.4
147.5°	729.8	730.6	730.9	731.6	732.3	733.0	733.7	734.0	734.4	734.7	735.0
150°	754.6	755.1	755.4	756.1	756.8	757.4	758.1	758.6	759.1	759.6	760.1
152.5°	778.2	778.7	779.1	780.0	780.9	781.7	782.6	783.3	783.9	784.6	785.3
155°	799.8	800.1	800.4	800.9	801.4	801.9	802.4	803.2	804.1	804.9	805.8
157.5°	819.8	820.0	820.2	820.5	820.8	821.2	821.5	822.7	823.9	825.0	826.2
160°	838.1	838.3	838.4	838.6	838.7	838.9	839.1	840.1	841.1	842.1	843.1
162.5°	853.6	853.6	853.7	853.8	854.0	854.1	854.3	855.5	856.7	857.9	859.1
165°	867.4	867.3	867.3	867.3	867.3	867.3	867.3	868.5	869.7	870.9	872.1
167.5°	879.1	878.8	878.8	878.8	878.8	878.8	878.8	880.0	881.2	882.3	883.5
170°	889.0	888.7	888.6	888.4	888.3	888.1	887.9	889.1	890.3	891.5	892.7
172.5°	895.8	895.6	895.5	895.3	895.2	895.0	894.8	896.0	897.2	898.3	899.5
175°	901.2	900.9	900.7	900.4	900.1	899.7	899.4	900.6	901.8	902.9	904.1
177.5°	904.2	904.0	903.8	903.5	903.1	902.8	902.4	903.4	904.4	905.5	906.5
180°	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2114.7	2111.6	2102.4	2105.5	2100.9	2100.9	2097.8	2097.8	2097.8	2105.5	2100.9
5°	1999.5	1988.8	1978.0	1973.4	1968.8	1964.2	1964.2	1962.7	1976.5	1973.4	1985.7
7.5°	1856.7	1853.6	1832.1	1832.1	1824.4	1821.4	1829.1	1830.6	1832.1	1835.2	1842.9
10°	1729.2	1721.5	1690.8	1693.9	1689.3	1683.2	1687.8	1684.7	1695.4	1698.5	1695.4
12.5°	1578.7	1564.9	1531.1	1514.2	1495.8	1482.0	1498.9	1486.6	1529.6	1541.9	1575.7
15°	1379.1	1353.0	1329.9	1329.9	1313.0	1300.8	1308.4	1322.3	1331.5	1345.3	1351.4
17.5°	1245.5	1234.7	1216.3	1205.5	1200.9	1196.3	1196.3	1202.5	1222.4	1220.9	1233.2
20°	1131.8	1125.7	1116.5	1102.7	1098.0	1095.0	1095.0	1095.0	1108.8	1121.1	1128.8
22.5°	1053.5	1048.9	1042.8	1024.3	1015.1	1012.0	1019.7	1024.3	1035.1	1044.3	1052.0
25°	975.2	964.4	953.7	947.5	942.9	942.9	946.0	947.5	952.2	956.8	966.0
27.5°	910.7	903.0	887.7	870.8	870.8	866.1	869.2	872.3	883.0	898.4	906.1
30°	838.5	837.0	830.8	824.7	818.5	815.5	821.6	826.2	827.8	835.4	835.4
32.5°	786.3	775.5	764.8	758.6	755.6	754.0	755.6	761.7	761.7	770.9	781.7
35°	734.1	727.9	717.2	706.4	703.4	695.7	701.8	708.0	718.7	723.3	727.9
37.5°	677.3	669.6	665.0	661.9	655.8	657.3	652.7	661.9	671.1	669.6	672.6
40°	634.3	620.4	606.6	605.1	603.5	602.0	602.0	603.5	609.7	615.8	625.0
42.5°	579.0	574.4	562.1	549.8	546.7	543.6	540.6	546.7	559.0	569.8	574.4
45°	522.1	516.0	512.9	503.7	497.6	496.0	493.0	500.6	511.4	516.0	519.1
47.5°	469.9	468.4	459.2	460.7	456.1	457.6	456.1	460.7	460.7	465.3	468.4
50°	434.6	430.0	425.4	422.3	417.7	417.7	416.2	417.7	423.9	430.0	428.5
52.5°	399.3	391.6	390.1	388.5	385.5	388.5	383.9	385.5	391.6	394.7	393.1
55°	357.8	356.3	353.2	350.1	348.6	347.1	347.1	347.1	353.2	357.8	359.4
57.5°	325.6	317.9	311.8	311.8	305.6	304.1	307.1	308.7	313.3	316.4	319.4
60°	281.0	278.0	268.8	264.1	254.9	253.4	253.4	259.5	267.2	278.0	281.0
62.5°	233.4	228.8	227.3	227.3	227.3	227.3	227.3	227.3	227.3	228.8	228.8
65°	207.3	208.9	207.3	205.8	207.3	207.3	205.8	205.8	205.8	207.3	208.9
67.5°	185.8	184.3	185.8	184.3	182.8	182.8	181.2	182.8	184.3	185.8	185.8
70°	161.3	161.3	159.7	161.3	159.7	158.2	156.6	156.6	159.7	161.3	161.3
72.5°	138.2	138.2	136.7	136.7	133.6	133.6	135.1	133.6	133.6	138.2	138.2
75°	115.2	113.6	112.1	112.1	110.6	110.6	110.6	109.0	112.1	112.1	113.6
77.5°	90.6	90.6	90.6	89.1	89.1	87.5	87.5	89.1	89.1	89.1	90.6
80°	69.1	69.1	69.1	67.6	66.0	66.0	66.0	66.0	66.0	67.6	66.0
82.5°	47.6	47.6	47.6	47.6	47.6	46.1	46.1	46.1	47.6	47.6	46.1
85°	29.2	27.6	29.2	29.2	27.6	29.2	27.6	27.6	26.1	26.1	27.6
87.5°	12.3	10.8	9.2	9.2	10.8	9.2	9.2	9.2	10.8	9.2	9.2
90°	25.2	25.3	25.5	25.6	25.8	26.0	25.8	25.6	25.5	25.3	25.2
92.5°	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4
95°	48.9	48.7	48.4	48.0	47.7	47.3	47.7	48.0	48.4	48.7	48.9
97.5°	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
100°	105.4	105.3	105.1	105.0	104.8	104.6	104.8	105.0	105.1	105.3	105.4
102.5°	137.4	137.3	137.2	137.0	136.9	136.7	136.9	137.0	137.2	137.3	137.4
105°	169.5	169.5	169.5	169.5	169.5	169.5	169.5	169.5	169.5	169.5	169.5
107.5°	203.1	202.7	201.8	201.0	200.1	199.3	200.1	201.0	201.8	202.7	203.1
110°	237.4	237.2	236.7	236.2	235.7	235.2	235.7	236.2	236.7	237.2	237.4

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	271.0	270.8	270.5	270.2	269.8	269.5	269.8	270.2	270.5	270.8	271.0
115°	307.7	307.4	306.9	306.4	305.9	305.4	305.9	306.4	306.9	307.4	307.7
117.5°	341.3	341.0	340.5	340.0	339.5	339.0	339.5	340.0	340.5	341.0	341.3
120°	377.2	376.9	376.4	375.9	375.4	374.9	375.4	375.9	376.4	376.9	377.2
122.5°	411.5	411.3	411.0	410.7	410.3	410.0	410.3	410.7	411.0	411.3	411.5
125°	446.6	446.5	446.4	446.2	446.1	445.9	446.1	446.2	446.4	446.5	446.6
127.5°	480.2	479.9	479.4	478.9	478.4	477.9	478.4	478.9	479.4	479.9	480.2
130°	516.1	515.8	515.1	514.4	513.8	513.1	513.8	514.4	515.1	515.8	516.1
132.5°	548.9	548.6	548.1	547.6	547.1	546.6	547.1	547.6	548.1	548.6	548.9
135°	584.1	583.8	583.3	582.8	582.3	581.8	582.3	582.8	583.3	583.8	584.1
137.5°	616.1	615.8	615.1	614.4	613.8	613.1	613.8	614.4	615.1	615.8	616.1
140°	649.0	648.7	648.0	647.3	646.6	645.9	646.6	647.3	648.0	648.7	649.0
142.5°	678.7	678.4	677.7	677.0	676.4	675.7	676.4	677.0	677.7	678.4	678.7
145°	708.5	708.2	707.5	706.8	706.2	705.5	706.2	706.8	707.5	708.2	708.5
147.5°	735.2	734.9	734.2	733.5	732.9	732.2	732.9	733.5	734.2	734.9	735.2
150°	760.4	760.1	759.6	759.1	758.6	758.1	758.6	759.1	759.6	760.1	760.4
152.5°	785.6	785.3	784.6	783.9	783.3	782.6	783.3	783.9	784.6	785.3	785.6
155°	806.2	805.9	805.4	804.9	804.4	803.9	804.4	804.9	805.4	805.9	806.2
157.5°	826.8	826.4	825.5	824.7	823.8	823.0	823.8	824.7	825.5	826.4	826.8
160°	843.6	843.3	842.6	841.9	841.3	840.6	841.3	841.9	842.6	843.3	843.6
162.5°	859.7	859.3	858.4	857.6	856.7	855.9	856.7	857.6	858.4	859.3	859.7
165°	872.7	872.3	871.4	870.5	869.7	868.8	869.7	870.5	871.4	872.3	872.7
167.5°	884.1	883.7	882.8	882.0	881.1	880.3	881.1	882.0	882.8	883.7	884.1
170°	893.3	892.8	891.8	890.7	889.7	888.7	889.7	890.7	891.8	892.8	893.3
172.5°	900.1	899.6	898.6	897.6	896.6	895.6	896.6	897.6	898.6	899.6	900.1
175°	904.7	904.2	903.2	902.1	901.1	900.1	901.1	902.1	903.2	904.2	904.7
177.5°	907.0	906.5	905.5	904.4	903.4	902.4	903.4	904.4	905.5	906.5	907.0
180°	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2105.5	2113.2	2110.1	2093.2	2110.1	2114.7	2123.9	2133.1	2139.3	2148.5	2156.2
5°	1973.4	1988.8	1998.0	1988.8	2019.5	2024.1	2045.6	2057.9	2076.3	2091.7	2103.9
7.5°	1849.0	1861.3	1879.7	1882.8	1901.2	1922.7	1953.4	1984.2	2013.3	2028.7	2042.5
10°	1715.4	1736.9	1764.5	1758.4	1786.1	1819.8	1852.1	1901.2	1925.8	1953.4	1978.0
12.5°	1581.8	1595.6	1632.5	1644.8	1684.7	1710.8	1755.3	1786.1	1847.5	1879.7	1901.2
15°	1348.4	1405.2	1451.3	1506.5	1558.8	1607.9	1647.8	1703.1	1756.9	1781.4	1816.8
17.5°	1242.4	1268.5	1296.2	1323.8	1391.4	1478.9	1549.5	1609.4	1655.5	1687.8	1729.2
20°	1131.8	1157.9	1188.7	1214.8	1256.2	1319.2	1406.7	1509.6	1564.9	1598.7	1638.6
22.5°	1053.5	1078.1	1098.0	1121.1	1153.3	1199.4	1265.4	1392.9	1466.6	1508.1	1543.4
25°	969.0	999.8	1021.3	1038.2	1064.3	1114.9	1168.7	1240.9	1372.9	1405.2	1454.3
27.5°	910.7	919.9	944.5	970.6	996.7	1024.3	1079.6	1141.0	1230.1	1300.8	1360.7
30°	841.6	864.6	887.7	898.4	921.4	961.4	995.2	1061.2	1130.3	1185.6	1257.8
32.5°	789.4	803.2	818.5	844.6	866.1	893.8	927.6	982.9	1041.2	1076.5	1131.8
35°	731.0	740.2	772.5	783.2	804.7	832.4	866.1	909.2	972.1	999.8	1039.7
37.5°	675.7	697.2	706.4	731.0	751.0	778.6	803.2	852.3	893.8	926.0	962.9
40°	632.7	641.9	658.8	680.3	697.2	718.7	749.4	784.8	829.3	855.4	887.7
42.5°	580.5	588.2	609.7	622.0	649.6	669.6	688.0	731.0	770.9	790.9	823.1
45°	523.7	542.1	555.9	580.5	595.9	620.4	643.5	674.2	711.0	734.1	752.5
47.5°	474.5	493.0	506.8	529.8	554.4	565.1	589.7	622.0	655.8	674.2	700.3
50°	434.6	440.8	466.9	477.6	503.7	525.2	542.1	569.8	606.6	617.4	638.9
52.5°	396.2	400.8	417.7	431.5	454.6	473.0	494.5	520.6	551.3	568.2	585.1
55°	362.4	365.5	373.2	388.5	403.9	426.9	446.9	471.5	497.6	516.0	531.4
57.5°	324.0	330.2	336.3	345.5	360.9	382.4	403.9	426.9	448.4	460.7	480.7
60°	279.5	288.7	299.5	310.2	321.0	336.3	360.9	382.4	402.4	413.1	428.5
62.5°	231.9	250.3	259.5	271.8	281.0	294.9	313.3	337.9	351.7	365.5	377.8
65°	208.9	210.4	211.9	224.2	241.1	254.9	271.8	290.3	311.8	321.0	330.2
67.5°	185.8	187.4	190.4	192.0	198.1	213.5	231.9	251.9	268.8	274.9	284.1
70°	162.8	162.8	168.9	170.5	172.0	173.5	188.9	208.9	224.2	231.9	242.6
72.5°	138.2	139.8	142.8	144.4	147.4	150.5	155.1	165.9	184.3	192.0	204.3
75°	113.6	115.2	116.7	118.3	122.9	124.4	129.0	135.1	142.8	152.0	159.7
77.5°	90.6	90.6	92.1	95.2	98.3	99.8	104.4	107.5	110.6	115.2	121.3
80°	67.6	69.1	69.1	72.2	72.2	73.7	75.3	79.9	82.9	86.0	89.1
82.5°	46.1	49.1	49.1	49.1	50.7	52.2	53.8	53.8	56.8	58.4	63.0
85°	27.6	29.2	29.2	29.2	27.6	30.7	30.7	32.3	32.3	32.3	33.8
87.5°	10.8	9.2	10.8	10.8	10.8	12.3	10.8	10.8	12.3	13.8	13.8
90°	25.4	25.7	26.0	26.4	26.7	23.0	19.2	15.5	11.8	9.9	8.9
92.5°	24.3	24.2	24.0	23.9	23.7	23.5	23.3	23.2	23.0	22.9	22.2
95°	48.9	48.9	48.9	48.9	48.9	48.5	48.2	47.8	47.5	47.3	46.5
97.5°	76.3	76.3	76.3	76.3	76.3	75.6	75.0	74.3	73.6	73.3	72.5
100°	105.4	105.4	105.4	105.4	105.4	104.9	104.4	103.9	103.4	103.1	102.4
102.5°	137.3	137.2	137.0	136.9	136.7	136.0	135.3	134.6	133.9	133.6	133.1
105°	169.3	169.0	168.7	168.3	168.0	167.6	167.3	166.9	166.6	166.4	166.1
107.5°	203.0	202.8	202.7	202.5	202.3	202.3	202.3	202.3	202.3	202.3	202.0
110°	237.4	237.4	237.4	237.4	237.4	237.4	237.4	237.4	237.4	237.4	236.9

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	271.3	271.8	272.3	272.8	273.3	273.5	273.7	273.8	274.0	274.1	273.6
115°	307.8	307.9	308.1	308.2	308.4	308.8	309.1	309.5	309.8	310.0	309.5
117.5°	341.6	342.1	342.6	343.1	343.6	344.4	345.3	346.1	347.0	347.4	346.7
120°	377.2	377.2	377.2	377.2	377.2	378.6	379.9	381.3	382.6	383.3	382.6
122.5°	411.8	412.3	412.8	413.3	413.8	414.6	415.5	416.3	417.2	417.6	416.8
125°	446.9	447.4	447.9	448.4	448.9	449.4	449.9	450.4	450.9	451.2	450.4
127.5°	480.5	481.2	481.9	482.6	483.3	484.0	484.6	485.3	486.0	486.3	485.4
130°	516.3	516.6	516.9	517.3	517.6	518.0	518.3	518.7	519.0	519.2	518.1
132.5°	549.3	550.2	551.1	551.9	552.8	552.6	552.4	552.3	552.1	552.0	551.2
135°	584.2	584.3	584.5	584.6	584.8	584.5	584.1	583.8	583.5	583.3	582.4
137.5°	616.2	616.4	616.5	616.7	616.9	616.6	616.2	615.9	615.6	615.4	614.6
140°	649.0	649.0	649.0	649.0	649.0	648.1	647.3	646.4	645.5	645.1	644.3
142.5°	678.6	678.5	678.3	678.2	678.0	677.5	677.0	676.5	676.0	675.7	674.9
145°	708.4	708.2	708.1	707.9	707.7	706.7	705.7	704.7	703.7	703.2	702.6
147.5°	735.0	734.7	734.4	734.0	733.7	733.0	732.3	731.6	730.9	730.6	729.8
150°	760.1	759.6	759.1	758.6	758.1	757.4	756.8	756.1	755.4	755.1	754.6
152.5°	785.3	784.6	783.9	783.3	782.6	781.7	780.9	780.0	779.1	778.7	778.2
155°	805.8	804.9	804.1	803.2	802.4	801.9	801.4	800.9	800.4	800.1	799.8
157.5°	826.2	825.0	823.9	822.7	821.5	821.2	820.8	820.5	820.2	820.0	819.8
160°	843.1	842.1	841.1	840.1	839.1	838.9	838.7	838.6	838.4	838.3	838.1
162.5°	859.1	857.9	856.7	855.5	854.3	854.1	854.0	853.8	853.7	853.6	853.6
165°	872.1	870.9	869.7	868.5	867.3	867.3	867.3	867.3	867.3	867.3	867.4
167.5°	883.5	882.3	881.2	880.0	878.8	878.8	878.8	878.8	878.8	878.8	879.1
170°	892.7	891.5	890.3	889.1	887.9	888.1	888.3	888.4	888.6	888.7	889.0
172.5°	899.5	898.3	897.2	896.0	894.8	895.0	895.2	895.3	895.5	895.6	895.8
175°	904.1	902.9	901.8	900.6	899.4	899.7	900.1	900.4	900.7	900.9	901.2
177.5°	906.5	905.5	904.4	903.4	902.4	902.8	903.1	903.5	903.8	904.0	904.2
180°	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7	904.7

TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	2209.9	2209.9	2209.9	2209.9
2.5°	2170.0	2165.4	2193.0	2223.7
5°	2125.4	2133.1	2168.4	2211.4
7.5°	2079.4	2096.3	2137.7	2194.6
10°	2014.9	2045.6	2108.6	2166.9
12.5°	1951.9	1993.4	2053.3	2122.4
15°	1881.3	1927.3	2001.1	2084.0
17.5°	1802.9	1855.2	1941.2	2031.8
20°	1720.0	1789.1	1879.7	1978.0
22.5°	1627.9	1710.8	1804.5	1913.5
25°	1538.8	1629.4	1723.1	1849.0
27.5°	1451.3	1540.3	1644.8	1772.2
30°	1363.7	1445.1	1557.2	1693.9
32.5°	1270.0	1354.5	1472.8	1612.5
35°	1184.0	1268.5	1379.1	1517.3
37.5°	1091.9	1182.5	1288.5	1431.3
40°	984.4	1090.4	1193.3	1329.9
42.5°	895.3	1007.4	1107.3	1236.3
45°	824.7	930.7	1013.6	1139.5
47.5°	758.6	844.6	929.1	1045.8
50°	695.7	761.7	849.3	953.7
52.5°	631.2	688.0	763.3	861.5
55°	572.8	626.6	694.1	769.4
57.5°	519.1	557.5	625.0	692.6
60°	459.2	499.1	551.3	608.1
62.5°	408.5	439.2	488.4	536.0
65°	354.8	383.9	420.8	465.3
67.5°	305.6	331.7	360.9	396.2
70°	261.1	281.0	302.5	333.3
72.5°	213.5	235.0	254.9	279.5
75°	175.1	184.3	201.2	218.1
77.5°	135.1	147.4	156.6	170.5
80°	96.8	107.5	110.6	121.3
82.5°	64.5	70.6	76.8	79.9
85°	36.9	39.9	46.1	47.6
87.5°	13.8	15.4	18.4	21.5
90°	6.9	4.8	2.8	0.8
92.5°	20.9	19.5	18.2	16.8
95°	44.8	43.1	41.4	39.7
97.5°	71.0	69.5	67.9	66.4
100°	101.1	99.7	98.4	97.0
102.5°	132.1	131.0	130.0	129.0
105°	165.6	165.1	164.6	164.1
107.5°	201.3	200.6	200.0	199.3
110°	235.9	234.9	233.9	232.9



TEST NUMBER: P999404

CATALOG NUMBER: SA2XXRDIP-B1005D725UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	272.6	271.5	270.5	269.5
115°	308.5	307.4	306.4	305.4
117.5°	345.4	344.0	342.7	341.3
120°	381.3	379.9	378.6	377.2
122.5°	415.1	413.4	411.7	410.0
125°	448.9	447.4	445.8	444.3
127.5°	483.5	481.6	479.8	477.9
130°	515.9	513.6	511.4	509.2
132.5°	549.5	547.8	546.1	544.4
135°	580.5	578.6	576.8	574.9
137.5°	613.1	611.6	610.0	608.5
140°	642.8	641.3	639.8	638.3
142.5°	673.4	671.9	670.3	668.8
145°	701.4	700.2	699.0	697.8
147.5°	728.3	726.8	725.3	723.8
150°	753.6	752.5	751.5	750.5
152.5°	777.2	776.2	775.2	774.2
155°	799.3	798.8	798.3	797.8
157.5°	819.5	819.1	818.8	818.4
160°	837.8	837.5	837.1	836.8
162.5°	853.6	853.6	853.6	853.6
165°	867.6	867.7	867.9	868.1
167.5°	879.6	880.1	880.6	881.1
170°	889.5	890.0	890.5	891.0
172.5°	896.3	896.8	897.3	897.8
175°	901.7	902.2	902.7	903.2
177.5°	904.7	905.2	905.7	906.2
180°	904.7	904.7	904.7	904.7

(END OF REPORT)