

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P999456

Luminaire Tested: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P999456
REPORT IS A COMBINATION OF REPORTS P988007 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1
Description: Define 2 Regressed Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865}
{m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7056.0 lumens
Efficiency: N/A
Efficacy: 78.6 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 0.85 / 1.01
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 89.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

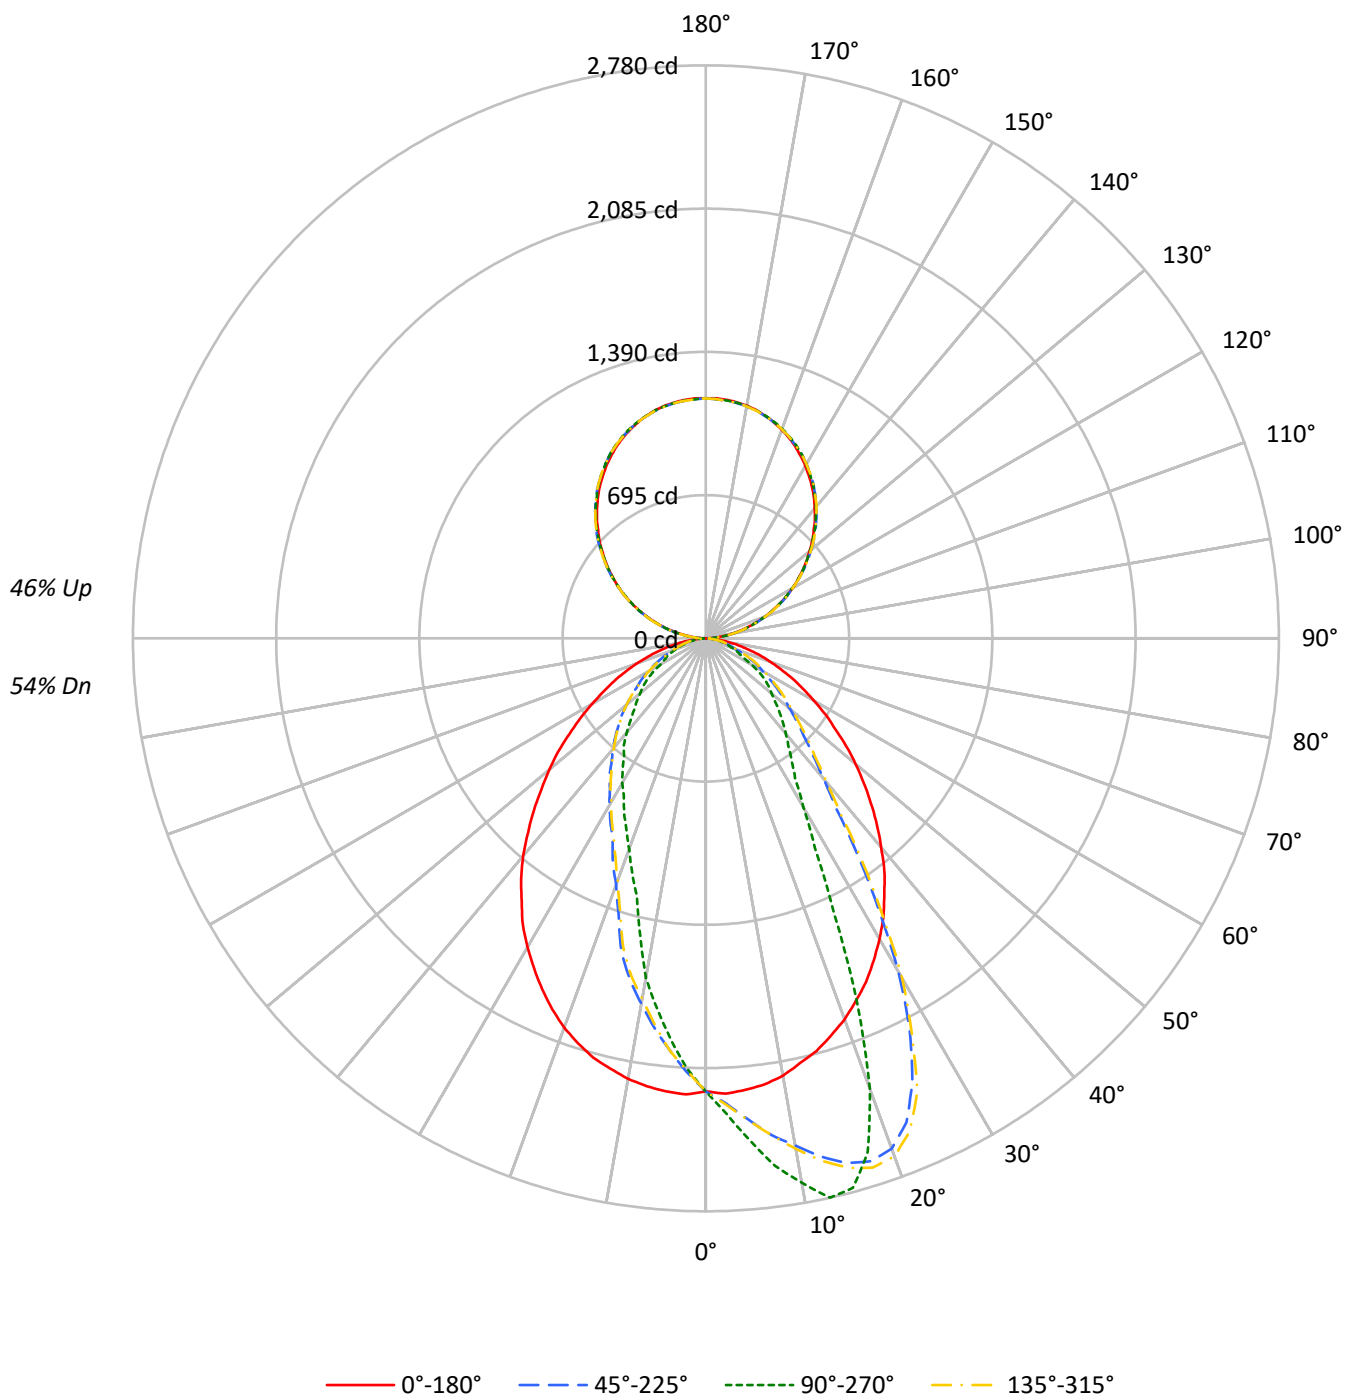

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60
1	99	95	92	89	92	89	86	83	76	74	72	65	63	62	54	53	52
2	91	84	79	74	85	79	74	69	68	64	61	58	55	53	49	47	45
3	84	75	68	63	78	70	64	59	61	56	52	52	49	46	44	42	40
4	77	67	60	54	72	63	56	51	55	50	46	47	43	40	40	37	35
5	71	60	53	47	66	57	50	45	49	44	40	43	39	35	36	34	31
6	66	55	47	41	61	51	44	39	45	40	35	39	35	32	34	30	28
7	61	50	42	37	57	47	40	35	41	36	32	36	32	28	31	28	25
8	57	45	38	33	53	43	36	31	38	32	29	33	29	26	29	25	23
9	53	42	35	30	50	39	33	28	35	30	26	31	26	23	27	23	21
10	50	39	32	27	47	36	30	26	32	27	24	29	24	22	25	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	34790	34790	34790	34790
5°	34870	36952	34991	29520
10°	34486	39056	34731	24377
15°	33737	39069	34309	18313
20°	32837	32295	33552	15109
25°	31746	20180	32433	12854
30°	30353	12920	31178	11065
35°	28658	9930	29585	9470
40°	26768	8347	27912	8283
45°	24749	7104	25784	6953
50°	22680	6036	23739	6014
55°	20390	5245	21487	5177
60°	18352	4000	19326	3952
65°	16452	3009	17430	3415
70°	14352	2404	15478	2783
75°	12133	1841	13241	2105
80°	9636	1253	10363	1381
85°	6681	647	7331	682

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 165°

Vertical Angle: 45°

Luminance: 31825 cd/sqm

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	208.5	3.0
10°-20°	581.9	8.2
20°-30°	748.9	10.6
30°-40°	710.4	10.1
40°-50°	608.9	8.6
50°-60°	463.7	6.6
60°-70°	292.4	4.1
70°-80°	145.9	2.1
80°-90°	40.8	0.6
90°-100°	72.0	1.0
100°-110°	228.9	3.2
110°-120°	391.7	5.6
120°-130°	515.2	7.3
130°-140°	578.3	8.2
140°-150°	567.1	8.0
150°-160°	475.7	6.7
160°-170°	315.5	4.5
170°-180°	110.3	1.6
0°-30°	1539.2	21.8
0°-40°	2249.6	31.9
0°-60°	3322.2	47.1
0°-90°	3801.3	53.9
90°-120°	692.7	9.8
90°-150°	2353.2	33.4
90°-180°	3255.0	46.1
0°-180°	7056.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2198	2198	2198	2198	2198	
5°	2199	2445	2207	1953	2199	209
15°	2072	2760	2108	1294	2072	583
25°	1839	1472	1879	938	1839	844
35°	1509	726	1558	692	1509	944
45°	1133	504	1181	493	1133	875
55°	765	350	806	345	765	690
65°	463	182	490	206	463	459
75°	217	96	237	110	217	235
85°	47	28	52	29	47	54
90°	1	33	1	33	1	6
95°	51	61	51	61	51	57
105°	211	218	211	218	211	223
115°	393	393	393	393	393	389
125°	572	574	572	574	572	511
135°	740	749	740	749	740	572
145°	898	908	898	908	898	561
155°	1027	1034	1027	1034	1027	473
165°	1117	1118	1117	1118	1117	315
175°	1162	1158	1162	1158	1162	110
180°	1164	1164	1164	1164	1164	

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8
2.5°	2211.5	2220.7	2225.2	2231.4	2245.1	2254.3	2268.0	2271.1	2269.5	2275.7	2258.9
5°	2199.3	2219.1	2237.5	2252.7	2277.2	2292.5	2309.3	2329.1	2333.7	2356.6	2342.9
7.5°	2182.5	2211.5	2237.5	2268.0	2304.7	2324.5	2350.5	2381.0	2394.8	2422.3	2429.9
10°	2155.0	2196.2	2240.5	2272.6	2323.0	2358.1	2382.6	2431.4	2463.5	2504.7	2498.6
12.5°	2110.7	2164.2	2223.7	2277.2	2342.9	2365.8	2411.6	2462.0	2503.2	2541.4	2575.0
15°	2072.5	2133.6	2199.3	2265.0	2339.8	2382.6	2428.4	2494.1	2538.3	2605.5	2634.6
17.5°	2020.6	2098.5	2176.4	2249.7	2338.3	2387.1	2443.7	2507.8	2573.5	2637.6	2660.5
20°	1967.1	2051.1	2135.1	2234.4	2335.2	2382.6	2440.6	2520.0	2584.2	2634.6	2634.6
22.5°	1903.0	2005.3	2101.5	2196.2	2306.2	2374.9	2434.5	2527.7	2573.5	2584.2	2542.9
25°	1838.8	1941.2	2046.6	2164.2	2289.4	2350.5	2417.7	2504.7	2520.0	2477.3	2370.3
27.5°	1762.5	1877.0	1996.2	2122.9	2254.3	2330.6	2391.7	2449.8	2420.7	2306.2	2139.7
30°	1684.6	1808.3	1942.7	2063.4	2222.2	2292.5	2344.4	2361.2	2269.5	2083.2	1867.9
32.5°	1603.6	1724.3	1866.3	2011.4	2171.8	2239.0	2272.6	2228.3	2060.3	1825.1	1562.4
35°	1509.0	1644.9	1793.0	1944.2	2103.1	2153.5	2173.3	2064.9	1849.5	1545.6	1284.4
37.5°	1423.4	1559.4	1718.2	1872.4	2026.7	2054.2	2034.3	1864.8	1591.4	1290.6	1035.5
40°	1322.6	1467.7	1623.5	1796.1	1922.8	1930.5	1881.6	1661.7	1322.6	1040.1	882.8
42.5°	1229.5	1376.1	1531.9	1707.5	1803.7	1777.8	1712.1	1423.4	1104.2	896.5	769.8
45°	1133.2	1272.2	1440.2	1596.0	1664.7	1603.6	1504.4	1197.4	927.1	771.3	673.5
47.5°	1040.1	1169.9	1336.4	1486.0	1498.3	1429.5	1311.9	1003.4	803.4	678.1	598.7
50°	948.4	1078.3	1234.0	1357.8	1345.5	1250.8	1118.0	872.1	698.0	598.7	533.0
52.5°	856.8	974.4	1125.6	1223.4	1171.4	1079.8	948.4	739.2	609.4	522.3	471.9
55°	765.2	875.1	1005.0	1085.9	1003.4	898.0	804.9	633.8	528.4	458.2	420.0
57.5°	688.8	775.9	895.0	943.9	844.6	762.1	681.2	545.2	458.2	407.8	363.5
60°	604.8	684.2	782.0	811.0	708.7	641.5	572.7	461.2	392.5	348.2	319.2
62.5°	533.0	598.7	673.5	673.5	583.4	533.0	481.1	386.4	329.9	294.8	281.0
65°	462.8	510.1	563.6	557.5	481.1	436.8	395.6	319.2	276.4	252.0	238.3
67.5°	394.0	430.7	465.8	444.4	389.5	351.3	313.1	258.1	229.1	212.3	194.0
70°	331.4	360.4	378.8	358.9	303.9	271.9	244.4	207.7	184.8	163.4	152.7
72.5°	278.0	290.2	296.3	271.9	226.0	207.7	187.9	161.9	142.0	131.3	128.3
75°	216.9	227.6	223.0	204.7	166.5	152.7	137.5	119.1	114.5	108.4	105.4
77.5°	169.5	169.5	161.9	145.1	119.1	108.4	102.3	93.2	88.6	87.1	84.0
80°	120.7	119.1	114.5	96.2	80.9	74.8	74.8	68.7	67.2	64.1	64.1
82.5°	79.4	79.4	73.3	58.0	53.5	51.9	50.4	47.3	47.3	45.8	45.8
85°	47.3	44.3	36.7	32.1	30.5	30.5	29.0	27.5	29.0	27.5	27.5
87.5°	21.4	16.8	12.2	12.2	12.2	12.2	12.2	12.2	12.2	12.2	12.2
90°	1.0	3.6	6.2	8.9	11.5	12.8	15.2	20.0	24.8	29.6	34.4
92.5°	21.6	23.4	25.1	26.9	28.6	29.5	29.6	29.8	30.1	30.3	30.5
95°	51.1	53.3	55.5	57.6	59.8	60.9	61.1	61.6	62.0	62.5	62.9
97.5°	85.5	87.5	89.4	91.4	93.3	94.3	94.7	95.6	96.5	97.3	98.2
100°	124.8	126.5	128.3	130.0	131.7	132.6	132.9	133.6	134.3	134.9	135.6
102.5°	166.0	167.3	168.6	169.9	171.2	171.9	172.3	173.2	174.1	174.9	175.8
105°	211.2	211.9	212.5	213.2	213.9	214.2	214.4	214.8	215.3	215.7	216.1
107.5°	256.4	257.3	258.1	259.0	259.9	260.3	260.3	260.3	260.3	260.3	260.3
110°	299.6	300.9	302.2	303.5	304.8	305.5	305.5	305.5	305.5	305.5	305.5

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	346.8	348.1	349.4	350.7	352.0	352.7	352.6	352.4	352.1	351.9	351.7
115°	393.0	394.3	395.6	396.9	398.2	398.8	398.6	398.2	397.7	397.3	396.9
117.5°	439.1	440.9	442.6	444.4	446.1	447.0	446.5	445.4	444.3	443.2	442.1
120°	485.3	487.1	488.8	490.6	492.3	493.2	492.3	490.6	488.8	487.1	485.3
122.5°	527.5	529.7	531.9	534.1	536.3	537.4	536.9	535.8	534.7	533.6	532.5
125°	571.7	573.7	575.7	577.6	579.6	580.6	580.3	579.6	578.9	578.3	577.6
127.5°	615.0	617.4	619.8	622.2	624.6	625.8	625.4	624.5	623.6	622.8	621.9
130°	655.3	658.1	660.9	663.8	666.6	668.0	667.8	667.4	666.9	666.5	666.1
132.5°	700.4	702.6	704.8	707.0	709.2	710.3	710.4	710.6	710.8	711.0	711.2
135°	739.7	742.1	744.5	746.9	749.3	750.5	750.7	751.2	751.6	752.1	752.5
137.5°	783.0	785.0	786.9	788.9	790.8	791.8	792.0	792.5	792.9	793.4	793.8
140°	821.3	823.3	825.2	827.2	829.1	830.1	830.6	831.7	832.8	833.9	835.0
142.5°	860.6	862.6	864.5	866.5	868.4	869.4	869.7	870.4	871.1	871.7	872.4
145°	897.9	899.4	901.0	902.5	904.0	904.8	905.5	906.8	908.1	909.4	910.7
147.5°	931.3	933.3	935.2	937.2	939.1	940.1	940.5	941.4	942.3	943.2	944.1
150°	965.7	967.0	968.3	969.6	970.9	971.6	972.0	972.9	973.8	974.6	975.5
152.5°	996.1	997.4	998.7	1000.0	1001.3	1002.0	1002.5	1003.6	1004.7	1005.8	1006.9
155°	1026.6	1027.2	1027.9	1028.5	1029.2	1029.5	1029.8	1030.5	1031.2	1031.8	1032.5
157.5°	1053.1	1053.5	1054.0	1054.4	1054.9	1055.1	1055.3	1055.7	1056.2	1056.6	1057.0
160°	1076.7	1077.1	1077.6	1078.0	1078.5	1078.7	1078.8	1079.0	1079.2	1079.4	1079.6
162.5°	1098.3	1098.3	1098.3	1098.3	1098.3	1098.3	1098.4	1098.6	1098.9	1099.1	1099.3
165°	1117.0	1116.8	1116.6	1116.3	1116.1	1116.0	1116.0	1116.0	1116.0	1116.0	1116.0
167.5°	1133.7	1133.0	1132.4	1131.7	1131.0	1130.7	1130.7	1130.7	1130.7	1130.7	1130.7
170°	1146.4	1145.8	1145.1	1144.5	1143.8	1143.5	1143.4	1143.2	1142.9	1142.7	1142.5
172.5°	1155.3	1154.6	1154.0	1153.3	1152.6	1152.3	1152.2	1152.0	1151.8	1151.6	1151.4
175°	1162.2	1161.5	1160.9	1160.2	1159.5	1159.2	1159.0	1158.6	1158.1	1157.7	1157.3
177.5°	1166.1	1165.4	1164.8	1164.1	1163.4	1163.1	1162.9	1162.5	1162.0	1161.6	1161.2
180°	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8
2.5°	2275.7	2278.7	2283.3	2304.7	2307.7	2313.8	2310.8	2310.8	2312.3	2309.3	2310.8
5°	2373.4	2378.0	2400.9	2426.9	2433.0	2426.9	2434.5	2445.2	2445.2	2445.2	2442.1
7.5°	2465.0	2481.8	2507.8	2546.0	2553.6	2561.3	2575.0	2565.8	2568.9	2582.6	2578.1
10°	2553.6	2578.1	2607.1	2639.1	2655.9	2666.6	2672.7	2686.5	2718.6	2681.9	2695.7
12.5°	2637.6	2672.7	2703.3	2738.4	2750.6	2764.4	2769.0	2781.2	2781.2	2779.7	2790.3
15°	2692.6	2724.7	2752.2	2775.1	2778.1	2775.1	2772.0	2773.5	2778.1	2759.8	2770.5
17.5°	2704.8	2707.9	2717.0	2707.9	2709.4	2677.3	2659.0	2654.4	2611.7	2613.2	2648.3
20°	2645.3	2593.3	2579.6	2529.2	2498.6	2416.2	2413.1	2390.2	2300.1	2327.6	2321.5
22.5°	2481.8	2393.3	2275.7	2217.6	2188.6	2101.5	2034.3	1987.0	1954.9	1922.8	1909.1
25°	2266.5	2122.9	1956.4	1841.9	1825.1	1744.2	1620.4	1562.4	1493.7	1472.3	1509.0
27.5°	1988.5	1802.2	1614.3	1438.7	1406.6	1333.3	1270.7	1229.5	1150.0	1145.5	1148.5
30°	1611.3	1423.4	1266.1	1151.6	1072.2	1038.6	997.3	966.8	934.7	946.9	950.0
32.5°	1324.2	1145.5	998.8	937.8	901.1	879.7	844.6	824.7	811.0	806.4	804.9
35°	1052.3	933.2	867.5	807.9	786.6	771.3	745.3	736.1	723.9	725.5	725.5
37.5°	901.1	801.8	753.0	722.4	702.5	694.9	678.1	668.9	661.3	658.3	662.8
40°	777.4	708.7	678.1	650.6	633.8	630.8	621.6	610.9	601.7	603.3	607.9
42.5°	687.3	647.6	610.9	589.5	577.3	572.7	565.1	557.5	557.5	552.9	551.3
45°	615.5	583.4	552.9	533.0	525.4	519.3	510.1	508.6	502.5	504.0	505.5
47.5°	551.3	525.4	502.5	482.6	475.0	473.5	464.3	458.2	458.2	456.7	455.1
50°	493.3	467.3	447.5	436.8	426.1	423.1	421.5	420.0	416.9	416.9	418.5
52.5°	446.0	420.0	404.7	395.6	389.5	386.4	386.4	384.9	384.9	384.9	383.3
55°	394.0	372.7	360.4	357.4	354.3	352.8	351.3	348.2	346.7	349.7	346.7
57.5°	345.2	337.5	326.8	323.8	316.1	316.1	311.6	308.5	305.5	308.5	308.5
60°	307.0	296.3	290.2	281.0	274.9	268.8	261.2	259.6	256.6	255.1	253.5
62.5°	267.3	258.1	242.8	229.1	219.9	213.8	210.8	209.2	209.2	207.7	207.7
65°	223.0	201.6	194.0	189.4	187.9	186.3	183.3	181.7	183.3	181.7	183.3
67.5°	174.1	171.1	166.5	163.4	161.9	160.4	160.4	158.8	158.8	158.8	158.8
70°	151.2	143.6	142.0	139.0	139.0	137.5	137.5	137.5	137.5	135.9	139.0
72.5°	125.2	120.7	119.1	117.6	117.6	117.6	116.1	116.1	116.1	114.5	116.1
75°	102.3	100.8	97.7	97.7	96.2	97.7	96.2	96.2	94.7	96.2	96.2
77.5°	82.5	80.9	79.4	79.4	77.9	77.9	77.9	77.9	77.9	77.9	79.4
80°	62.6	61.1	59.6	61.1	59.6	61.1	59.6	59.6	61.1	59.6	59.6
82.5°	45.8	44.3	44.3	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8
85°	27.5	26.0	26.0	27.5	26.0	27.5	26.0	26.0	26.0	27.5	27.5
87.5°	12.2	13.7	12.2	12.2	12.2	12.2	12.2	12.2	12.2	12.2	13.7
90°	34.0	33.5	33.1	32.6	32.4	32.5	32.7	33.0	33.2	33.4	33.2
92.5°	30.7	30.9	31.1	31.3	31.4	31.4	31.4	31.4	31.4	31.4	31.4
95°	62.9	62.9	62.9	62.9	62.9	62.7	62.2	61.8	61.3	60.9	61.3
97.5°	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
100°	135.6	135.6	135.6	135.6	135.6	135.5	135.3	135.0	134.8	134.6	134.8
102.5°	176.0	176.2	176.5	176.7	176.8	176.7	176.5	176.2	176.0	175.8	176.0
105°	216.5	217.0	217.4	217.9	218.1	218.1	218.1	218.1	218.1	218.1	218.1
107.5°	260.5	260.7	261.0	261.2	261.3	260.8	259.7	258.6	257.5	256.4	257.5
110°	305.5	305.5	305.5	305.5	305.5	305.2	304.5	303.9	303.2	302.6	303.2

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	351.0	350.4	349.7	349.0	348.7	348.5	348.1	347.6	347.2	346.8	347.2
115°	396.7	396.5	396.2	396.0	395.9	395.6	394.9	394.3	393.6	393.0	393.6
117.5°	441.4	440.8	440.1	439.4	439.1	438.8	438.1	437.5	436.8	436.2	436.8
120°	485.3	485.3	485.3	485.3	485.3	485.0	484.3	483.7	483.0	482.4	483.0
122.5°	531.8	531.2	530.5	529.8	529.5	529.3	528.8	528.4	527.9	527.5	527.9
125°	577.0	576.3	575.7	575.0	574.7	574.6	574.4	574.1	573.9	573.7	573.9
127.5°	621.0	620.1	619.2	618.3	617.9	617.6	616.9	616.3	615.6	615.0	615.6
130°	665.7	665.2	664.8	664.3	664.1	663.7	662.8	661.9	661.1	660.2	661.1
132.5°	710.1	709.0	707.9	706.8	706.3	706.0	705.3	704.7	704.0	703.4	704.0
135°	752.3	752.1	751.8	751.6	751.5	751.2	750.5	749.9	749.2	748.6	749.2
137.5°	793.6	793.4	793.1	792.9	792.8	792.4	791.5	790.6	789.8	788.9	789.8
140°	835.0	835.0	835.0	835.0	835.0	834.6	833.7	832.8	832.0	831.1	832.0
142.5°	872.6	872.8	873.0	873.2	873.3	872.9	872.0	871.1	870.3	869.4	870.3
145°	910.9	911.1	911.4	911.6	911.7	911.3	910.4	909.5	908.6	907.7	908.6
147.5°	944.5	944.9	945.4	945.8	946.0	945.6	944.7	943.8	943.0	942.1	943.0
150°	976.2	976.8	977.5	978.2	978.5	978.2	977.5	976.8	976.2	975.5	976.2
152.5°	1007.8	1008.7	1009.6	1010.5	1010.9	1010.5	1009.6	1008.7	1007.8	1006.9	1007.8
155°	1033.6	1034.7	1035.8	1036.9	1037.4	1037.1	1036.4	1035.8	1035.1	1034.5	1035.1
157.5°	1058.5	1060.1	1061.6	1063.1	1063.9	1063.4	1062.3	1061.2	1060.1	1059.0	1060.1
160°	1080.9	1082.2	1083.5	1084.8	1085.5	1085.1	1084.2	1083.3	1082.5	1081.6	1082.5
162.5°	1100.8	1102.4	1103.9	1105.4	1106.2	1105.7	1104.6	1103.5	1102.4	1101.3	1102.4
165°	1117.5	1119.1	1120.6	1122.1	1122.9	1122.4	1121.3	1120.2	1119.1	1118.0	1119.1
167.5°	1132.2	1133.8	1135.3	1136.8	1137.6	1137.1	1136.0	1134.9	1133.8	1132.7	1133.8
170°	1144.0	1145.6	1147.1	1148.6	1149.4	1148.7	1147.4	1146.1	1144.8	1143.5	1144.8
172.5°	1152.9	1154.4	1155.9	1157.4	1158.2	1157.5	1156.2	1154.9	1153.6	1152.3	1153.6
175°	1158.8	1160.3	1161.8	1163.3	1164.1	1163.4	1162.1	1160.8	1159.5	1158.2	1159.5
177.5°	1162.5	1163.8	1165.1	1166.4	1167.1	1166.4	1165.1	1163.8	1162.5	1161.2	1162.5
180°	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8
2.5°	2316.9	2306.2	2303.1	2306.2	2303.1	2304.7	2294.0	2254.3	2265.0	2248.2	2257.3
5°	2448.2	2439.1	2419.2	2416.2	2413.1	2410.1	2394.8	2359.7	2345.9	2323.0	2321.5
7.5°	2573.5	2573.5	2558.2	2547.5	2533.8	2523.1	2503.2	2451.3	2429.9	2402.4	2387.1
10°	2697.2	2657.5	2674.3	2663.6	2630.0	2623.9	2587.2	2556.7	2515.4	2487.9	2463.5
12.5°	2785.8	2773.5	2758.3	2749.1	2739.9	2720.1	2695.7	2617.8	2596.4	2541.4	2513.9
15°	2782.7	2775.1	2779.7	2779.7	2776.6	2772.0	2752.2	2695.7	2659.0	2605.5	2558.2
17.5°	2633.0	2652.9	2672.7	2686.5	2717.0	2730.8	2749.1	2715.5	2692.6	2646.8	2596.4
20°	2371.9	2420.7	2478.8	2491.0	2518.5	2599.4	2636.1	2665.1	2674.3	2659.0	2617.8
22.5°	2008.4	2049.6	2190.1	2187.1	2226.8	2323.0	2429.9	2517.0	2585.7	2623.9	2608.6
25°	1573.1	1631.1	1706.0	1762.5	1892.3	2035.9	2168.7	2307.7	2426.9	2532.2	2558.2
27.5°	1189.8	1266.1	1325.7	1400.5	1466.2	1635.7	1806.8	2023.6	2162.6	2362.7	2466.6
30°	962.2	997.3	1056.9	1092.0	1124.1	1253.9	1447.9	1661.7	1906.0	2136.7	2315.4
32.5°	821.7	846.1	890.4	905.7	939.3	1026.3	1148.5	1344.0	1596.0	1875.5	2110.7
35°	737.7	763.6	772.8	786.6	814.0	869.0	953.0	1095.1	1322.6	1596.0	1877.0
37.5°	665.9	679.6	705.6	714.8	723.9	765.2	821.7	921.0	1072.2	1296.7	1608.2
40°	615.5	623.1	636.9	644.5	650.6	679.6	730.0	797.2	908.7	1079.8	1366.9
42.5°	562.0	571.2	580.4	589.5	597.2	620.1	650.6	714.8	789.6	919.4	1127.1
45°	510.1	516.2	526.9	533.0	543.7	562.0	589.5	633.8	701.0	783.5	951.5
47.5°	462.8	470.4	475.0	482.6	490.3	510.1	536.1	565.1	620.1	701.0	823.2
50°	420.0	429.2	435.3	436.8	442.9	461.2	482.6	514.7	549.8	612.4	719.3
52.5°	389.5	391.0	395.6	401.7	400.1	410.8	430.7	455.1	491.8	542.2	620.1
55°	354.3	358.9	362.0	363.5	363.5	372.7	383.3	406.3	435.3	476.5	542.2
57.5°	310.0	314.6	323.8	326.8	331.4	336.0	340.6	355.9	380.3	420.0	473.5
60°	264.2	267.3	276.4	282.5	285.6	297.8	303.9	316.1	329.9	358.9	409.3
62.5°	212.3	215.3	219.9	226.0	232.1	250.5	265.7	278.0	288.7	308.5	349.7
65°	184.8	186.3	189.4	190.9	192.4	200.1	213.8	230.6	250.5	265.7	290.2
67.5°	160.4	161.9	163.4	166.5	168.0	169.5	175.6	180.2	200.1	221.5	239.8
70°	137.5	140.5	142.0	142.0	143.6	146.6	149.7	155.8	161.9	172.6	195.5
72.5°	116.1	117.6	120.7	120.7	120.7	123.7	126.8	129.8	132.9	139.0	148.1
75°	96.2	99.3	99.3	99.3	100.8	100.8	103.9	106.9	110.0	114.5	117.6
77.5°	79.4	79.4	79.4	79.4	80.9	80.9	82.5	85.5	87.1	88.6	91.6
80°	59.6	61.1	61.1	61.1	62.6	62.6	62.6	65.7	67.2	67.2	70.3
82.5°	44.3	44.3	44.3	45.8	44.3	45.8	45.8	47.3	45.8	47.3	48.9
85°	27.5	27.5	27.5	29.0	29.0	29.0	29.0	29.0	29.0	29.0	30.5
87.5°	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7	15.3	13.7	13.7
90°	33.0	32.7	32.5	32.4	32.6	33.1	33.5	34.0	34.4	29.6	24.8
92.5°	31.4	31.4	31.4	31.4	31.3	31.1	30.9	30.7	30.5	30.3	30.1
95°	61.8	62.2	62.7	62.9	62.9	62.9	62.9	62.9	62.9	62.5	62.0
97.5°	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	97.3	96.5
100°	135.0	135.3	135.5	135.6	135.6	135.6	135.6	135.6	135.6	134.9	134.3
102.5°	176.2	176.5	176.7	176.8	176.7	176.5	176.2	176.0	175.8	174.9	174.1
105°	218.1	218.1	218.1	218.1	217.9	217.4	217.0	216.5	216.1	215.7	215.3
107.5°	258.6	259.7	260.8	261.3	261.2	261.0	260.7	260.5	260.3	260.3	260.3
110°	303.9	304.5	305.2	305.5	305.5	305.5	305.5	305.5	305.5	305.5	305.5

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	347.6	348.1	348.5	348.7	349.0	349.7	350.4	351.0	351.7	351.9	352.1
115°	394.3	394.9	395.6	395.9	396.0	396.2	396.5	396.7	396.9	397.3	397.7
117.5°	437.5	438.1	438.8	439.1	439.4	440.1	440.8	441.4	442.1	443.2	444.3
120°	483.7	484.3	485.0	485.3	485.3	485.3	485.3	485.3	485.3	487.1	488.8
122.5°	528.4	528.8	529.3	529.5	529.8	530.5	531.2	531.8	532.5	533.6	534.7
125°	574.1	574.4	574.6	574.7	575.0	575.7	576.3	577.0	577.6	578.3	578.9
127.5°	616.3	616.9	617.6	617.9	618.3	619.2	620.1	621.0	621.9	622.8	623.6
130°	661.9	662.8	663.7	664.1	664.3	664.8	665.2	665.7	666.1	666.5	666.9
132.5°	704.7	705.3	706.0	706.3	706.8	707.9	709.0	710.1	711.2	711.0	710.8
135°	749.9	750.5	751.2	751.5	751.6	751.8	752.1	752.3	752.5	752.1	751.6
137.5°	790.6	791.5	792.4	792.8	792.9	793.1	793.4	793.6	793.8	793.4	792.9
140°	832.8	833.7	834.6	835.0	835.0	835.0	835.0	835.0	835.0	833.9	832.8
142.5°	871.1	872.0	872.9	873.3	873.2	873.0	872.8	872.6	872.4	871.7	871.1
145°	909.5	910.4	911.3	911.7	911.6	911.4	911.1	910.9	910.7	909.4	908.1
147.5°	943.8	944.7	945.6	946.0	945.8	945.4	944.9	944.5	944.1	943.2	942.3
150°	976.8	977.5	978.2	978.5	978.2	977.5	976.8	976.2	975.5	974.6	973.8
152.5°	1008.7	1009.6	1010.5	1010.9	1010.5	1009.6	1008.7	1007.8	1006.9	1005.8	1004.7
155°	1035.8	1036.4	1037.1	1037.4	1036.9	1035.8	1034.7	1033.6	1032.5	1031.8	1031.2
157.5°	1061.2	1062.3	1063.4	1063.9	1063.1	1061.6	1060.1	1058.5	1057.0	1056.6	1056.2
160°	1083.3	1084.2	1085.1	1085.5	1084.8	1083.5	1082.2	1080.9	1079.6	1079.4	1079.2
162.5°	1103.5	1104.6	1105.7	1106.2	1105.4	1103.9	1102.4	1100.8	1099.3	1099.1	1098.9
165°	1120.2	1121.3	1122.4	1122.9	1122.1	1120.6	1119.1	1117.5	1116.0	1116.0	1116.0
167.5°	1134.9	1136.0	1137.1	1137.6	1136.8	1135.3	1133.8	1132.2	1130.7	1130.7	1130.7
170°	1146.1	1147.4	1148.7	1149.4	1148.6	1147.1	1145.6	1144.0	1142.5	1142.7	1142.9
172.5°	1154.9	1156.2	1157.5	1158.2	1157.4	1155.9	1154.4	1152.9	1151.4	1151.6	1151.8
175°	1160.8	1162.1	1163.4	1164.1	1163.3	1161.8	1160.3	1158.8	1157.3	1157.7	1158.1
177.5°	1163.8	1165.1	1166.4	1167.1	1166.4	1165.1	1163.8	1162.5	1161.2	1161.6	1162.0
180°	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8
2.5°	2243.6	2235.9	2235.9	2231.4	2231.4	2206.9	2206.9	2214.6	2205.4	2194.7	2179.4
5°	2301.6	2284.8	2280.2	2274.1	2254.3	2223.7	2211.5	2206.9	2188.6	2165.7	2139.7
7.5°	2356.6	2329.1	2315.4	2301.6	2275.7	2232.9	2208.4	2191.6	2164.2	2129.0	2095.4
10°	2410.1	2374.9	2339.8	2323.0	2286.3	2232.9	2197.8	2170.3	2130.6	2083.2	2035.9
12.5°	2458.9	2385.6	2379.5	2345.9	2292.5	2231.4	2177.9	2138.2	2087.8	2032.8	1977.8
15°	2501.7	2426.9	2390.2	2359.7	2289.4	2213.0	2156.5	2107.6	2040.4	1977.8	1910.6
17.5°	2523.1	2442.1	2417.7	2367.3	2295.5	2196.2	2119.9	2060.3	1987.0	1912.2	1835.8
20°	2544.5	2449.8	2410.1	2374.9	2277.2	2164.2	2078.6	2009.9	1929.0	1840.4	1756.4
22.5°	2555.1	2449.8	2402.4	2353.5	2258.9	2129.0	2028.2	1947.3	1852.6	1762.5	1661.7
25°	2536.8	2440.6	2384.1	2333.7	2226.8	2086.3	1970.2	1878.6	1777.8	1675.4	1573.1
27.5°	2491.0	2419.2	2353.5	2301.6	2182.5	2031.3	1909.1	1805.2	1701.4	1586.8	1483.0
30°	2405.5	2373.4	2321.5	2263.4	2133.6	1982.4	1837.3	1730.4	1615.9	1501.3	1392.9
32.5°	2272.6	2300.1	2266.5	2216.1	2075.6	1915.2	1761.0	1652.5	1527.3	1403.6	1304.3
35°	2110.7	2208.4	2190.1	2155.0	2014.5	1843.4	1689.2	1557.8	1432.6	1307.4	1208.1
37.5°	1933.5	2081.7	2097.0	2075.6	1944.2	1770.1	1600.6	1472.3	1344.0	1217.2	1116.4
40°	1690.7	1918.3	1967.1	1976.3	1870.9	1681.5	1504.4	1379.1	1252.4	1128.7	1006.5
42.5°	1467.7	1754.8	1815.9	1854.1	1777.8	1594.5	1415.8	1276.8	1151.6	1040.1	917.9
45°	1258.5	1557.8	1657.1	1706.0	1672.4	1495.2	1310.4	1180.6	1066.0	963.7	846.1
47.5°	1043.1	1344.0	1483.0	1560.9	1560.9	1394.4	1209.6	1081.3	971.4	884.3	780.4
50°	899.6	1150.0	1293.6	1395.9	1423.4	1292.1	1118.0	992.7	888.9	794.2	714.8
52.5°	766.7	991.2	1110.3	1217.2	1296.7	1182.1	1015.6	902.6	800.3	711.7	649.1
55°	662.8	830.8	939.3	1056.9	1145.5	1070.6	916.4	806.4	717.8	644.5	591.1
57.5°	563.6	710.2	798.8	902.6	997.3	940.8	817.1	722.4	644.5	580.4	533.0
60°	479.6	598.7	667.4	748.4	866.0	826.3	723.9	636.9	574.3	516.2	476.5
62.5°	407.8	502.5	560.5	618.5	725.5	707.1	627.7	560.5	507.1	458.2	424.6
65°	334.5	412.4	458.2	508.6	594.1	601.7	537.6	490.3	441.4	398.6	368.1
67.5°	270.3	331.4	372.7	415.4	484.1	505.5	461.2	421.5	380.3	345.2	317.7
70°	218.4	261.2	291.7	325.3	381.8	407.8	384.9	357.4	323.8	294.8	270.3
72.5°	172.6	200.1	218.4	244.4	290.2	316.1	314.6	290.2	265.7	245.9	226.0
75°	126.8	148.1	163.4	180.2	216.9	241.3	247.4	236.7	212.3	197.0	181.7
77.5°	96.2	108.4	116.1	128.3	154.3	175.6	184.8	181.7	164.9	152.7	142.0
80°	73.3	76.4	79.4	84.0	105.4	125.2	131.3	129.8	120.7	116.1	103.9
82.5°	51.9	53.5	55.0	56.5	64.1	80.9	87.1	90.1	82.5	77.9	67.2
85°	30.5	32.1	32.1	35.1	36.7	41.2	51.9	51.9	50.4	44.3	42.8
87.5°	15.3	15.3	13.7	13.7	15.3	16.8	19.9	22.9	19.9	18.3	16.8
90°	20.0	15.2	12.8	11.5	8.9	6.2	3.6	1.0	3.6	6.2	8.9
92.5°	29.8	29.6	29.5	28.6	26.9	25.1	23.4	21.6	23.4	25.1	26.9
95°	61.6	61.1	60.9	59.8	57.6	55.5	53.3	51.1	53.3	55.5	57.6
97.5°	95.6	94.7	94.3	93.3	91.4	89.4	87.5	85.5	87.5	89.4	91.4
100°	133.6	132.9	132.6	131.7	130.0	128.3	126.5	124.8	126.5	128.3	130.0
102.5°	173.2	172.3	171.9	171.2	169.9	168.6	167.3	166.0	167.3	168.6	169.9
105°	214.8	214.4	214.2	213.9	213.2	212.5	211.9	211.2	211.9	212.5	213.2
107.5°	260.3	260.3	260.3	259.9	259.0	258.1	257.3	256.4	257.3	258.1	259.0
110°	305.5	305.5	305.5	304.8	303.5	302.2	300.9	299.6	300.9	302.2	303.5

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	352.4	352.6	352.7	352.0	350.7	349.4	348.1	346.8	348.1	349.4	350.7
115°	398.2	398.6	398.8	398.2	396.9	395.6	394.3	393.0	394.3	395.6	396.9
117.5°	445.4	446.5	447.0	446.1	444.4	442.6	440.9	439.1	440.9	442.6	444.4
120°	490.6	492.3	493.2	492.3	490.6	488.8	487.1	485.3	487.1	488.8	490.6
122.5°	535.8	536.9	537.4	536.3	534.1	531.9	529.7	527.5	529.7	531.9	534.1
125°	579.6	580.3	580.6	579.6	577.6	575.7	573.7	571.7	573.7	575.7	577.6
127.5°	624.5	625.4	625.8	624.6	622.2	619.8	617.4	615.0	617.4	619.8	622.2
130°	667.4	667.8	668.0	666.6	663.8	660.9	658.1	655.3	658.1	660.9	663.8
132.5°	710.6	710.4	710.3	709.2	707.0	704.8	702.6	700.4	702.6	704.8	707.0
135°	751.2	750.7	750.5	749.3	746.9	744.5	742.1	739.7	742.1	744.5	746.9
137.5°	792.5	792.0	791.8	790.8	788.9	786.9	785.0	783.0	785.0	786.9	788.9
140°	831.7	830.6	830.1	829.1	827.2	825.2	823.3	821.3	823.3	825.2	827.2
142.5°	870.4	869.7	869.4	868.4	866.5	864.5	862.6	860.6	862.6	864.5	866.5
145°	906.8	905.5	904.8	904.0	902.5	901.0	899.4	897.9	899.4	901.0	902.5
147.5°	941.4	940.5	940.1	939.1	937.2	935.2	933.3	931.3	933.3	935.2	937.2
150°	972.9	972.0	971.6	970.9	969.6	968.3	967.0	965.7	967.0	968.3	969.6
152.5°	1003.6	1002.5	1002.0	1001.3	1000.0	998.7	997.4	996.1	997.4	998.7	1000.0
155°	1030.5	1029.8	1029.5	1029.2	1028.5	1027.9	1027.2	1026.6	1027.2	1027.9	1028.5
157.5°	1055.7	1055.3	1055.1	1054.9	1054.4	1054.0	1053.5	1053.1	1053.5	1054.0	1054.4
160°	1079.0	1078.8	1078.7	1078.5	1078.0	1077.6	1077.1	1076.7	1077.1	1077.6	1078.0
162.5°	1098.6	1098.4	1098.3	1098.3	1098.3	1098.3	1098.3	1098.3	1098.3	1098.3	1098.3
165°	1116.0	1116.0	1116.0	1116.1	1116.3	1116.6	1116.8	1117.0	1116.8	1116.6	1116.3
167.5°	1130.7	1130.7	1130.7	1131.0	1131.7	1132.4	1133.0	1133.7	1133.0	1132.4	1131.7
170°	1143.2	1143.4	1143.5	1143.8	1144.5	1145.1	1145.8	1146.4	1145.8	1145.1	1144.5
172.5°	1152.0	1152.2	1152.3	1152.6	1153.3	1154.0	1154.6	1155.3	1154.6	1154.0	1153.3
175°	1158.6	1159.0	1159.2	1159.5	1160.2	1160.9	1161.5	1162.2	1161.5	1160.9	1160.2
177.5°	1162.5	1162.9	1163.1	1163.4	1164.1	1164.8	1165.4	1166.1	1165.4	1164.8	1164.1
180°	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8
2.5°	2173.3	2174.8	2179.4	2165.7	2144.3	2135.1	2107.6	2103.1	2098.5	2098.5	2103.1
5°	2124.4	2118.3	2119.9	2093.9	2063.4	2045.0	2006.8	2013.0	1993.1	1980.9	1983.9
7.5°	2071.0	2054.2	2052.7	2019.1	1980.9	1947.3	1907.6	1898.4	1880.1	1858.7	1849.5
10°	2003.8	1991.6	1968.7	1930.5	1881.6	1854.1	1800.7	1768.6	1764.0	1731.9	1719.7
12.5°	1935.1	1913.7	1890.8	1837.3	1782.3	1738.0	1698.3	1663.2	1638.8	1611.3	1593.0
15°	1855.6	1829.7	1803.7	1747.2	1683.1	1638.8	1579.2	1527.3	1455.5	1399.0	1366.9
17.5°	1768.6	1739.6	1704.4	1641.8	1579.2	1518.1	1408.2	1347.1	1296.7	1263.1	1243.2
20°	1678.5	1646.4	1611.3	1548.7	1440.2	1333.3	1272.2	1224.9	1194.3	1160.7	1136.3
22.5°	1583.8	1550.2	1512.0	1414.3	1299.7	1224.9	1177.5	1133.2	1089.0	1070.6	1058.4
25°	1495.2	1464.7	1415.8	1282.9	1192.8	1124.1	1070.6	1041.6	1018.7	994.3	971.4
27.5°	1403.6	1347.1	1278.3	1166.8	1110.3	1040.1	1001.9	980.5	940.8	924.0	913.3
30°	1293.6	1231.0	1165.3	1085.9	1020.2	971.4	936.2	901.1	878.2	861.4	843.1
32.5°	1182.1	1122.6	1081.3	998.8	950.0	899.6	866.0	844.6	811.0	800.3	792.7
35°	1085.9	1035.5	998.8	931.6	885.8	840.0	815.6	783.5	762.1	742.3	730.0
37.5°	991.2	963.7	925.5	869.0	820.2	783.5	749.9	739.2	710.2	699.5	687.3
40°	925.5	884.3	852.2	803.4	762.1	722.4	701.0	676.6	656.7	639.9	635.3
42.5°	846.1	815.6	797.2	743.8	701.0	678.1	652.1	624.7	609.4	595.6	578.8
45°	786.6	759.1	733.1	690.3	652.1	623.1	600.2	581.9	555.9	549.8	523.9
47.5°	723.9	696.4	676.6	633.8	598.7	571.2	554.4	530.0	508.6	494.8	482.6
50°	661.3	638.4	620.1	583.4	552.9	523.9	500.9	476.5	467.3	444.4	436.8
52.5°	601.7	586.5	566.6	531.5	500.9	476.5	452.1	432.2	418.5	406.3	397.1
55°	551.3	526.9	517.7	479.6	453.6	427.6	406.3	394.0	377.2	369.6	362.0
57.5°	494.8	481.1	465.8	436.8	407.8	383.3	368.1	349.7	340.6	331.4	325.3
60°	446.0	426.1	413.9	389.5	363.5	340.6	326.8	313.1	300.9	293.2	281.0
62.5°	389.5	374.2	366.5	340.6	319.2	297.8	285.6	271.9	262.7	248.9	233.7
65°	340.6	328.4	319.2	297.8	278.0	258.1	245.9	229.1	216.9	209.2	207.7
67.5°	297.8	288.7	274.9	255.1	235.2	219.9	206.2	192.4	190.9	187.9	187.9
70°	250.5	241.3	233.7	212.3	195.5	178.7	175.6	171.1	166.5	164.9	161.9
72.5°	209.2	201.6	192.4	174.1	157.3	152.7	149.7	146.6	142.0	140.5	139.0
75°	169.5	158.8	152.7	135.9	131.3	128.3	125.2	120.7	117.6	116.1	113.0
77.5°	129.8	119.1	119.1	110.0	106.9	102.3	99.3	96.2	94.7	91.6	91.6
80°	91.6	91.6	88.6	84.0	79.4	77.9	73.3	71.8	70.3	71.8	68.7
82.5°	67.2	61.1	61.1	58.0	55.0	53.5	50.4	50.4	48.9	48.9	48.9
85°	38.2	38.2	36.7	33.6	32.1	32.1	30.5	30.5	29.0	29.0	27.5
87.5°	15.3	13.7	15.3	13.7	13.7	12.2	12.2	12.2	10.7	12.2	10.7
90°	11.5	12.8	15.2	20.0	24.8	29.6	34.4	34.0	33.5	33.1	32.6
92.5°	28.6	29.5	29.6	29.8	30.1	30.3	30.5	30.7	30.9	31.1	31.3
95°	59.8	60.9	61.1	61.6	62.0	62.5	62.9	62.9	62.9	62.9	62.9
97.5°	93.3	94.3	94.7	95.6	96.5	97.3	98.2	98.2	98.2	98.2	98.2
100°	131.7	132.6	132.9	133.6	134.3	134.9	135.6	135.6	135.6	135.6	135.6
102.5°	171.2	171.9	172.3	173.2	174.1	174.9	175.8	176.0	176.2	176.5	176.7
105°	213.9	214.2	214.4	214.8	215.3	215.7	216.1	216.5	217.0	217.4	217.9
107.5°	259.9	260.3	260.3	260.3	260.3	260.3	260.3	260.5	260.7	261.0	261.2
110°	304.8	305.5	305.5	305.5	305.5	305.5	305.5	305.5	305.5	305.5	305.5

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	352.0	352.7	352.6	352.4	352.1	351.9	351.7	351.0	350.4	349.7	349.0
115°	398.2	398.8	398.6	398.2	397.7	397.3	396.9	396.7	396.5	396.2	396.0
117.5°	446.1	447.0	446.5	445.4	444.3	443.2	442.1	441.4	440.8	440.1	439.4
120°	492.3	493.2	492.3	490.6	488.8	487.1	485.3	485.3	485.3	485.3	485.3
122.5°	536.3	537.4	536.9	535.8	534.7	533.6	532.5	531.8	531.2	530.5	529.8
125°	579.6	580.6	580.3	579.6	578.9	578.3	577.6	577.0	576.3	575.7	575.0
127.5°	624.6	625.8	625.4	624.5	623.6	622.8	621.9	621.0	620.1	619.2	618.3
130°	666.6	668.0	667.8	667.4	666.9	666.5	666.1	665.7	665.2	664.8	664.3
132.5°	709.2	710.3	710.4	710.6	710.8	711.0	711.2	710.1	709.0	707.9	706.8
135°	749.3	750.5	750.7	751.2	751.6	752.1	752.5	752.3	752.1	751.8	751.6
137.5°	790.8	791.8	792.0	792.5	792.9	793.4	793.8	793.6	793.4	793.1	792.9
140°	829.1	830.1	830.6	831.7	832.8	833.9	835.0	835.0	835.0	835.0	835.0
142.5°	868.4	869.4	869.7	870.4	871.1	871.7	872.4	872.6	872.8	873.0	873.2
145°	904.0	904.8	905.5	906.8	908.1	909.4	910.7	910.9	911.1	911.4	911.6
147.5°	939.1	940.1	940.5	941.4	942.3	943.2	944.1	944.5	944.9	945.4	945.8
150°	970.9	971.6	972.0	972.9	973.8	974.6	975.5	976.2	976.8	977.5	978.2
152.5°	1001.3	1002.0	1002.5	1003.6	1004.7	1005.8	1006.9	1007.8	1008.7	1009.6	1010.5
155°	1029.2	1029.5	1029.8	1030.5	1031.2	1031.8	1032.5	1033.6	1034.7	1035.8	1036.9
157.5°	1054.9	1055.1	1055.3	1055.7	1056.2	1056.6	1057.0	1058.5	1060.1	1061.6	1063.1
160°	1078.5	1078.7	1078.8	1079.0	1079.2	1079.4	1079.6	1080.9	1082.2	1083.5	1084.8
162.5°	1098.3	1098.3	1098.4	1098.6	1098.9	1099.1	1099.3	1100.8	1102.4	1103.9	1105.4
165°	1116.1	1116.0	1116.0	1116.0	1116.0	1116.0	1116.0	1117.5	1119.1	1120.6	1122.1
167.5°	1131.0	1130.7	1130.7	1130.7	1130.7	1130.7	1130.7	1132.2	1133.8	1135.3	1136.8
170°	1143.8	1143.5	1143.4	1143.2	1142.9	1142.7	1142.5	1144.0	1145.6	1147.1	1148.6
172.5°	1152.6	1152.3	1152.2	1152.0	1151.8	1151.6	1151.4	1152.9	1154.4	1155.9	1157.4
175°	1159.5	1159.2	1159.0	1158.6	1158.1	1157.7	1157.3	1158.8	1160.3	1161.8	1163.3
177.5°	1163.4	1163.1	1162.9	1162.5	1162.0	1161.6	1161.2	1162.5	1163.8	1165.1	1166.4
180°	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8
2.5°	2103.1	2100.0	2090.8	2093.9	2089.3	2089.3	2086.3	2086.3	2086.3	2093.9	2089.3
5°	1988.5	1977.8	1967.1	1962.6	1958.0	1953.4	1953.4	1951.9	1965.6	1962.6	1974.8
7.5°	1846.5	1843.4	1822.0	1822.0	1814.4	1811.4	1819.0	1820.5	1822.0	1825.1	1832.7
10°	1719.7	1712.1	1681.5	1684.6	1680.0	1673.9	1678.5	1675.4	1686.1	1689.2	1686.1
12.5°	1570.0	1556.3	1522.7	1505.9	1487.6	1473.8	1490.6	1478.4	1521.2	1533.4	1567.0
15°	1371.5	1345.5	1322.6	1322.6	1305.8	1293.6	1301.2	1315.0	1324.2	1337.9	1344.0
17.5°	1238.6	1227.9	1209.6	1198.9	1194.3	1189.8	1189.8	1195.9	1215.7	1214.2	1226.4
20°	1125.6	1119.5	1110.3	1096.6	1092.0	1089.0	1089.0	1089.0	1102.7	1114.9	1122.6
22.5°	1047.7	1043.1	1037.0	1018.7	1009.5	1006.5	1014.1	1018.7	1029.4	1038.6	1046.2
25°	969.8	959.1	948.4	942.3	937.8	937.8	940.8	942.3	946.9	951.5	960.7
27.5°	905.7	898.0	882.8	866.0	866.0	861.4	864.4	867.5	878.2	893.5	901.1
30°	833.9	832.4	826.3	820.2	814.0	811.0	817.1	821.7	823.2	830.8	830.8
32.5°	782.0	771.3	760.6	754.5	751.4	749.9	751.4	757.5	757.5	766.7	777.4
35°	730.0	723.9	713.2	702.5	699.5	691.9	698.0	704.1	714.8	719.3	723.9
37.5°	673.5	665.9	661.3	658.3	652.1	653.7	649.1	658.3	667.4	665.9	668.9
40°	630.8	617.0	603.3	601.7	600.2	598.7	598.7	600.2	606.3	612.4	621.6
42.5°	575.8	571.2	559.0	546.8	543.7	540.7	537.6	543.7	555.9	566.6	571.2
45°	519.3	513.2	510.1	500.9	494.8	493.3	490.3	497.9	508.6	513.2	516.2
47.5°	467.3	465.8	456.7	458.2	453.6	455.1	453.6	458.2	458.2	462.8	465.8
50°	432.2	427.6	423.1	420.0	415.4	415.4	413.9	415.4	421.5	427.6	426.1
52.5°	397.1	389.5	387.9	386.4	383.3	386.4	381.8	383.3	389.5	392.5	391.0
55°	355.9	354.3	351.3	348.2	346.7	345.2	345.2	345.2	351.3	355.9	357.4
57.5°	323.8	316.1	310.0	310.0	303.9	302.4	305.5	307.0	311.6	314.6	317.7
60°	279.5	276.4	267.3	262.7	253.5	252.0	252.0	258.1	265.7	276.4	279.5
62.5°	232.1	227.6	226.0	226.0	226.0	226.0	226.0	226.0	226.0	227.6	227.6
65°	206.2	207.7	206.2	204.7	206.2	206.2	204.7	204.7	204.7	206.2	207.7
67.5°	184.8	183.3	184.8	183.3	181.7	181.7	180.2	181.7	183.3	184.8	184.8
70°	160.4	160.4	158.8	160.4	158.8	157.3	155.8	155.8	158.8	160.4	160.4
72.5°	137.5	137.5	135.9	135.9	132.9	132.9	134.4	132.9	132.9	137.5	137.5
75°	114.5	113.0	111.5	111.5	110.0	110.0	110.0	108.4	111.5	111.5	113.0
77.5°	90.1	90.1	90.1	88.6	88.6	87.1	87.1	88.6	88.6	88.6	90.1
80°	68.7	68.7	68.7	67.2	65.7	65.7	65.7	65.7	65.7	67.2	65.7
82.5°	47.3	47.3	47.3	47.3	47.3	45.8	45.8	45.8	47.3	47.3	45.8
85°	29.0	27.5	29.0	29.0	27.5	29.0	27.5	27.5	26.0	26.0	27.5
87.5°	12.2	10.7	9.2	9.2	10.7	9.2	9.2	9.2	10.7	9.2	9.2
90°	32.4	32.5	32.7	33.0	33.2	33.4	33.2	33.0	32.7	32.5	32.4
92.5°	31.4	31.4	31.4	31.4	31.4	31.4	31.4	31.4	31.4	31.4	31.4
95°	62.9	62.7	62.2	61.8	61.3	60.9	61.3	61.8	62.2	62.7	62.9
97.5°	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
100°	135.6	135.5	135.3	135.0	134.8	134.6	134.8	135.0	135.3	135.5	135.6
102.5°	176.8	176.7	176.5	176.2	176.0	175.8	176.0	176.2	176.5	176.7	176.8
105°	218.1	218.1	218.1	218.1	218.1	218.1	218.1	218.1	218.1	218.1	218.1
107.5°	261.3	260.8	259.7	258.6	257.5	256.4	257.5	258.6	259.7	260.8	261.3
110°	305.5	305.2	304.5	303.9	303.2	302.6	303.2	303.9	304.5	305.2	305.5

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	348.7	348.5	348.1	347.6	347.2	346.8	347.2	347.6	348.1	348.5	348.7
115°	395.9	395.6	394.9	394.3	393.6	393.0	393.6	394.3	394.9	395.6	395.9
117.5°	439.1	438.8	438.1	437.5	436.8	436.2	436.8	437.5	438.1	438.8	439.1
120°	485.3	485.0	484.3	483.7	483.0	482.4	483.0	483.7	484.3	485.0	485.3
122.5°	529.5	529.3	528.8	528.4	527.9	527.5	527.9	528.4	528.8	529.3	529.5
125°	574.7	574.6	574.4	574.1	573.9	573.7	573.9	574.1	574.4	574.6	574.7
127.5°	617.9	617.6	616.9	616.3	615.6	615.0	615.6	616.3	616.9	617.6	617.9
130°	664.1	663.7	662.8	661.9	661.1	660.2	661.1	661.9	662.8	663.7	664.1
132.5°	706.3	706.0	705.3	704.7	704.0	703.4	704.0	704.7	705.3	706.0	706.3
135°	751.5	751.2	750.5	749.9	749.2	748.6	749.2	749.9	750.5	751.2	751.5
137.5°	792.8	792.4	791.5	790.6	789.8	788.9	789.8	790.6	791.5	792.4	792.8
140°	835.0	834.6	833.7	832.8	832.0	831.1	832.0	832.8	833.7	834.6	835.0
142.5°	873.3	872.9	872.0	871.1	870.3	869.4	870.3	871.1	872.0	872.9	873.3
145°	911.7	911.3	910.4	909.5	908.6	907.7	908.6	909.5	910.4	911.3	911.7
147.5°	946.0	945.6	944.7	943.8	943.0	942.1	943.0	943.8	944.7	945.6	946.0
150°	978.5	978.2	977.5	976.8	976.2	975.5	976.2	976.8	977.5	978.2	978.5
152.5°	1010.9	1010.5	1009.6	1008.7	1007.8	1006.9	1007.8	1008.7	1009.6	1010.5	1010.9
155°	1037.4	1037.1	1036.4	1035.8	1035.1	1034.5	1035.1	1035.8	1036.4	1037.1	1037.4
157.5°	1063.9	1063.4	1062.3	1061.2	1060.1	1059.0	1060.1	1061.2	1062.3	1063.4	1063.9
160°	1085.5	1085.1	1084.2	1083.3	1082.5	1081.6	1082.5	1083.3	1084.2	1085.1	1085.5
162.5°	1106.2	1105.7	1104.6	1103.5	1102.4	1101.3	1102.4	1103.5	1104.6	1105.7	1106.2
165°	1122.9	1122.4	1121.3	1120.2	1119.1	1118.0	1119.1	1120.2	1121.3	1122.4	1122.9
167.5°	1137.6	1137.1	1136.0	1134.9	1133.8	1132.7	1133.8	1134.9	1136.0	1137.1	1137.6
170°	1149.4	1148.7	1147.4	1146.1	1144.8	1143.5	1144.8	1146.1	1147.4	1148.7	1149.4
172.5°	1158.2	1157.5	1156.2	1154.9	1153.6	1152.3	1153.6	1154.9	1156.2	1157.5	1158.2
175°	1164.1	1163.4	1162.1	1160.8	1159.5	1158.2	1159.5	1160.8	1162.1	1163.4	1164.1
177.5°	1167.1	1166.4	1165.1	1163.8	1162.5	1161.2	1162.5	1163.8	1165.1	1166.4	1167.1
180°	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8	2197.8
2.5°	2093.9	2101.5	2098.5	2081.7	2098.5	2103.1	2112.2	2121.4	2127.5	2136.7	2144.3
5°	1962.6	1977.8	1987.0	1977.8	2008.4	2013.0	2034.3	2046.6	2064.9	2080.2	2092.4
7.5°	1838.8	1851.1	1869.4	1872.4	1890.8	1912.2	1942.7	1973.2	2002.3	2017.5	2031.3
10°	1706.0	1727.4	1754.8	1748.7	1776.2	1809.8	1841.9	1890.8	1915.2	1942.7	1967.1
12.5°	1573.1	1586.8	1623.5	1635.7	1675.4	1701.4	1745.7	1776.2	1837.3	1869.4	1890.8
15°	1341.0	1397.5	1443.3	1498.3	1550.2	1599.1	1638.8	1693.8	1747.2	1771.6	1806.8
17.5°	1235.6	1261.5	1289.0	1316.5	1383.7	1470.8	1541.0	1600.6	1646.4	1678.5	1719.7
20°	1125.6	1151.6	1182.1	1208.1	1249.3	1311.9	1399.0	1501.3	1556.3	1589.9	1629.6
22.5°	1047.7	1072.2	1092.0	1114.9	1147.0	1192.8	1258.5	1385.2	1458.6	1499.8	1534.9
25°	963.7	994.3	1015.6	1032.4	1058.4	1108.8	1162.3	1234.0	1365.4	1397.5	1446.3
27.5°	905.7	914.8	939.3	965.2	991.2	1018.7	1073.7	1134.8	1223.4	1293.6	1353.2
30°	837.0	859.9	882.8	893.5	916.4	956.1	989.7	1055.4	1124.1	1179.1	1250.8
32.5°	785.0	798.8	814.0	840.0	861.4	888.9	922.5	977.5	1035.5	1070.6	1125.6
35°	727.0	736.1	768.2	778.9	800.3	827.8	861.4	904.2	966.8	994.3	1034.0
37.5°	672.0	693.4	702.5	727.0	746.8	774.3	798.8	847.6	888.9	921.0	957.6
40°	629.2	638.4	655.2	676.6	693.4	714.8	745.3	780.4	824.7	850.7	882.8
42.5°	577.3	584.9	606.3	618.5	646.0	665.9	684.2	727.0	766.7	786.6	818.6
45°	520.8	539.1	552.9	577.3	592.6	617.0	639.9	670.5	707.1	730.0	748.4
47.5°	471.9	490.3	504.0	526.9	551.3	562.0	586.5	618.5	652.1	670.5	696.4
50°	432.2	438.3	464.3	475.0	500.9	522.3	539.1	566.6	603.3	614.0	635.3
52.5°	394.0	398.6	415.4	429.2	452.1	470.4	491.8	517.7	548.3	565.1	581.9
55°	360.4	363.5	371.1	386.4	401.7	424.6	444.4	468.9	494.8	513.2	528.4
57.5°	322.3	328.4	334.5	343.6	358.9	380.3	401.7	424.6	446.0	458.2	478.0
60°	278.0	287.1	297.8	308.5	319.2	334.5	358.9	380.3	400.1	410.8	426.1
62.5°	230.6	248.9	258.1	270.3	279.5	293.2	311.6	336.0	349.7	363.5	375.7
65°	207.7	209.2	210.8	223.0	239.8	253.5	270.3	288.7	310.0	319.2	328.4
67.5°	184.8	186.3	189.4	190.9	197.0	212.3	230.6	250.5	267.3	273.4	282.5
70°	161.9	161.9	168.0	169.5	171.1	172.6	187.9	207.7	223.0	230.6	241.3
72.5°	137.5	139.0	142.0	143.6	146.6	149.7	154.3	164.9	183.3	190.9	203.1
75°	113.0	114.5	116.1	117.6	122.2	123.7	128.3	134.4	142.0	151.2	158.8
77.5°	90.1	90.1	91.6	94.7	97.7	99.3	103.9	106.9	110.0	114.5	120.7
80°	67.2	68.7	68.7	71.8	71.8	73.3	74.8	79.4	82.5	85.5	88.6
82.5°	45.8	48.9	48.9	48.9	50.4	51.9	53.5	53.5	56.5	58.0	62.6
85°	27.5	29.0	29.0	29.0	27.5	30.5	30.5	32.1	32.1	32.1	33.6
87.5°	10.7	9.2	10.7	10.7	10.7	12.2	10.7	10.7	12.2	13.7	13.7
90°	32.6	33.1	33.5	34.0	34.4	29.6	24.8	20.0	15.2	12.8	11.5
92.5°	31.3	31.1	30.9	30.7	30.5	30.3	30.1	29.8	29.6	29.5	28.6
95°	62.9	62.9	62.9	62.9	62.9	62.5	62.0	61.6	61.1	60.9	59.8
97.5°	98.2	98.2	98.2	98.2	98.2	97.3	96.5	95.6	94.7	94.3	93.3
100°	135.6	135.6	135.6	135.6	135.6	134.9	134.3	133.6	132.9	132.6	131.7
102.5°	176.7	176.5	176.2	176.0	175.8	174.9	174.1	173.2	172.3	171.9	171.2
105°	217.9	217.4	217.0	216.5	216.1	215.7	215.3	214.8	214.4	214.2	213.9
107.5°	261.2	261.0	260.7	260.5	260.3	260.3	260.3	260.3	260.3	260.3	259.9
110°	305.5	305.5	305.5	305.5	305.5	305.5	305.5	305.5	305.5	305.5	304.8

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	349.0	349.7	350.4	351.0	351.7	351.9	352.1	352.4	352.6	352.7	352.0
115°	396.0	396.2	396.5	396.7	396.9	397.3	397.7	398.2	398.6	398.8	398.2
117.5°	439.4	440.1	440.8	441.4	442.1	443.2	444.3	445.4	446.5	447.0	446.1
120°	485.3	485.3	485.3	485.3	485.3	487.1	488.8	490.6	492.3	493.2	492.3
122.5°	529.8	530.5	531.2	531.8	532.5	533.6	534.7	535.8	536.9	537.4	536.3
125°	575.0	575.7	576.3	577.0	577.6	578.3	578.9	579.6	580.3	580.6	579.6
127.5°	618.3	619.2	620.1	621.0	621.9	622.8	623.6	624.5	625.4	625.8	624.6
130°	664.3	664.8	665.2	665.7	666.1	666.5	666.9	667.4	667.8	668.0	666.6
132.5°	706.8	707.9	709.0	710.1	711.2	711.0	710.8	710.6	710.4	710.3	709.2
135°	751.6	751.8	752.1	752.3	752.5	752.1	751.6	751.2	750.7	750.5	749.3
137.5°	792.9	793.1	793.4	793.6	793.8	793.4	792.9	792.5	792.0	791.8	790.8
140°	835.0	835.0	835.0	835.0	835.0	833.9	832.8	831.7	830.6	830.1	829.1
142.5°	873.2	873.0	872.8	872.6	872.4	871.7	871.1	870.4	869.7	869.4	868.4
145°	911.6	911.4	911.1	910.9	910.7	909.4	908.1	906.8	905.5	904.8	904.0
147.5°	945.8	945.4	944.9	944.5	944.1	943.2	942.3	941.4	940.5	940.1	939.1
150°	978.2	977.5	976.8	976.2	975.5	974.6	973.8	972.9	972.0	971.6	970.9
152.5°	1010.5	1009.6	1008.7	1007.8	1006.9	1005.8	1004.7	1003.6	1002.5	1002.0	1001.3
155°	1036.9	1035.8	1034.7	1033.6	1032.5	1031.8	1031.2	1030.5	1029.8	1029.5	1029.2
157.5°	1063.1	1061.6	1060.1	1058.5	1057.0	1056.6	1056.2	1055.7	1055.3	1055.1	1054.9
160°	1084.8	1083.5	1082.2	1080.9	1079.6	1079.4	1079.2	1079.0	1078.8	1078.7	1078.5
162.5°	1105.4	1103.9	1102.4	1100.8	1099.3	1099.1	1098.9	1098.6	1098.4	1098.3	1098.3
165°	1122.1	1120.6	1119.1	1117.5	1116.0	1116.0	1116.0	1116.0	1116.0	1116.0	1116.1
167.5°	1136.8	1135.3	1133.8	1132.2	1130.7	1130.7	1130.7	1130.7	1130.7	1130.7	1131.0
170°	1148.6	1147.1	1145.6	1144.0	1142.5	1142.7	1142.9	1143.2	1143.4	1143.5	1143.8
172.5°	1157.4	1155.9	1154.4	1152.9	1151.4	1151.6	1151.8	1152.0	1152.2	1152.3	1152.6
175°	1163.3	1161.8	1160.3	1158.8	1157.3	1157.7	1158.1	1158.6	1159.0	1159.2	1159.5
177.5°	1166.4	1165.1	1163.8	1162.5	1161.2	1161.6	1162.0	1162.5	1162.9	1163.1	1163.4
180°	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1	1164.1

TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	2197.8	2197.8	2197.8	2197.8
2.5°	2158.0	2153.5	2181.0	2211.5
5°	2113.8	2121.4	2156.5	2199.3
7.5°	2067.9	2084.7	2126.0	2182.5
10°	2003.8	2034.3	2097.0	2155.0
12.5°	1941.2	1982.4	2042.0	2110.7
15°	1870.9	1916.7	1990.0	2072.5
17.5°	1793.0	1845.0	1930.5	2020.6
20°	1710.6	1779.3	1869.4	1967.1
22.5°	1618.9	1701.4	1794.6	1903.0
25°	1530.3	1620.4	1713.6	1838.8
27.5°	1443.3	1531.9	1635.7	1762.5
30°	1356.2	1437.2	1548.7	1684.6
32.5°	1263.1	1347.1	1464.7	1603.6
35°	1177.5	1261.5	1371.5	1509.0
37.5°	1085.9	1176.0	1281.4	1423.4
40°	979.0	1084.4	1186.7	1322.6
42.5°	890.4	1001.9	1101.2	1229.5
45°	820.2	925.5	1008.0	1133.2
47.5°	754.5	840.0	924.0	1040.1
50°	691.9	757.5	844.6	948.4
52.5°	627.7	684.2	759.1	856.8
55°	569.7	623.1	690.3	765.2
57.5°	516.2	554.4	621.6	688.8
60°	456.7	496.4	548.3	604.8
62.5°	406.3	436.8	485.7	533.0
65°	352.8	381.8	418.5	462.8
67.5°	303.9	329.9	358.9	394.0
70°	259.6	279.5	300.9	331.4
72.5°	212.3	233.7	253.5	278.0
75°	174.1	183.3	200.1	216.9
77.5°	134.4	146.6	155.8	169.5
80°	96.2	106.9	110.0	120.7
82.5°	64.1	70.3	76.4	79.4
85°	36.7	39.7	45.8	47.3
87.5°	13.7	15.3	18.3	21.4
90°	8.9	6.2	3.6	1.0
92.5°	26.9	25.1	23.4	21.6
95°	57.6	55.5	53.3	51.1
97.5°	91.4	89.4	87.5	85.5
100°	130.0	128.3	126.5	124.8
102.5°	169.9	168.6	167.3	166.0
105°	213.2	212.5	211.9	211.2
107.5°	259.0	258.1	257.3	256.4
110°	303.5	302.2	300.9	299.6



TEST NUMBER: P999456

CATALOG NUMBER: SA2XXRDIP-B1005D925UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	350.7	349.4	348.1	346.8
115°	396.9	395.6	394.3	393.0
117.5°	444.4	442.6	440.9	439.1
120°	490.6	488.8	487.1	485.3
122.5°	534.1	531.9	529.7	527.5
125°	577.6	575.7	573.7	571.7
127.5°	622.2	619.8	617.4	615.0
130°	663.8	660.9	658.1	655.3
132.5°	707.0	704.8	702.6	700.4
135°	746.9	744.5	742.1	739.7
137.5°	788.9	786.9	785.0	783.0
140°	827.2	825.2	823.3	821.3
142.5°	866.5	864.5	862.6	860.6
145°	902.5	901.0	899.4	897.9
147.5°	937.2	935.2	933.3	931.3
150°	969.6	968.3	967.0	965.7
152.5°	1000.0	998.7	997.4	996.1
155°	1028.5	1027.9	1027.2	1026.6
157.5°	1054.4	1054.0	1053.5	1053.1
160°	1078.0	1077.6	1077.1	1076.7
162.5°	1098.3	1098.3	1098.3	1098.3
165°	1116.3	1116.6	1116.8	1117.0
167.5°	1131.7	1132.4	1133.0	1133.7
170°	1144.5	1145.1	1145.8	1146.4
172.5°	1153.3	1154.0	1154.6	1155.3
175°	1160.2	1160.9	1161.5	1162.2
177.5°	1164.1	1164.8	1165.4	1166.1
180°	1164.1	1164.1	1164.1	1164.1

(END OF REPORT)