

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1000134

Luminaire Tested: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1000134
REPORT IS A COMBINATION OF REPORTS P988694 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1
Description: Define 2 Regressed Direct/Indirect Pendant with 5000K BioUP LEDs {m-DER=1.015}
{m-EER=1.115}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4287.0 lumens
Efficiency: N/A
Efficacy: 76.4 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 0.85 / 1.01
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 56.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

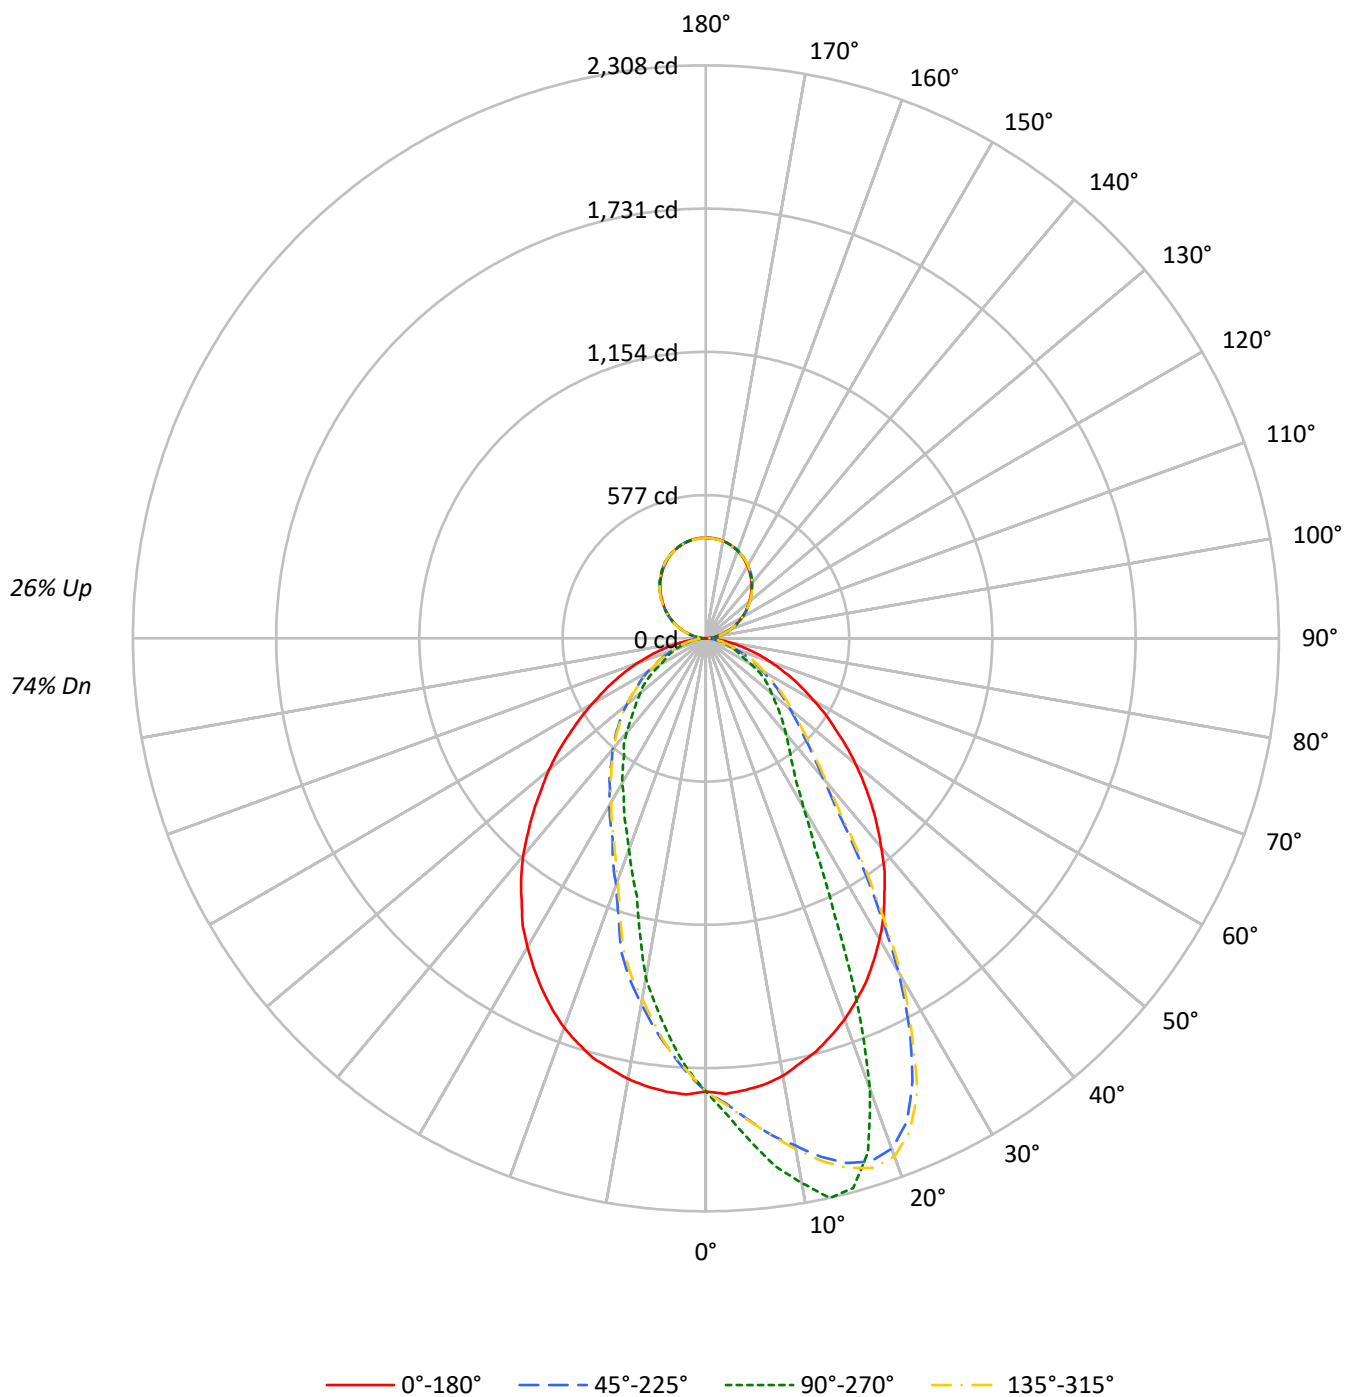

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	113	113	113	113	107	107	107	107	96	96	96	87	87	87	78	78	78
1	104	100	97	93	99	95	92	89	86	84	82	78	76	75	71	69	68
2	96	89	83	78	91	85	80	75	77	73	70	70	67	64	64	61	59
3	88	79	72	67	84	76	70	65	69	64	60	63	59	56	58	54	52
4	82	71	64	58	77	68	61	56	63	57	53	57	53	49	52	49	46
5	76	64	57	51	72	62	55	49	57	51	46	52	47	44	48	44	41
6	70	59	51	45	67	56	49	44	52	46	41	48	43	39	44	40	37
7	65	53	46	40	62	51	44	39	48	42	37	44	39	35	41	37	33
8	61	49	42	36	58	47	40	35	44	38	34	41	36	32	38	34	30
9	57	45	38	33	55	44	37	32	41	35	31	38	33	29	35	31	28
10	54	42	35	30	51	41	34	30	38	32	28	35	30	27	33	29	26

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	28890	28890	28890	28890
5°	28958	30686	29058	24515
10°	28639	32435	28842	20244
15°	28017	32444	28492	15208
20°	27270	26818	27863	12547
25°	26363	16758	26932	10673
30°	25205	10730	25892	9189
35°	23798	8245	24569	7863
40°	22231	6931	23180	6879
45°	20554	5899	21412	5775
50°	18834	5012	19714	4995
55°	16931	4355	17845	4298
60°	15242	3321	16049	3282
65°	13662	2499	14472	2835
70°	11918	1997	12854	2310
75°	10075	1529	10998	1748
80°	8000	1041	8607	1146
85°	5551	536	6088	567

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 165°

Vertical Angle: 45°

Luminance: 26428 cd/sqm

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	173.1	4.0
10°-20°	483.2	11.3
20°-30°	621.9	14.5
30°-40°	590.0	13.8
40°-50°	505.6	11.8
50°-60°	385.1	9.0
60°-70°	242.8	5.7
70°-80°	121.1	2.8
80°-90°	32.3	0.8
90°-100°	25.0	0.6
100°-110°	79.6	1.9
110°-120°	136.2	3.2
120°-130°	179.2	4.2
130°-140°	201.1	4.7
140°-150°	197.2	4.6
150°-160°	165.4	3.9
160°-170°	109.7	2.6
170°-180°	38.3	0.9
0°-30°	1278.2	29.8
0°-40°	1868.2	43.6
0°-60°	2758.9	64.4
0°-90°	3155.1	73.6
90°-120°	240.9	5.6
90°-150°	818.4	19.1
90°-180°	1132.0	26.4
0°-180°	4287.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1825	1825	1825	1825	1825	
5°	1826	2031	1833	1622	1826	173
15°	1721	2292	1750	1074	1721	484
25°	1527	1223	1560	779	1527	701
35°	1253	602	1294	574	1253	784
45°	941	418	980	410	941	726
55°	635	290	670	287	635	573
65°	384	151	407	171	384	381
75°	180	80	197	91	180	195
85°	39	23	43	24	39	45
90°	0	12	0	12	0	4
95°	18	21	18	21	18	20
105°	74	76	74	76	74	78
115°	137	137	137	137	137	135
125°	199	200	199	200	199	178
135°	257	260	257	260	257	199
145°	312	316	312	316	312	195
155°	357	360	357	360	357	164
165°	388	389	388	389	388	110
175°	404	403	404	403	404	38
180°	405	405	405	405	405	

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1
2.5°	1836.5	1844.1	1847.9	1853.0	1864.4	1872.0	1883.4	1886.0	1884.7	1889.8	1875.8
5°	1826.4	1842.9	1858.1	1870.8	1891.1	1903.7	1917.7	1934.2	1938.0	1957.0	1945.6
7.5°	1812.4	1836.5	1858.1	1883.4	1913.9	1930.4	1951.9	1977.3	1988.7	2011.5	2017.9
10°	1789.6	1823.8	1860.6	1887.2	1929.1	1958.3	1978.6	2019.2	2045.8	2080.0	2075.0
12.5°	1752.8	1797.2	1846.7	1891.1	1945.6	1964.6	2002.7	2044.5	2078.8	2110.5	2138.4
15°	1721.1	1771.8	1826.4	1880.9	1943.1	1978.6	2016.6	2071.2	2107.9	2163.7	2187.8
17.5°	1678.0	1742.7	1807.3	1868.2	1941.8	1982.4	2029.3	2082.6	2137.1	2190.4	2209.4
20°	1633.6	1703.3	1773.1	1855.5	1939.2	1978.6	2026.8	2092.7	2146.0	2187.8	2187.8
22.5°	1580.3	1665.3	1745.2	1823.8	1915.2	1972.2	2021.7	2099.1	2137.1	2146.0	2111.7
25°	1527.0	1612.0	1699.5	1797.2	1901.2	1951.9	2007.7	2080.0	2092.7	2057.2	1968.4
27.5°	1463.6	1558.8	1657.7	1763.0	1872.0	1935.4	1986.2	2034.4	2010.3	1915.2	1776.9
30°	1398.9	1501.7	1613.3	1713.5	1845.4	1903.7	1946.9	1960.8	1884.7	1730.0	1551.1
32.5°	1331.7	1431.9	1549.9	1670.4	1803.5	1859.3	1887.2	1850.5	1711.0	1515.6	1297.5
35°	1253.1	1366.0	1489.0	1614.6	1746.5	1788.3	1804.8	1714.8	1535.9	1283.5	1066.7
37.5°	1182.1	1294.9	1426.9	1555.0	1683.0	1705.9	1689.4	1548.6	1321.6	1071.7	859.9
40°	1098.4	1218.8	1348.2	1491.5	1596.8	1603.1	1562.6	1379.9	1098.4	863.7	733.1
42.5°	1021.0	1142.7	1272.1	1418.0	1497.9	1476.3	1421.8	1182.1	917.0	744.5	639.2
45°	941.1	1056.5	1196.0	1325.4	1382.5	1331.7	1249.3	994.4	769.9	640.5	559.3
47.5°	863.7	971.5	1109.8	1234.1	1244.2	1187.1	1089.5	833.3	667.1	563.1	497.2
50°	787.6	895.4	1024.8	1127.5	1117.4	1038.7	928.4	724.2	579.6	497.2	442.6
52.5°	711.5	809.2	934.7	1015.9	972.8	896.7	787.6	613.9	506.1	433.8	391.9
55°	635.4	726.7	834.5	901.8	833.3	745.8	668.4	526.3	438.8	380.5	348.8
57.5°	572.0	644.3	743.2	783.8	701.4	632.9	565.7	452.8	380.5	338.6	301.9
60°	502.3	568.2	649.4	673.5	588.5	532.7	475.6	383.0	326.0	289.2	265.1
62.5°	442.6	497.2	559.3	559.3	484.5	442.6	399.5	320.9	274.0	244.8	233.4
65°	384.3	423.6	468.0	462.9	399.5	362.7	328.5	265.1	229.6	209.3	197.9
67.5°	327.2	357.7	386.8	369.1	323.4	291.7	260.0	214.3	190.2	176.3	161.1
70°	275.2	299.3	314.5	298.1	252.4	225.8	202.9	172.5	153.5	135.7	126.8
72.5°	230.8	241.0	246.1	225.8	187.7	172.5	156.0	134.4	118.0	109.1	106.5
75°	180.1	189.0	185.2	170.0	138.2	126.8	114.1	98.9	95.1	90.1	87.5
77.5°	140.8	140.8	134.4	120.5	98.9	90.1	85.0	77.4	73.6	72.3	69.8
80°	100.2	98.9	95.1	79.9	67.2	62.1	62.1	57.1	55.8	53.3	53.3
82.5°	66.0	66.0	60.9	48.2	44.4	43.1	41.9	39.3	39.3	38.0	38.0
85°	39.3	36.8	30.4	26.6	25.4	25.4	24.1	22.8	24.1	22.8	22.8
87.5°	17.8	14.0	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1
90°	0.3	1.2	2.1	3.0	3.9	4.4	5.2	6.9	8.6	10.3	12.0
92.5°	7.5	8.1	8.7	9.3	9.9	10.2	10.2	10.3	10.4	10.5	10.6
95°	17.8	18.6	19.3	20.1	20.8	21.2	21.3	21.4	21.6	21.7	21.9
97.5°	29.7	30.4	31.1	31.8	32.5	32.8	33.0	33.3	33.6	33.9	34.2
100°	43.4	44.0	44.6	45.2	45.8	46.1	46.2	46.4	46.7	46.9	47.1
102.5°	57.7	58.2	58.6	59.1	59.6	59.8	60.0	60.3	60.6	60.9	61.2
105°	73.5	73.7	73.9	74.2	74.4	74.5	74.6	74.7	74.9	75.0	75.2
107.5°	89.2	89.5	89.8	90.1	90.4	90.5	90.5	90.5	90.5	90.5	90.5
110°	104.2	104.6	105.1	105.5	106.0	106.2	106.2	106.2	106.2	106.2	106.2



TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	120.6	121.0	121.5	121.9	122.4	122.6	122.6	122.5	122.4	122.4	122.3
115°	136.7	137.1	137.6	138.0	138.5	138.7	138.6	138.5	138.3	138.2	138.0
117.5°	152.7	153.3	153.9	154.5	155.1	155.4	155.2	154.8	154.5	154.1	153.7
120°	168.8	169.4	170.0	170.6	171.2	171.5	171.2	170.6	170.0	169.4	168.8
122.5°	183.5	184.3	185.0	185.8	186.5	186.9	186.7	186.3	186.0	185.6	185.2
125°	198.8	199.5	200.2	200.9	201.6	201.9	201.8	201.6	201.3	201.1	200.9
127.5°	213.9	214.7	215.5	216.4	217.2	217.6	217.5	217.2	216.9	216.6	216.3
130°	227.9	228.9	229.9	230.8	231.8	232.3	232.2	232.1	231.9	231.8	231.6
132.5°	243.6	244.4	245.1	245.9	246.6	247.0	247.0	247.1	247.2	247.2	247.3
135°	257.3	258.1	258.9	259.8	260.6	261.0	261.1	261.2	261.4	261.5	261.7
137.5°	272.3	273.0	273.7	274.4	275.1	275.4	275.5	275.6	275.7	275.9	276.0
140°	285.6	286.3	287.0	287.7	288.4	288.7	288.9	289.3	289.6	290.0	290.4
142.5°	299.3	300.0	300.6	301.3	302.0	302.3	302.4	302.7	302.9	303.2	303.4
145°	312.3	312.8	313.3	313.8	314.3	314.6	314.8	315.3	315.8	316.2	316.7
147.5°	323.9	324.6	325.2	325.9	326.6	326.9	327.1	327.4	327.7	328.0	328.3
150°	335.8	336.3	336.7	337.2	337.7	337.9	338.0	338.3	338.6	338.9	339.2
152.5°	346.4	346.9	347.3	347.8	348.3	348.5	348.7	349.1	349.4	349.8	350.2
155°	357.0	357.2	357.4	357.7	357.9	358.0	358.1	358.4	358.6	358.9	359.1
157.5°	366.2	366.4	366.5	366.7	366.8	366.9	367.0	367.1	367.3	367.4	367.6
160°	374.4	374.6	374.7	374.9	375.0	375.1	375.1	375.2	375.3	375.4	375.5
162.5°	381.9	381.9	381.9	381.9	381.9	381.9	381.9	382.0	382.1	382.2	382.3
165°	388.4	388.3	388.3	388.2	388.1	388.1	388.1	388.1	388.1	388.1	388.1
167.5°	394.2	394.0	393.8	393.5	393.3	393.2	393.2	393.2	393.2	393.2	393.2
170°	398.7	398.5	398.3	398.0	397.8	397.7	397.7	397.6	397.5	397.4	397.3
172.5°	401.8	401.6	401.3	401.1	400.8	400.7	400.7	400.6	400.5	400.5	400.4
175°	404.2	404.0	403.7	403.5	403.2	403.1	403.0	402.9	402.7	402.6	402.4
177.5°	405.5	405.3	405.1	404.8	404.6	404.5	404.4	404.3	404.1	404.0	403.8
180°	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1
2.5°	1889.8	1892.3	1896.1	1913.9	1916.4	1921.5	1919.0	1919.0	1920.2	1917.7	1919.0
5°	1971.0	1974.8	1993.8	2015.3	2020.4	2015.3	2021.7	2030.6	2030.6	2030.6	2028.0
7.5°	2047.1	2061.0	2082.6	2114.3	2120.6	2127.0	2138.4	2130.8	2133.3	2144.7	2140.9
10°	2120.6	2140.9	2165.0	2191.6	2205.6	2214.5	2219.5	2231.0	2257.6	2227.2	2238.6
12.5°	2190.4	2219.5	2244.9	2274.1	2284.2	2295.6	2299.4	2309.6	2309.6	2308.3	2317.2
15°	2236.0	2262.7	2285.5	2304.5	2307.1	2304.5	2302.0	2303.3	2307.1	2291.8	2300.7
17.5°	2246.2	2248.7	2256.3	2248.7	2250.0	2223.4	2208.1	2204.3	2168.8	2170.1	2199.3
20°	2196.7	2153.6	2142.2	2100.3	2075.0	2006.5	2003.9	1984.9	1910.1	1932.9	1927.8
22.5°	2061.0	1987.4	1889.8	1841.6	1817.5	1745.2	1689.4	1650.1	1623.4	1596.8	1585.4
25°	1882.2	1763.0	1624.7	1529.6	1515.6	1448.4	1345.7	1297.5	1240.4	1222.7	1253.1
27.5°	1651.3	1496.6	1340.6	1194.7	1168.1	1107.2	1055.2	1021.0	955.0	951.2	953.8
30°	1338.1	1182.1	1051.4	956.3	890.4	862.5	828.2	802.8	776.2	786.4	788.9
32.5°	1099.6	951.2	829.5	778.7	748.3	730.5	701.4	684.9	673.5	669.7	668.4
35°	873.9	774.9	720.4	670.9	653.2	640.5	618.9	611.3	601.2	602.4	602.4
37.5°	748.3	665.9	625.3	599.9	583.4	577.1	563.1	555.5	549.2	546.6	550.4
40°	645.6	588.5	563.1	540.3	526.3	523.8	516.2	507.3	499.7	501.0	504.8
42.5°	570.7	537.8	507.3	489.6	479.4	475.6	469.3	462.9	462.9	459.1	457.9
45°	511.1	484.5	459.1	442.6	436.3	431.2	423.6	422.3	417.3	418.5	419.8
47.5°	457.9	436.3	417.3	400.8	394.4	393.2	385.6	380.5	380.5	379.2	378.0
50°	409.7	388.1	371.6	362.7	353.9	351.3	350.1	348.8	346.2	346.2	347.5
52.5°	370.3	348.8	336.1	328.5	323.4	320.9	320.9	319.6	319.6	319.6	318.3
55°	327.2	309.5	299.3	296.8	294.2	293.0	291.7	289.2	287.9	290.4	287.9
57.5°	286.6	280.3	271.4	268.9	262.5	262.5	258.7	256.2	253.7	256.2	256.2
60°	254.9	246.1	241.0	233.4	228.3	223.2	216.9	215.6	213.1	211.8	210.5
62.5°	222.0	214.3	201.7	190.2	182.6	177.6	175.0	173.8	173.8	172.5	172.5
65°	185.2	167.4	161.1	157.3	156.0	154.7	152.2	150.9	152.2	150.9	152.2
67.5°	144.6	142.1	138.2	135.7	134.4	133.2	133.2	131.9	131.9	131.9	131.9
70°	125.6	119.2	118.0	115.4	115.4	114.1	114.1	114.1	114.1	112.9	115.4
72.5°	104.0	100.2	98.9	97.7	97.7	97.7	96.4	96.4	96.4	95.1	96.4
75°	85.0	83.7	81.2	81.2	79.9	81.2	79.9	79.9	78.6	79.9	79.9
77.5°	68.5	67.2	66.0	66.0	64.7	64.7	64.7	64.7	64.7	64.7	66.0
80°	52.0	50.7	49.5	50.7	49.5	50.7	49.5	49.5	50.7	49.5	49.5
82.5°	38.0	36.8	36.8	35.5	35.5	35.5	35.5	35.5	35.5	35.5	35.5
85°	22.8	21.6	21.6	22.8	21.6	22.8	21.6	21.6	21.6	22.8	22.8
87.5°	10.1	11.4	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	11.4
90°	11.8	11.7	11.5	11.4	11.3	11.3	11.4	11.5	11.5	11.6	11.5
92.5°	10.7	10.7	10.8	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
95°	21.9	21.9	21.9	21.9	21.9	21.8	21.7	21.5	21.4	21.2	21.4
97.5°	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2
100°	47.1	47.1	47.1	47.1	47.1	47.1	47.0	46.9	46.9	46.8	46.9
102.5°	61.3	61.3	61.4	61.5	61.5	61.5	61.4	61.3	61.3	61.2	61.3
105°	75.3	75.5	75.6	75.7	75.8	75.8	75.8	75.8	75.8	75.8	75.8
107.5°	90.6	90.7	90.8	90.9	90.9	90.7	90.3	90.0	89.6	89.2	89.6
110°	106.2	106.2	106.2	106.2	106.2	106.1	105.9	105.6	105.4	105.2	105.4

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	122.1	121.9	121.6	121.4	121.3	121.2	121.1	120.9	120.8	120.6	120.8
115°	137.9	137.9	137.8	137.7	137.7	137.6	137.4	137.1	136.9	136.7	136.9
117.5°	153.5	153.3	153.0	152.8	152.7	152.6	152.4	152.1	151.9	151.7	151.9
120°	168.8	168.8	168.8	168.8	168.8	168.7	168.4	168.2	167.9	167.7	167.9
122.5°	185.0	184.7	184.5	184.2	184.1	184.0	183.9	183.8	183.6	183.5	183.6
125°	200.7	200.5	200.2	200.0	199.9	199.9	199.8	199.7	199.6	199.5	199.6
127.5°	216.0	215.7	215.4	215.1	214.9	214.8	214.6	214.3	214.1	213.9	214.1
130°	231.4	231.3	231.1	231.0	230.9	230.8	230.5	230.2	229.9	229.6	229.9
132.5°	246.9	246.5	246.2	245.8	245.6	245.5	245.3	245.0	244.8	244.6	244.8
135°	261.6	261.6	261.5	261.4	261.4	261.3	261.0	260.8	260.5	260.3	260.5
137.5°	275.9	275.9	275.8	275.7	275.7	275.5	275.2	274.9	274.6	274.3	274.6
140°	290.4	290.4	290.4	290.4	290.4	290.2	289.9	289.6	289.3	289.0	289.3
142.5°	303.5	303.5	303.6	303.7	303.7	303.5	303.2	302.9	302.6	302.3	302.6
145°	316.8	316.8	316.9	317.0	317.0	316.9	316.6	316.3	316.0	315.7	316.0
147.5°	328.5	328.6	328.8	328.9	329.0	328.8	328.5	328.2	327.9	327.6	327.9
150°	339.4	339.7	339.9	340.2	340.3	340.2	339.9	339.7	339.4	339.2	339.4
152.5°	350.5	350.8	351.1	351.4	351.5	351.4	351.1	350.8	350.5	350.2	350.5
155°	359.5	359.9	360.2	360.6	360.8	360.7	360.4	360.2	359.9	359.7	359.9
157.5°	368.1	368.7	369.2	369.7	370.0	369.8	369.4	369.1	368.7	368.3	368.7
160°	375.9	376.4	376.8	377.3	377.5	377.3	377.0	376.7	376.4	376.1	376.4
162.5°	382.8	383.4	383.9	384.4	384.7	384.5	384.1	383.8	383.4	383.0	383.4
165°	388.6	389.2	389.7	390.2	390.5	390.3	389.9	389.6	389.2	388.8	389.2
167.5°	393.7	394.3	394.8	395.3	395.6	395.4	395.0	394.7	394.3	393.9	394.3
170°	397.8	398.4	398.9	399.4	399.7	399.5	399.0	398.6	398.1	397.7	398.1
172.5°	400.9	401.5	402.0	402.5	402.8	402.6	402.1	401.6	401.2	400.7	401.2
175°	402.9	403.5	404.0	404.5	404.8	404.6	404.1	403.7	403.2	402.8	403.2
177.5°	404.3	404.7	405.2	405.7	405.9	405.7	405.2	404.7	404.3	403.8	404.3
180°	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1
2.5°	1924.0	1915.2	1912.6	1915.2	1912.6	1913.9	1905.0	1872.0	1880.9	1867.0	1874.6
5°	2033.1	2025.5	2009.0	2006.5	2003.9	2001.4	1988.7	1959.5	1948.1	1929.1	1927.8
7.5°	2137.1	2137.1	2124.4	2115.5	2104.1	2095.3	2078.8	2035.6	2017.9	1995.1	1982.4
10°	2239.8	2206.9	2220.8	2211.9	2184.0	2179.0	2148.5	2123.2	2088.9	2066.1	2045.8
12.5°	2313.4	2303.3	2290.6	2283.0	2275.4	2258.9	2238.6	2173.9	2156.1	2110.5	2087.6
15°	2310.9	2304.5	2308.3	2308.3	2305.8	2302.0	2285.5	2238.6	2208.1	2163.7	2124.4
17.5°	2186.6	2203.1	2219.5	2231.0	2256.3	2267.7	2283.0	2255.1	2236.0	2198.0	2156.1
20°	1969.7	2010.3	2058.5	2068.6	2091.4	2158.7	2189.1	2213.2	2220.8	2208.1	2173.9
22.5°	1667.8	1702.1	1818.8	1816.2	1849.2	1929.1	2017.9	2090.2	2147.3	2179.0	2166.3
25°	1306.4	1354.6	1416.7	1463.6	1571.4	1690.7	1801.0	1916.4	2015.3	2102.9	2124.4
27.5°	988.0	1051.4	1100.9	1163.0	1217.6	1358.4	1500.4	1680.5	1795.9	1962.1	2048.3
30°	799.0	828.2	877.7	906.8	933.5	1041.3	1202.4	1379.9	1582.9	1774.4	1922.8
32.5°	682.4	702.6	739.4	752.1	780.0	852.3	953.8	1116.1	1325.4	1557.5	1752.8
35°	612.6	634.2	641.8	653.2	676.0	721.7	791.4	909.4	1098.4	1325.4	1558.8
37.5°	553.0	564.4	586.0	593.6	601.2	635.4	682.4	764.8	890.4	1076.8	1335.5
40°	511.1	517.5	528.9	535.2	540.3	564.4	606.3	662.1	754.6	896.7	1135.1
42.5°	466.7	474.3	482.0	489.6	495.9	514.9	540.3	593.6	655.7	763.5	936.0
45°	423.6	428.7	437.6	442.6	451.5	466.7	489.6	526.3	582.2	650.6	790.2
47.5°	384.3	390.6	394.4	400.8	407.1	423.6	445.2	469.3	514.9	582.2	683.6
50°	348.8	356.4	361.5	362.7	367.8	383.0	400.8	427.4	456.6	508.6	597.4
52.5°	323.4	324.7	328.5	333.6	332.3	341.2	357.7	378.0	408.4	450.3	514.9
55°	294.2	298.1	300.6	301.9	301.9	309.5	318.3	337.4	361.5	395.7	450.3
57.5°	257.5	261.3	268.9	271.4	275.2	279.0	282.8	295.5	315.8	348.8	393.2
60°	219.4	222.0	229.6	234.6	237.2	247.3	252.4	262.5	274.0	298.1	339.9
62.5°	176.3	178.8	182.6	187.7	192.8	208.0	220.7	230.8	239.7	256.2	290.4
65°	153.5	154.7	157.3	158.5	159.8	166.1	177.6	191.5	208.0	220.7	241.0
67.5°	133.2	134.4	135.7	138.2	139.5	140.8	145.9	149.7	166.1	183.9	199.1
70°	114.1	116.7	118.0	118.0	119.2	121.8	124.3	129.4	134.4	143.3	162.3
72.5°	96.4	97.7	100.2	100.2	100.2	102.7	105.3	107.8	110.3	115.4	123.0
75°	79.9	82.4	82.4	82.4	83.7	83.7	86.2	88.8	91.3	95.1	97.7
77.5°	66.0	66.0	66.0	66.0	67.2	67.2	68.5	71.0	72.3	73.6	76.1
80°	49.5	50.7	50.7	50.7	52.0	52.0	52.0	54.5	55.8	55.8	58.3
82.5°	36.8	36.8	36.8	38.0	36.8	38.0	38.0	39.3	38.0	39.3	40.6
85°	22.8	22.8	22.8	24.1	24.1	24.1	24.1	24.1	24.1	24.1	25.4
87.5°	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	12.7	11.4	11.4
90°	11.5	11.4	11.3	11.3	11.4	11.5	11.7	11.8	12.0	10.3	8.6
92.5°	10.9	10.9	10.9	10.9	10.9	10.8	10.7	10.7	10.6	10.5	10.4
95°	21.5	21.7	21.8	21.9	21.9	21.9	21.9	21.9	21.9	21.7	21.6
97.5°	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	33.9	33.6
100°	46.9	47.0	47.1	47.1	47.1	47.1	47.1	47.1	47.1	46.9	46.7
102.5°	61.3	61.4	61.5	61.5	61.5	61.4	61.3	61.3	61.2	60.9	60.6
105°	75.8	75.8	75.8	75.8	75.7	75.6	75.5	75.3	75.2	75.0	74.9
107.5°	90.0	90.3	90.7	90.9	90.9	90.8	90.7	90.6	90.5	90.5	90.5
110°	105.6	105.9	106.1	106.2	106.2	106.2	106.2	106.2	106.2	106.2	106.2

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	120.9	121.1	121.2	121.3	121.4	121.6	121.9	122.1	122.3	122.4	122.4
115°	137.1	137.4	137.6	137.7	137.7	137.8	137.9	137.9	138.0	138.2	138.3
117.5°	152.1	152.4	152.6	152.7	152.8	153.0	153.3	153.5	153.7	154.1	154.5
120°	168.2	168.4	168.7	168.8	168.8	168.8	168.8	168.8	168.8	169.4	170.0
122.5°	183.8	183.9	184.0	184.1	184.2	184.5	184.7	185.0	185.2	185.6	186.0
125°	199.7	199.8	199.9	199.9	200.0	200.2	200.5	200.7	200.9	201.1	201.3
127.5°	214.3	214.6	214.8	214.9	215.1	215.4	215.7	216.0	216.3	216.6	216.9
130°	230.2	230.5	230.8	230.9	231.0	231.1	231.3	231.4	231.6	231.8	231.9
132.5°	245.0	245.3	245.5	245.6	245.8	246.2	246.5	246.9	247.3	247.2	247.2
135°	260.8	261.0	261.3	261.4	261.4	261.5	261.6	261.6	261.7	261.5	261.4
137.5°	274.9	275.2	275.5	275.7	275.7	275.8	275.9	275.9	276.0	275.9	275.7
140°	289.6	289.9	290.2	290.4	290.4	290.4	290.4	290.4	290.4	290.0	289.6
142.5°	302.9	303.2	303.5	303.7	303.7	303.6	303.5	303.5	303.4	303.2	302.9
145°	316.3	316.6	316.9	317.0	317.0	316.9	316.8	316.8	316.7	316.2	315.8
147.5°	328.2	328.5	328.8	329.0	328.9	328.8	328.6	328.5	328.3	328.0	327.7
150°	339.7	339.9	340.2	340.3	340.2	339.9	339.7	339.4	339.2	338.9	338.6
152.5°	350.8	351.1	351.4	351.5	351.4	351.1	350.8	350.5	350.2	349.8	349.4
155°	360.2	360.4	360.7	360.8	360.6	360.2	359.9	359.5	359.1	358.9	358.6
157.5°	369.1	369.4	369.8	370.0	369.7	369.2	368.7	368.1	367.6	367.4	367.3
160°	376.7	377.0	377.3	377.5	377.3	376.8	376.4	375.9	375.5	375.4	375.3
162.5°	383.8	384.1	384.5	384.7	384.4	383.9	383.4	382.8	382.3	382.2	382.1
165°	389.6	389.9	390.3	390.5	390.2	389.7	389.2	388.6	388.1	388.1	388.1
167.5°	394.7	395.0	395.4	395.6	395.3	394.8	394.3	393.7	393.2	393.2	393.2
170°	398.6	399.0	399.5	399.7	399.4	398.9	398.4	397.8	397.3	397.4	397.5
172.5°	401.6	402.1	402.6	402.8	402.5	402.0	401.5	400.9	400.4	400.5	400.5
175°	403.7	404.1	404.6	404.8	404.5	404.0	403.5	402.9	402.4	402.6	402.7
177.5°	404.7	405.2	405.7	405.9	405.7	405.2	404.7	404.3	403.8	404.0	404.1
180°	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1
2.5°	1863.1	1856.8	1856.8	1853.0	1853.0	1832.7	1832.7	1839.1	1831.4	1822.6	1809.9
5°	1911.3	1897.4	1893.6	1888.5	1872.0	1846.7	1836.5	1832.7	1817.5	1798.5	1776.9
7.5°	1957.0	1934.2	1922.8	1911.3	1889.8	1854.3	1834.0	1820.0	1797.2	1768.0	1740.1
10°	2001.4	1972.2	1943.1	1929.1	1898.7	1854.3	1825.1	1802.3	1769.3	1730.0	1690.7
12.5°	2042.0	1981.1	1976.0	1948.1	1903.7	1853.0	1808.6	1775.6	1733.8	1688.1	1642.5
15°	2077.5	2015.3	1984.9	1959.5	1901.2	1837.8	1790.9	1750.3	1694.5	1642.5	1586.7
17.5°	2095.3	2028.0	2007.7	1965.9	1906.3	1823.8	1760.4	1711.0	1650.1	1587.9	1524.5
20°	2113.0	2034.4	2001.4	1972.2	1891.1	1797.2	1726.2	1669.1	1601.9	1528.3	1458.6
22.5°	2121.9	2034.4	1995.1	1954.5	1875.8	1768.0	1684.3	1617.1	1538.5	1463.6	1379.9
25°	2106.7	2026.8	1979.8	1938.0	1849.2	1732.5	1636.1	1560.0	1476.3	1391.3	1306.4
27.5°	2068.6	2009.0	1954.5	1911.3	1812.4	1686.9	1585.4	1499.1	1412.9	1317.8	1231.5
30°	1997.6	1971.0	1927.8	1879.6	1771.8	1646.3	1525.8	1437.0	1341.9	1246.8	1156.7
32.5°	1887.2	1910.1	1882.2	1840.3	1723.6	1590.5	1462.4	1372.3	1268.3	1165.6	1083.1
35°	1752.8	1834.0	1818.8	1789.6	1672.9	1530.9	1402.8	1293.7	1189.7	1085.7	1003.2
37.5°	1605.7	1728.7	1741.4	1723.6	1614.6	1470.0	1329.2	1222.7	1116.1	1010.8	927.1
40°	1404.0	1593.0	1633.6	1641.2	1553.7	1396.4	1249.3	1145.3	1040.0	937.3	835.8
42.5°	1218.8	1457.3	1508.0	1539.7	1476.3	1324.1	1175.7	1060.3	956.3	863.7	762.3
45°	1045.1	1293.7	1376.1	1416.7	1388.8	1241.7	1088.2	980.4	885.3	800.3	702.6
47.5°	866.3	1116.1	1231.5	1296.2	1296.2	1158.0	1004.5	898.0	806.6	734.4	648.1
50°	747.0	955.0	1074.3	1159.2	1182.1	1073.0	928.4	824.4	738.2	659.5	593.6
52.5°	636.7	823.1	922.1	1010.8	1076.8	981.7	843.4	749.6	664.6	591.0	539.0
55°	550.4	690.0	780.0	877.7	951.2	889.1	761.0	669.7	596.1	535.2	490.8
57.5°	468.0	589.8	663.3	749.6	828.2	781.3	678.5	599.9	535.2	482.0	442.6
60°	398.2	497.2	554.3	621.5	719.1	686.2	601.2	528.9	476.9	428.7	395.7
62.5°	338.6	417.3	465.5	513.7	602.4	587.2	521.3	465.5	421.1	380.5	352.6
65°	277.8	342.4	380.5	422.3	493.4	499.7	446.4	407.1	366.5	331.0	305.7
67.5°	224.5	275.2	309.5	345.0	402.1	419.8	383.0	350.1	315.8	286.6	263.8
70°	181.4	216.9	242.2	270.2	317.1	338.6	319.6	296.8	268.9	244.8	224.5
72.5°	143.3	166.1	181.4	202.9	241.0	262.5	261.3	241.0	220.7	204.2	187.7
75°	105.3	123.0	135.7	149.7	180.1	200.4	205.5	196.6	176.3	163.6	150.9
77.5°	79.9	90.1	96.4	106.5	128.1	145.9	153.5	150.9	137.0	126.8	118.0
80°	60.9	63.4	66.0	69.8	87.5	104.0	109.1	107.8	100.2	96.4	86.2
82.5°	43.1	44.4	45.7	46.9	53.3	67.2	72.3	74.8	68.5	64.7	55.8
85°	25.4	26.6	26.6	29.2	30.4	34.2	43.1	43.1	41.9	36.8	35.5
87.5°	12.7	12.7	11.4	11.4	12.7	14.0	16.5	19.0	16.5	15.2	14.0
90°	6.9	5.2	4.4	3.9	3.0	2.1	1.2	0.3	1.2	2.1	3.0
92.5°	10.3	10.2	10.2	9.9	9.3	8.7	8.1	7.5	8.1	8.7	9.3
95°	21.4	21.3	21.2	20.8	20.1	19.3	18.6	17.8	18.6	19.3	20.1
97.5°	33.3	33.0	32.8	32.5	31.8	31.1	30.4	29.7	30.4	31.1	31.8
100°	46.4	46.2	46.1	45.8	45.2	44.6	44.0	43.4	44.0	44.6	45.2
102.5°	60.3	60.0	59.8	59.6	59.1	58.6	58.2	57.7	58.2	58.6	59.1
105°	74.7	74.6	74.5	74.4	74.2	73.9	73.7	73.5	73.7	73.9	74.2
107.5°	90.5	90.5	90.5	90.4	90.1	89.8	89.5	89.2	89.5	89.8	90.1
110°	106.2	106.2	106.2	106.0	105.5	105.1	104.6	104.2	104.6	105.1	105.5

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	122.5	122.6	122.6	122.4	121.9	121.5	121.0	120.6	121.0	121.5	121.9
115°	138.5	138.6	138.7	138.5	138.0	137.6	137.1	136.7	137.1	137.6	138.0
117.5°	154.8	155.2	155.4	155.1	154.5	153.9	153.3	152.7	153.3	153.9	154.5
120°	170.6	171.2	171.5	171.2	170.6	170.0	169.4	168.8	169.4	170.0	170.6
122.5°	186.3	186.7	186.9	186.5	185.8	185.0	184.3	183.5	184.3	185.0	185.8
125°	201.6	201.8	201.9	201.6	200.9	200.2	199.5	198.8	199.5	200.2	200.9
127.5°	217.2	217.5	217.6	217.2	216.4	215.5	214.7	213.9	214.7	215.5	216.4
130°	232.1	232.2	232.3	231.8	230.8	229.9	228.9	227.9	228.9	229.9	230.8
132.5°	247.1	247.0	247.0	246.6	245.9	245.1	244.4	243.6	244.4	245.1	245.9
135°	261.2	261.1	261.0	260.6	259.8	258.9	258.1	257.3	258.1	258.9	259.8
137.5°	275.6	275.5	275.4	275.1	274.4	273.7	273.0	272.3	273.0	273.7	274.4
140°	289.3	288.9	288.7	288.4	287.7	287.0	286.3	285.6	286.3	287.0	287.7
142.5°	302.7	302.4	302.3	302.0	301.3	300.6	300.0	299.3	300.0	300.6	301.3
145°	315.3	314.8	314.6	314.3	313.8	313.3	312.8	312.3	312.8	313.3	313.8
147.5°	327.4	327.1	326.9	326.6	325.9	325.2	324.6	323.9	324.6	325.2	325.9
150°	338.3	338.0	337.9	337.7	337.2	336.7	336.3	335.8	336.3	336.7	337.2
152.5°	349.1	348.7	348.5	348.3	347.8	347.3	346.9	346.4	346.9	347.3	347.8
155°	358.4	358.1	358.0	357.9	357.7	357.4	357.2	357.0	357.2	357.4	357.7
157.5°	367.1	367.0	366.9	366.8	366.7	366.5	366.4	366.2	366.4	366.5	366.7
160°	375.2	375.1	375.1	375.0	374.9	374.7	374.6	374.4	374.6	374.7	374.9
162.5°	382.0	381.9	381.9	381.9	381.9	381.9	381.9	381.9	381.9	381.9	381.9
165°	388.1	388.1	388.1	388.1	388.2	388.3	388.3	388.4	388.3	388.3	388.2
167.5°	393.2	393.2	393.2	393.3	393.5	393.8	394.0	394.2	394.0	393.8	393.5
170°	397.6	397.7	397.7	397.8	398.0	398.3	398.5	398.7	398.5	398.3	398.0
172.5°	400.6	400.7	400.7	400.8	401.1	401.3	401.6	401.8	401.6	401.3	401.1
175°	402.9	403.0	403.1	403.2	403.5	403.7	404.0	404.2	404.0	403.7	403.5
177.5°	404.3	404.4	404.5	404.6	404.8	405.1	405.3	405.5	405.3	405.1	404.8
180°	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1
2.5°	1804.8	1806.1	1809.9	1798.5	1780.7	1773.1	1750.3	1746.5	1742.7	1742.7	1746.5
5°	1764.2	1759.1	1760.4	1738.9	1713.5	1698.3	1666.6	1671.6	1655.1	1645.0	1647.5
7.5°	1719.8	1705.9	1704.6	1676.7	1645.0	1617.1	1584.1	1576.5	1561.3	1543.5	1535.9
10°	1664.0	1653.9	1634.9	1603.1	1562.6	1539.7	1495.3	1468.7	1464.9	1438.3	1428.1
12.5°	1607.0	1589.2	1570.2	1525.8	1480.1	1443.3	1410.4	1381.2	1360.9	1338.1	1322.8
15°	1541.0	1519.4	1497.9	1450.9	1397.7	1360.9	1311.4	1268.3	1208.7	1161.8	1135.1
17.5°	1468.7	1444.6	1415.4	1363.4	1311.4	1260.7	1169.4	1118.7	1076.8	1048.9	1032.4
20°	1393.9	1367.2	1338.1	1286.1	1196.0	1107.2	1056.5	1017.2	991.8	963.9	943.6
22.5°	1315.2	1287.3	1255.6	1174.5	1079.3	1017.2	977.9	941.1	904.3	889.1	878.9
25°	1241.7	1216.3	1175.7	1065.4	990.6	933.5	889.1	865.0	846.0	825.7	806.6
27.5°	1165.6	1118.7	1061.6	969.0	922.1	863.7	832.0	814.3	781.3	767.3	758.5
30°	1074.3	1022.3	967.7	901.8	847.2	806.6	777.5	748.3	729.3	715.3	700.1
32.5°	981.7	932.2	898.0	829.5	788.9	747.0	719.1	701.4	673.5	664.6	658.3
35°	901.8	859.9	829.5	773.7	735.6	697.6	677.3	650.6	632.9	616.4	606.3
37.5°	823.1	800.3	768.6	721.7	681.1	650.6	622.7	613.9	589.8	580.9	570.7
40°	768.6	734.4	707.7	667.1	632.9	599.9	582.2	561.9	545.4	531.4	527.6
42.5°	702.6	677.3	662.1	617.7	582.2	563.1	541.6	518.7	506.1	494.6	480.7
45°	653.2	630.4	608.8	573.3	541.6	517.5	498.4	483.2	461.7	456.6	435.0
47.5°	601.2	578.4	561.9	526.3	497.2	474.3	460.4	440.1	422.3	410.9	400.8
50°	549.2	530.2	514.9	484.5	459.1	435.0	416.0	395.7	388.1	369.1	362.7
52.5°	499.7	487.0	470.5	441.4	416.0	395.7	375.4	358.9	347.5	337.4	329.8
55°	457.9	437.6	430.0	398.2	376.7	355.1	337.4	327.2	313.3	306.9	300.6
57.5°	410.9	399.5	386.8	362.7	338.6	318.3	305.7	290.4	282.8	275.2	270.2
60°	370.3	353.9	343.7	323.4	301.9	282.8	271.4	260.0	249.9	243.5	233.4
62.5°	323.4	310.7	304.4	282.8	265.1	247.3	237.2	225.8	218.1	206.7	194.1
65°	282.8	272.7	265.1	247.3	230.8	214.3	204.2	190.2	180.1	173.8	172.5
67.5°	247.3	239.7	228.3	211.8	195.3	182.6	171.2	159.8	158.5	156.0	156.0
70°	208.0	200.4	194.1	176.3	162.3	148.4	145.9	142.1	138.2	137.0	134.4
72.5°	173.8	167.4	159.8	144.6	130.6	126.8	124.3	121.8	118.0	116.7	115.4
75°	140.8	131.9	126.8	112.9	109.1	106.5	104.0	100.2	97.7	96.4	93.9
77.5°	107.8	98.9	98.9	91.3	88.8	85.0	82.4	79.9	78.6	76.1	76.1
80°	76.1	76.1	73.6	69.8	66.0	64.7	60.9	59.6	58.3	59.6	57.1
82.5°	55.8	50.7	50.7	48.2	45.7	44.4	41.9	41.9	40.6	40.6	40.6
85°	31.7	31.7	30.4	27.9	26.6	26.6	25.4	25.4	24.1	24.1	22.8
87.5°	12.7	11.4	12.7	11.4	11.4	10.1	10.1	10.1	8.9	10.1	8.9
90°	3.9	4.4	5.2	6.9	8.6	10.3	12.0	11.8	11.7	11.5	11.4
92.5°	9.9	10.2	10.2	10.3	10.4	10.5	10.6	10.7	10.7	10.8	10.9
95°	20.8	21.2	21.3	21.4	21.6	21.7	21.9	21.9	21.9	21.9	21.9
97.5°	32.5	32.8	33.0	33.3	33.6	33.9	34.2	34.2	34.2	34.2	34.2
100°	45.8	46.1	46.2	46.4	46.7	46.9	47.1	47.1	47.1	47.1	47.1
102.5°	59.6	59.8	60.0	60.3	60.6	60.9	61.2	61.3	61.3	61.4	61.5
105°	74.4	74.5	74.6	74.7	74.9	75.0	75.2	75.3	75.5	75.6	75.7
107.5°	90.4	90.5	90.5	90.5	90.5	90.5	90.5	90.6	90.7	90.8	90.9
110°	106.0	106.2	106.2	106.2	106.2	106.2	106.2	106.2	106.2	106.2	106.2

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	122.4	122.6	122.6	122.5	122.4	122.4	122.3	122.1	121.9	121.6	121.4
115°	138.5	138.7	138.6	138.5	138.3	138.2	138.0	137.9	137.9	137.8	137.7
117.5°	155.1	155.4	155.2	154.8	154.5	154.1	153.7	153.5	153.3	153.0	152.8
120°	171.2	171.5	171.2	170.6	170.0	169.4	168.8	168.8	168.8	168.8	168.8
122.5°	186.5	186.9	186.7	186.3	186.0	185.6	185.2	185.0	184.7	184.5	184.2
125°	201.6	201.9	201.8	201.6	201.3	201.1	200.9	200.7	200.5	200.2	200.0
127.5°	217.2	217.6	217.5	217.2	216.9	216.6	216.3	216.0	215.7	215.4	215.1
130°	231.8	232.3	232.2	232.1	231.9	231.8	231.6	231.4	231.3	231.1	231.0
132.5°	246.6	247.0	247.0	247.1	247.2	247.2	247.3	246.9	246.5	246.2	245.8
135°	260.6	261.0	261.1	261.2	261.4	261.5	261.7	261.6	261.6	261.5	261.4
137.5°	275.1	275.4	275.5	275.6	275.7	275.9	276.0	275.9	275.9	275.8	275.7
140°	288.4	288.7	288.9	289.3	289.6	290.0	290.4	290.4	290.4	290.4	290.4
142.5°	302.0	302.3	302.4	302.7	302.9	303.2	303.4	303.5	303.5	303.6	303.7
145°	314.3	314.6	314.8	315.3	315.8	316.2	316.7	316.8	316.8	316.9	317.0
147.5°	326.6	326.9	327.1	327.4	327.7	328.0	328.3	328.5	328.6	328.8	328.9
150°	337.7	337.9	338.0	338.3	338.6	338.9	339.2	339.4	339.7	339.9	340.2
152.5°	348.3	348.5	348.7	349.1	349.4	349.8	350.2	350.5	350.8	351.1	351.4
155°	357.9	358.0	358.1	358.4	358.6	358.9	359.1	359.5	359.9	360.2	360.6
157.5°	366.8	366.9	367.0	367.1	367.3	367.4	367.6	368.1	368.7	369.2	369.7
160°	375.0	375.1	375.1	375.2	375.3	375.4	375.5	375.9	376.4	376.8	377.3
162.5°	381.9	381.9	381.9	382.0	382.1	382.2	382.3	382.8	383.4	383.9	384.4
165°	388.1	388.1	388.1	388.1	388.1	388.1	388.1	388.6	389.2	389.7	390.2
167.5°	393.3	393.2	393.2	393.2	393.2	393.2	393.2	393.7	394.3	394.8	395.3
170°	397.8	397.7	397.7	397.6	397.5	397.4	397.3	397.8	398.4	398.9	399.4
172.5°	400.8	400.7	400.7	400.6	400.5	400.5	400.4	400.9	401.5	402.0	402.5
175°	403.2	403.1	403.0	402.9	402.7	402.6	402.4	402.9	403.5	404.0	404.5
177.5°	404.6	404.5	404.4	404.3	404.1	404.0	403.8	404.3	404.7	405.2	405.7
180°	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1
2.5°	1746.5	1743.9	1736.3	1738.9	1735.1	1735.1	1732.5	1732.5	1732.5	1738.9	1735.1
5°	1651.3	1642.5	1633.6	1629.8	1626.0	1622.2	1622.2	1620.9	1632.3	1629.8	1639.9
7.5°	1533.4	1530.9	1513.1	1513.1	1506.8	1504.2	1510.6	1511.8	1513.1	1515.6	1522.0
10°	1428.1	1421.8	1396.4	1398.9	1395.1	1390.1	1393.9	1391.3	1400.2	1402.8	1400.2
12.5°	1303.8	1292.4	1264.5	1250.6	1235.3	1223.9	1237.9	1227.7	1263.2	1273.4	1301.3
15°	1138.9	1117.4	1098.4	1098.4	1084.4	1074.3	1080.6	1092.0	1099.6	1111.0	1116.1
17.5°	1028.6	1019.7	1004.5	995.6	991.8	988.0	988.0	993.1	1009.6	1008.3	1018.5
20°	934.7	929.7	922.1	910.6	906.8	904.3	904.3	904.3	915.7	925.9	932.2
22.5°	870.1	866.3	861.2	846.0	838.4	835.8	842.2	846.0	854.8	862.5	868.8
25°	805.4	796.5	787.6	782.5	778.7	778.7	781.3	782.5	786.4	790.2	797.8
27.5°	752.1	745.8	733.1	719.1	719.1	715.3	717.9	720.4	729.3	742.0	748.3
30°	692.5	691.2	686.2	681.1	676.0	673.5	678.5	682.4	683.6	690.0	690.0
32.5°	649.4	640.5	631.6	626.5	624.0	622.7	624.0	629.1	629.1	636.7	645.6
35°	606.3	601.2	592.3	583.4	580.9	574.5	579.6	584.7	593.6	597.4	601.2
37.5°	559.3	553.0	549.2	546.6	541.6	542.8	539.0	546.6	554.3	553.0	555.5
40°	523.8	512.4	501.0	499.7	498.4	497.2	497.2	498.4	503.5	508.6	516.2
42.5°	478.2	474.3	464.2	454.1	451.5	449.0	446.4	451.5	461.7	470.5	474.3
45°	431.2	426.2	423.6	416.0	410.9	409.7	407.1	413.5	422.3	426.2	428.7
47.5°	388.1	386.8	379.2	380.5	376.7	378.0	376.7	380.5	380.5	384.3	386.8
50°	358.9	355.1	351.3	348.8	345.0	345.0	343.7	345.0	350.1	355.1	353.9
52.5°	329.8	323.4	322.2	320.9	318.3	320.9	317.1	318.3	323.4	326.0	324.7
55°	295.5	294.2	291.7	289.2	287.9	286.6	286.6	286.6	291.7	295.5	296.8
57.5°	268.9	262.5	257.5	257.5	252.4	251.1	253.7	254.9	258.7	261.3	263.8
60°	232.1	229.6	222.0	218.1	210.5	209.3	209.3	214.3	220.7	229.6	232.1
62.5°	192.8	189.0	187.7	187.7	187.7	187.7	187.7	187.7	187.7	189.0	189.0
65°	171.2	172.5	171.2	170.0	171.2	171.2	170.0	170.0	170.0	171.2	172.5
67.5°	153.5	152.2	153.5	152.2	150.9	150.9	149.7	150.9	152.2	153.5	153.5
70°	133.2	133.2	131.9	133.2	131.9	130.6	129.4	129.4	131.9	133.2	133.2
72.5°	114.1	114.1	112.9	112.9	110.3	110.3	111.6	110.3	110.3	114.1	114.1
75°	95.1	93.9	92.6	92.6	91.3	91.3	91.3	90.1	92.6	92.6	93.9
77.5°	74.8	74.8	74.8	73.6	73.6	72.3	72.3	73.6	73.6	73.6	74.8
80°	57.1	57.1	57.1	55.8	54.5	54.5	54.5	54.5	54.5	55.8	54.5
82.5°	39.3	39.3	39.3	39.3	39.3	38.0	38.0	38.0	39.3	39.3	38.0
85°	24.1	22.8	24.1	24.1	22.8	24.1	22.8	22.8	21.6	21.6	22.8
87.5°	10.1	8.9	7.6	7.6	8.9	7.6	7.6	7.6	8.9	7.6	7.6
90°	11.3	11.3	11.4	11.5	11.5	11.6	11.5	11.5	11.4	11.3	11.3
92.5°	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
95°	21.9	21.8	21.7	21.5	21.4	21.2	21.4	21.5	21.7	21.8	21.9
97.5°	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2
100°	47.1	47.1	47.0	46.9	46.9	46.8	46.9	46.9	47.0	47.1	47.1
102.5°	61.5	61.5	61.4	61.3	61.3	61.2	61.3	61.3	61.4	61.5	61.5
105°	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8
107.5°	90.9	90.7	90.3	90.0	89.6	89.2	89.6	90.0	90.3	90.7	90.9
110°	106.2	106.1	105.9	105.6	105.4	105.2	105.4	105.6	105.9	106.1	106.2

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	121.3	121.2	121.1	120.9	120.8	120.6	120.8	120.9	121.1	121.2	121.3
115°	137.7	137.6	137.4	137.1	136.9	136.7	136.9	137.1	137.4	137.6	137.7
117.5°	152.7	152.6	152.4	152.1	151.9	151.7	151.9	152.1	152.4	152.6	152.7
120°	168.8	168.7	168.4	168.2	167.9	167.7	167.9	168.2	168.4	168.7	168.8
122.5°	184.1	184.0	183.9	183.8	183.6	183.5	183.6	183.8	183.9	184.0	184.1
125°	199.9	199.9	199.8	199.7	199.6	199.5	199.6	199.7	199.8	199.9	199.9
127.5°	214.9	214.8	214.6	214.3	214.1	213.9	214.1	214.3	214.6	214.8	214.9
130°	230.9	230.8	230.5	230.2	229.9	229.6	229.9	230.2	230.5	230.8	230.9
132.5°	245.6	245.5	245.3	245.0	244.8	244.6	244.8	245.0	245.3	245.5	245.6
135°	261.4	261.3	261.0	260.8	260.5	260.3	260.5	260.8	261.0	261.3	261.4
137.5°	275.7	275.5	275.2	274.9	274.6	274.3	274.6	274.9	275.2	275.5	275.7
140°	290.4	290.2	289.9	289.6	289.3	289.0	289.3	289.6	289.9	290.2	290.4
142.5°	303.7	303.5	303.2	302.9	302.6	302.3	302.6	302.9	303.2	303.5	303.7
145°	317.0	316.9	316.6	316.3	316.0	315.7	316.0	316.3	316.6	316.9	317.0
147.5°	329.0	328.8	328.5	328.2	327.9	327.6	327.9	328.2	328.5	328.8	329.0
150°	340.3	340.2	339.9	339.7	339.4	339.2	339.4	339.7	339.9	340.2	340.3
152.5°	351.5	351.4	351.1	350.8	350.5	350.2	350.5	350.8	351.1	351.4	351.5
155°	360.8	360.7	360.4	360.2	359.9	359.7	359.9	360.2	360.4	360.7	360.8
157.5°	370.0	369.8	369.4	369.1	368.7	368.3	368.7	369.1	369.4	369.8	370.0
160°	377.5	377.3	377.0	376.7	376.4	376.1	376.4	376.7	377.0	377.3	377.5
162.5°	384.7	384.5	384.1	383.8	383.4	383.0	383.4	383.8	384.1	384.5	384.7
165°	390.5	390.3	389.9	389.6	389.2	388.8	389.2	389.6	389.9	390.3	390.5
167.5°	395.6	395.4	395.0	394.7	394.3	393.9	394.3	394.7	395.0	395.4	395.6
170°	399.7	399.5	399.0	398.6	398.1	397.7	398.1	398.6	399.0	399.5	399.7
172.5°	402.8	402.6	402.1	401.6	401.2	400.7	401.2	401.6	402.1	402.6	402.8
175°	404.8	404.6	404.1	403.7	403.2	402.8	403.2	403.7	404.1	404.6	404.8
177.5°	405.9	405.7	405.2	404.7	404.3	403.8	404.3	404.7	405.2	405.7	405.9
180°	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1	1825.1
2.5°	1738.9	1745.2	1742.7	1728.7	1742.7	1746.5	1754.1	1761.7	1766.8	1774.4	1780.7
5°	1629.8	1642.5	1650.1	1642.5	1667.8	1671.6	1689.4	1699.5	1714.8	1727.4	1737.6
7.5°	1527.0	1537.2	1552.4	1555.0	1570.2	1587.9	1613.3	1638.7	1662.8	1675.4	1686.9
10°	1416.7	1434.5	1457.3	1452.2	1475.0	1502.9	1529.6	1570.2	1590.5	1613.3	1633.6
12.5°	1306.4	1317.8	1348.2	1358.4	1391.3	1412.9	1449.7	1475.0	1525.8	1552.4	1570.2
15°	1113.6	1160.5	1198.6	1244.2	1287.3	1327.9	1360.9	1406.6	1450.9	1471.2	1500.4
17.5°	1026.1	1047.6	1070.5	1093.3	1149.1	1221.4	1279.7	1329.2	1367.2	1393.9	1428.1
20°	934.7	956.3	981.7	1003.2	1037.5	1089.5	1161.8	1246.8	1292.4	1320.3	1353.3
22.5°	870.1	890.4	906.8	925.9	952.5	990.6	1045.1	1150.4	1211.2	1245.5	1274.7
25°	800.3	825.7	843.4	857.4	878.9	920.8	965.2	1024.8	1133.9	1160.5	1201.1
27.5°	752.1	759.7	780.0	801.6	823.1	846.0	891.6	942.4	1015.9	1074.3	1123.7
30°	695.0	714.1	733.1	742.0	761.0	794.0	821.9	876.4	933.5	979.1	1038.7
32.5°	651.9	663.3	676.0	697.6	715.3	738.2	766.1	811.7	859.9	889.1	934.7
35°	603.7	611.3	638.0	646.8	664.6	687.4	715.3	750.8	802.8	825.7	858.6
37.5°	558.1	575.8	583.4	603.7	620.2	643.0	663.3	703.9	738.2	764.8	795.2
40°	522.5	530.2	544.1	561.9	575.8	593.6	618.9	648.1	684.9	706.4	733.1
42.5°	479.4	485.8	503.5	513.7	536.5	553.0	568.2	603.7	636.7	653.2	679.8
45°	432.5	447.7	459.1	479.4	492.1	512.4	531.4	556.8	587.2	606.3	621.5
47.5°	391.9	407.1	418.5	437.6	457.9	466.7	487.0	513.7	541.6	556.8	578.4
50°	358.9	364.0	385.6	394.4	416.0	433.8	447.7	470.5	501.0	509.9	527.6
52.5°	327.2	331.0	345.0	356.4	375.4	390.6	408.4	430.0	455.3	469.3	483.2
55°	299.3	301.9	308.2	320.9	333.6	352.6	369.1	389.4	410.9	426.2	438.8
57.5°	267.6	272.7	277.8	285.4	298.1	315.8	333.6	352.6	370.3	380.5	397.0
60°	230.8	238.4	247.3	256.2	265.1	277.8	298.1	315.8	332.3	341.2	353.9
62.5°	191.5	206.7	214.3	224.5	232.1	243.5	258.7	279.0	290.4	301.9	312.0
65°	172.5	173.8	175.0	185.2	199.1	210.5	224.5	239.7	257.5	265.1	272.7
67.5°	153.5	154.7	157.3	158.5	163.6	176.3	191.5	208.0	222.0	227.0	234.6
70°	134.4	134.4	139.5	140.8	142.1	143.3	156.0	172.5	185.2	191.5	200.4
72.5°	114.1	115.4	118.0	119.2	121.8	124.3	128.1	137.0	152.2	158.5	168.7
75°	93.9	95.1	96.4	97.7	101.5	102.7	106.5	111.6	118.0	125.6	131.9
77.5°	74.8	74.8	76.1	78.6	81.2	82.4	86.2	88.8	91.3	95.1	100.2
80°	55.8	57.1	57.1	59.6	59.6	60.9	62.1	66.0	68.5	71.0	73.6
82.5°	38.0	40.6	40.6	40.6	41.9	43.1	44.4	44.4	46.9	48.2	52.0
85°	22.8	24.1	24.1	24.1	22.8	25.4	25.4	26.6	26.6	26.6	27.9
87.5°	8.9	7.6	8.9	8.9	8.9	10.1	8.9	8.9	10.1	11.4	11.4
90°	11.4	11.5	11.7	11.8	12.0	10.3	8.6	6.9	5.2	4.4	3.9
92.5°	10.9	10.8	10.7	10.7	10.6	10.5	10.4	10.3	10.2	10.2	9.9
95°	21.9	21.9	21.9	21.9	21.9	21.7	21.6	21.4	21.3	21.2	20.8
97.5°	34.2	34.2	34.2	34.2	34.2	33.9	33.6	33.3	33.0	32.8	32.5
100°	47.1	47.1	47.1	47.1	47.1	46.9	46.7	46.4	46.2	46.1	45.8
102.5°	61.5	61.4	61.3	61.3	61.2	60.9	60.6	60.3	60.0	59.8	59.6
105°	75.7	75.6	75.5	75.3	75.2	75.0	74.9	74.7	74.6	74.5	74.4
107.5°	90.9	90.8	90.7	90.6	90.5	90.5	90.5	90.5	90.5	90.5	90.4
110°	106.2	106.2	106.2	106.2	106.2	106.2	106.2	106.2	106.2	106.2	106.0

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	121.4	121.6	121.9	122.1	122.3	122.4	122.4	122.5	122.6	122.6	122.4
115°	137.7	137.8	137.9	137.9	138.0	138.2	138.3	138.5	138.6	138.7	138.5
117.5°	152.8	153.0	153.3	153.5	153.7	154.1	154.5	154.8	155.2	155.4	155.1
120°	168.8	168.8	168.8	168.8	168.8	169.4	170.0	170.6	171.2	171.5	171.2
122.5°	184.2	184.5	184.7	185.0	185.2	185.6	186.0	186.3	186.7	186.9	186.5
125°	200.0	200.2	200.5	200.7	200.9	201.1	201.3	201.6	201.8	201.9	201.6
127.5°	215.1	215.4	215.7	216.0	216.3	216.6	216.9	217.2	217.5	217.6	217.2
130°	231.0	231.1	231.3	231.4	231.6	231.8	231.9	232.1	232.2	232.3	231.8
132.5°	245.8	246.2	246.5	246.9	247.3	247.2	247.2	247.1	247.0	247.0	246.6
135°	261.4	261.5	261.6	261.6	261.7	261.5	261.4	261.2	261.1	261.0	260.6
137.5°	275.7	275.8	275.9	275.9	276.0	275.9	275.7	275.6	275.5	275.4	275.1
140°	290.4	290.4	290.4	290.4	290.4	290.0	289.6	289.3	288.9	288.7	288.4
142.5°	303.7	303.6	303.5	303.5	303.4	303.2	302.9	302.7	302.4	302.3	302.0
145°	317.0	316.9	316.8	316.8	316.7	316.2	315.8	315.3	314.8	314.6	314.3
147.5°	328.9	328.8	328.6	328.5	328.3	328.0	327.7	327.4	327.1	326.9	326.6
150°	340.2	339.9	339.7	339.4	339.2	338.9	338.6	338.3	338.0	337.9	337.7
152.5°	351.4	351.1	350.8	350.5	350.2	349.8	349.4	349.1	348.7	348.5	348.3
155°	360.6	360.2	359.9	359.5	359.1	358.9	358.6	358.4	358.1	358.0	357.9
157.5°	369.7	369.2	368.7	368.1	367.6	367.4	367.3	367.1	367.0	366.9	366.8
160°	377.3	376.8	376.4	375.9	375.5	375.4	375.3	375.2	375.1	375.1	375.0
162.5°	384.4	383.9	383.4	382.8	382.3	382.2	382.1	382.0	381.9	381.9	381.9
165°	390.2	389.7	389.2	388.6	388.1	388.1	388.1	388.1	388.1	388.1	388.1
167.5°	395.3	394.8	394.3	393.7	393.2	393.2	393.2	393.2	393.2	393.2	393.3
170°	399.4	398.9	398.4	397.8	397.3	397.4	397.5	397.6	397.7	397.7	397.8
172.5°	402.5	402.0	401.5	400.9	400.4	400.5	400.5	400.6	400.7	400.7	400.8
175°	404.5	404.0	403.5	402.9	402.4	402.6	402.7	402.9	403.0	403.1	403.2
177.5°	405.7	405.2	404.7	404.3	403.8	404.0	404.1	404.3	404.4	404.5	404.6
180°	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8	404.8

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1825.1	1825.1	1825.1	1825.1
2.5°	1792.1	1788.3	1811.1	1836.5
5°	1755.3	1761.7	1790.9	1826.4
7.5°	1717.3	1731.2	1765.5	1812.4
10°	1664.0	1689.4	1741.4	1789.6
12.5°	1612.0	1646.3	1695.7	1752.8
15°	1553.7	1591.7	1652.6	1721.1
17.5°	1489.0	1532.1	1603.1	1678.0
20°	1420.5	1477.6	1552.4	1633.6
22.5°	1344.4	1412.9	1490.3	1580.3
25°	1270.8	1345.7	1423.0	1527.0
27.5°	1198.6	1272.1	1358.4	1463.6
30°	1126.3	1193.5	1286.1	1398.9
32.5°	1048.9	1118.7	1216.3	1331.7
35°	977.9	1047.6	1138.9	1253.1
37.5°	901.8	976.6	1064.1	1182.1
40°	813.0	900.5	985.5	1098.4
42.5°	739.4	832.0	914.5	1021.0
45°	681.1	768.6	837.1	941.1
47.5°	626.5	697.6	767.3	863.7
50°	574.5	629.1	701.4	787.6
52.5°	521.3	568.2	630.4	711.5
55°	473.1	517.5	573.3	635.4
57.5°	428.7	460.4	516.2	572.0
60°	379.2	412.2	455.3	502.3
62.5°	337.4	362.7	403.3	442.6
65°	293.0	317.1	347.5	384.3
67.5°	252.4	274.0	298.1	327.2
70°	215.6	232.1	249.9	275.2
72.5°	176.3	194.1	210.5	230.8
75°	144.6	152.2	166.1	180.1
77.5°	111.6	121.8	129.4	140.8
80°	79.9	88.8	91.3	100.2
82.5°	53.3	58.3	63.4	66.0
85°	30.4	33.0	38.0	39.3
87.5°	11.4	12.7	15.2	17.8
90°	3.0	2.1	1.2	0.3
92.5°	9.3	8.7	8.1	7.5
95°	20.1	19.3	18.6	17.8
97.5°	31.8	31.1	30.4	29.7
100°	45.2	44.6	44.0	43.4
102.5°	59.1	58.6	58.2	57.7
105°	74.2	73.9	73.7	73.5
107.5°	90.1	89.8	89.5	89.2
110°	105.5	105.1	104.6	104.2

TEST NUMBER: P1000134

CATALOG NUMBER: SA2XXRDIP-B865D330UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	121.9	121.5	121.0	120.6
115°	138.0	137.6	137.1	136.7
117.5°	154.5	153.9	153.3	152.7
120°	170.6	170.0	169.4	168.8
122.5°	185.8	185.0	184.3	183.5
125°	200.9	200.2	199.5	198.8
127.5°	216.4	215.5	214.7	213.9
130°	230.8	229.9	228.9	227.9
132.5°	245.9	245.1	244.4	243.6
135°	259.8	258.9	258.1	257.3
137.5°	274.4	273.7	273.0	272.3
140°	287.7	287.0	286.3	285.6
142.5°	301.3	300.6	300.0	299.3
145°	313.8	313.3	312.8	312.3
147.5°	325.9	325.2	324.6	323.9
150°	337.2	336.7	336.3	335.8
152.5°	347.8	347.3	346.9	346.4
155°	357.7	357.4	357.2	357.0
157.5°	366.7	366.5	366.4	366.2
160°	374.9	374.7	374.6	374.4
162.5°	381.9	381.9	381.9	381.9
165°	388.2	388.3	388.3	388.4
167.5°	393.5	393.8	394.0	394.2
170°	398.0	398.3	398.5	398.7
172.5°	401.1	401.3	401.6	401.8
175°	403.5	403.7	404.0	404.2
177.5°	404.8	405.1	405.3	405.5
180°	404.8	404.8	404.8	404.8

(END OF REPORT)