

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1000798

Luminaire Tested: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1000798
REPORT IS A COMBINATION OF REPORTS P995411 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1
Description: Define 4 Direct/Indirect Pendant with 5000K BioUP LEDs {m-DER=1.015} {m-EER=1.115}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7037.0 lumens
Efficiency: N/A
Efficacy: 103.6 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.3 / 1.41
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 67.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

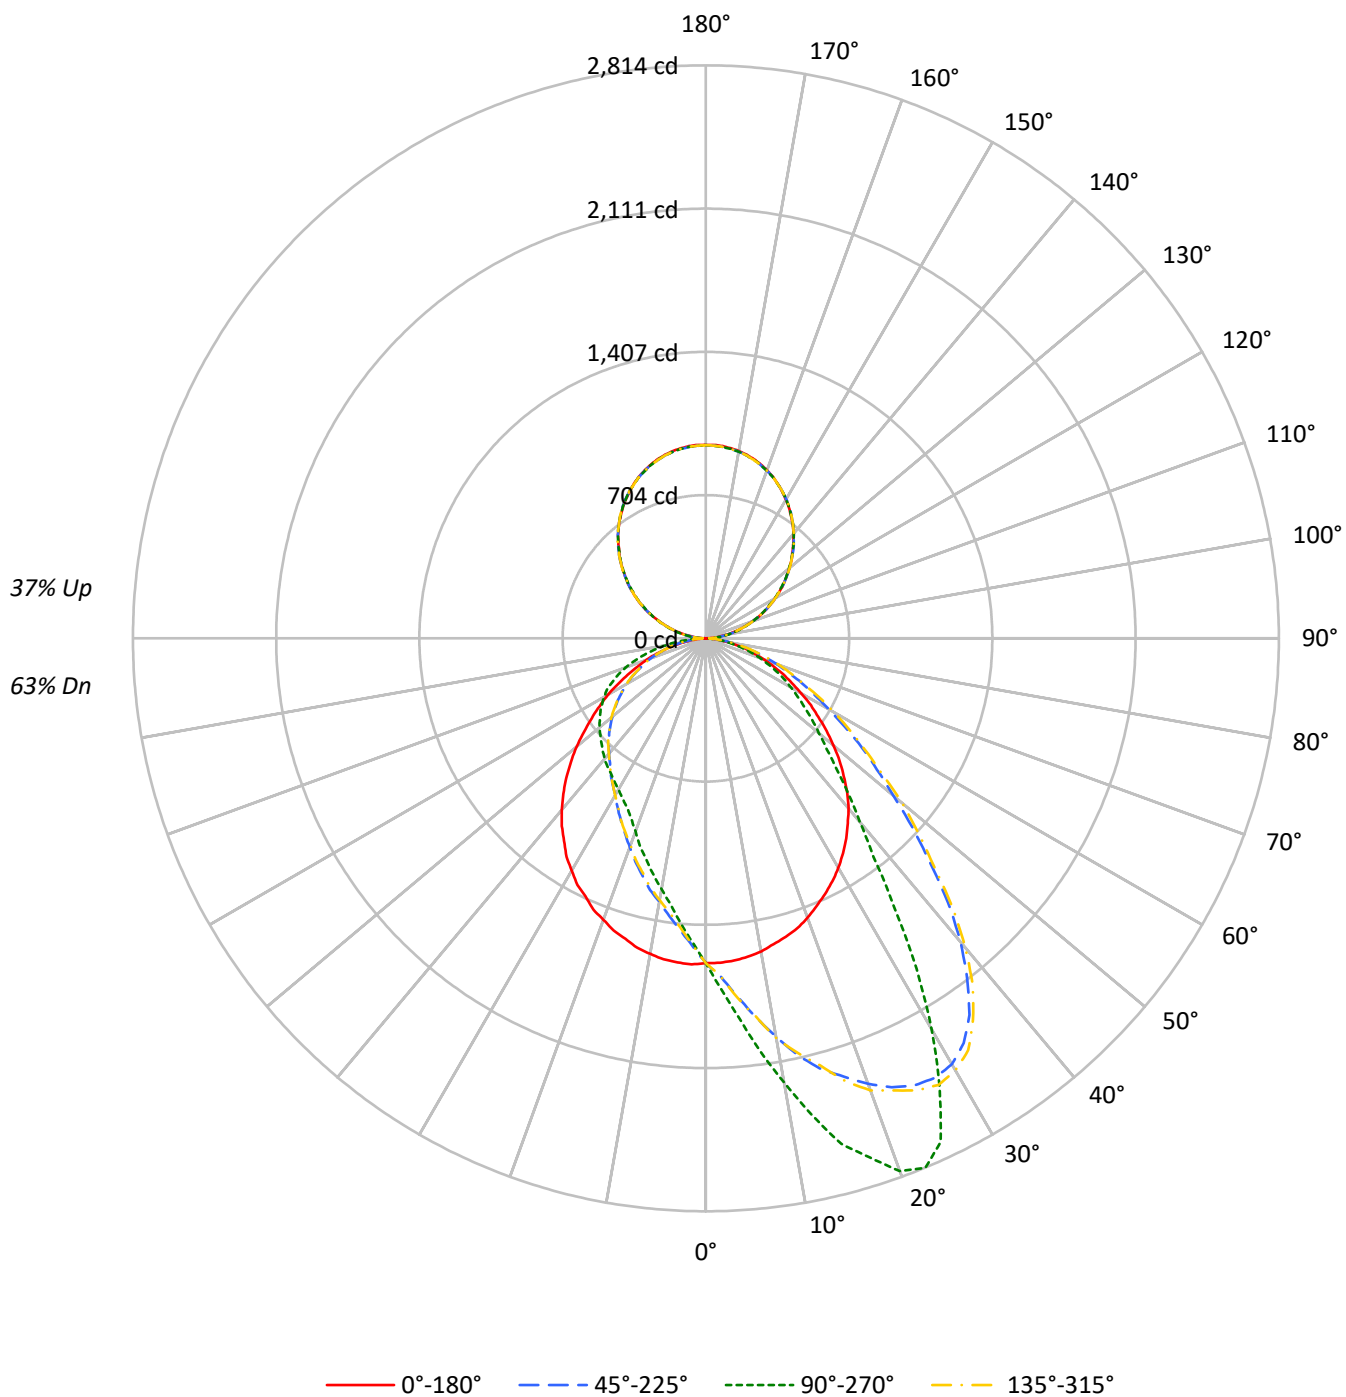

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68
1	101	97	93	89	94	91	87	84	80	77	75	70	68	66	60	59	58
2	92	85	79	73	86	80	74	70	70	66	62	61	58	56	53	51	49
3	84	75	67	62	79	70	64	59	62	57	53	55	51	47	48	45	42
4	77	66	58	52	72	63	55	50	55	50	45	49	44	41	43	39	37
5	71	59	51	45	66	56	49	43	50	44	39	44	39	36	39	35	32
6	66	53	45	39	61	51	43	38	45	39	35	40	35	31	35	31	28
7	61	48	40	35	57	46	39	33	41	35	31	36	32	28	32	28	25
8	56	44	36	31	53	42	35	30	37	32	27	33	29	25	30	26	23
9	53	40	33	28	49	38	31	27	34	29	25	31	26	23	27	23	21
10	49	37	30	25	46	35	29	24	32	26	22	28	24	20	25	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13006	13006	13006	13006
5°	12973	14921	13048	11211
10°	12876	17407	12974	9836
15°	12721	20068	12810	8801
20°	12556	21760	12647	7890
25°	12316	21511	12434	7219
30°	12081	17780	12228	6873
35°	11751	13250	11880	6663
40°	11366	9981	11476	6560
45°	10778	8010	10912	6420
50°	10076	6749	10222	6355
55°	9250	5874	9396	6280
60°	8448	5172	8696	6175
65°	7695	4451	7769	5919
70°	6809	3662	6956	5450
75°	5939	2814	5902	4631
80°	4672	1848	4619	3515
85°	3078	830	2882	2050

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 145°

Vertical Angle: 45°

Luminance: 16817 cd/sqm

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	155.2	2.2
10°-20°	479.1	6.8
20°-30°	761.1	10.8
30°-40°	845.7	12.0
40°-50°	769.1	10.9
50°-60°	628.5	8.9
60°-70°	448.6	6.4
70°-80°	246.9	3.5
80°-90°	68.7	1.0
90°-100°	61.9	0.9
100°-110°	185.3	2.6
110°-120°	314.8	4.5
120°-130°	415.2	5.9
130°-140°	466.4	6.6
140°-150°	458.4	6.5
150°-160°	385.5	5.5
160°-170°	256.5	3.6
170°-180°	89.8	1.3
0°-30°	1395.4	19.8
0°-40°	2241.2	31.8
0°-60°	3638.8	51.7
0°-90°	4403.0	62.6
90°-120°	562.1	8.0
90°-150°	1902.1	27.0
90°-180°	2634.0	37.4
0°-180°	7037.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1595	1595	1595	1595	1595	
5°	1588	1871	1598	1406	1588	151
15°	1517	2570	1528	1127	1517	428
25°	1385	2729	1398	916	1385	638
35°	1201	1613	1214	811	1201	750
45°	958	905	970	725	958	739
55°	674	592	684	633	674	606
65°	420	381	424	506	420	415
75°	206	190	205	313	206	216
85°	42	40	40	98	42	49
90°	2	22	2	22	2	6
95°	44	58	44	58	44	48
105°	171	179	171	179	171	181
115°	320	317	320	317	320	316
125°	466	462	466	462	466	416
135°	601	602	601	602	601	465
145°	730	731	730	731	730	457
155°	837	836	837	836	837	385
165°	911	909	911	909	911	257
175°	948	943	948	943	948	90
180°	949	949	949	949	949	

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9
2.5°	1594.9	1610.8	1617.4	1622.6	1639.8	1645.1	1646.4	1654.4	1661.0	1662.3	1662.3
5°	1588.3	1613.4	1633.2	1651.7	1679.5	1691.4	1705.9	1721.7	1742.9	1756.1	1762.7
7.5°	1577.7	1614.7	1645.1	1676.8	1715.1	1738.9	1752.1	1794.4	1823.5	1847.3	1876.3
10°	1561.9	1609.4	1653.0	1699.3	1753.5	1782.5	1811.6	1863.1	1904.1	1950.3	1987.3
12.5°	1538.1	1600.2	1653.0	1717.8	1785.2	1819.5	1853.9	1943.7	1991.3	2032.3	2098.3
15°	1516.9	1579.0	1654.4	1720.4	1803.7	1855.2	1905.4	1963.6	2038.9	2127.4	2190.8
17.5°	1493.2	1571.1	1641.1	1733.6	1826.1	1875.0	1916.0	2005.8	2111.6	2198.8	2256.9
20°	1460.1	1539.4	1631.9	1729.7	1839.3	1877.7	1931.8	2052.1	2147.2	2233.1	2328.3
22.5°	1421.8	1514.3	1612.1	1705.9	1819.5	1900.1	1959.6	2065.3	2180.3	2279.4	2386.4
25°	1384.8	1485.2	1571.1	1699.3	1819.5	1873.7	1941.1	2066.6	2192.2	2312.4	2422.1
27.5°	1345.2	1439.0	1555.3	1657.0	1793.1	1852.6	1925.2	2062.7	2196.1	2316.4	2434.0
30°	1301.6	1402.0	1498.4	1618.7	1750.8	1827.5	1894.8	2044.2	2180.3	2305.8	2415.5
32.5°	1252.7	1347.8	1450.9	1564.5	1703.2	1781.2	1865.8	2019.1	2164.4	2272.8	2357.3
35°	1201.1	1297.6	1387.4	1503.7	1646.4	1724.4	1806.3	1975.5	2119.5	2208.0	2256.9
37.5°	1144.3	1235.5	1324.0	1439.0	1581.7	1664.9	1748.2	1912.0	2048.1	2122.1	2108.9
40°	1090.1	1172.1	1254.0	1362.3	1511.6	1600.2	1672.9	1838.0	1957.0	1988.7	1945.1
42.5°	1028.0	1098.1	1177.3	1288.3	1433.7	1516.9	1608.1	1758.7	1847.3	1834.1	1760.1
45°	958.0	1020.1	1099.4	1203.8	1351.8	1437.7	1514.3	1657.0	1721.7	1688.7	1553.9
47.5°	890.6	951.4	1016.1	1120.5	1264.6	1337.2	1415.2	1543.4	1580.4	1510.3	1375.5
50°	817.9	868.1	935.5	1034.6	1169.4	1246.1	1310.8	1413.9	1427.1	1341.2	1201.1
52.5°	747.9	790.2	854.9	952.7	1078.2	1139.0	1202.4	1293.6	1283.1	1194.5	1059.7
55°	673.9	713.5	773.0	862.9	973.9	1032.0	1086.2	1166.8	1144.3	1053.1	935.5
57.5°	611.8	639.5	697.7	780.9	872.1	935.5	981.8	1045.2	1010.8	919.7	810.0
60°	540.4	574.8	623.7	691.1	780.9	823.2	864.2	906.5	882.7	795.5	697.7
62.5°	475.7	502.1	544.4	609.2	679.2	717.5	761.1	787.5	763.8	683.1	601.2
65°	420.2	441.3	474.4	527.2	594.6	626.3	651.4	676.5	656.7	581.4	521.9
67.5°	359.4	377.9	405.7	447.9	504.8	527.2	551.0	568.2	545.7	495.5	437.4
70°	305.2	318.5	344.9	376.6	416.2	437.4	457.2	474.4	454.6	412.3	368.7
72.5°	249.7	260.3	284.1	306.6	342.2	356.8	371.3	384.5	377.9	338.3	302.6
75°	206.1	210.1	226.0	244.5	266.9	282.8	293.3	301.3	296.0	264.3	241.8
77.5°	155.9	161.2	173.1	187.6	207.5	216.7	223.3	231.2	224.6	199.5	183.7
80°	113.6	115.0	121.6	134.8	148.0	149.3	155.9	166.5	162.5	145.4	133.5
82.5°	72.7	76.6	79.3	87.2	96.5	99.1	103.1	105.7	104.4	93.8	89.9
85°	42.3	42.3	44.9	50.2	52.9	56.8	58.1	59.5	62.1	55.5	51.5
87.5°	18.5	19.8	19.8	21.1	23.8	23.8	25.1	26.4	27.7	26.4	22.5
90°	2.2	4.0	5.8	7.6	9.4	10.3	11.0	12.3	13.6	14.9	16.2
92.5°	19.1	21.2	23.3	25.4	27.5	28.6	29.0	29.8	30.7	31.5	32.3
95°	44.1	45.6	47.0	48.5	50.0	50.7	51.3	52.4	53.5	54.7	55.8
97.5°	70.5	71.8	73.1	74.4	75.7	76.4	77.0	78.3	79.6	80.9	82.2
100°	102.8	103.4	104.1	104.7	105.4	105.7	106.4	107.9	109.4	110.8	112.3
102.5°	136.6	136.8	136.9	137.1	137.2	137.3	138.0	139.3	140.6	141.9	143.2
105°	171.1	171.3	171.4	171.6	171.7	171.8	172.1	172.8	173.4	174.1	174.7
107.5°	207.0	207.2	207.4	207.5	207.7	207.8	207.9	208.0	208.2	208.3	208.5
110°	243.8	244.1	244.4	244.7	245.0	245.2	245.1	245.0	244.8	244.7	244.5

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	281.9	281.9	281.9	281.9	281.9	281.9	281.7	281.4	281.1	280.8	280.5
115°	320.1	320.1	320.1	320.1	320.1	320.1	319.9	319.6	319.3	318.9	318.6
117.5°	356.1	356.1	356.1	356.1	356.1	356.1	356.0	355.8	355.7	355.5	355.3
120°	392.1	392.7	393.4	394.0	394.7	395.0	394.8	394.3	393.8	393.3	392.8
122.5°	429.5	429.7	429.8	430.0	430.1	430.2	430.1	430.0	429.8	429.7	429.5
125°	466.2	466.2	466.2	466.2	466.2	466.2	466.1	466.0	465.8	465.7	465.5
127.5°	499.2	499.7	500.2	500.7	501.2	501.5	501.3	501.0	500.7	500.3	500.0
130°	534.5	535.0	535.5	536.0	536.5	536.7	536.7	536.7	536.7	536.7	536.7
132.5°	570.5	570.8	571.1	571.4	571.7	571.9	571.8	571.7	571.5	571.4	571.2
135°	601.3	602.3	603.3	604.2	605.2	605.7	605.7	605.7	605.7	605.7	605.7
137.5°	635.8	636.3	636.8	637.3	637.8	638.0	638.2	638.5	638.8	639.2	639.5
140°	670.3	670.6	671.0	671.3	671.6	671.8	671.8	671.8	671.8	671.8	671.8
142.5°	701.9	702.2	702.6	702.9	703.2	703.4	703.3	703.1	703.0	702.8	702.6
145°	730.5	731.2	731.8	732.5	733.2	733.5	733.6	733.7	733.9	734.0	734.2
147.5°	759.9	760.7	761.5	762.4	763.2	763.6	763.5	763.3	763.2	763.0	762.8
150°	786.3	787.0	787.6	788.3	789.0	789.3	789.3	789.3	789.3	789.3	789.3
152.5°	811.3	811.6	811.9	812.2	812.5	812.7	812.8	813.0	813.1	813.3	813.5
155°	837.0	837.0	837.0	837.0	837.0	837.0	836.9	836.7	836.6	836.4	836.2
157.5°	859.0	858.7	858.3	858.0	857.7	857.5	857.5	857.5	857.5	857.5	857.5
160°	878.1	877.9	877.8	877.6	877.5	877.4	877.3	877.1	877.0	876.8	876.6
162.5°	895.7	895.2	894.7	894.2	893.7	893.5	893.4	893.3	893.1	893.0	892.8
165°	911.1	910.6	910.1	909.6	909.1	908.9	908.7	908.4	908.1	907.8	907.5
167.5°	923.6	923.0	922.3	921.7	921.0	920.7	920.7	920.7	920.7	920.7	920.7
170°	933.9	933.1	932.3	931.4	930.6	930.2	930.3	930.4	930.6	930.7	930.9
172.5°	941.2	940.6	939.9	939.3	938.6	938.3	938.3	938.3	938.3	938.3	938.3
175°	947.8	947.0	946.2	945.4	944.6	944.2	944.1	943.9	943.8	943.6	943.4
177.5°	950.8	950.0	949.2	948.3	947.5	947.1	947.1	947.1	947.1	947.1	947.1
180°	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9
2.5°	1666.2	1690.0	1700.6	1703.2	1717.8	1708.5	1712.5	1711.2	1721.7	1723.1	1723.1
5°	1787.8	1815.6	1824.8	1838.0	1857.8	1863.1	1859.2	1867.1	1881.6	1871.1	1886.9
7.5°	1916.0	1946.4	1967.5	1996.6	2003.2	2020.4	2030.9	2040.2	2042.8	2044.2	2046.8
10°	2034.9	2073.2	2102.3	2151.2	2161.8	2171.0	2217.3	2198.8	2222.5	2214.6	2217.3
12.5°	2131.4	2206.7	2230.5	2312.4	2320.3	2352.0	2349.4	2378.5	2383.8	2394.3	2383.8
15°	2258.2	2345.4	2383.8	2430.0	2456.4	2493.4	2500.0	2539.7	2555.5	2570.1	2555.5
17.5°	2374.5	2420.8	2518.5	2555.5	2572.7	2592.5	2642.7	2657.3	2681.1	2671.8	2698.2
20°	2432.6	2498.7	2601.8	2665.2	2691.6	2710.1	2752.4	2774.9	2784.1	2784.1	2786.8
22.5°	2484.2	2579.3	2656.0	2728.6	2752.4	2765.6	2790.7	2807.9	2811.9	2814.5	2817.2
25°	2530.4	2616.3	2678.4	2719.4	2728.6	2728.6	2743.2	2732.6	2715.4	2728.6	2736.6
27.5°	2530.4	2591.2	2619.0	2633.5	2633.5	2597.8	2576.7	2533.1	2496.1	2485.5	2509.3
30°	2488.1	2515.9	2477.6	2441.9	2414.1	2390.4	2307.1	2241.0	2227.8	2218.6	2254.3
32.5°	2390.4	2354.7	2279.4	2176.3	2135.3	2081.2	2016.4	1966.2	1935.8	1925.2	1917.3
35°	2217.3	2124.8	2027.0	1888.2	1859.2	1790.5	1701.9	1664.9	1614.7	1613.4	1630.6
37.5°	2028.3	1885.6	1779.9	1647.8	1606.8	1534.1	1450.9	1412.5	1378.2	1351.8	1383.5
40°	1807.6	1683.4	1522.2	1413.9	1355.7	1317.4	1247.4	1205.1	1189.2	1176.0	1195.8
42.5°	1601.5	1465.4	1339.9	1228.9	1181.3	1137.7	1091.5	1050.5	1038.6	1037.3	1051.8
45°	1396.7	1263.2	1147.0	1051.8	1021.4	995.0	950.1	938.2	918.4	905.1	911.7
47.5°	1232.8	1095.4	999.0	926.3	899.9	877.4	848.3	828.5	811.3	806.0	814.0
50°	1071.6	979.1	880.0	819.3	799.4	778.3	755.8	737.3	729.4	724.1	729.4
52.5°	942.1	843.0	775.6	726.8	706.9	691.1	675.2	667.3	656.7	659.4	664.7
55°	825.9	738.6	681.8	646.2	634.3	627.7	607.8	598.6	594.6	592.0	594.6
57.5°	716.2	652.8	610.5	580.1	564.2	560.3	544.4	544.4	540.4	536.5	537.8
60°	629.0	574.8	533.8	510.0	507.4	500.8	490.2	488.9	479.7	483.6	484.9
62.5°	540.4	496.8	469.1	454.6	445.3	442.7	436.1	434.7	430.8	432.1	429.4
65°	470.4	434.7	407.0	395.1	391.1	389.8	384.5	380.6	377.9	380.6	377.9
67.5°	400.4	376.6	355.4	343.6	338.3	336.9	333.0	330.3	331.7	327.7	330.3
70°	334.3	310.5	297.3	290.7	288.1	284.1	284.1	284.1	284.1	281.5	280.1
72.5°	281.5	257.7	248.4	244.5	241.8	240.5	236.5	237.8	236.5	235.2	240.5
75°	223.3	208.8	199.5	195.6	198.2	194.2	190.3	192.9	189.0	190.3	195.6
77.5°	169.1	162.5	157.2	154.6	152.0	149.3	149.3	146.7	146.7	146.7	146.7
80°	122.9	121.6	112.3	111.0	111.0	108.4	108.4	108.4	108.4	107.0	108.4
82.5°	81.9	80.6	78.0	76.6	74.0	75.3	75.3	72.7	72.7	71.4	72.7
85°	47.6	47.6	44.9	43.6	42.3	43.6	41.0	39.6	41.0	39.6	41.0
87.5°	22.5	19.8	21.1	19.8	17.2	18.5	15.9	17.2	15.9	14.5	17.2
90°	17.2	18.2	19.1	20.1	20.6	20.8	21.1	21.4	21.7	22.0	21.7
92.5°	32.8	33.3	33.8	34.3	34.5	34.6	34.7	34.9	35.0	35.2	35.0
95°	56.3	56.8	57.3	57.8	58.0	58.0	58.0	58.0	58.0	58.0	58.0
97.5°	82.9	83.5	84.2	84.9	85.2	85.2	85.2	85.2	85.2	85.2	85.2
100°	112.6	113.0	113.3	113.6	113.8	113.8	113.8	113.8	113.8	113.8	113.8
102.5°	143.7	144.2	144.7	145.2	145.4	145.5	145.6	145.8	145.9	146.1	145.9
105°	175.2	175.7	176.2	176.7	176.9	177.1	177.6	178.1	178.6	179.1	178.6
107.5°	209.1	209.8	210.4	211.1	211.4	211.3	211.2	211.0	210.9	210.7	210.9
110°	244.2	243.8	243.5	243.2	243.0	243.2	243.7	244.2	244.7	245.2	244.7

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5
115°	318.4	318.3	318.1	318.0	317.9	317.8	317.7	317.5	317.4	317.2	317.4
117.5°	354.8	354.3	353.8	353.3	353.1	352.9	352.4	351.9	351.4	350.9	351.4
120°	392.0	391.2	390.3	389.5	389.1	389.3	389.6	389.9	390.3	390.6	390.3
122.5°	429.0	428.5	428.0	427.5	427.3	426.9	426.1	425.2	424.4	423.6	424.4
125°	465.2	464.8	464.5	464.2	464.0	463.8	463.5	463.2	462.8	462.5	462.8
127.5°	499.7	499.3	499.0	498.7	498.5	498.4	498.3	498.1	498.0	497.8	498.0
130°	536.4	536.0	535.7	535.4	535.2	534.9	534.2	533.6	532.9	532.3	532.9
132.5°	570.9	570.5	570.2	569.9	569.7	569.6	569.5	569.3	569.2	569.0	569.2
135°	605.4	605.0	604.7	604.4	604.2	604.0	603.5	603.0	602.5	602.0	602.5
137.5°	639.0	638.5	638.0	637.5	637.3	637.4	637.5	637.7	637.8	638.0	637.8
140°	671.6	671.4	671.3	671.1	671.0	670.9	670.8	670.6	670.5	670.3	670.5
142.5°	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6
145°	734.0	733.9	733.7	733.6	733.5	733.3	732.8	732.3	731.8	731.3	731.8
147.5°	762.6	762.5	762.3	762.2	762.1	762.0	761.9	761.7	761.6	761.4	761.6
150°	789.3	789.3	789.3	789.3	789.3	789.2	789.0	788.9	788.7	788.5	788.7
152.5°	814.0	814.5	815.0	815.5	815.7	815.5	815.0	814.5	814.0	813.5	814.0
155°	836.9	837.5	838.2	838.9	839.2	838.9	838.2	837.5	836.9	836.2	836.9
157.5°	858.0	858.5	859.0	859.5	859.7	859.5	859.0	858.5	858.0	857.5	858.0
160°	877.1	877.6	878.1	878.6	878.8	878.4	877.6	876.8	876.0	875.2	876.0
162.5°	893.8	894.8	895.7	896.7	897.2	896.8	896.0	895.1	894.3	893.5	894.3
165°	908.5	909.5	910.4	911.4	911.9	911.6	910.9	910.2	909.6	908.9	909.6
167.5°	921.7	922.7	923.6	924.6	925.1	924.6	923.6	922.7	921.7	920.7	921.7
170°	931.9	932.9	933.9	934.9	935.4	934.8	933.7	932.5	931.4	930.2	931.4
172.5°	939.4	940.6	941.7	942.8	943.4	942.8	941.7	940.6	939.4	938.3	939.4
175°	944.6	945.7	946.9	948.0	948.6	948.0	946.9	945.7	944.6	943.4	944.6
177.5°	948.2	949.4	950.5	951.6	952.2	951.6	950.3	949.0	947.7	946.4	947.7
180°	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9
2.5°	1720.4	1716.5	1711.2	1711.2	1704.6	1704.6	1694.0	1675.5	1659.6	1654.4	1657.0
5°	1867.1	1868.4	1860.5	1853.9	1842.0	1832.7	1815.6	1782.5	1772.0	1750.8	1736.3
7.5°	2034.9	2029.6	2015.1	2004.5	2001.9	1980.7	1943.7	1904.1	1872.4	1851.2	1820.9
10°	2223.9	2202.7	2181.6	2175.0	2159.1	2123.4	2081.2	2037.6	1994.0	1947.7	1896.2
12.5°	2382.4	2341.5	2340.1	2324.3	2293.9	2274.1	2223.9	2161.8	2086.4	2034.9	1976.8
15°	2552.9	2514.6	2482.9	2453.8	2439.3	2381.1	2338.8	2260.9	2171.0	2115.5	2075.9
17.5°	2674.5	2657.3	2603.1	2589.9	2570.1	2502.7	2435.3	2358.6	2280.7	2202.7	2095.7
20°	2772.2	2761.7	2726.0	2707.5	2675.8	2622.9	2541.0	2452.5	2362.6	2251.6	2151.2
22.5°	2814.5	2801.3	2772.2	2756.4	2736.6	2691.6	2621.6	2521.2	2403.6	2304.5	2197.4
25°	2731.3	2755.1	2747.1	2740.5	2732.6	2706.2	2653.3	2564.8	2449.8	2337.5	2204.0
27.5°	2543.6	2584.6	2624.2	2629.5	2642.7	2653.3	2632.2	2568.7	2472.3	2353.4	2206.7
30°	2291.3	2309.8	2390.4	2414.1	2432.6	2500.0	2539.7	2523.8	2449.8	2342.8	2208.0
32.5°	1967.5	2016.4	2098.3	2155.2	2205.4	2280.7	2383.8	2424.7	2398.3	2311.1	2177.6
35°	1661.0	1719.1	1814.2	1886.9	1937.1	2044.2	2165.7	2254.3	2287.3	2243.7	2124.8
37.5°	1409.9	1479.9	1564.5	1592.3	1650.4	1782.5	1950.3	2073.2	2153.8	2157.8	2065.3
40°	1220.9	1256.6	1324.0	1366.3	1423.1	1534.1	1698.0	1860.5	1982.1	2023.0	1974.1
42.5°	1061.1	1088.8	1139.0	1190.6	1242.1	1326.7	1477.3	1629.3	1793.1	1875.0	1873.7
45°	934.2	963.3	997.6	1039.9	1075.6	1166.8	1285.7	1441.6	1583.0	1709.9	1741.6
47.5°	823.2	848.3	890.6	909.1	932.9	1018.8	1121.8	1267.2	1413.9	1559.2	1596.2
50°	741.3	762.4	791.5	803.4	829.8	893.2	977.8	1095.4	1257.9	1391.4	1460.1
52.5°	667.3	683.1	705.6	714.9	733.4	780.9	857.6	950.1	1084.8	1222.3	1318.7
55°	603.9	614.4	630.3	640.9	654.1	696.4	753.2	836.4	952.7	1071.6	1165.4
57.5°	544.4	552.3	568.2	573.5	584.0	617.1	656.7	726.8	833.8	939.5	1030.7
60°	488.9	494.2	503.4	515.3	523.3	545.7	582.7	640.9	726.8	823.2	897.2
62.5°	436.1	444.0	446.6	451.9	458.5	479.7	508.7	551.0	626.3	705.6	783.6
65°	381.9	388.5	393.8	395.1	401.7	417.6	444.0	481.0	529.9	598.6	671.3
67.5°	331.7	335.6	338.3	343.6	350.2	358.1	379.2	407.0	451.9	507.4	565.5
70°	285.4	285.4	289.4	290.7	298.6	307.9	317.1	343.6	383.2	428.1	467.8
72.5°	235.2	241.8	240.5	247.1	245.8	252.4	264.3	281.5	310.5	346.2	384.5
75°	191.6	195.6	195.6	195.6	198.2	203.5	210.1	226.0	248.4	277.5	300.0
77.5°	149.3	152.0	152.0	152.0	153.3	158.6	165.2	175.7	191.6	208.8	222.0
80°	107.0	109.7	109.7	112.3	112.3	113.6	120.2	125.5	133.5	146.7	159.9
82.5°	72.7	74.0	76.6	76.6	75.3	78.0	79.3	84.6	92.5	95.1	104.4
85°	39.6	41.0	42.3	42.3	43.6	46.2	44.9	50.2	50.2	55.5	58.1
87.5°	15.9	18.5	18.5	17.2	18.5	18.5	18.5	21.1	22.5	23.8	22.5
90°	21.4	21.1	20.8	20.6	20.1	19.1	18.2	17.2	16.2	14.9	13.6
92.5°	34.9	34.7	34.6	34.5	34.3	33.8	33.3	32.8	32.3	31.5	30.7
95°	58.0	58.0	58.0	58.0	57.8	57.3	56.8	56.3	55.8	54.7	53.5
97.5°	85.2	85.2	85.2	85.2	84.9	84.2	83.5	82.9	82.2	80.9	79.6
100°	113.8	113.8	113.8	113.8	113.6	113.3	113.0	112.6	112.3	110.8	109.4
102.5°	145.8	145.6	145.5	145.4	145.2	144.7	144.2	143.7	143.2	141.9	140.6
105°	178.1	177.6	177.1	176.9	176.7	176.2	175.7	175.2	174.7	174.1	173.4
107.5°	211.0	211.2	211.3	211.4	211.1	210.4	209.8	209.1	208.5	208.3	208.2
110°	244.2	243.7	243.2	243.0	243.2	243.5	243.8	244.2	244.5	244.7	244.8

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.8	281.1
115°	317.5	317.7	317.8	317.9	318.0	318.1	318.3	318.4	318.6	318.9	319.3
117.5°	351.9	352.4	352.9	353.1	353.3	353.8	354.3	354.8	355.3	355.5	355.7
120°	389.9	389.6	389.3	389.1	389.5	390.3	391.2	392.0	392.8	393.3	393.8
122.5°	425.2	426.1	426.9	427.3	427.5	428.0	428.5	429.0	429.5	429.7	429.8
125°	463.2	463.5	463.8	464.0	464.2	464.5	464.8	465.2	465.5	465.7	465.8
127.5°	498.1	498.3	498.4	498.5	498.7	499.0	499.3	499.7	500.0	500.3	500.7
130°	533.6	534.2	534.9	535.2	535.4	535.7	536.0	536.4	536.7	536.7	536.7
132.5°	569.3	569.5	569.6	569.7	569.9	570.2	570.5	570.9	571.2	571.4	571.5
135°	603.0	603.5	604.0	604.2	604.4	604.7	605.0	605.4	605.7	605.7	605.7
137.5°	637.7	637.5	637.4	637.3	637.5	638.0	638.5	639.0	639.5	639.2	638.8
140°	670.6	670.8	670.9	671.0	671.1	671.3	671.4	671.6	671.8	671.8	671.8
142.5°	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.8	703.0
145°	732.3	732.8	733.3	733.5	733.6	733.7	733.9	734.0	734.2	734.0	733.9
147.5°	761.7	761.9	762.0	762.1	762.2	762.3	762.5	762.6	762.8	763.0	763.2
150°	788.9	789.0	789.2	789.3	789.3	789.3	789.3	789.3	789.3	789.3	789.3
152.5°	814.5	815.0	815.5	815.7	815.5	815.0	814.5	814.0	813.5	813.3	813.1
155°	837.5	838.2	838.9	839.2	838.9	838.2	837.5	836.9	836.2	836.4	836.6
157.5°	858.5	859.0	859.5	859.7	859.5	859.0	858.5	858.0	857.5	857.5	857.5
160°	876.8	877.6	878.4	878.8	878.6	878.1	877.6	877.1	876.6	876.8	877.0
162.5°	895.1	896.0	896.8	897.2	896.7	895.7	894.8	893.8	892.8	893.0	893.1
165°	910.2	910.9	911.6	911.9	911.4	910.4	909.5	908.5	907.5	907.8	908.1
167.5°	922.7	923.6	924.6	925.1	924.6	923.6	922.7	921.7	920.7	920.7	920.7
170°	932.5	933.7	934.8	935.4	934.9	933.9	932.9	931.9	930.9	930.7	930.6
172.5°	940.6	941.7	942.8	943.4	942.8	941.7	940.6	939.4	938.3	938.3	938.3
175°	945.7	946.9	948.0	948.6	948.0	946.9	945.7	944.6	943.4	943.6	943.8
177.5°	949.0	950.3	951.6	952.2	951.6	950.5	949.4	948.2	947.1	947.1	947.1
180°	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9
2.5°	1645.1	1639.8	1635.9	1635.9	1624.0	1612.1	1605.5	1602.8	1600.2	1589.6	1575.1
5°	1712.5	1695.3	1683.4	1671.5	1651.7	1630.6	1609.4	1597.5	1580.4	1556.6	1539.4
7.5°	1787.8	1746.9	1733.6	1719.1	1679.5	1643.8	1614.7	1589.6	1561.9	1531.5	1501.1
10°	1851.2	1807.6	1778.6	1753.5	1701.9	1654.4	1610.8	1573.8	1538.1	1498.4	1461.4
12.5°	1912.0	1849.9	1819.5	1782.5	1728.4	1659.6	1602.8	1556.6	1503.7	1462.8	1417.8
15°	1996.6	1892.2	1842.0	1818.2	1745.5	1664.9	1596.2	1527.5	1483.9	1421.8	1382.2
17.5°	2009.8	1925.2	1892.2	1831.4	1744.2	1653.0	1573.8	1505.0	1439.0	1383.5	1331.9
20°	2056.1	1945.1	1892.2	1853.9	1738.9	1646.4	1559.2	1470.7	1407.3	1347.8	1289.7
22.5°	2085.1	1959.6	1904.1	1843.3	1733.6	1622.6	1519.6	1442.9	1365.0	1304.2	1257.9
25°	2077.2	1951.7	1889.6	1832.7	1699.3	1588.3	1495.8	1398.0	1325.3	1259.3	1198.5
27.5°	2073.2	1931.8	1865.8	1802.4	1676.8	1560.5	1444.3	1365.0	1284.4	1207.7	1162.8
30°	2062.7	1906.7	1830.1	1761.4	1630.6	1509.0	1409.9	1317.4	1236.8	1166.8	1107.3
32.5°	2027.0	1864.5	1790.5	1716.5	1580.4	1458.8	1358.4	1272.5	1191.9	1119.2	1062.4
35°	1979.4	1814.2	1733.6	1655.7	1519.6	1396.7	1304.2	1214.3	1139.0	1069.0	1014.8
37.5°	1931.8	1756.1	1680.8	1590.9	1465.4	1337.2	1242.1	1161.5	1091.5	1018.8	959.3
40°	1863.1	1687.4	1604.1	1527.5	1380.8	1260.6	1173.4	1100.7	1032.0	963.3	913.1
42.5°	1769.3	1612.1	1526.2	1441.6	1304.2	1185.3	1100.7	1036.0	971.2	914.4	858.9
45°	1674.2	1520.9	1444.3	1368.9	1219.6	1107.3	1029.3	969.9	915.7	853.6	808.7
47.5°	1559.2	1429.7	1353.1	1279.1	1137.7	1025.4	954.0	898.5	848.3	796.8	754.5
50°	1441.6	1329.3	1259.3	1182.6	1047.8	946.1	876.1	829.8	788.9	740.0	705.6
52.5°	1314.8	1217.0	1157.5	1083.5	964.6	870.8	799.4	753.2	718.8	683.1	652.8
55°	1180.0	1108.6	1045.2	985.7	873.4	788.9	725.4	684.5	660.7	627.7	601.2
57.5°	1058.4	989.7	951.4	884.0	786.2	703.0	652.8	618.4	590.7	570.8	549.7
60°	931.6	876.1	833.8	784.9	699.0	629.0	576.1	556.3	527.2	512.7	503.4
62.5°	810.0	770.4	730.7	693.7	617.1	551.0	511.4	486.3	469.1	454.6	446.6
65°	695.0	658.0	630.3	597.3	533.8	481.0	444.0	424.2	407.0	403.0	393.8
67.5°	582.7	566.9	536.5	510.0	455.9	414.9	387.2	362.1	352.8	348.8	340.9
70°	487.6	469.1	445.3	422.8	381.9	346.2	321.1	311.8	298.6	297.3	288.1
72.5°	401.7	379.2	362.1	344.9	314.5	282.8	269.6	256.3	249.7	244.5	240.5
75°	318.5	302.6	290.7	276.2	249.7	228.6	210.1	204.8	200.8	199.5	196.9
77.5°	237.8	227.3	222.0	207.5	189.0	170.5	162.5	154.6	154.6	152.0	153.3
80°	169.1	162.5	155.9	148.0	132.1	124.2	117.6	112.3	109.7	108.4	109.7
82.5°	107.0	103.1	101.7	96.5	85.9	81.9	76.6	72.7	72.7	72.7	72.7
85°	59.5	59.5	59.5	51.5	47.6	43.6	41.0	39.6	39.6	39.6	41.0
87.5°	25.1	25.1	21.1	21.1	19.8	17.2	15.9	15.9	17.2	17.2	18.5
90°	12.3	11.0	10.3	9.4	7.6	5.8	4.0	2.2	4.0	5.8	7.6
92.5°	29.8	29.0	28.6	27.5	25.4	23.3	21.2	19.1	21.2	23.3	25.4
95°	52.4	51.3	50.7	50.0	48.5	47.0	45.6	44.1	45.6	47.0	48.5
97.5°	78.3	77.0	76.4	75.7	74.4	73.1	71.8	70.5	71.8	73.1	74.4
100°	107.9	106.4	105.7	105.4	104.7	104.1	103.4	102.8	103.4	104.1	104.7
102.5°	139.3	138.0	137.3	137.2	137.1	136.9	136.8	136.6	136.8	136.9	137.1
105°	172.8	172.1	171.8	171.7	171.6	171.4	171.3	171.1	171.3	171.4	171.6
107.5°	208.0	207.9	207.8	207.7	207.5	207.4	207.2	207.0	207.2	207.4	207.5
110°	245.0	245.1	245.2	245.0	244.7	244.4	244.1	243.8	244.1	244.4	244.7

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	281.4	281.7	281.9	281.9	281.9	281.9	281.9	281.9	281.9	281.9	281.9
115°	319.6	319.9	320.1	320.1	320.1	320.1	320.1	320.1	320.1	320.1	320.1
117.5°	355.8	356.0	356.1	356.1	356.1	356.1	356.1	356.1	356.1	356.1	356.1
120°	394.3	394.8	395.0	394.7	394.0	393.4	392.7	392.1	392.7	393.4	394.0
122.5°	430.0	430.1	430.2	430.1	430.0	429.8	429.7	429.5	429.7	429.8	430.0
125°	466.0	466.1	466.2	466.2	466.2	466.2	466.2	466.2	466.2	466.2	466.2
127.5°	501.0	501.3	501.5	501.2	500.7	500.2	499.7	499.2	499.7	500.2	500.7
130°	536.7	536.7	536.7	536.5	536.0	535.5	535.0	534.5	535.0	535.5	536.0
132.5°	571.7	571.8	571.9	571.7	571.4	571.1	570.8	570.5	570.8	571.1	571.4
135°	605.7	605.7	605.7	605.2	604.2	603.3	602.3	601.3	602.3	603.3	604.2
137.5°	638.5	638.2	638.0	637.8	637.3	636.8	636.3	635.8	636.3	636.8	637.3
140°	671.8	671.8	671.8	671.6	671.3	671.0	670.6	670.3	670.6	671.0	671.3
142.5°	703.1	703.3	703.4	703.2	702.9	702.6	702.2	701.9	702.2	702.6	702.9
145°	733.7	733.6	733.5	733.2	732.5	731.8	731.2	730.5	731.2	731.8	732.5
147.5°	763.3	763.5	763.6	763.2	762.4	761.5	760.7	759.9	760.7	761.5	762.4
150°	789.3	789.3	789.3	789.0	788.3	787.6	787.0	786.3	787.0	787.6	788.3
152.5°	813.0	812.8	812.7	812.5	812.2	811.9	811.6	811.3	811.6	811.9	812.2
155°	836.7	836.9	837.0	837.0	837.0	837.0	837.0	837.0	837.0	837.0	837.0
157.5°	857.5	857.5	857.5	857.7	858.0	858.3	858.7	859.0	858.7	858.3	858.0
160°	877.1	877.3	877.4	877.5	877.6	877.8	877.9	878.1	877.9	877.8	877.6
162.5°	893.3	893.4	893.5	893.7	894.2	894.7	895.2	895.7	895.2	894.7	894.2
165°	908.4	908.7	908.9	909.1	909.6	910.1	910.6	911.1	910.6	910.1	909.6
167.5°	920.7	920.7	920.7	921.0	921.7	922.3	923.0	923.6	923.0	922.3	921.7
170°	930.4	930.3	930.2	930.6	931.4	932.3	933.1	933.9	933.1	932.3	931.4
172.5°	938.3	938.3	938.3	938.6	939.3	939.9	940.6	941.2	940.6	939.9	939.3
175°	943.9	944.1	944.2	944.6	945.4	946.2	947.0	947.8	947.0	946.2	945.4
177.5°	947.1	947.1	947.1	947.5	948.3	949.2	950.0	950.8	950.0	949.2	948.3
180°	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9
2.5°	1571.1	1565.8	1568.5	1555.3	1543.4	1526.2	1511.6	1509.0	1506.4	1514.3	1509.0
5°	1526.2	1519.6	1513.0	1497.1	1473.3	1458.8	1437.7	1436.3	1428.4	1416.5	1419.2
7.5°	1477.3	1473.3	1464.1	1439.0	1417.8	1392.7	1375.5	1361.0	1354.4	1343.8	1339.9
10°	1437.7	1423.1	1415.2	1387.4	1362.3	1335.9	1313.4	1302.9	1291.0	1281.7	1275.1
12.5°	1383.5	1379.5	1357.0	1334.6	1313.4	1283.1	1265.9	1235.5	1219.6	1227.6	1224.9
15°	1347.8	1329.3	1324.0	1292.3	1256.6	1236.8	1205.1	1185.3	1178.7	1166.8	1152.2
17.5°	1300.2	1288.3	1269.8	1240.8	1199.8	1172.1	1149.6	1131.1	1123.2	1107.3	1095.4
20°	1255.3	1235.5	1220.9	1194.5	1154.9	1119.2	1091.5	1079.6	1059.7	1046.5	1039.9
22.5°	1214.3	1199.8	1178.7	1139.0	1104.7	1070.3	1037.3	1020.1	1001.6	993.7	983.1
25°	1164.1	1140.3	1125.8	1082.2	1045.2	1017.5	987.1	964.6	954.0	940.8	938.2
27.5°	1115.2	1092.8	1075.6	1037.3	992.4	956.7	938.2	922.3	903.8	903.8	897.2
30°	1066.3	1050.5	1024.1	987.1	944.8	910.4	889.3	874.7	868.1	862.9	861.5
32.5°	1017.5	996.3	980.5	930.2	898.5	866.8	851.0	839.1	831.1	829.8	831.1
35°	967.2	943.5	927.6	882.7	851.0	821.9	815.3	804.7	800.8	799.4	806.0
37.5°	914.4	895.9	876.1	839.1	803.4	786.2	773.0	769.0	767.7	775.6	778.3
40°	865.5	849.6	831.1	791.5	765.1	746.6	740.0	736.0	741.3	749.2	753.2
42.5°	819.3	796.8	782.3	746.6	722.8	712.2	704.3	704.3	709.6	718.8	725.4
45°	770.4	753.2	738.6	706.9	685.8	673.9	672.6	673.9	680.5	687.1	695.0
47.5°	722.8	705.6	689.8	663.3	644.8	638.2	636.9	638.2	648.8	658.0	667.3
50°	679.2	660.7	646.2	621.0	606.5	598.6	599.9	606.5	614.4	627.7	639.5
52.5°	627.7	614.4	601.2	578.8	565.5	560.3	564.2	569.5	584.0	593.3	607.8
55°	577.4	565.5	555.0	537.8	527.2	523.3	525.9	533.8	545.7	561.6	578.8
57.5°	531.2	518.0	507.4	495.5	483.6	484.9	486.3	496.8	511.4	525.9	545.7
60°	479.7	471.7	462.5	447.9	442.7	442.7	446.6	458.5	471.7	495.5	512.7
62.5°	433.4	422.8	416.2	407.0	399.1	400.4	409.6	420.2	436.1	455.9	478.3
65°	385.8	373.9	368.7	360.7	358.1	359.4	366.0	381.9	399.1	416.2	437.4
67.5°	333.0	329.0	323.7	315.8	318.5	319.8	326.4	339.6	358.1	375.3	399.1
70°	288.1	280.1	278.8	272.2	272.2	276.2	289.4	298.6	315.8	334.3	359.4
72.5°	240.5	233.9	233.9	228.6	232.6	236.5	243.1	256.3	272.2	290.7	311.8
75°	191.6	189.0	191.6	189.0	189.0	195.6	203.5	214.1	231.2	251.1	268.2
77.5°	148.0	148.0	146.7	150.6	150.6	154.6	165.2	175.7	189.0	204.8	223.3
80°	108.4	108.4	108.4	112.3	116.3	116.3	122.9	136.1	148.0	158.6	175.7
82.5°	74.0	74.0	74.0	76.6	81.9	81.9	89.9	97.8	111.0	120.2	128.2
85°	44.9	44.9	43.6	46.2	47.6	51.5	58.1	63.4	70.0	78.0	85.9
87.5°	19.8	19.8	21.1	22.5	23.8	26.4	29.1	31.7	38.3	41.0	44.9
90°	9.4	10.3	11.0	12.3	13.6	14.9	16.2	17.2	18.2	19.1	20.1
92.5°	27.5	28.6	29.0	29.8	30.7	31.5	32.3	32.8	33.3	33.8	34.3
95°	50.0	50.7	51.3	52.4	53.5	54.7	55.8	56.3	56.8	57.3	57.8
97.5°	75.7	76.4	77.0	78.3	79.6	80.9	82.2	82.9	83.5	84.2	84.9
100°	105.4	105.7	106.4	107.9	109.4	110.8	112.3	112.6	113.0	113.3	113.6
102.5°	137.2	137.3	138.0	139.3	140.6	141.9	143.2	143.7	144.2	144.7	145.2
105°	171.7	171.8	172.1	172.8	173.4	174.1	174.7	175.2	175.7	176.2	176.7
107.5°	207.7	207.8	207.9	208.0	208.2	208.3	208.5	209.1	209.8	210.4	211.1
110°	245.0	245.2	245.1	245.0	244.8	244.7	244.5	244.2	243.8	243.5	243.2

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	281.9	281.9	281.7	281.4	281.1	280.8	280.5	280.5	280.5	280.5	280.5
115°	320.1	320.1	319.9	319.6	319.3	318.9	318.6	318.4	318.3	318.1	318.0
117.5°	356.1	356.1	356.0	355.8	355.7	355.5	355.3	354.8	354.3	353.8	353.3
120°	394.7	395.0	394.8	394.3	393.8	393.3	392.8	392.0	391.2	390.3	389.5
122.5°	430.1	430.2	430.1	430.0	429.8	429.7	429.5	429.0	428.5	428.0	427.5
125°	466.2	466.2	466.1	466.0	465.8	465.7	465.5	465.2	464.8	464.5	464.2
127.5°	501.2	501.5	501.3	501.0	500.7	500.3	500.0	499.7	499.3	499.0	498.7
130°	536.5	536.7	536.7	536.7	536.7	536.7	536.7	536.4	536.0	535.7	535.4
132.5°	571.7	571.9	571.8	571.7	571.5	571.4	571.2	570.9	570.5	570.2	569.9
135°	605.2	605.7	605.7	605.7	605.7	605.7	605.7	605.4	605.0	604.7	604.4
137.5°	637.8	638.0	638.2	638.5	638.8	639.2	639.5	639.0	638.5	638.0	637.5
140°	671.6	671.8	671.8	671.8	671.8	671.8	671.8	671.6	671.4	671.3	671.1
142.5°	703.2	703.4	703.3	703.1	703.0	702.8	702.6	702.6	702.6	702.6	702.6
145°	733.2	733.5	733.6	733.7	733.9	734.0	734.2	734.0	733.9	733.7	733.6
147.5°	763.2	763.6	763.5	763.3	763.2	763.0	762.8	762.6	762.5	762.3	762.2
150°	789.0	789.3	789.3	789.3	789.3	789.3	789.3	789.3	789.3	789.3	789.3
152.5°	812.5	812.7	812.8	813.0	813.1	813.3	813.5	814.0	814.5	815.0	815.5
155°	837.0	837.0	836.9	836.7	836.6	836.4	836.2	836.9	837.5	838.2	838.9
157.5°	857.7	857.5	857.5	857.5	857.5	857.5	857.5	858.0	858.5	859.0	859.5
160°	877.5	877.4	877.3	877.1	877.0	876.8	876.6	877.1	877.6	878.1	878.6
162.5°	893.7	893.5	893.4	893.3	893.1	893.0	892.8	893.8	894.8	895.7	896.7
165°	909.1	908.9	908.7	908.4	908.1	907.8	907.5	908.5	909.5	910.4	911.4
167.5°	921.0	920.7	920.7	920.7	920.7	920.7	920.7	921.7	922.7	923.6	924.6
170°	930.6	930.2	930.3	930.4	930.6	930.7	930.9	931.9	932.9	933.9	934.9
172.5°	938.6	938.3	938.3	938.3	938.3	938.3	938.3	939.4	940.6	941.7	942.8
175°	944.6	944.2	944.1	943.9	943.8	943.6	943.4	944.6	945.7	946.9	948.0
177.5°	947.5	947.1	947.1	947.1	947.1	947.1	947.1	948.2	949.4	950.5	951.6
180°	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9
2.5°	1505.0	1503.7	1497.1	1499.8	1491.8	1494.5	1498.4	1499.8	1505.0	1501.1	1499.8
5°	1412.5	1409.9	1405.9	1402.0	1400.7	1405.9	1396.7	1399.3	1402.0	1405.9	1411.2
7.5°	1337.2	1335.9	1331.9	1325.3	1322.7	1320.1	1321.4	1330.6	1329.3	1328.0	1337.2
10°	1268.5	1269.8	1261.9	1260.6	1252.7	1251.3	1252.7	1255.3	1259.3	1264.6	1265.9
12.5°	1197.2	1214.3	1199.8	1194.5	1182.6	1189.2	1191.9	1180.0	1186.6	1190.6	1210.4
15°	1152.2	1144.3	1135.1	1135.1	1129.8	1127.1	1120.5	1129.8	1135.1	1143.0	1140.3
17.5°	1090.1	1076.9	1071.6	1066.3	1067.7	1073.0	1058.4	1079.6	1079.6	1083.5	1076.9
20°	1036.0	1025.4	1018.8	1016.1	1012.2	1009.5	1008.2	1013.5	1021.4	1024.1	1030.7
22.5°	979.1	979.1	968.6	964.6	962.0	958.0	964.6	960.6	965.9	971.2	981.8
25°	931.6	931.6	927.6	922.3	918.4	915.7	919.7	918.4	922.3	928.9	931.6
27.5°	893.2	889.3	888.0	886.6	885.3	886.6	885.3	889.3	893.2	894.6	891.9
30°	860.2	856.2	857.6	857.6	858.9	857.6	856.2	860.2	861.5	858.9	860.2
32.5°	829.8	829.8	832.5	833.8	833.8	835.1	836.4	833.8	835.1	831.1	832.5
35°	804.7	807.4	810.0	811.3	812.6	811.3	814.0	812.6	810.0	807.4	806.0
37.5°	779.6	782.3	787.5	788.9	792.8	794.1	791.5	791.5	790.2	784.9	782.3
40°	753.2	755.8	762.4	766.4	769.0	773.0	770.4	770.4	765.1	759.8	755.8
42.5°	728.1	733.4	740.0	743.9	749.2	749.2	749.2	746.6	740.0	734.7	730.7
45°	703.0	704.3	713.5	720.1	725.4	725.4	725.4	721.5	717.5	706.9	701.6
47.5°	675.2	679.2	689.8	696.4	701.6	703.0	703.0	699.0	691.1	681.8	675.2
50°	644.8	651.4	663.3	672.6	679.2	681.8	677.9	675.2	666.0	655.4	647.5
52.5°	615.8	623.7	638.2	646.2	655.4	656.7	655.4	651.4	640.9	626.3	619.7
55°	586.7	593.3	609.2	622.4	630.3	632.9	630.3	623.7	610.5	595.9	589.3
57.5°	555.0	564.2	581.4	594.6	603.9	605.2	602.5	595.9	585.4	566.9	557.6
60°	521.9	533.8	551.0	564.2	576.1	577.4	574.8	565.5	552.3	533.8	525.9
62.5°	488.9	498.2	518.0	532.5	541.8	548.4	543.1	533.8	520.6	502.1	490.2
65°	450.6	463.8	481.0	494.2	504.8	506.1	503.4	495.5	481.0	461.2	451.9
67.5°	413.6	422.8	440.0	457.2	461.2	465.1	461.2	453.2	441.3	424.2	410.9
70°	368.7	376.6	397.7	409.6	414.9	418.9	416.2	408.3	397.7	381.9	371.3
72.5°	323.7	330.3	350.2	359.4	370.0	368.7	367.3	362.1	347.5	336.9	330.3
75°	276.2	284.1	297.3	309.2	313.2	313.2	313.2	309.2	300.0	282.8	276.2
77.5°	232.6	236.5	247.1	253.7	257.7	259.0	257.7	251.1	245.8	233.9	229.9
80°	178.4	189.0	196.9	198.2	203.5	203.5	203.5	200.8	195.6	183.7	182.3
82.5°	134.8	137.4	145.4	149.3	152.0	150.6	150.6	145.4	144.0	137.4	134.8
85°	91.2	95.1	93.8	99.1	100.4	97.8	97.8	100.4	93.8	95.1	91.2
87.5°	50.2	50.2	52.9	51.5	56.8	56.8	54.2	55.5	52.9	51.5	50.2
90°	20.6	20.8	21.1	21.4	21.7	22.0	21.7	21.4	21.1	20.8	20.6
92.5°	34.5	34.6	34.7	34.9	35.0	35.2	35.0	34.9	34.7	34.6	34.5
95°	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0
97.5°	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2
100°	113.8	113.8	113.8	113.8	113.8	113.8	113.8	113.8	113.8	113.8	113.8
102.5°	145.4	145.5	145.6	145.8	145.9	146.1	145.9	145.8	145.6	145.5	145.4
105°	176.9	177.1	177.6	178.1	178.6	179.1	178.6	178.1	177.6	177.1	176.9
107.5°	211.4	211.3	211.2	211.0	210.9	210.7	210.9	211.0	211.2	211.3	211.4
110°	243.0	243.2	243.7	244.2	244.7	245.2	244.7	244.2	243.7	243.2	243.0

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5	280.5
115°	317.9	317.8	317.7	317.5	317.4	317.2	317.4	317.5	317.7	317.8	317.9
117.5°	353.1	352.9	352.4	351.9	351.4	350.9	351.4	351.9	352.4	352.9	353.1
120°	389.1	389.3	389.6	389.9	390.3	390.6	390.3	389.9	389.6	389.3	389.1
122.5°	427.3	426.9	426.1	425.2	424.4	423.6	424.4	425.2	426.1	426.9	427.3
125°	464.0	463.8	463.5	463.2	462.8	462.5	462.8	463.2	463.5	463.8	464.0
127.5°	498.5	498.4	498.3	498.1	498.0	497.8	498.0	498.1	498.3	498.4	498.5
130°	535.2	534.9	534.2	533.6	532.9	532.3	532.9	533.6	534.2	534.9	535.2
132.5°	569.7	569.6	569.5	569.3	569.2	569.0	569.2	569.3	569.5	569.6	569.7
135°	604.2	604.0	603.5	603.0	602.5	602.0	602.5	603.0	603.5	604.0	604.2
137.5°	637.3	637.4	637.5	637.7	637.8	638.0	637.8	637.7	637.5	637.4	637.3
140°	671.0	670.9	670.8	670.6	670.5	670.3	670.5	670.6	670.8	670.9	671.0
142.5°	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6	702.6
145°	733.5	733.3	732.8	732.3	731.8	731.3	731.8	732.3	732.8	733.3	733.5
147.5°	762.1	762.0	761.9	761.7	761.6	761.4	761.6	761.7	761.9	762.0	762.1
150°	789.3	789.2	789.0	788.9	788.7	788.5	788.7	788.9	789.0	789.2	789.3
152.5°	815.7	815.5	815.0	814.5	814.0	813.5	814.0	814.5	815.0	815.5	815.7
155°	839.2	838.9	838.2	837.5	836.9	836.2	836.9	837.5	838.2	838.9	839.2
157.5°	859.7	859.5	859.0	858.5	858.0	857.5	858.0	858.5	859.0	859.5	859.7
160°	878.8	878.4	877.6	876.8	876.0	875.2	876.0	876.8	877.6	878.4	878.8
162.5°	897.2	896.8	896.0	895.1	894.3	893.5	894.3	895.1	896.0	896.8	897.2
165°	911.9	911.6	910.9	910.2	909.6	908.9	909.6	910.2	910.9	911.6	911.9
167.5°	925.1	924.6	923.6	922.7	921.7	920.7	921.7	922.7	923.6	924.6	925.1
170°	935.4	934.8	933.7	932.5	931.4	930.2	931.4	932.5	933.7	934.8	935.4
172.5°	943.4	942.8	941.7	940.6	939.4	938.3	939.4	940.6	941.7	942.8	943.4
175°	948.6	948.0	946.9	945.7	944.6	943.4	944.6	945.7	946.9	948.0	948.6
177.5°	952.2	951.6	950.3	949.0	947.7	946.4	947.7	949.0	950.3	951.6	952.2
180°	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9	1594.9
2.5°	1499.8	1507.7	1499.8	1505.0	1507.7	1514.3	1516.9	1528.8	1532.8	1542.0	1542.0
5°	1409.9	1413.9	1415.2	1420.5	1425.8	1439.0	1448.2	1465.4	1485.2	1487.9	1499.8
7.5°	1337.2	1343.8	1354.4	1350.4	1359.7	1379.5	1391.4	1412.5	1432.4	1442.9	1457.5
10°	1272.5	1280.4	1284.4	1288.3	1305.5	1322.7	1341.2	1355.7	1382.2	1398.0	1409.9
12.5°	1219.6	1213.0	1220.9	1235.5	1255.3	1265.9	1291.0	1313.4	1333.3	1350.4	1361.0
15°	1150.9	1156.2	1164.1	1189.2	1194.5	1220.9	1230.2	1255.3	1292.3	1308.2	1321.4
17.5°	1084.8	1102.0	1117.9	1127.1	1143.0	1164.1	1190.6	1218.3	1242.1	1260.6	1276.4
20°	1032.0	1049.2	1058.4	1065.0	1080.9	1110.0	1135.1	1169.4	1199.8	1214.3	1235.5
22.5°	989.7	989.7	1002.9	1022.7	1032.0	1059.7	1080.9	1117.9	1150.9	1169.4	1189.2
25°	936.9	944.8	955.4	972.5	985.7	1008.2	1038.6	1070.3	1106.0	1121.8	1147.0
27.5°	893.2	902.5	917.0	921.0	934.2	954.0	985.7	1020.1	1057.1	1074.3	1095.4
30°	860.2	865.5	870.8	878.7	890.6	907.8	934.2	964.6	1009.5	1022.7	1049.2
32.5°	831.1	833.8	836.4	843.0	849.6	866.8	888.0	921.0	958.0	977.8	1001.6
35°	804.7	802.1	803.4	807.4	814.0	820.6	843.0	870.8	905.1	928.9	947.4
37.5°	779.6	774.3	773.0	773.0	775.6	783.6	800.8	824.5	861.5	881.4	899.9
40°	751.9	746.6	743.9	742.6	741.3	746.6	759.8	783.6	812.6	831.1	852.3
42.5°	725.4	720.1	713.5	712.2	709.6	712.2	721.5	743.9	769.0	787.5	804.7
45°	699.0	689.8	681.8	676.5	677.9	673.9	680.5	697.7	726.8	738.6	755.8
47.5°	669.9	659.4	648.8	643.5	638.2	640.9	643.5	658.0	683.1	695.0	712.2
50°	642.2	627.7	615.8	609.2	605.2	602.5	605.2	619.7	638.2	648.8	663.3
52.5°	610.5	595.9	584.0	573.5	568.2	564.2	565.5	578.8	595.9	606.5	621.0
55°	581.4	562.9	547.0	533.8	529.9	528.5	527.2	536.5	551.0	561.6	573.5
57.5°	548.4	529.9	512.7	496.8	488.9	487.6	487.6	490.2	508.7	516.7	523.3
60°	515.3	495.5	477.0	462.5	450.6	446.6	445.3	450.6	459.8	467.8	477.0
62.5°	478.3	458.5	436.1	422.8	410.9	400.4	404.3	405.7	418.9	422.8	430.8
65°	442.7	420.2	401.7	380.6	367.3	360.7	358.1	360.7	371.3	372.6	377.9
67.5°	401.7	380.6	358.1	343.6	331.7	319.8	317.1	317.1	322.4	326.4	333.0
70°	362.1	340.9	315.8	300.0	288.1	277.5	273.5	272.2	276.2	278.8	285.4
72.5°	315.8	294.7	276.2	259.0	244.5	236.5	232.6	229.9	233.9	236.5	237.8
75°	266.9	249.7	231.2	214.1	204.8	196.9	191.6	187.6	190.3	190.3	190.3
77.5°	220.7	203.5	189.0	177.1	165.2	155.9	152.0	148.0	149.3	149.3	152.0
80°	171.8	159.9	148.0	137.4	126.9	118.9	116.3	112.3	109.7	108.4	108.4
82.5°	126.9	117.6	107.0	97.8	92.5	84.6	81.9	76.6	76.6	75.3	75.3
85°	84.6	79.3	68.7	62.1	58.1	54.2	51.5	48.9	44.9	44.9	43.6
87.5°	44.9	42.3	39.6	31.7	31.7	27.7	26.4	25.1	21.1	22.5	22.5
90°	20.1	19.1	18.2	17.2	16.2	14.9	13.6	12.3	11.0	10.3	9.4
92.5°	34.3	33.8	33.3	32.8	32.3	31.5	30.7	29.8	29.0	28.6	27.5
95°	57.8	57.3	56.8	56.3	55.8	54.7	53.5	52.4	51.3	50.7	50.0
97.5°	84.9	84.2	83.5	82.9	82.2	80.9	79.6	78.3	77.0	76.4	75.7
100°	113.6	113.3	113.0	112.6	112.3	110.8	109.4	107.9	106.4	105.7	105.4
102.5°	145.2	144.7	144.2	143.7	143.2	141.9	140.6	139.3	138.0	137.3	137.2
105°	176.7	176.2	175.7	175.2	174.7	174.1	173.4	172.8	172.1	171.8	171.7
107.5°	211.1	210.4	209.8	209.1	208.5	208.3	208.2	208.0	207.9	207.8	207.7
110°	243.2	243.5	243.8	244.2	244.5	244.7	244.8	245.0	245.1	245.2	245.0

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	280.5	280.5	280.5	280.5	280.5	280.8	281.1	281.4	281.7	281.9	281.9
115°	318.0	318.1	318.3	318.4	318.6	318.9	319.3	319.6	319.9	320.1	320.1
117.5°	353.3	353.8	354.3	354.8	355.3	355.5	355.7	355.8	356.0	356.1	356.1
120°	389.5	390.3	391.2	392.0	392.8	393.3	393.8	394.3	394.8	395.0	394.7
122.5°	427.5	428.0	428.5	429.0	429.5	429.7	429.8	430.0	430.1	430.2	430.1
125°	464.2	464.5	464.8	465.2	465.5	465.7	465.8	466.0	466.1	466.2	466.2
127.5°	498.7	499.0	499.3	499.7	500.0	500.3	500.7	501.0	501.3	501.5	501.2
130°	535.4	535.7	536.0	536.4	536.7	536.7	536.7	536.7	536.7	536.7	536.5
132.5°	569.9	570.2	570.5	570.9	571.2	571.4	571.5	571.7	571.8	571.9	571.7
135°	604.4	604.7	605.0	605.4	605.7	605.7	605.7	605.7	605.7	605.7	605.2
137.5°	637.5	638.0	638.5	639.0	639.5	639.2	638.8	638.5	638.2	638.0	637.8
140°	671.1	671.3	671.4	671.6	671.8	671.8	671.8	671.8	671.8	671.8	671.6
142.5°	702.6	702.6	702.6	702.6	702.6	702.8	703.0	703.1	703.3	703.4	703.2
145°	733.6	733.7	733.9	734.0	734.2	734.0	733.9	733.7	733.6	733.5	733.2
147.5°	762.2	762.3	762.5	762.6	762.8	763.0	763.2	763.3	763.5	763.6	763.2
150°	789.3	789.3	789.3	789.3	789.3	789.3	789.3	789.3	789.3	789.3	789.0
152.5°	815.5	815.0	814.5	814.0	813.5	813.3	813.1	813.0	812.8	812.7	812.5
155°	838.9	838.2	837.5	836.9	836.2	836.4	836.6	836.7	836.9	837.0	837.0
157.5°	859.5	859.0	858.5	858.0	857.5	857.5	857.5	857.5	857.5	857.5	857.7
160°	878.6	878.1	877.6	877.1	876.6	876.8	877.0	877.1	877.3	877.4	877.5
162.5°	896.7	895.7	894.8	893.8	892.8	893.0	893.1	893.3	893.4	893.5	893.7
165°	911.4	910.4	909.5	908.5	907.5	907.8	908.1	908.4	908.7	908.9	909.1
167.5°	924.6	923.6	922.7	921.7	920.7	920.7	920.7	920.7	920.7	920.7	921.0
170°	934.9	933.9	932.9	931.9	930.9	930.7	930.6	930.4	930.3	930.2	930.6
172.5°	942.8	941.7	940.6	939.4	938.3	938.3	938.3	938.3	938.3	938.3	938.6
175°	948.0	946.9	945.7	944.6	943.4	943.6	943.8	943.9	944.1	944.2	944.6
177.5°	951.6	950.5	949.4	948.2	947.1	947.1	947.1	947.1	947.1	947.1	947.5
180°	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3	949.3

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1594.9	1594.9	1594.9	1594.9
2.5°	1551.3	1564.5	1576.4	1594.9
5°	1516.9	1535.4	1560.5	1588.3
7.5°	1477.3	1506.4	1539.4	1577.7
10°	1440.3	1473.3	1515.6	1561.9
12.5°	1402.0	1441.6	1487.9	1538.1
15°	1358.4	1398.0	1449.5	1516.9
17.5°	1318.7	1366.3	1421.8	1493.2
20°	1272.5	1317.4	1378.2	1460.1
22.5°	1231.5	1283.1	1350.4	1421.8
25°	1186.6	1231.5	1298.9	1384.8
27.5°	1141.7	1197.2	1261.9	1345.2
30°	1098.1	1144.3	1214.3	1301.6
32.5°	1050.5	1106.0	1170.7	1252.7
35°	999.0	1051.8	1112.6	1201.1
37.5°	952.7	1004.2	1066.3	1144.3
40°	901.2	955.4	1012.2	1090.1
42.5°	851.0	899.9	956.7	1028.0
45°	802.1	844.4	895.9	958.0
47.5°	751.9	787.5	835.1	890.6
50°	697.7	736.0	771.7	817.9
52.5°	647.5	680.5	709.6	747.9
55°	598.6	621.0	644.8	673.9
57.5°	547.0	564.2	581.4	611.8
60°	495.5	511.4	520.6	540.4
62.5°	445.3	451.9	463.8	475.7
65°	389.8	399.1	405.7	420.2
67.5°	339.6	343.6	350.2	359.4
70°	286.7	296.0	298.6	305.2
72.5°	241.8	245.8	248.4	249.7
75°	191.6	195.6	198.2	206.1
77.5°	150.6	149.3	154.6	155.9
80°	111.0	107.0	108.4	113.6
82.5°	72.7	74.0	72.7	72.7
85°	44.9	43.6	41.0	42.3
87.5°	19.8	19.8	18.5	18.5
90°	7.6	5.8	4.0	2.2
92.5°	25.4	23.3	21.2	19.1
95°	48.5	47.0	45.6	44.1
97.5°	74.4	73.1	71.8	70.5
100°	104.7	104.1	103.4	102.8
102.5°	137.1	136.9	136.8	136.6
105°	171.6	171.4	171.3	171.1
107.5°	207.5	207.4	207.2	207.0
110°	244.7	244.4	244.1	243.8

TEST NUMBER: P1000798

CATALOG NUMBER: SA4XXDIP-B1020D810UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	281.9	281.9	281.9	281.9
115°	320.1	320.1	320.1	320.1
117.5°	356.1	356.1	356.1	356.1
120°	394.0	393.4	392.7	392.1
122.5°	430.0	429.8	429.7	429.5
125°	466.2	466.2	466.2	466.2
127.5°	500.7	500.2	499.7	499.2
130°	536.0	535.5	535.0	534.5
132.5°	571.4	571.1	570.8	570.5
135°	604.2	603.3	602.3	601.3
137.5°	637.3	636.8	636.3	635.8
140°	671.3	671.0	670.6	670.3
142.5°	702.9	702.6	702.2	701.9
145°	732.5	731.8	731.2	730.5
147.5°	762.4	761.5	760.7	759.9
150°	788.3	787.6	787.0	786.3
152.5°	812.2	811.9	811.6	811.3
155°	837.0	837.0	837.0	837.0
157.5°	858.0	858.3	858.7	859.0
160°	877.6	877.8	877.9	878.1
162.5°	894.2	894.7	895.2	895.7
165°	909.6	910.1	910.6	911.1
167.5°	921.7	922.3	923.0	923.6
170°	931.4	932.3	933.1	933.9
172.5°	939.3	939.9	940.6	941.2
175°	945.4	946.2	947.0	947.8
177.5°	948.3	949.2	950.0	950.8
180°	949.3	949.3	949.3	949.3

(END OF REPORT)