

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1001857

Luminaire Tested: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1001857
REPORT IS A COMBINATION OF REPORTS P996482 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1
Description: Define 4 Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865} {m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4810.0 lumens
Efficiency: N/A
Efficacy: 106.4 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.3 / 1.41
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 45.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

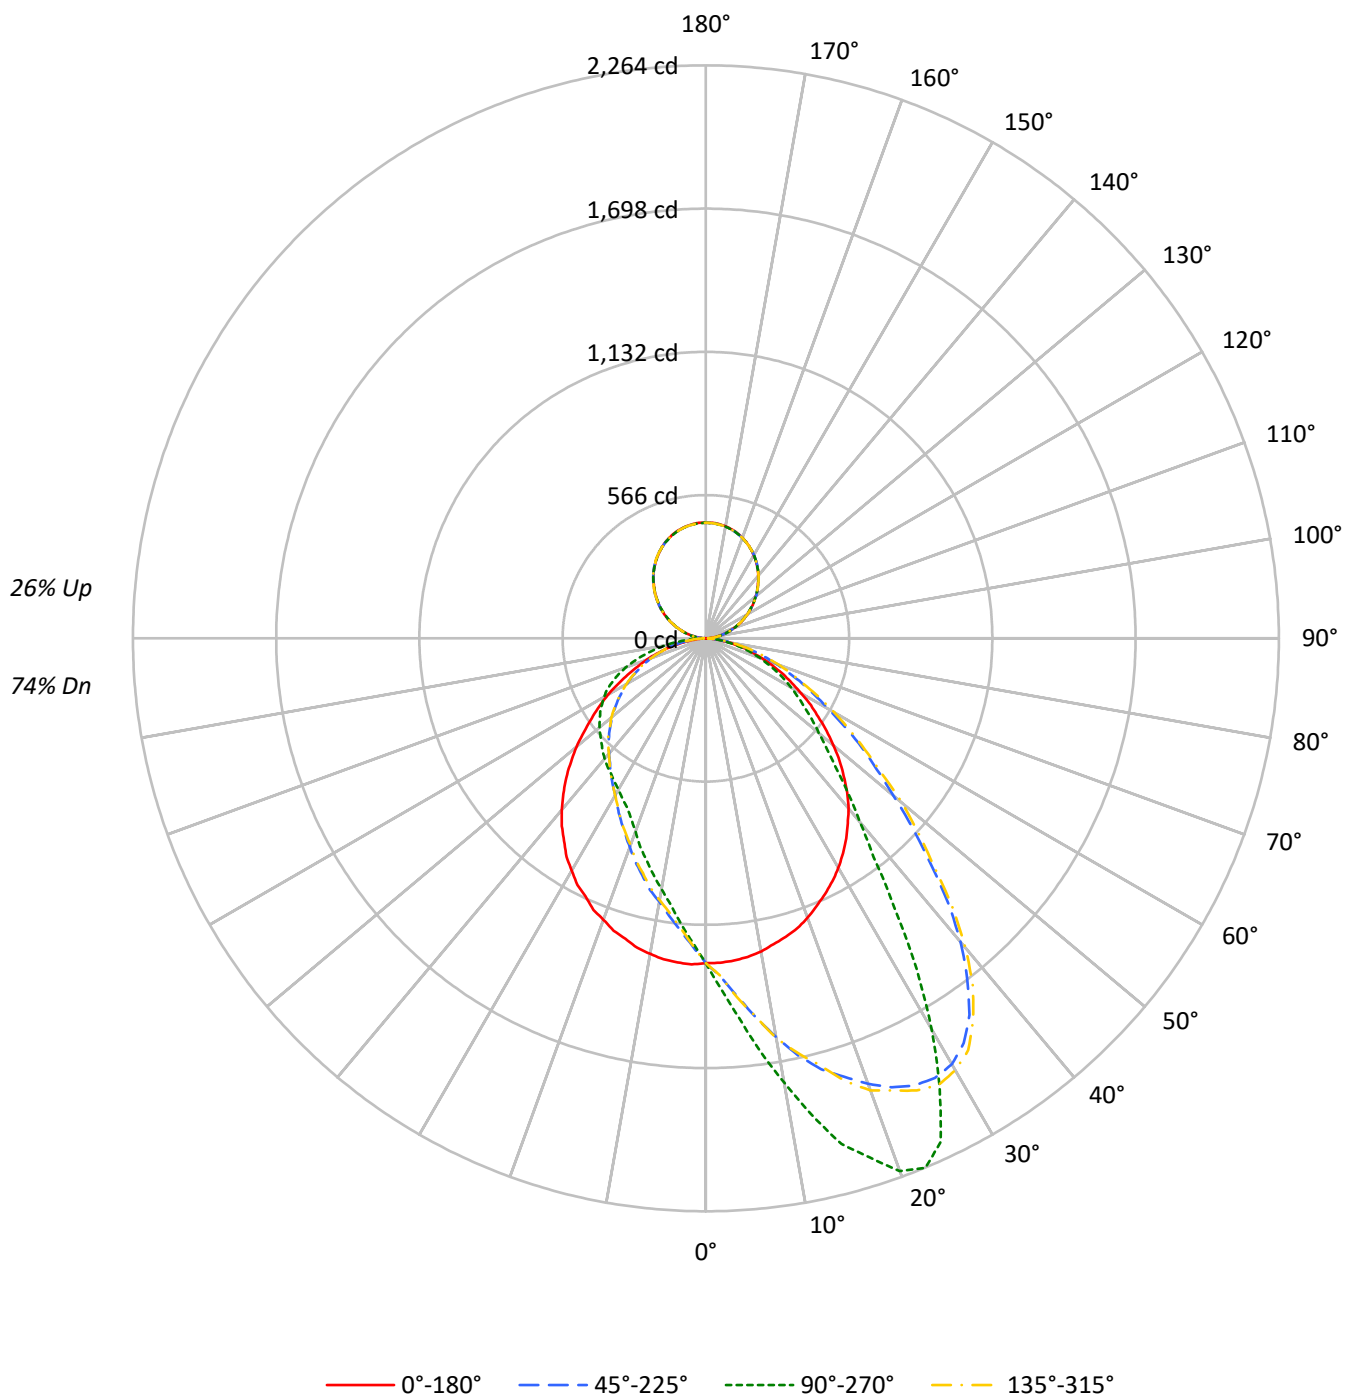

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	113	113	113	113	107	107	107	107	96	96	96	87	87	87	78	78	78	74		
1	103	99	95	92	98	94	91	88	85	83	80	77	75	73	69	68	66	63		
2	94	87	81	75	89	83	77	73	75	71	67	68	65	62	61	59	56	53		
3	86	77	69	63	82	73	67	61	67	61	57	60	56	53	55	51	48	45		
4	79	68	60	54	75	65	58	52	59	53	49	54	49	45	49	45	42	39		
5	73	61	53	47	69	58	51	45	53	47	42	49	44	40	44	40	37	34		
6	67	55	47	41	64	53	45	40	48	42	37	44	39	35	40	36	33	30		
7	63	50	42	36	59	48	40	35	44	38	33	40	35	31	37	33	29	27		
8	58	46	38	32	55	44	36	31	40	34	30	37	32	28	34	30	26	24		
9	54	42	34	29	52	40	33	28	37	31	27	34	29	25	32	27	24	22		
10	51	38	31	26	48	37	30	25	34	28	24	32	27	23	29	25	22	20		

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10464	10464	10464	10464
5°	10438	12004	10499	9020
10°	10360	14006	10438	7914
15°	10235	16146	10306	7081
20°	10103	17508	10176	6349
25°	9909	17307	10004	5809
30°	9720	14305	9839	5530
35°	9455	10660	9558	5361
40°	9145	8030	9233	5278
45°	8672	6446	8780	5166
50°	8107	5430	8225	5113
55°	7443	4726	7559	5054
60°	6797	4162	6997	4969
65°	6192	3581	6250	4762
70°	5479	2947	5598	4384
75°	4781	2264	4749	3726
80°	3759	1487	3718	2828
85°	2474	669	2321	1650

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 145°

Vertical Angle: 45°

Luminance: 13530 cd/sqm

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.9	2.6
10°-20°	385.5	8.0
20°-30°	612.4	12.7
30°-40°	680.5	14.1
40°-50°	618.8	12.9
50°-60°	505.7	10.5
60°-70°	361.0	7.5
70°-80°	198.6	4.1
80°-90°	54.7	1.1
90°-100°	29.8	0.6
100°-110°	89.2	1.9
110°-120°	151.6	3.2
120°-130°	199.9	4.2
130°-140°	224.5	4.7
140°-150°	220.7	4.6
150°-160°	185.6	3.9
160°-170°	123.5	2.6
170°-180°	43.2	0.9
0°-30°	1122.8	23.3
0°-40°	1803.2	37.5
0°-60°	2927.7	60.9
0°-90°	3542.0	73.6
90°-120°	270.6	5.6
90°-150°	915.7	19.0
90°-180°	1268.0	26.4
0°-180°	4810.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1283	1283	1283	1283	1283	
5°	1278	1505	1285	1131	1278	121
15°	1220	2068	1229	907	1220	344
25°	1114	2195	1125	737	1114	513
35°	966	1298	977	653	966	604
45°	771	728	780	584	771	594
55°	542	476	551	509	542	488
65°	338	306	341	407	338	334
75°	166	153	165	252	166	174
85°	34	32	32	79	34	40
90°	1	11	1	11	1	4
95°	21	28	21	28	21	23
105°	82	86	82	86	82	87
115°	154	153	154	153	154	152
125°	224	223	224	223	224	200
135°	290	290	290	290	290	224
145°	352	352	352	352	352	220
155°	403	403	403	403	403	185
165°	439	438	439	438	439	124
175°	456	454	456	454	456	43
180°	457	457	457	457	457	

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2
2.5°	1283.2	1296.0	1301.3	1305.6	1319.4	1323.6	1324.7	1331.1	1336.4	1337.5	1337.5
5°	1277.9	1298.1	1314.1	1329.0	1351.3	1360.8	1372.5	1385.3	1402.3	1412.9	1418.3
7.5°	1269.4	1299.2	1323.6	1349.2	1380.0	1399.1	1409.8	1443.8	1467.2	1486.3	1509.7
10°	1256.7	1294.9	1330.0	1367.2	1410.8	1434.2	1457.6	1499.1	1532.0	1569.2	1599.0
12.5°	1237.5	1287.5	1330.0	1382.1	1436.3	1464.0	1491.6	1563.9	1602.2	1635.1	1688.3
15°	1220.5	1270.5	1331.1	1384.2	1451.2	1492.7	1533.1	1579.9	1640.5	1711.7	1762.7
17.5°	1201.4	1264.1	1320.4	1394.9	1469.3	1508.6	1541.6	1613.9	1698.9	1769.1	1815.9
20°	1174.8	1238.6	1313.0	1391.7	1479.9	1510.8	1554.3	1651.1	1727.6	1796.7	1873.3
22.5°	1144.0	1218.4	1297.1	1372.5	1464.0	1528.8	1576.7	1661.7	1754.2	1834.0	1920.1
25°	1114.2	1195.0	1264.1	1367.2	1464.0	1507.6	1561.8	1662.8	1763.8	1860.5	1948.8
27.5°	1082.3	1157.8	1251.3	1333.2	1442.7	1490.6	1549.0	1659.6	1767.0	1863.7	1958.3
30°	1047.2	1128.0	1205.6	1302.4	1408.7	1470.4	1524.6	1644.7	1754.2	1855.2	1943.5
32.5°	1007.9	1084.4	1167.4	1258.8	1370.4	1433.1	1501.2	1624.5	1741.5	1828.6	1896.7
35°	966.4	1044.0	1116.3	1209.9	1324.7	1387.4	1453.3	1589.4	1705.3	1776.5	1815.9
37.5°	920.7	994.1	1065.3	1157.8	1272.6	1339.6	1406.6	1538.4	1647.9	1707.4	1696.8
40°	877.1	943.0	1008.9	1096.1	1216.3	1287.5	1346.0	1478.9	1574.5	1600.1	1565.0
42.5°	827.1	883.5	947.3	1036.6	1153.5	1220.5	1293.9	1415.1	1486.3	1475.7	1416.1
45°	770.8	820.8	884.6	968.5	1087.6	1156.7	1218.4	1333.2	1385.3	1358.7	1250.3
47.5°	716.6	765.5	817.6	901.6	1017.4	1075.9	1138.6	1241.8	1271.5	1215.2	1106.8
50°	658.1	698.5	752.7	832.5	940.9	1002.6	1054.7	1137.6	1148.2	1079.1	966.4
52.5°	601.7	635.8	687.9	766.5	867.5	916.4	967.5	1040.8	1032.3	961.1	852.7
55°	542.2	574.1	621.9	694.2	783.6	830.3	873.9	938.8	920.7	847.3	752.7
57.5°	492.2	514.6	561.3	628.3	701.7	752.7	789.9	841.0	813.3	740.0	651.7
60°	434.8	462.5	501.8	556.0	628.3	662.4	695.3	729.3	710.2	640.0	561.3
62.5°	382.7	404.0	438.0	490.1	546.5	577.3	612.4	633.6	614.5	549.7	483.7
65°	338.1	355.1	381.7	424.2	478.4	503.9	524.1	544.3	528.4	467.8	419.9
67.5°	289.2	304.1	326.4	360.4	406.1	424.2	443.3	457.2	439.1	398.7	351.9
70°	245.6	256.2	277.5	303.0	334.9	351.9	367.9	381.7	365.7	331.7	296.6
72.5°	200.9	209.4	228.6	246.7	275.4	287.1	298.7	309.4	304.1	272.2	243.5
75°	165.9	169.0	181.8	196.7	214.8	227.5	236.0	242.4	238.1	212.6	194.6
77.5°	125.5	129.7	139.3	151.0	166.9	174.4	179.7	186.1	180.7	160.5	147.8
80°	91.4	92.5	97.8	108.4	119.1	120.1	125.5	134.0	130.8	116.9	107.4
82.5°	58.5	61.7	63.8	70.2	77.6	79.7	82.9	85.1	84.0	75.5	72.3
85°	34.0	34.0	36.1	40.4	42.5	45.7	46.8	47.8	50.0	44.7	41.5
87.5°	14.9	15.9	15.9	17.0	19.1	19.1	20.2	21.3	22.3	21.3	18.1
90°	1.1	1.9	2.8	3.6	4.5	4.9	5.2	5.9	6.5	7.2	7.8
92.5°	9.2	10.2	11.2	12.3	13.3	13.8	14.0	14.4	14.8	15.2	15.6
95°	21.2	21.9	22.6	23.3	24.0	24.4	24.7	25.2	25.8	26.3	26.9
97.5°	33.9	34.5	35.2	35.8	36.5	36.8	37.1	37.7	38.4	39.0	39.6
100°	49.5	49.8	50.1	50.4	50.7	50.9	51.3	52.0	52.7	53.4	54.1
102.5°	65.7	65.8	65.9	66.0	66.1	66.1	66.4	67.0	67.7	68.3	68.9
105°	82.4	82.5	82.5	82.6	82.7	82.7	82.9	83.2	83.5	83.8	84.1
107.5°	99.7	99.8	99.8	99.9	100.0	100.0	100.0	100.1	100.2	100.3	100.4
110°	117.3	117.5	117.7	117.8	118.0	118.1	118.1	118.0	117.9	117.8	117.7

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	135.7	135.7	135.7	135.7	135.7	135.7	135.6	135.5	135.3	135.2	135.0
115°	154.1	154.1	154.1	154.1	154.1	154.1	154.0	153.9	153.7	153.6	153.4
117.5°	171.4	171.4	171.4	171.4	171.4	171.4	171.4	171.3	171.2	171.2	171.1
120°	188.7	189.0	189.4	189.7	190.0	190.2	190.1	189.8	189.6	189.3	189.1
122.5°	206.8	206.9	206.9	207.0	207.1	207.1	207.1	207.0	206.9	206.9	206.8
125°	224.4	224.4	224.4	224.4	224.4	224.4	224.4	224.3	224.2	224.2	224.1
127.5°	240.3	240.5	240.8	241.0	241.3	241.4	241.3	241.2	241.0	240.9	240.7
130°	257.3	257.5	257.8	258.0	258.3	258.4	258.4	258.4	258.4	258.4	258.4
132.5°	274.6	274.8	274.9	275.1	275.2	275.3	275.3	275.2	275.1	275.1	275.0
135°	289.5	290.0	290.4	290.9	291.4	291.6	291.6	291.6	291.6	291.6	291.6
137.5°	306.1	306.3	306.5	306.8	307.0	307.1	307.2	307.4	307.5	307.7	307.9
140°	322.7	322.9	323.0	323.2	323.3	323.4	323.4	323.4	323.4	323.4	323.4
142.5°	337.9	338.1	338.2	338.4	338.5	338.6	338.6	338.5	338.4	338.3	338.2
145°	351.7	352.0	352.3	352.6	352.9	353.1	353.1	353.2	353.3	353.3	353.4
147.5°	365.8	366.2	366.6	367.0	367.4	367.6	367.6	367.5	367.4	367.3	367.2
150°	378.5	378.8	379.2	379.5	379.8	380.0	380.0	380.0	380.0	380.0	380.0
152.5°	390.6	390.8	390.9	391.1	391.2	391.3	391.3	391.4	391.5	391.5	391.6
155°	402.9	402.9	402.9	402.9	402.9	402.9	402.9	402.8	402.7	402.7	402.6
157.5°	413.5	413.3	413.2	413.0	412.9	412.8	412.8	412.8	412.8	412.8	412.8
160°	422.7	422.6	422.6	422.5	422.4	422.4	422.4	422.3	422.2	422.1	422.0
162.5°	431.2	431.0	430.7	430.5	430.2	430.1	430.1	430.0	429.9	429.9	429.8
165°	438.6	438.4	438.2	437.9	437.7	437.6	437.5	437.4	437.2	437.1	436.9
167.5°	444.6	444.3	444.0	443.7	443.4	443.2	443.2	443.2	443.2	443.2	443.2
170°	449.6	449.2	448.8	448.4	448.0	447.8	447.8	447.9	448.0	448.1	448.2
172.5°	453.1	452.8	452.5	452.2	451.9	451.7	451.7	451.7	451.7	451.7	451.7
175°	456.3	455.9	455.5	455.1	454.7	454.5	454.5	454.4	454.3	454.3	454.2
177.5°	457.7	457.3	456.9	456.5	456.1	455.9	455.9	455.9	455.9	455.9	455.9
180°	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2
2.5°	1340.6	1359.8	1368.3	1370.4	1382.1	1374.7	1377.9	1376.8	1385.3	1386.4	1386.4
5°	1438.5	1460.8	1468.2	1478.9	1494.8	1499.1	1495.9	1502.2	1513.9	1505.4	1518.2
7.5°	1541.6	1566.0	1583.0	1606.4	1611.8	1625.6	1634.1	1641.5	1643.6	1644.7	1646.8
10°	1637.3	1668.1	1691.5	1730.8	1739.3	1746.8	1784.0	1769.1	1788.2	1781.9	1784.0
12.5°	1714.9	1775.5	1794.6	1860.5	1866.9	1892.4	1890.3	1913.7	1917.9	1926.5	1917.9
15°	1816.9	1887.1	1917.9	1955.2	1976.4	2006.2	2011.5	2043.4	2056.2	2067.9	2056.2
17.5°	1910.5	1947.7	2026.4	2056.2	2070.0	2085.9	2126.3	2138.0	2157.2	2149.7	2171.0
20°	1957.3	2010.4	2093.4	2144.4	2165.7	2180.5	2214.6	2232.6	2240.1	2240.1	2242.2
22.5°	1998.7	2075.3	2137.0	2195.4	2214.6	2225.2	2245.4	2259.2	2262.4	2264.5	2266.7
25°	2036.0	2105.1	2155.0	2188.0	2195.4	2195.4	2207.1	2198.6	2184.8	2195.4	2201.8
27.5°	2036.0	2084.9	2107.2	2118.9	2118.9	2090.2	2073.2	2038.1	2008.3	1999.8	2018.9
30°	2001.9	2024.3	1993.4	1964.7	1942.4	1923.3	1856.3	1803.1	1792.5	1785.0	1813.8
32.5°	1923.3	1894.6	1834.0	1751.0	1718.1	1674.5	1622.4	1582.0	1557.5	1549.0	1542.6
35°	1784.0	1709.6	1630.9	1519.3	1495.9	1440.6	1369.4	1339.6	1299.2	1298.1	1311.9
37.5°	1632.0	1517.1	1432.1	1325.8	1292.8	1234.3	1167.4	1136.5	1108.9	1087.6	1113.1
40°	1454.4	1354.5	1224.8	1137.6	1090.8	1060.0	1003.6	969.6	956.8	946.2	962.2
42.5°	1288.6	1179.0	1078.0	988.7	950.5	915.4	878.2	845.2	835.6	834.6	846.3
45°	1123.8	1016.4	922.8	846.3	821.8	800.6	764.4	754.8	738.9	728.3	733.6
47.5°	991.9	881.4	803.8	745.3	724.0	705.9	682.6	666.6	652.8	648.5	654.9
50°	862.2	787.8	708.1	659.2	643.2	626.2	608.1	593.2	586.9	582.6	586.9
52.5°	758.0	678.3	624.1	584.7	568.8	556.0	543.3	536.9	528.4	530.5	534.8
55°	664.5	594.3	548.6	519.9	510.3	505.0	489.1	481.6	478.4	476.3	478.4
57.5°	576.2	525.2	491.2	466.7	454.0	450.8	438.0	438.0	434.8	431.6	432.7
60°	506.1	462.5	429.5	410.4	408.3	402.9	394.4	393.4	385.9	389.1	390.2
62.5°	434.8	399.7	377.4	365.7	358.3	356.2	350.8	349.8	346.6	347.7	345.5
65°	378.5	349.8	327.5	317.9	314.7	313.6	309.4	306.2	304.1	306.2	304.1
67.5°	322.1	303.0	286.0	276.4	272.2	271.1	267.9	265.8	266.9	263.7	265.8
70°	269.0	249.8	239.2	233.9	231.8	228.6	228.6	228.6	228.6	226.5	225.4
72.5°	226.5	207.3	199.9	196.7	194.6	193.5	190.3	191.4	190.3	189.2	193.5
75°	179.7	168.0	160.5	157.3	159.5	156.3	153.1	155.2	152.0	153.1	157.3
77.5°	136.1	130.8	126.5	124.4	122.3	120.1	120.1	118.0	118.0	118.0	118.0
80°	98.9	97.8	90.4	89.3	89.3	87.2	87.2	87.2	87.2	86.1	87.2
82.5°	65.9	64.9	62.7	61.7	59.5	60.6	60.6	58.5	58.5	57.4	58.5
85°	38.3	38.3	36.1	35.1	34.0	35.1	33.0	31.9	33.0	31.9	33.0
87.5°	18.1	15.9	17.0	15.9	13.8	14.9	12.8	13.8	12.8	11.7	13.8
90°	8.3	8.7	9.2	9.7	9.9	10.0	10.1	10.3	10.4	10.6	10.4
92.5°	15.8	16.0	16.3	16.5	16.6	16.6	16.7	16.8	16.9	17.0	16.9
95°	27.1	27.3	27.6	27.8	27.9	27.9	27.9	27.9	27.9	27.9	27.9
97.5°	39.9	40.2	40.5	40.8	41.0	41.0	41.0	41.0	41.0	41.0	41.0
100°	54.3	54.4	54.6	54.7	54.8	54.8	54.8	54.8	54.8	54.8	54.8
102.5°	69.1	69.4	69.6	69.9	70.0	70.0	70.1	70.2	70.2	70.3	70.2
105°	84.3	84.6	84.8	85.1	85.2	85.3	85.5	85.8	86.0	86.2	86.0
107.5°	100.7	101.0	101.3	101.6	101.8	101.8	101.7	101.6	101.5	101.4	101.5
110°	117.5	117.4	117.2	117.1	117.0	117.1	117.4	117.6	117.9	118.1	117.9

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0
115°	153.3	153.2	153.1	153.0	153.0	153.0	152.9	152.8	152.8	152.7	152.8
117.5°	170.9	170.6	170.4	170.1	170.0	169.9	169.6	169.4	169.1	168.9	169.1
120°	188.7	188.3	187.9	187.5	187.3	187.4	187.5	187.7	187.8	188.0	187.8
122.5°	206.6	206.3	206.1	205.8	205.7	205.5	205.1	204.7	204.3	203.9	204.3
125°	223.9	223.8	223.6	223.5	223.4	223.3	223.2	223.0	222.9	222.7	222.9
127.5°	240.5	240.4	240.2	240.1	240.0	240.0	239.9	239.8	239.7	239.6	239.7
130°	258.2	258.1	257.9	257.8	257.7	257.5	257.2	256.9	256.5	256.2	256.5
132.5°	274.8	274.7	274.5	274.4	274.3	274.3	274.2	274.1	274.0	273.9	274.0
135°	291.4	291.3	291.1	291.0	290.9	290.8	290.5	290.3	290.0	289.8	290.0
137.5°	307.7	307.4	307.2	306.9	306.8	306.8	306.9	307.0	307.0	307.1	307.0
140°	323.3	323.2	323.1	323.0	323.0	323.0	322.9	322.8	322.8	322.7	322.8
142.5°	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2
145°	353.3	353.3	353.2	353.1	353.1	353.0	352.7	352.5	352.2	352.0	352.2
147.5°	367.1	367.1	367.0	366.9	366.9	366.9	366.8	366.7	366.6	366.5	366.6
150°	380.0	380.0	380.0	380.0	380.0	380.0	379.9	379.8	379.7	379.6	379.7
152.5°	391.8	392.1	392.3	392.6	392.7	392.6	392.3	392.1	391.8	391.6	391.8
155°	402.9	403.2	403.5	403.8	404.0	403.8	403.5	403.2	402.9	402.6	402.9
157.5°	413.0	413.3	413.5	413.8	413.9	413.8	413.5	413.3	413.0	412.8	413.0
160°	422.2	422.5	422.7	423.0	423.1	422.9	422.5	422.1	421.7	421.3	421.7
162.5°	430.3	430.7	431.2	431.7	431.9	431.7	431.3	430.9	430.5	430.1	430.5
165°	437.4	437.8	438.3	438.8	439.0	438.8	438.5	438.2	437.9	437.6	437.9
167.5°	443.7	444.1	444.6	445.1	445.3	445.1	444.6	444.1	443.7	443.2	443.7
170°	448.7	449.1	449.6	450.1	450.3	450.0	449.5	448.9	448.4	447.8	448.4
172.5°	452.3	452.8	453.4	453.9	454.2	453.9	453.4	452.8	452.3	451.7	452.3
175°	454.8	455.3	455.9	456.4	456.7	456.4	455.9	455.3	454.8	454.2	454.8
177.5°	456.5	457.0	457.6	458.1	458.4	458.1	457.5	456.8	456.2	455.6	456.2
180°	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2
2.5°	1384.2	1381.0	1376.8	1376.8	1371.5	1371.5	1363.0	1348.1	1335.3	1331.1	1333.2
5°	1502.2	1503.3	1496.9	1491.6	1482.0	1474.6	1460.8	1434.2	1425.7	1408.7	1397.0
7.5°	1637.3	1633.0	1621.3	1612.8	1610.7	1593.7	1563.9	1532.0	1506.5	1489.5	1465.0
10°	1789.3	1772.3	1755.3	1750.0	1737.2	1708.5	1674.5	1639.4	1604.3	1567.1	1525.6
12.5°	1916.9	1883.9	1882.9	1870.1	1845.6	1829.7	1789.3	1739.3	1678.7	1637.3	1590.5
15°	2054.0	2023.2	1997.7	1974.3	1962.6	1915.8	1881.8	1819.1	1746.8	1702.1	1670.2
17.5°	2151.8	2138.0	2094.4	2083.8	2067.9	2013.6	1959.4	1897.7	1835.0	1772.3	1686.2
20°	2230.5	2222.0	2193.3	2178.4	2152.9	2110.4	2044.5	1973.2	1900.9	1811.6	1730.8
22.5°	2264.5	2253.9	2230.5	2217.8	2201.8	2165.7	2109.3	2028.5	1933.9	1854.2	1768.0
25°	2197.6	2216.7	2210.3	2205.0	2198.6	2177.4	2134.8	2063.6	1971.1	1880.7	1773.4
27.5°	2046.6	2079.5	2111.4	2115.7	2126.3	2134.8	2117.8	2066.8	1989.2	1893.5	1775.5
30°	1843.5	1858.4	1923.3	1942.4	1957.3	2011.5	2043.4	2030.6	1971.1	1885.0	1776.5
32.5°	1583.0	1622.4	1688.3	1734.0	1774.4	1835.0	1917.9	1950.9	1929.6	1859.5	1752.1
35°	1336.4	1383.2	1459.7	1518.2	1558.6	1644.7	1742.5	1813.8	1840.3	1805.2	1709.6
37.5°	1134.4	1190.7	1258.8	1281.1	1327.9	1434.2	1569.2	1668.1	1733.0	1736.1	1661.7
40°	982.4	1011.1	1065.3	1099.3	1145.0	1234.3	1366.2	1496.9	1594.7	1627.7	1588.4
42.5°	853.7	876.0	916.4	957.9	999.4	1067.4	1188.6	1310.9	1442.7	1508.6	1507.6
45°	751.7	775.0	802.7	836.7	865.4	938.8	1034.5	1159.9	1273.7	1375.7	1401.2
47.5°	662.4	682.6	716.6	731.5	750.6	819.7	902.6	1019.6	1137.6	1254.5	1284.3
50°	596.4	613.4	636.8	646.4	667.7	718.7	786.7	881.4	1012.1	1119.5	1174.8
52.5°	536.9	549.7	567.7	575.2	590.1	628.3	690.0	764.4	872.9	983.4	1061.0
55°	485.9	494.4	507.1	515.6	526.3	560.3	606.0	673.0	766.5	862.2	937.7
57.5°	438.0	444.4	457.2	461.4	469.9	496.5	528.4	584.7	670.9	755.9	829.3
60°	393.4	397.6	405.1	414.6	421.0	439.1	468.9	515.6	584.7	662.4	721.9
62.5°	350.8	357.2	359.3	363.6	368.9	385.9	409.3	443.3	503.9	567.7	630.5
65°	307.3	312.6	316.8	317.9	323.2	336.0	357.2	387.0	426.3	481.6	540.1
67.5°	266.9	270.0	272.2	276.4	281.7	288.1	305.1	327.5	363.6	408.3	455.0
70°	229.6	229.6	232.8	233.9	240.3	247.7	255.2	276.4	308.3	344.5	376.4
72.5°	189.2	194.6	193.5	198.8	197.7	203.1	212.6	226.5	249.8	278.5	309.4
75°	154.2	157.3	157.3	157.3	159.5	163.7	169.0	181.8	199.9	223.3	241.3
77.5°	120.1	122.3	122.3	122.3	123.3	127.6	132.9	141.4	154.2	168.0	178.6
80°	86.1	88.2	88.2	90.4	90.4	91.4	96.7	101.0	107.4	118.0	128.6
82.5°	58.5	59.5	61.7	61.7	60.6	62.7	63.8	68.0	74.4	76.5	84.0
85°	31.9	33.0	34.0	34.0	35.1	37.2	36.1	40.4	40.4	44.7	46.8
87.5°	12.8	14.9	14.9	13.8	14.9	14.9	14.9	17.0	18.1	19.1	18.1
90°	10.3	10.1	10.0	9.9	9.7	9.2	8.7	8.3	7.8	7.2	6.5
92.5°	16.8	16.7	16.6	16.6	16.5	16.3	16.0	15.8	15.6	15.2	14.8
95°	27.9	27.9	27.9	27.9	27.8	27.6	27.3	27.1	26.9	26.3	25.8
97.5°	41.0	41.0	41.0	41.0	40.8	40.5	40.2	39.9	39.6	39.0	38.4
100°	54.8	54.8	54.8	54.8	54.7	54.6	54.4	54.3	54.1	53.4	52.7
102.5°	70.2	70.1	70.0	70.0	69.9	69.6	69.4	69.1	68.9	68.3	67.7
105°	85.8	85.5	85.3	85.2	85.1	84.8	84.6	84.3	84.1	83.8	83.5
107.5°	101.6	101.7	101.8	101.8	101.6	101.3	101.0	100.7	100.4	100.3	100.2
110°	117.6	117.4	117.1	117.0	117.1	117.2	117.4	117.5	117.7	117.8	117.9



TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.2	135.3
115°	152.8	152.9	153.0	153.0	153.0	153.1	153.2	153.3	153.4	153.6	153.7
117.5°	169.4	169.6	169.9	170.0	170.1	170.4	170.6	170.9	171.1	171.2	171.2
120°	187.7	187.5	187.4	187.3	187.5	187.9	188.3	188.7	189.1	189.3	189.6
122.5°	204.7	205.1	205.5	205.7	205.8	206.1	206.3	206.6	206.8	206.9	206.9
125°	223.0	223.2	223.3	223.4	223.5	223.6	223.8	223.9	224.1	224.2	224.2
127.5°	239.8	239.9	240.0	240.0	240.1	240.2	240.4	240.5	240.7	240.9	241.0
130°	256.9	257.2	257.5	257.7	257.8	257.9	258.1	258.2	258.4	258.4	258.4
132.5°	274.1	274.2	274.3	274.3	274.4	274.5	274.7	274.8	275.0	275.1	275.1
135°	290.3	290.5	290.8	290.9	291.0	291.1	291.3	291.4	291.6	291.6	291.6
137.5°	307.0	306.9	306.8	306.8	306.9	307.2	307.4	307.7	307.9	307.7	307.5
140°	322.8	322.9	323.0	323.0	323.0	323.1	323.2	323.3	323.4	323.4	323.4
142.5°	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.3	338.4
145°	352.5	352.7	353.0	353.1	353.1	353.2	353.3	353.3	353.4	353.3	353.3
147.5°	366.7	366.8	366.9	366.9	366.9	367.0	367.1	367.1	367.2	367.3	367.4
150°	379.8	379.9	380.0	380.0	380.0	380.0	380.0	380.0	380.0	380.0	380.0
152.5°	392.1	392.3	392.6	392.7	392.6	392.3	392.1	391.8	391.6	391.5	391.5
155°	403.2	403.5	403.8	404.0	403.8	403.5	403.2	402.9	402.6	402.7	402.7
157.5°	413.3	413.5	413.8	413.9	413.8	413.5	413.3	413.0	412.8	412.8	412.8
160°	422.1	422.5	422.9	423.1	423.0	422.7	422.5	422.2	422.0	422.1	422.2
162.5°	430.9	431.3	431.7	431.9	431.7	431.2	430.7	430.3	429.8	429.9	429.9
165°	438.2	438.5	438.8	439.0	438.8	438.3	437.8	437.4	436.9	437.1	437.2
167.5°	444.1	444.6	445.1	445.3	445.1	444.6	444.1	443.7	443.2	443.2	443.2
170°	448.9	449.5	450.0	450.3	450.1	449.6	449.1	448.7	448.2	448.1	448.0
172.5°	452.8	453.4	453.9	454.2	453.9	453.4	452.8	452.3	451.7	451.7	451.7
175°	455.3	455.9	456.4	456.7	456.4	455.9	455.3	454.8	454.2	454.3	454.3
177.5°	456.8	457.5	458.1	458.4	458.1	457.6	457.0	456.5	455.9	455.9	455.9
180°	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2
2.5°	1323.6	1319.4	1316.2	1316.2	1306.6	1297.1	1291.7	1289.6	1287.5	1279.0	1267.3
5°	1377.9	1364.0	1354.5	1344.9	1329.0	1311.9	1294.9	1285.4	1271.5	1252.4	1238.6
7.5°	1438.5	1405.5	1394.9	1383.2	1351.3	1322.6	1299.2	1279.0	1256.7	1232.2	1207.8
10°	1489.5	1454.4	1431.0	1410.8	1369.4	1331.1	1296.0	1266.2	1237.5	1205.6	1175.9
12.5°	1538.4	1488.4	1464.0	1434.2	1390.6	1335.3	1289.6	1252.4	1209.9	1176.9	1140.8
15°	1606.4	1522.4	1482.0	1462.9	1404.4	1339.6	1284.3	1229.0	1193.9	1144.0	1112.1
17.5°	1617.1	1549.0	1522.4	1473.5	1403.4	1330.0	1266.2	1210.9	1157.8	1113.1	1071.7
20°	1654.3	1565.0	1522.4	1491.6	1399.1	1324.7	1254.5	1183.3	1132.3	1084.4	1037.6
22.5°	1677.7	1576.7	1532.0	1483.1	1394.9	1305.6	1222.6	1161.0	1098.2	1049.3	1012.1
25°	1671.3	1570.3	1520.3	1474.6	1367.2	1277.9	1203.5	1124.8	1066.4	1013.2	964.3
27.5°	1668.1	1554.3	1501.2	1450.2	1349.2	1255.6	1162.0	1098.2	1033.4	971.7	935.6
30°	1659.6	1534.1	1472.5	1417.2	1311.9	1214.1	1134.4	1060.0	995.1	938.8	890.9
32.5°	1630.9	1500.1	1440.6	1381.0	1271.5	1173.7	1092.9	1023.8	959.0	900.5	854.8
35°	1592.6	1459.7	1394.9	1332.1	1222.6	1123.8	1049.3	977.0	916.4	860.1	816.5
37.5°	1554.3	1412.9	1352.3	1280.0	1179.0	1075.9	999.4	934.5	878.2	819.7	771.9
40°	1499.1	1357.7	1290.7	1229.0	1111.0	1014.3	944.1	885.6	830.3	775.0	734.6
42.5°	1423.6	1297.1	1228.0	1159.9	1049.3	953.7	885.6	833.5	781.4	735.7	691.1
45°	1347.0	1223.7	1162.0	1101.4	981.3	890.9	828.2	780.4	736.8	686.8	650.7
47.5°	1254.5	1150.3	1088.7	1029.1	915.4	825.0	767.6	723.0	682.6	641.1	607.1
50°	1159.9	1069.5	1013.2	951.5	843.1	761.2	704.9	667.7	634.7	595.4	567.7
52.5°	1057.8	979.2	931.3	871.8	776.1	700.6	643.2	606.0	578.4	549.7	525.2
55°	949.4	892.0	841.0	793.1	702.8	634.7	583.7	550.7	531.6	505.0	483.7
57.5°	851.6	796.3	765.5	711.3	632.6	565.6	525.2	497.6	475.2	459.3	442.3
60°	749.5	704.9	670.9	631.5	562.4	506.1	463.5	447.6	424.2	412.5	405.1
62.5°	651.7	619.8	587.9	558.2	496.5	443.3	411.4	391.2	377.4	365.7	359.3
65°	559.2	529.5	507.1	480.5	429.5	387.0	357.2	341.3	327.5	324.3	316.8
67.5°	468.9	456.1	431.6	410.4	366.8	333.8	311.5	291.3	283.9	280.7	274.3
70°	392.3	377.4	358.3	340.2	307.3	278.5	258.3	250.9	240.3	239.2	231.8
72.5°	323.2	305.1	291.3	277.5	253.0	227.5	216.9	206.3	200.9	196.7	193.5
75°	256.2	243.5	233.9	222.2	200.9	183.9	169.0	164.8	161.6	160.5	158.4
77.5°	191.4	182.9	178.6	166.9	152.0	137.1	130.8	124.4	124.4	122.3	123.3
80°	136.1	130.8	125.5	119.1	106.3	99.9	94.6	90.4	88.2	87.2	88.2
82.5°	86.1	82.9	81.9	77.6	69.1	65.9	61.7	58.5	58.5	58.5	58.5
85°	47.8	47.8	47.8	41.5	38.3	35.1	33.0	31.9	31.9	31.9	33.0
87.5°	20.2	20.2	17.0	17.0	15.9	13.8	12.8	12.8	13.8	13.8	14.9
90°	5.9	5.2	4.9	4.5	3.6	2.8	1.9	1.1	1.9	2.8	3.6
92.5°	14.4	14.0	13.8	13.3	12.3	11.2	10.2	9.2	10.2	11.2	12.3
95°	25.2	24.7	24.4	24.0	23.3	22.6	21.9	21.2	21.9	22.6	23.3
97.5°	37.7	37.1	36.8	36.5	35.8	35.2	34.5	33.9	34.5	35.2	35.8
100°	52.0	51.3	50.9	50.7	50.4	50.1	49.8	49.5	49.8	50.1	50.4
102.5°	67.0	66.4	66.1	66.1	66.0	65.9	65.8	65.7	65.8	65.9	66.0
105°	83.2	82.9	82.7	82.7	82.6	82.5	82.5	82.4	82.5	82.5	82.6
107.5°	100.1	100.0	100.0	100.0	99.9	99.8	99.8	99.7	99.8	99.8	99.9
110°	118.0	118.1	118.1	118.0	117.8	117.7	117.5	117.3	117.5	117.7	117.8

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	135.5	135.6	135.7	135.7	135.7	135.7	135.7	135.7	135.7	135.7	135.7
115°	153.9	154.0	154.1	154.1	154.1	154.1	154.1	154.1	154.1	154.1	154.1
117.5°	171.3	171.4	171.4	171.4	171.4	171.4	171.4	171.4	171.4	171.4	171.4
120°	189.8	190.1	190.2	190.0	189.7	189.4	189.0	188.7	189.0	189.4	189.7
122.5°	207.0	207.1	207.1	207.1	207.0	206.9	206.9	206.8	206.9	206.9	207.0
125°	224.3	224.4	224.4	224.4	224.4	224.4	224.4	224.4	224.4	224.4	224.4
127.5°	241.2	241.3	241.4	241.3	241.0	240.8	240.5	240.3	240.5	240.8	241.0
130°	258.4	258.4	258.4	258.3	258.0	257.8	257.5	257.3	257.5	257.8	258.0
132.5°	275.2	275.3	275.3	275.2	275.1	274.9	274.8	274.6	274.8	274.9	275.1
135°	291.6	291.6	291.6	291.4	290.9	290.4	290.0	289.5	290.0	290.4	290.9
137.5°	307.4	307.2	307.1	307.0	306.8	306.5	306.3	306.1	306.3	306.5	306.8
140°	323.4	323.4	323.4	323.3	323.2	323.0	322.9	322.7	322.9	323.0	323.2
142.5°	338.5	338.6	338.6	338.5	338.4	338.2	338.1	337.9	338.1	338.2	338.4
145°	353.2	353.1	353.1	352.9	352.6	352.3	352.0	351.7	352.0	352.3	352.6
147.5°	367.5	367.6	367.6	367.4	367.0	366.6	366.2	365.8	366.2	366.6	367.0
150°	380.0	380.0	380.0	379.8	379.5	379.2	378.8	378.5	378.8	379.2	379.5
152.5°	391.4	391.3	391.3	391.2	391.1	390.9	390.8	390.6	390.8	390.9	391.1
155°	402.8	402.9	402.9	402.9	402.9	402.9	402.9	402.9	402.9	402.9	402.9
157.5°	412.8	412.8	412.8	412.9	413.0	413.2	413.3	413.5	413.3	413.2	413.0
160°	422.3	422.4	422.4	422.4	422.5	422.6	422.6	422.7	422.6	422.6	422.5
162.5°	430.0	430.1	430.1	430.2	430.5	430.7	431.0	431.2	431.0	430.7	430.5
165°	437.4	437.5	437.6	437.7	437.9	438.2	438.4	438.6	438.4	438.2	437.9
167.5°	443.2	443.2	443.2	443.4	443.7	444.0	444.3	444.6	444.3	444.0	443.7
170°	447.9	447.8	447.8	448.0	448.4	448.8	449.2	449.6	449.2	448.8	448.4
172.5°	451.7	451.7	451.7	451.9	452.2	452.5	452.8	453.1	452.8	452.5	452.2
175°	454.4	454.5	454.5	454.7	455.1	455.5	455.9	456.3	455.9	455.5	455.1
177.5°	455.9	455.9	455.9	456.1	456.5	456.9	457.3	457.7	457.3	456.9	456.5
180°	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2
2.5°	1264.1	1259.8	1262.0	1251.3	1241.8	1228.0	1216.3	1214.1	1212.0	1218.4	1214.1
5°	1228.0	1222.6	1217.3	1204.6	1185.4	1173.7	1156.7	1155.7	1149.3	1139.7	1141.8
7.5°	1188.6	1185.4	1178.0	1157.8	1140.8	1120.6	1106.8	1095.1	1089.7	1081.2	1078.0
10°	1156.7	1145.0	1138.6	1116.3	1096.1	1074.9	1056.8	1048.3	1038.7	1031.3	1026.0
12.5°	1113.1	1109.9	1091.9	1073.8	1056.8	1032.3	1018.5	994.1	981.3	987.7	985.6
15°	1084.4	1069.5	1065.3	1039.8	1011.1	995.1	969.6	953.7	948.3	938.8	927.1
17.5°	1046.2	1036.6	1021.7	998.3	965.4	943.0	925.0	910.1	903.7	890.9	881.4
20°	1010.0	994.1	982.4	961.1	929.2	900.5	878.2	868.6	852.7	842.0	836.7
22.5°	977.0	965.4	948.3	916.4	888.8	861.2	834.6	820.8	805.9	799.5	791.0
25°	936.6	917.5	905.8	870.7	841.0	818.6	794.2	776.1	767.6	757.0	754.8
27.5°	897.3	879.2	865.4	834.6	798.4	769.7	754.8	742.1	727.2	727.2	721.9
30°	858.0	845.2	824.0	794.2	760.2	732.5	715.5	703.8	698.5	694.2	693.2
32.5°	818.6	801.6	788.9	748.5	723.0	697.4	684.7	675.1	668.7	667.7	668.7
35°	778.2	759.1	746.3	710.2	684.7	661.3	656.0	647.5	644.3	643.2	648.5
37.5°	735.7	720.8	704.9	675.1	646.4	632.6	621.9	618.8	617.7	624.1	626.2
40°	696.4	683.6	668.7	636.8	615.6	600.7	595.4	592.2	596.4	602.8	606.0
42.5°	659.2	641.1	629.4	600.7	581.5	573.0	566.7	566.7	570.9	578.4	583.7
45°	619.8	606.0	594.3	568.8	551.8	542.2	541.1	542.2	547.5	552.8	559.2
47.5°	581.5	567.7	555.0	533.7	518.8	513.5	512.4	513.5	522.0	529.5	536.9
50°	546.5	531.6	519.9	499.7	488.0	481.6	482.7	488.0	494.4	505.0	514.6
52.5°	505.0	494.4	483.7	465.7	455.0	450.8	454.0	458.2	469.9	477.4	489.1
55°	464.6	455.0	446.5	432.7	424.2	421.0	423.1	429.5	439.1	451.8	465.7
57.5°	427.4	416.8	408.3	398.7	389.1	390.2	391.2	399.7	411.4	423.1	439.1
60°	385.9	379.5	372.1	360.4	356.2	356.2	359.3	368.9	379.5	398.7	412.5
62.5°	348.7	340.2	334.9	327.5	321.1	322.1	329.6	338.1	350.8	366.8	384.9
65°	310.4	300.9	296.6	290.2	288.1	289.2	294.5	307.3	321.1	334.9	351.9
67.5°	267.9	264.7	260.5	254.1	256.2	257.3	262.6	273.2	288.1	301.9	321.1
70°	231.8	225.4	224.3	219.0	219.0	222.2	232.8	240.3	254.1	269.0	289.2
72.5°	193.5	188.2	188.2	183.9	187.1	190.3	195.6	206.3	219.0	233.9	250.9
75°	154.2	152.0	154.2	152.0	152.0	157.3	163.7	172.2	186.1	202.0	215.8
77.5°	119.1	119.1	118.0	121.2	121.2	124.4	132.9	141.4	152.0	164.8	179.7
80°	87.2	87.2	87.2	90.4	93.6	93.6	98.9	109.5	119.1	127.6	141.4
82.5°	59.5	59.5	59.5	61.7	65.9	65.9	72.3	78.7	89.3	96.7	103.1
85°	36.1	36.1	35.1	37.2	38.3	41.5	46.8	51.0	56.3	62.7	69.1
87.5°	15.9	15.9	17.0	18.1	19.1	21.3	23.4	25.5	30.8	33.0	36.1
90°	4.5	4.9	5.2	5.9	6.5	7.2	7.8	8.3	8.7	9.2	9.7
92.5°	13.3	13.8	14.0	14.4	14.8	15.2	15.6	15.8	16.0	16.3	16.5
95°	24.0	24.4	24.7	25.2	25.8	26.3	26.9	27.1	27.3	27.6	27.8
97.5°	36.5	36.8	37.1	37.7	38.4	39.0	39.6	39.9	40.2	40.5	40.8
100°	50.7	50.9	51.3	52.0	52.7	53.4	54.1	54.3	54.4	54.6	54.7
102.5°	66.1	66.1	66.4	67.0	67.7	68.3	68.9	69.1	69.4	69.6	69.9
105°	82.7	82.7	82.9	83.2	83.5	83.8	84.1	84.3	84.6	84.8	85.1
107.5°	100.0	100.0	100.0	100.1	100.2	100.3	100.4	100.7	101.0	101.3	101.6
110°	118.0	118.1	118.1	118.0	117.9	117.8	117.7	117.5	117.4	117.2	117.1

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	135.7	135.7	135.6	135.5	135.3	135.2	135.0	135.0	135.0	135.0	135.0
115°	154.1	154.1	154.0	153.9	153.7	153.6	153.4	153.3	153.2	153.1	153.0
117.5°	171.4	171.4	171.4	171.3	171.2	171.2	171.1	170.9	170.6	170.4	170.1
120°	190.0	190.2	190.1	189.8	189.6	189.3	189.1	188.7	188.3	187.9	187.5
122.5°	207.1	207.1	207.1	207.0	206.9	206.9	206.8	206.6	206.3	206.1	205.8
125°	224.4	224.4	224.4	224.3	224.2	224.2	224.1	223.9	223.8	223.6	223.5
127.5°	241.3	241.4	241.3	241.2	241.0	240.9	240.7	240.5	240.4	240.2	240.1
130°	258.3	258.4	258.4	258.4	258.4	258.4	258.4	258.2	258.1	257.9	257.8
132.5°	275.2	275.3	275.3	275.2	275.1	275.1	275.0	274.8	274.7	274.5	274.4
135°	291.4	291.6	291.6	291.6	291.6	291.6	291.6	291.4	291.3	291.1	291.0
137.5°	307.0	307.1	307.2	307.4	307.5	307.7	307.9	307.7	307.4	307.2	306.9
140°	323.3	323.4	323.4	323.4	323.4	323.4	323.4	323.3	323.2	323.1	323.0
142.5°	338.5	338.6	338.6	338.5	338.4	338.3	338.2	338.2	338.2	338.2	338.2
145°	352.9	353.1	353.1	353.2	353.3	353.3	353.4	353.3	353.3	353.2	353.1
147.5°	367.4	367.6	367.6	367.5	367.4	367.3	367.2	367.1	367.1	367.0	366.9
150°	379.8	380.0	380.0	380.0	380.0	380.0	380.0	380.0	380.0	380.0	380.0
152.5°	391.2	391.3	391.3	391.4	391.5	391.5	391.6	391.8	392.1	392.3	392.6
155°	402.9	402.9	402.9	402.8	402.7	402.7	402.6	402.9	403.2	403.5	403.8
157.5°	412.9	412.8	412.8	412.8	412.8	412.8	412.8	413.0	413.3	413.5	413.8
160°	422.4	422.4	422.4	422.3	422.2	422.1	422.0	422.2	422.5	422.7	423.0
162.5°	430.2	430.1	430.1	430.0	429.9	429.9	429.8	430.3	430.7	431.2	431.7
165°	437.7	437.6	437.5	437.4	437.2	437.1	436.9	437.4	437.8	438.3	438.8
167.5°	443.4	443.2	443.2	443.2	443.2	443.2	443.2	443.7	444.1	444.6	445.1
170°	448.0	447.8	447.8	447.9	448.0	448.1	448.2	448.7	449.1	449.6	450.1
172.5°	451.9	451.7	451.7	451.7	451.7	451.7	451.7	452.3	452.8	453.4	453.9
175°	454.7	454.5	454.5	454.4	454.3	454.3	454.2	454.8	455.3	455.9	456.4
177.5°	456.1	455.9	455.9	455.9	455.9	455.9	455.9	456.5	457.0	457.6	458.1
180°	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2
2.5°	1210.9	1209.9	1204.6	1206.7	1200.3	1202.4	1205.6	1206.7	1210.9	1207.8	1206.7
5°	1136.5	1134.4	1131.2	1128.0	1127.0	1131.2	1123.8	1125.9	1128.0	1131.2	1135.5
7.5°	1075.9	1074.9	1071.7	1066.4	1064.2	1062.1	1063.2	1070.6	1069.5	1068.5	1075.9
10°	1020.6	1021.7	1015.3	1014.3	1007.9	1006.8	1007.9	1010.0	1013.2	1017.4	1018.5
12.5°	963.2	977.0	965.4	961.1	951.5	956.8	959.0	949.4	954.7	957.9	973.9
15°	927.1	920.7	913.3	913.3	909.0	906.9	901.6	909.0	913.3	919.6	917.5
17.5°	877.1	866.5	862.2	858.0	859.0	863.3	851.6	868.6	868.6	871.8	866.5
20°	833.5	825.0	819.7	817.6	814.4	812.3	811.2	815.4	821.8	824.0	829.3
22.5°	787.8	787.8	779.3	776.1	774.0	770.8	776.1	772.9	777.2	781.4	789.9
25°	749.5	749.5	746.3	742.1	738.9	736.8	740.0	738.9	742.1	747.4	749.5
27.5°	718.7	715.5	714.4	713.4	712.3	713.4	712.3	715.5	718.7	719.8	717.6
30°	692.1	688.9	690.0	690.0	691.1	690.0	688.9	692.1	693.2	691.1	692.1
32.5°	667.7	667.7	669.8	670.9	670.9	671.9	673.0	670.9	671.9	668.7	669.8
35°	647.5	649.6	651.7	652.8	653.8	652.8	654.9	653.8	651.7	649.6	648.5
37.5°	627.3	629.4	633.6	634.7	637.9	639.0	636.8	636.8	635.8	631.5	629.4
40°	606.0	608.1	613.4	616.6	618.8	621.9	619.8	619.8	615.6	611.3	608.1
42.5°	585.8	590.1	595.4	598.6	602.8	602.8	602.8	600.7	595.4	591.1	587.9
45°	565.6	566.7	574.1	579.4	583.7	583.7	583.7	580.5	577.3	568.8	564.5
47.5°	543.3	546.5	555.0	560.3	564.5	565.6	565.6	562.4	556.0	548.6	543.3
50°	518.8	524.1	533.7	541.1	546.5	548.6	545.4	543.3	535.8	527.3	520.9
52.5°	495.4	501.8	513.5	519.9	527.3	528.4	527.3	524.1	515.6	503.9	498.6
55°	472.0	477.4	490.1	500.7	507.1	509.3	507.1	501.8	491.2	479.5	474.2
57.5°	446.5	454.0	467.8	478.4	485.9	486.9	484.8	479.5	471.0	456.1	448.7
60°	419.9	429.5	443.3	454.0	463.5	464.6	462.5	455.0	444.4	429.5	423.1
62.5°	393.4	400.8	416.8	428.5	435.9	441.2	437.0	429.5	418.9	404.0	394.4
65°	362.5	373.2	387.0	397.6	406.1	407.2	405.1	398.7	387.0	371.0	363.6
67.5°	332.8	340.2	354.0	367.9	371.0	374.2	371.0	364.7	355.1	341.3	330.6
70°	296.6	303.0	320.0	329.6	333.8	337.0	334.9	328.5	320.0	307.3	298.7
72.5°	260.5	265.8	281.7	289.2	297.7	296.6	295.6	291.3	279.6	271.1	265.8
75°	222.2	228.6	239.2	248.8	252.0	252.0	252.0	248.8	241.3	227.5	222.2
77.5°	187.1	190.3	198.8	204.1	207.3	208.4	207.3	202.0	197.7	188.2	185.0
80°	143.5	152.0	158.4	159.5	163.7	163.7	163.7	161.6	157.3	147.8	146.7
82.5°	108.4	110.6	116.9	120.1	122.3	121.2	121.2	116.9	115.9	110.6	108.4
85°	73.4	76.5	75.5	79.7	80.8	78.7	78.7	80.8	75.5	76.5	73.4
87.5°	40.4	40.4	42.5	41.5	45.7	45.7	43.6	44.7	42.5	41.5	40.4
90°	9.9	10.0	10.1	10.3	10.4	10.6	10.4	10.3	10.1	10.0	9.9
92.5°	16.6	16.6	16.7	16.8	16.9	17.0	16.9	16.8	16.7	16.6	16.6
95°	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.9
97.5°	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0
100°	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8
102.5°	70.0	70.0	70.1	70.2	70.2	70.3	70.2	70.2	70.1	70.0	70.0
105°	85.2	85.3	85.5	85.8	86.0	86.2	86.0	85.8	85.5	85.3	85.2
107.5°	101.8	101.8	101.7	101.6	101.5	101.4	101.5	101.6	101.7	101.8	101.8
110°	117.0	117.1	117.4	117.6	117.9	118.1	117.9	117.6	117.4	117.1	117.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0	135.0
115°	153.0	153.0	152.9	152.8	152.8	152.7	152.8	152.8	152.9	153.0	153.0
117.5°	170.0	169.9	169.6	169.4	169.1	168.9	169.1	169.4	169.6	169.9	170.0
120°	187.3	187.4	187.5	187.7	187.8	188.0	187.8	187.7	187.5	187.4	187.3
122.5°	205.7	205.5	205.1	204.7	204.3	203.9	204.3	204.7	205.1	205.5	205.7
125°	223.4	223.3	223.2	223.0	222.9	222.7	222.9	223.0	223.2	223.3	223.4
127.5°	240.0	240.0	239.9	239.8	239.7	239.6	239.7	239.8	239.9	240.0	240.0
130°	257.7	257.5	257.2	256.9	256.5	256.2	256.5	256.9	257.2	257.5	257.7
132.5°	274.3	274.3	274.2	274.1	274.0	273.9	274.0	274.1	274.2	274.3	274.3
135°	290.9	290.8	290.5	290.3	290.0	289.8	290.0	290.3	290.5	290.8	290.9
137.5°	306.8	306.8	306.9	307.0	307.0	307.1	307.0	307.0	306.9	306.8	306.8
140°	323.0	323.0	322.9	322.8	322.8	322.7	322.8	322.8	322.9	323.0	323.0
142.5°	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2	338.2
145°	353.1	353.0	352.7	352.5	352.2	352.0	352.2	352.5	352.7	353.0	353.1
147.5°	366.9	366.9	366.8	366.7	366.6	366.5	366.6	366.7	366.8	366.9	366.9
150°	380.0	380.0	379.9	379.8	379.7	379.6	379.7	379.8	379.9	380.0	380.0
152.5°	392.7	392.6	392.3	392.1	391.8	391.6	391.8	392.1	392.3	392.6	392.7
155°	404.0	403.8	403.5	403.2	402.9	402.6	402.9	403.2	403.5	403.8	404.0
157.5°	413.9	413.8	413.5	413.3	413.0	412.8	413.0	413.3	413.5	413.8	413.9
160°	423.1	422.9	422.5	422.1	421.7	421.3	421.7	422.1	422.5	422.9	423.1
162.5°	431.9	431.7	431.3	430.9	430.5	430.1	430.5	430.9	431.3	431.7	431.9
165°	439.0	438.8	438.5	438.2	437.9	437.6	437.9	438.2	438.5	438.8	439.0
167.5°	445.3	445.1	444.6	444.1	443.7	443.2	443.7	444.1	444.6	445.1	445.3
170°	450.3	450.0	449.5	448.9	448.4	447.8	448.4	448.9	449.5	450.0	450.3
172.5°	454.2	453.9	453.4	452.8	452.3	451.7	452.3	452.8	453.4	453.9	454.2
175°	456.7	456.4	455.9	455.3	454.8	454.2	454.8	455.3	455.9	456.4	456.7
177.5°	458.4	458.1	457.5	456.8	456.2	455.6	456.2	456.8	457.5	458.1	458.4
180°	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2
2.5°	1206.7	1213.1	1206.7	1210.9	1213.1	1218.4	1220.5	1230.1	1233.3	1240.7	1240.7
5°	1134.4	1137.6	1138.6	1142.9	1147.2	1157.8	1165.2	1179.0	1195.0	1197.1	1206.7
7.5°	1075.9	1081.2	1089.7	1086.6	1094.0	1109.9	1119.5	1136.5	1152.5	1161.0	1172.7
10°	1023.8	1030.2	1033.4	1036.6	1050.4	1064.2	1079.1	1090.8	1112.1	1124.8	1134.4
12.5°	981.3	976.0	982.4	994.1	1010.0	1018.5	1038.7	1056.8	1072.7	1086.6	1095.1
15°	926.0	930.3	936.6	956.8	961.1	982.4	989.8	1010.0	1039.8	1052.5	1063.2
17.5°	872.9	886.7	899.4	906.9	919.6	936.6	957.9	980.2	999.4	1014.3	1027.0
20°	830.3	844.2	851.6	856.9	869.7	893.1	913.3	940.9	965.4	977.0	994.1
22.5°	796.3	796.3	806.9	822.9	830.3	852.7	869.7	899.4	926.0	940.9	956.8
25°	753.8	760.2	768.7	782.5	793.1	811.2	835.6	861.2	889.9	902.6	922.8
27.5°	718.7	726.1	737.8	741.0	751.7	767.6	793.1	820.8	850.5	864.4	881.4
30°	692.1	696.4	700.6	707.0	716.6	730.4	751.7	776.1	812.3	822.9	844.2
32.5°	668.7	670.9	673.0	678.3	683.6	697.4	714.4	741.0	770.8	786.7	805.9
35°	647.5	645.3	646.4	649.6	654.9	660.2	678.3	700.6	728.3	747.4	762.3
37.5°	627.3	623.0	621.9	621.9	624.1	630.5	644.3	663.4	693.2	709.1	724.0
40°	604.9	600.7	598.6	597.5	596.4	600.7	611.3	630.5	653.8	668.7	685.7
42.5°	583.7	579.4	574.1	573.0	570.9	573.0	580.5	598.6	618.8	633.6	647.5
45°	562.4	555.0	548.6	544.3	545.4	542.2	547.5	561.3	584.7	594.3	608.1
47.5°	539.0	530.5	522.0	517.8	513.5	515.6	517.8	529.5	549.7	559.2	573.0
50°	516.7	505.0	495.4	490.1	486.9	484.8	486.9	498.6	513.5	522.0	533.7
52.5°	491.2	479.5	469.9	461.4	457.2	454.0	455.0	465.7	479.5	488.0	499.7
55°	467.8	452.9	440.1	429.5	426.3	425.3	424.2	431.6	443.3	451.8	461.4
57.5°	441.2	426.3	412.5	399.7	393.4	392.3	392.3	394.4	409.3	415.7	421.0
60°	414.6	398.7	383.8	372.1	362.5	359.3	358.3	362.5	370.0	376.4	383.8
62.5°	384.9	368.9	350.8	340.2	330.6	322.1	325.3	326.4	337.0	340.2	346.6
65°	356.2	338.1	323.2	306.2	295.6	290.2	288.1	290.2	298.7	299.8	304.1
67.5°	323.2	306.2	288.1	276.4	266.9	257.3	255.2	255.2	259.4	262.6	267.9
70°	291.3	274.3	254.1	241.3	231.8	223.3	220.1	219.0	222.2	224.3	229.6
72.5°	254.1	237.1	222.2	208.4	196.7	190.3	187.1	185.0	188.2	190.3	191.4
75°	214.8	200.9	186.1	172.2	164.8	158.4	154.2	151.0	153.1	153.1	153.1
77.5°	177.5	163.7	152.0	142.5	132.9	125.5	122.3	119.1	120.1	120.1	122.3
80°	138.2	128.6	119.1	110.6	102.1	95.7	93.6	90.4	88.2	87.2	87.2
82.5°	102.1	94.6	86.1	78.7	74.4	68.0	65.9	61.7	61.7	60.6	60.6
85°	68.0	63.8	55.3	50.0	46.8	43.6	41.5	39.3	36.1	36.1	35.1
87.5°	36.1	34.0	31.9	25.5	25.5	22.3	21.3	20.2	17.0	18.1	18.1
90°	9.7	9.2	8.7	8.3	7.8	7.2	6.5	5.9	5.2	4.9	4.5
92.5°	16.5	16.3	16.0	15.8	15.6	15.2	14.8	14.4	14.0	13.8	13.3
95°	27.8	27.6	27.3	27.1	26.9	26.3	25.8	25.2	24.7	24.4	24.0
97.5°	40.8	40.5	40.2	39.9	39.6	39.0	38.4	37.7	37.1	36.8	36.5
100°	54.7	54.6	54.4	54.3	54.1	53.4	52.7	52.0	51.3	50.9	50.7
102.5°	69.9	69.6	69.4	69.1	68.9	68.3	67.7	67.0	66.4	66.1	66.1
105°	85.1	84.8	84.6	84.3	84.1	83.8	83.5	83.2	82.9	82.7	82.7
107.5°	101.6	101.3	101.0	100.7	100.4	100.3	100.2	100.1	100.0	100.0	100.0
110°	117.1	117.2	117.4	117.5	117.7	117.8	117.9	118.0	118.1	118.1	118.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	135.0	135.0	135.0	135.0	135.0	135.2	135.3	135.5	135.6	135.7	135.7
115°	153.0	153.1	153.2	153.3	153.4	153.6	153.7	153.9	154.0	154.1	154.1
117.5°	170.1	170.4	170.6	170.9	171.1	171.2	171.2	171.3	171.4	171.4	171.4
120°	187.5	187.9	188.3	188.7	189.1	189.3	189.6	189.8	190.1	190.2	190.0
122.5°	205.8	206.1	206.3	206.6	206.8	206.9	206.9	207.0	207.1	207.1	207.1
125°	223.5	223.6	223.8	223.9	224.1	224.2	224.2	224.3	224.4	224.4	224.4
127.5°	240.1	240.2	240.4	240.5	240.7	240.9	241.0	241.2	241.3	241.4	241.3
130°	257.8	257.9	258.1	258.2	258.4	258.4	258.4	258.4	258.4	258.4	258.3
132.5°	274.4	274.5	274.7	274.8	275.0	275.1	275.1	275.2	275.3	275.3	275.2
135°	291.0	291.1	291.3	291.4	291.6	291.6	291.6	291.6	291.6	291.6	291.4
137.5°	306.9	307.2	307.4	307.7	307.9	307.7	307.5	307.4	307.2	307.1	307.0
140°	323.0	323.1	323.2	323.3	323.4	323.4	323.4	323.4	323.4	323.4	323.3
142.5°	338.2	338.2	338.2	338.2	338.2	338.3	338.4	338.5	338.6	338.6	338.5
145°	353.1	353.2	353.3	353.3	353.4	353.3	353.3	353.2	353.1	353.1	352.9
147.5°	366.9	367.0	367.1	367.1	367.2	367.3	367.4	367.5	367.6	367.6	367.4
150°	380.0	380.0	380.0	380.0	380.0	380.0	380.0	380.0	380.0	380.0	379.8
152.5°	392.6	392.3	392.1	391.8	391.6	391.5	391.5	391.4	391.3	391.3	391.2
155°	403.8	403.5	403.2	402.9	402.6	402.7	402.7	402.8	402.9	402.9	402.9
157.5°	413.8	413.5	413.3	413.0	412.8	412.8	412.8	412.8	412.8	412.8	412.9
160°	423.0	422.7	422.5	422.2	422.0	422.1	422.2	422.3	422.4	422.4	422.4
162.5°	431.7	431.2	430.7	430.3	429.8	429.9	429.9	430.0	430.1	430.1	430.2
165°	438.8	438.3	437.8	437.4	436.9	437.1	437.2	437.4	437.5	437.6	437.7
167.5°	445.1	444.6	444.1	443.7	443.2	443.2	443.2	443.2	443.2	443.2	443.4
170°	450.1	449.6	449.1	448.7	448.2	448.1	448.0	447.9	447.8	447.8	448.0
172.5°	453.9	453.4	452.8	452.3	451.7	451.7	451.7	451.7	451.7	451.7	451.9
175°	456.4	455.9	455.3	454.8	454.2	454.3	454.3	454.4	454.5	454.5	454.7
177.5°	458.1	457.6	457.0	456.5	455.9	455.9	455.9	455.9	455.9	455.9	456.1
180°	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0	457.0

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1283.2	1283.2	1283.2	1283.2
2.5°	1248.2	1258.8	1268.4	1283.2
5°	1220.5	1235.4	1255.6	1277.9
7.5°	1188.6	1212.0	1238.6	1269.4
10°	1158.8	1185.4	1219.4	1256.7
12.5°	1128.0	1159.9	1197.1	1237.5
15°	1092.9	1124.8	1166.3	1220.5
17.5°	1061.0	1099.3	1144.0	1201.4
20°	1023.8	1060.0	1108.9	1174.8
22.5°	990.9	1032.3	1086.6	1144.0
25°	954.7	990.9	1045.1	1114.2
27.5°	918.6	963.2	1015.3	1082.3
30°	883.5	920.7	977.0	1047.2
32.5°	845.2	889.9	942.0	1007.9
35°	803.8	846.3	895.2	966.4
37.5°	766.5	808.0	858.0	920.7
40°	725.1	768.7	814.4	877.1
42.5°	684.7	724.0	769.7	827.1
45°	645.3	679.4	720.8	770.8
47.5°	604.9	633.6	671.9	716.6
50°	561.3	592.2	620.9	658.1
52.5°	520.9	547.5	570.9	601.7
55°	481.6	499.7	518.8	542.2
57.5°	440.1	454.0	467.8	492.2
60°	398.7	411.4	418.9	434.8
62.5°	358.3	363.6	373.2	382.7
65°	313.6	321.1	326.4	338.1
67.5°	273.2	276.4	281.7	289.2
70°	230.7	238.1	240.3	245.6
72.5°	194.6	197.7	199.9	200.9
75°	154.2	157.3	159.5	165.9
77.5°	121.2	120.1	124.4	125.5
80°	89.3	86.1	87.2	91.4
82.5°	58.5	59.5	58.5	58.5
85°	36.1	35.1	33.0	34.0
87.5°	15.9	15.9	14.9	14.9
90°	3.6	2.8	1.9	1.1
92.5°	12.3	11.2	10.2	9.2
95°	23.3	22.6	21.9	21.2
97.5°	35.8	35.2	34.5	33.9
100°	50.4	50.1	49.8	49.5
102.5°	66.0	65.9	65.8	65.7
105°	82.6	82.5	82.5	82.4
107.5°	99.9	99.8	99.8	99.7
110°	117.8	117.7	117.5	117.3

TEST NUMBER: P1001857

CATALOG NUMBER: SA4XXDIP-B795D365UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	135.7	135.7	135.7	135.7
115°	154.1	154.1	154.1	154.1
117.5°	171.4	171.4	171.4	171.4
120°	189.7	189.4	189.0	188.7
122.5°	207.0	206.9	206.9	206.8
125°	224.4	224.4	224.4	224.4
127.5°	241.0	240.8	240.5	240.3
130°	258.0	257.8	257.5	257.3
132.5°	275.1	274.9	274.8	274.6
135°	290.9	290.4	290.0	289.5
137.5°	306.8	306.5	306.3	306.1
140°	323.2	323.0	322.9	322.7
142.5°	338.4	338.2	338.1	337.9
145°	352.6	352.3	352.0	351.7
147.5°	367.0	366.6	366.2	365.8
150°	379.5	379.2	378.8	378.5
152.5°	391.1	390.9	390.8	390.6
155°	402.9	402.9	402.9	402.9
157.5°	413.0	413.2	413.3	413.5
160°	422.5	422.6	422.6	422.7
162.5°	430.5	430.7	431.0	431.2
165°	437.9	438.2	438.4	438.6
167.5°	443.7	444.0	444.3	444.6
170°	448.4	448.8	449.2	449.6
172.5°	452.2	452.5	452.8	453.1
175°	455.1	455.5	455.9	456.3
177.5°	456.5	456.9	457.3	457.7
180°	457.0	457.0	457.0	457.0

(END OF REPORT)