

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1009719

Luminaire Tested: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1009719
REPORT IS A COMBINATION OF REPORTS P987915 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1
Description: Define 2 Regressed Direct/Indirect Pendant with 3000K BioUP LEDs {m-DER=0.589}
{m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5714.0 lumens
Efficiency: N/A
Efficacy: 74.5 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 0.85 / 1.01
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 76.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

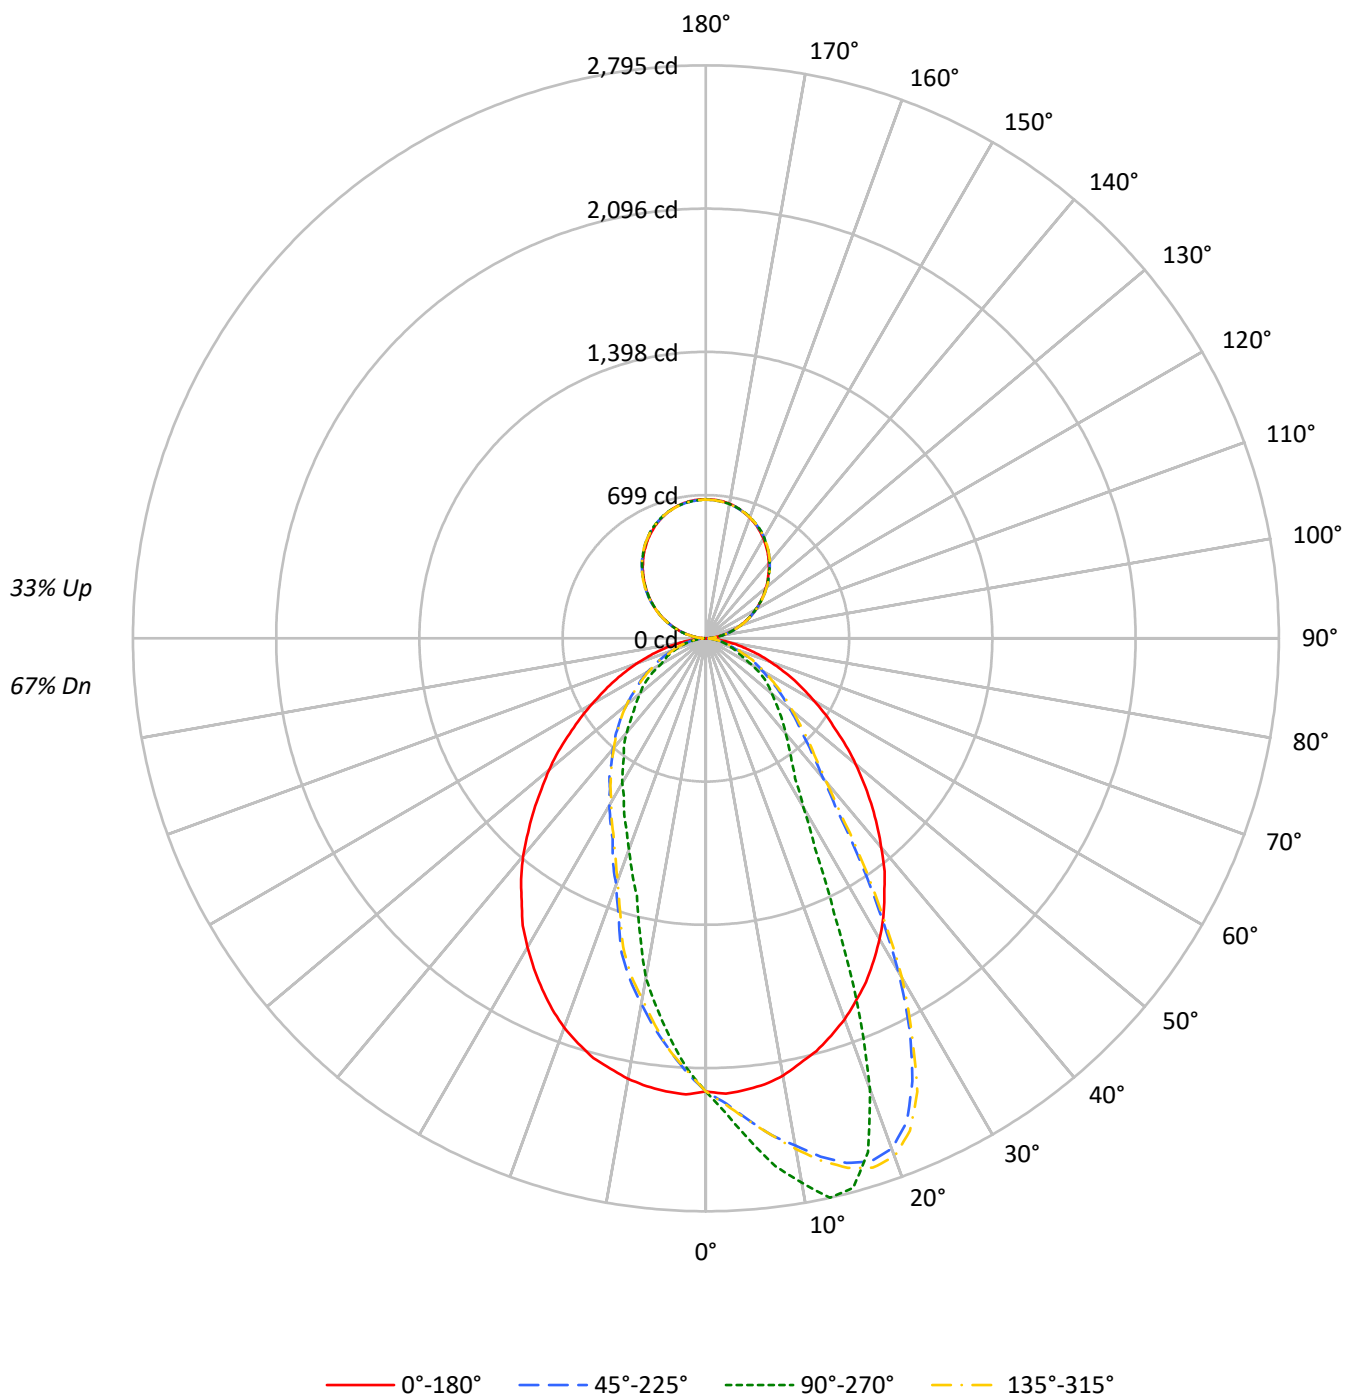

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67		
1	103	99	95	92	97	93	90	87	83	81	78	74	72	70	65	64	63	58		
2	94	87	82	77	89	83	78	73	74	70	67	66	63	60	58	56	54	51		
3	87	78	71	65	82	74	68	63	66	62	58	59	56	52	53	50	48	44		
4	80	70	62	57	75	66	60	54	60	54	50	54	50	46	48	45	42	39		
5	74	63	55	49	70	60	53	48	54	49	44	49	44	41	44	40	38	35		
6	69	57	49	44	65	55	47	42	50	44	39	45	40	37	40	37	34	31		
7	64	52	44	39	60	50	43	38	45	40	35	41	37	33	37	34	31	28		
8	60	48	40	35	57	46	39	34	42	36	32	38	33	30	35	31	28	26		
9	56	44	37	32	53	42	36	31	39	33	29	35	31	27	32	28	26	24		
10	53	41	34	29	50	39	33	28	36	30	27	33	28	25	30	26	24	22		

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	34981	34981	34981	34981
5°	35062	37156	35184	29683
10°	34677	39272	34923	24512
15°	33925	39285	34499	18415
20°	33019	32472	33737	15193
25°	31922	20291	32611	12923
30°	30521	12992	31351	11127
35°	28816	9984	29748	9522
40°	26916	8392	28068	8329
45°	24887	7143	25926	6991
50°	22806	6070	23870	6047
55°	20502	5275	21607	5206
60°	18453	4022	19433	3974
65°	16541	3028	17526	3433
70°	14434	2418	15565	2799
75°	12201	1853	13314	2117
80°	9684	1259	10419	1388
85°	6724	649	7374	687

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 165°

Vertical Angle: 45°

Luminance: 32000 cd/sqm

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.6	3.7
10°-20°	585.1	10.2
20°-30°	753.0	13.2
30°-40°	714.4	12.5
40°-50°	612.2	10.7
50°-60°	466.2	8.2
60°-70°	294.0	5.1
70°-80°	146.7	2.6
80°-90°	39.6	0.7
90°-100°	41.9	0.7
100°-110°	133.2	2.3
110°-120°	227.8	4.0
120°-130°	299.7	5.2
130°-140°	336.4	5.9
140°-150°	329.9	5.8
150°-160°	276.7	4.8
160°-170°	183.5	3.2
170°-180°	64.1	1.1
0°-30°	1547.7	27.1
0°-40°	2262.1	39.6
0°-60°	3340.6	58.5
0°-90°	3820.9	66.9
90°-120°	402.9	7.1
90°-150°	1368.8	24.0
90°-180°	1893.0	33.1
0°-180°	5714.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2210	2210	2210	2210	2210	
5°	2211	2459	2219	1964	2211	210
15°	2084	2775	2119	1301	2084	586
25°	1849	1480	1889	943	1849	849
35°	1517	730	1566	696	1517	949
45°	1140	507	1187	496	1140	880
55°	769	352	811	347	769	693
65°	465	183	493	207	465	462
75°	218	97	238	111	218	236
85°	48	28	52	29	48	54
90°	1	19	1	19	1	5
95°	30	35	30	35	30	33
105°	123	127	123	127	123	130
115°	229	229	229	229	229	226
125°	333	334	333	334	333	297
135°	430	435	430	435	430	332
145°	522	528	522	528	522	326
155°	597	602	597	602	597	275
165°	650	650	650	650	650	183
175°	676	674	676	674	676	64
180°	677	677	677	677	677	

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2223.7	2232.9	2237.6	2243.7	2257.5	2266.7	2280.6	2283.6	2282.1	2288.2	2271.3
5°	2211.4	2231.4	2249.8	2265.2	2289.8	2305.1	2322.0	2342.0	2346.6	2369.6	2355.8
7.5°	2194.6	2223.7	2249.8	2280.6	2317.4	2337.4	2363.5	2394.2	2408.0	2435.7	2443.3
10°	2166.9	2208.4	2252.9	2285.2	2335.8	2371.2	2395.7	2444.9	2477.1	2518.6	2512.4
12.5°	2122.4	2176.1	2236.0	2289.8	2355.8	2378.8	2424.9	2475.6	2517.1	2555.4	2589.2
15°	2084.0	2145.4	2211.4	2277.5	2352.7	2395.7	2441.8	2507.8	2552.4	2619.9	2649.1
17.5°	2031.8	2110.1	2188.4	2262.1	2351.2	2400.3	2457.2	2521.7	2587.7	2652.2	2675.2
20°	1978.0	2062.5	2146.9	2246.8	2348.1	2395.7	2454.1	2533.9	2598.4	2649.1	2649.1
22.5°	1913.5	2016.4	2113.2	2208.4	2318.9	2388.1	2447.9	2541.6	2587.7	2598.4	2557.0
25°	1849.0	1951.9	2057.9	2176.1	2302.1	2363.5	2431.1	2518.6	2533.9	2490.9	2383.4
27.5°	1772.2	1887.4	2007.2	2134.7	2266.7	2343.5	2404.9	2463.3	2434.1	2318.9	2151.6
30°	1693.9	1818.3	1953.4	2074.8	2234.5	2305.1	2357.3	2374.2	2282.1	2094.7	1878.2
32.5°	1612.5	1733.8	1876.7	2022.6	2183.8	2251.4	2285.2	2240.6	2071.7	1835.2	1571.0
35°	1517.3	1654.0	1802.9	1955.0	2114.7	2165.4	2185.3	2076.3	1859.8	1554.2	1291.5
37.5°	1431.3	1568.0	1727.7	1882.8	2037.9	2065.6	2045.6	1875.1	1600.2	1297.7	1041.2
40°	1329.9	1475.8	1632.5	1806.0	1933.5	1941.2	1892.0	1670.9	1329.9	1045.8	887.7
42.5°	1236.3	1383.7	1540.3	1716.9	1813.7	1787.6	1721.5	1431.3	1110.3	901.5	774.0
45°	1139.5	1279.3	1448.2	1604.8	1673.9	1612.5	1512.7	1204.0	932.2	775.5	677.3
47.5°	1045.8	1176.4	1343.8	1494.3	1506.5	1437.4	1319.2	1009.0	807.8	681.9	602.0
50°	953.7	1084.2	1240.9	1365.3	1353.0	1257.8	1124.2	876.9	701.8	602.0	536.0
52.5°	861.5	979.8	1131.8	1230.1	1177.9	1085.8	953.7	743.3	612.8	525.2	474.5
55°	769.4	880.0	1010.5	1091.9	1009.0	903.0	809.3	637.3	531.4	460.7	422.3
57.5°	692.6	780.1	899.9	949.1	849.3	766.3	684.9	548.3	460.7	410.0	365.5
60°	608.1	688.0	786.3	815.5	712.6	645.0	575.9	463.8	394.7	350.1	321.0
62.5°	536.0	602.0	677.3	677.3	586.6	536.0	483.8	388.5	331.7	296.4	282.6
65°	465.3	512.9	566.7	560.5	483.8	439.2	397.8	321.0	278.0	253.4	239.6
67.5°	396.2	433.1	468.4	446.9	391.6	353.2	314.8	259.5	230.4	213.5	195.0
70°	333.3	362.4	380.9	360.9	305.6	273.4	245.7	208.9	185.8	164.3	153.6
72.5°	279.5	291.8	297.9	273.4	227.3	208.9	188.9	162.8	142.8	132.1	129.0
75°	218.1	228.8	224.2	205.8	167.4	153.6	138.2	119.8	115.2	109.0	106.0
77.5°	170.5	170.5	162.8	145.9	119.8	109.0	102.9	93.7	89.1	87.5	84.5
80°	121.3	119.8	115.2	96.8	81.4	75.3	75.3	69.1	67.6	64.5	64.5
82.5°	79.9	79.9	73.7	58.4	53.8	52.2	50.7	47.6	47.6	46.1	46.1
85°	47.6	44.5	36.9	32.3	30.7	30.7	29.2	27.6	29.2	27.6	27.6
87.5°	21.5	16.9	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3
90°	0.6	2.1	3.6	5.1	6.6	7.4	8.8	11.6	14.4	17.2	20.0
92.5°	12.6	13.6	14.6	15.6	16.6	17.1	17.2	17.3	17.4	17.6	17.7
95°	29.7	31.0	32.2	33.5	34.8	35.4	35.5	35.8	36.1	36.3	36.6
97.5°	49.7	50.9	52.0	53.2	54.3	54.9	55.1	55.6	56.1	56.6	57.1
100°	72.6	73.6	74.6	75.6	76.6	77.1	77.3	77.7	78.1	78.5	78.9
102.5°	96.6	97.4	98.1	98.9	99.6	100.0	100.3	100.8	101.3	101.8	102.3
105°	122.9	123.3	123.7	124.0	124.4	124.6	124.7	125.0	125.2	125.5	125.7
107.5°	149.1	149.6	150.1	150.6	151.1	151.4	151.4	151.4	151.4	151.4	151.4
110°	174.3	175.1	175.8	176.6	177.3	177.7	177.7	177.7	177.7	177.7	177.7

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	201.7	202.5	203.2	204.0	204.7	205.1	205.0	204.9	204.8	204.7	204.6
115°	228.6	229.4	230.1	230.9	231.6	232.0	231.9	231.6	231.3	231.1	230.8
117.5°	255.4	256.4	257.4	258.5	259.5	260.0	259.7	259.0	258.4	257.7	257.1
120°	282.3	283.3	284.3	285.3	286.3	286.8	286.3	285.3	284.3	283.3	282.3
122.5°	306.8	308.1	309.4	310.7	312.0	312.6	312.3	311.6	311.0	310.3	309.7
125°	332.6	333.7	334.9	336.0	337.1	337.7	337.5	337.1	336.8	336.4	336.0
127.5°	357.7	359.1	360.5	361.9	363.3	364.0	363.7	363.2	362.7	362.2	361.7
130°	381.1	382.8	384.4	386.1	387.8	388.6	388.5	388.2	387.9	387.7	387.4
132.5°	407.4	408.7	409.9	411.2	412.5	413.1	413.2	413.3	413.4	413.6	413.7
135°	430.3	431.7	433.1	434.5	435.9	436.6	436.7	437.0	437.2	437.5	437.7
137.5°	455.4	456.5	457.7	458.8	459.9	460.5	460.6	460.9	461.2	461.4	461.7
140°	477.7	478.8	480.0	481.1	482.2	482.8	483.1	483.8	484.4	485.1	485.7
142.5°	500.5	501.7	502.8	504.0	505.1	505.7	505.9	506.3	506.6	507.0	507.4
145°	522.3	523.2	524.1	525.0	525.9	526.3	526.7	527.4	528.2	528.9	529.7
147.5°	541.7	542.8	544.0	545.1	546.2	546.8	547.1	547.6	548.1	548.6	549.1
150°	561.7	562.5	563.2	564.0	564.7	565.1	565.4	565.9	566.4	566.9	567.4
152.5°	579.4	580.2	580.9	581.7	582.4	582.8	583.1	583.8	584.4	585.1	585.7
155°	597.1	597.5	597.9	598.2	598.6	598.8	599.0	599.4	599.7	600.1	600.5
157.5°	612.5	612.8	613.0	613.3	613.6	613.7	613.8	614.1	614.3	614.6	614.8
160°	626.3	626.5	626.8	627.0	627.3	627.4	627.5	627.6	627.7	627.9	628.0
162.5°	638.8	638.8	638.8	638.8	638.8	638.8	638.9	639.0	639.1	639.3	639.4
165°	649.7	649.6	649.4	649.3	649.2	649.1	649.1	649.1	649.1	649.1	649.1
167.5°	659.4	659.0	658.6	658.3	657.9	657.7	657.7	657.7	657.7	657.7	657.7
170°	666.8	666.4	666.0	665.7	665.3	665.1	665.0	664.9	664.8	664.6	664.5
172.5°	672.0	671.6	671.2	670.9	670.5	670.3	670.2	670.1	670.0	669.8	669.7
175°	676.0	675.6	675.2	674.9	674.5	674.3	674.2	673.9	673.6	673.4	673.1
177.5°	678.3	677.9	677.5	677.1	676.7	676.5	676.4	676.1	675.9	675.6	675.4
180°	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2288.2	2291.3	2295.9	2317.4	2320.5	2326.6	2323.6	2323.6	2325.1	2322.0	2323.6
5°	2386.5	2391.1	2414.2	2440.3	2446.4	2440.3	2447.9	2458.7	2458.7	2458.7	2455.6
7.5°	2478.7	2495.6	2521.7	2560.1	2567.7	2575.4	2589.2	2580.0	2583.1	2596.9	2592.3
10°	2567.7	2592.3	2621.5	2653.7	2670.6	2681.4	2687.5	2701.3	2733.6	2696.7	2710.6
12.5°	2652.2	2687.5	2718.2	2753.6	2765.8	2779.7	2784.3	2796.6	2796.6	2795.0	2805.8
15°	2707.5	2739.7	2767.4	2790.4	2793.5	2790.4	2787.3	2788.9	2793.5	2775.1	2785.8
17.5°	2719.8	2722.8	2732.1	2722.8	2724.4	2692.1	2673.7	2669.1	2626.1	2627.6	2663.0
20°	2659.9	2607.7	2593.8	2543.2	2512.4	2429.5	2426.4	2403.4	2312.8	2340.4	2334.3
22.5°	2495.6	2406.5	2288.2	2229.9	2200.7	2113.2	2045.6	1998.0	1965.7	1933.5	1919.7
25°	2279.0	2134.7	1967.3	1852.1	1835.2	1753.8	1629.4	1571.0	1501.9	1480.4	1517.3
27.5°	1999.5	1812.2	1623.3	1446.7	1414.4	1340.7	1277.7	1236.3	1156.4	1151.8	1154.9
30°	1620.2	1431.3	1273.1	1157.9	1078.1	1044.3	1002.8	972.1	939.9	952.2	955.2
32.5°	1331.5	1151.8	1004.4	942.9	906.1	884.6	849.3	829.3	815.5	810.9	809.3
35°	1058.1	938.3	872.3	812.4	790.9	775.5	749.4	740.2	727.9	729.5	729.5
37.5°	906.1	806.3	757.1	726.4	706.4	698.8	681.9	672.6	665.0	661.9	666.5
40°	781.7	712.6	681.9	654.2	637.3	634.3	625.0	614.3	605.1	606.6	611.2
42.5°	691.1	651.1	614.3	592.8	580.5	575.9	568.2	560.5	560.5	555.9	554.4
45°	618.9	586.6	555.9	536.0	528.3	522.1	512.9	511.4	505.3	506.8	508.3
47.5°	554.4	528.3	505.3	485.3	477.6	476.1	466.9	460.7	460.7	459.2	457.6
50°	496.0	469.9	450.0	439.2	428.5	425.4	423.9	422.3	419.3	419.3	420.8
52.5°	448.4	422.3	407.0	397.8	391.6	388.5	388.5	387.0	387.0	387.0	385.5
55°	396.2	374.7	362.4	359.4	356.3	354.8	353.2	350.1	348.6	351.7	348.6
57.5°	347.1	339.4	328.6	325.6	317.9	317.9	313.3	310.2	307.1	310.2	310.2
60°	308.7	297.9	291.8	282.6	276.4	270.3	262.6	261.1	258.0	256.5	254.9
62.5°	268.8	259.5	244.2	230.4	221.1	215.0	211.9	210.4	210.4	208.9	208.9
65°	224.2	202.7	195.0	190.4	188.9	187.4	184.3	182.8	184.3	182.8	184.3
67.5°	175.1	172.0	167.4	164.3	162.8	161.3	161.3	159.7	159.7	159.7	159.7
70°	152.0	144.4	142.8	139.8	139.8	138.2	138.2	138.2	138.2	136.7	139.8
72.5°	125.9	121.3	119.8	118.3	118.3	118.3	116.7	116.7	116.7	115.2	116.7
75°	102.9	101.4	98.3	98.3	96.8	98.3	96.8	96.8	95.2	96.8	96.8
77.5°	82.9	81.4	79.9	79.9	78.3	78.3	78.3	78.3	78.3	78.3	79.9
80°	63.0	61.4	59.9	61.4	59.9	61.4	59.9	59.9	61.4	59.9	59.9
82.5°	46.1	44.5	44.5	43.0	43.0	43.0	43.0	43.0	43.0	43.0	43.0
85°	27.6	26.1	26.1	27.6	26.1	27.6	26.1	26.1	26.1	27.6	27.6
87.5°	12.3	13.8	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	13.8
90°	19.8	19.5	19.3	19.0	18.9	19.0	19.1	19.2	19.3	19.4	19.3
92.5°	17.8	18.0	18.1	18.2	18.3	18.3	18.3	18.3	18.3	18.3	18.3
95°	36.6	36.6	36.6	36.6	36.6	36.5	36.2	35.9	35.7	35.4	35.7
97.5°	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1
100°	78.9	78.9	78.9	78.9	78.9	78.8	78.7	78.6	78.4	78.3	78.4
102.5°	102.4	102.6	102.7	102.8	102.9	102.8	102.7	102.6	102.4	102.3	102.4
105°	126.0	126.2	126.5	126.8	126.9	126.9	126.9	126.9	126.9	126.9	126.9
107.5°	151.5	151.7	151.8	151.9	152.0	151.7	151.0	150.4	149.7	149.1	149.7
110°	177.7	177.7	177.7	177.7	177.7	177.5	177.1	176.8	176.4	176.0	176.4

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	204.2	203.8	203.4	203.0	202.8	202.7	202.4	202.2	201.9	201.7	201.9
115°	230.7	230.6	230.5	230.4	230.3	230.1	229.7	229.4	229.0	228.6	229.0
117.5°	256.7	256.3	256.0	255.6	255.4	255.2	254.8	254.5	254.1	253.7	254.1
120°	282.3	282.3	282.3	282.3	282.3	282.1	281.7	281.4	281.0	280.6	281.0
122.5°	309.3	308.9	308.6	308.2	308.0	307.9	307.6	307.3	307.1	306.8	307.1
125°	335.6	335.2	334.9	334.5	334.3	334.2	334.1	334.0	333.8	333.7	333.8
127.5°	361.2	360.7	360.2	359.7	359.4	359.2	358.8	358.5	358.1	357.7	358.1
130°	387.2	386.9	386.7	386.4	386.3	386.0	385.5	385.0	384.5	384.0	384.5
132.5°	413.1	412.4	411.8	411.1	410.8	410.6	410.2	409.9	409.5	409.1	409.5
135°	437.6	437.4	437.3	437.2	437.1	436.9	436.5	436.2	435.8	435.4	435.8
137.5°	461.6	461.4	461.3	461.2	461.1	460.8	460.3	459.8	459.3	458.8	459.3
140°	485.7	485.7	485.7	485.7	485.7	485.4	484.9	484.4	483.9	483.4	483.9
142.5°	507.5	507.7	507.8	507.9	508.0	507.7	507.2	506.7	506.2	505.7	506.2
145°	529.8	530.0	530.1	530.2	530.3	530.0	529.5	529.0	528.5	528.0	528.5
147.5°	549.4	549.6	549.9	550.2	550.3	550.0	549.5	549.0	548.5	548.0	548.5
150°	567.8	568.2	568.5	568.9	569.1	568.9	568.5	568.2	567.8	567.4	567.8
152.5°	586.2	586.7	587.2	587.7	588.0	587.7	587.2	586.7	586.2	585.7	586.2
155°	601.1	601.8	602.4	603.1	603.4	603.2	602.8	602.5	602.1	601.7	602.1
157.5°	615.7	616.6	617.5	618.4	618.8	618.5	617.9	617.2	616.6	616.0	616.6
160°	628.8	629.5	630.3	631.0	631.4	631.1	630.6	630.1	629.6	629.1	629.6
162.5°	640.3	641.2	642.1	643.0	643.4	643.1	642.4	641.8	641.1	640.5	641.1
165°	650.0	650.9	651.8	652.7	653.1	652.8	652.2	651.5	650.9	650.3	650.9
167.5°	658.6	659.5	660.4	661.3	661.7	661.4	660.7	660.1	659.4	658.8	659.4
170°	665.4	666.3	667.2	668.1	668.5	668.1	667.4	666.6	665.9	665.1	665.9
172.5°	670.6	671.5	672.4	673.3	673.7	673.3	672.6	671.8	671.1	670.3	671.1
175°	674.0	674.9	675.8	676.7	677.1	676.7	676.0	675.2	674.5	673.7	674.5
177.5°	676.2	676.9	677.7	678.4	678.8	678.4	677.7	676.9	676.2	675.4	676.2
180°	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2329.7	2318.9	2315.9	2318.9	2315.9	2317.4	2306.7	2266.7	2277.5	2260.6	2269.8
5°	2461.8	2452.6	2432.6	2429.5	2426.4	2423.4	2408.0	2372.7	2358.9	2335.8	2334.3
7.5°	2587.7	2587.7	2572.3	2561.6	2547.8	2537.0	2517.1	2464.8	2443.3	2415.7	2400.3
10°	2712.1	2672.2	2689.1	2678.3	2644.5	2638.4	2601.5	2570.8	2529.3	2501.7	2477.1
12.5°	2801.2	2788.9	2773.5	2764.3	2755.1	2735.1	2710.6	2632.2	2610.7	2555.4	2527.8
15°	2798.1	2790.4	2795.0	2795.0	2792.0	2787.3	2767.4	2710.6	2673.7	2619.9	2572.3
17.5°	2647.6	2667.6	2687.5	2701.3	2732.1	2745.9	2764.3	2730.5	2707.5	2661.4	2610.7
20°	2385.0	2434.1	2492.5	2504.8	2532.4	2613.8	2650.7	2679.8	2689.1	2673.7	2632.2
22.5°	2019.5	2060.9	2202.2	2199.2	2239.1	2335.8	2443.3	2530.9	2600.0	2638.4	2623.0
25°	1581.8	1640.2	1715.4	1772.2	1902.8	2047.1	2180.7	2320.5	2440.3	2546.2	2572.3
27.5°	1196.3	1273.1	1333.0	1408.3	1474.3	1644.8	1816.8	2034.8	2174.6	2375.8	2480.2
30°	967.5	1002.8	1062.7	1098.0	1130.3	1260.8	1455.9	1670.9	1916.6	2148.5	2328.2
32.5°	826.2	850.8	895.3	910.7	944.5	1032.0	1154.9	1351.4	1604.8	1885.9	2122.4
35°	741.8	767.9	777.1	790.9	818.5	873.8	958.3	1101.1	1329.9	1604.8	1887.4
37.5°	669.6	683.4	709.5	718.7	727.9	769.4	826.2	926.0	1078.1	1303.8	1617.1
40°	618.9	626.6	640.4	648.1	654.2	683.4	734.1	801.6	913.8	1085.8	1374.5
42.5°	565.1	574.4	583.6	592.8	600.5	623.5	654.2	718.7	794.0	924.5	1133.4
45°	512.9	519.1	529.8	536.0	546.7	565.1	592.8	637.3	704.9	787.8	956.8
47.5°	465.3	473.0	477.6	485.3	493.0	512.9	539.0	568.2	623.5	704.9	827.8
50°	422.3	431.5	437.7	439.2	445.4	463.8	485.3	517.5	552.9	615.8	723.3
52.5°	391.6	393.1	397.8	403.9	402.4	413.1	433.1	457.6	494.5	545.2	623.5
55°	356.3	360.9	364.0	365.5	365.5	374.7	385.5	408.5	437.7	479.1	545.2
57.5°	311.8	316.4	325.6	328.6	333.3	337.9	342.5	357.8	382.4	422.3	476.1
60°	265.7	268.8	278.0	284.1	287.2	299.5	305.6	317.9	331.7	360.9	411.6
62.5°	213.5	216.5	221.1	227.3	233.4	251.9	267.2	279.5	290.3	310.2	351.7
65°	185.8	187.4	190.4	192.0	193.5	201.2	215.0	231.9	251.9	267.2	291.8
67.5°	161.3	162.8	164.3	167.4	168.9	170.5	176.6	181.2	201.2	222.7	241.1
70°	138.2	141.3	142.8	142.8	144.4	147.4	150.5	156.6	162.8	173.5	196.6
72.5°	116.7	118.3	121.3	121.3	121.3	124.4	127.5	130.5	133.6	139.8	149.0
75°	96.8	99.8	99.8	99.8	101.4	101.4	104.4	107.5	110.6	115.2	118.3
77.5°	79.9	79.9	79.9	79.9	81.4	81.4	82.9	86.0	87.5	89.1	92.1
80°	59.9	61.4	61.4	61.4	63.0	63.0	63.0	66.0	67.6	67.6	70.6
82.5°	44.5	44.5	44.5	46.1	44.5	46.1	46.1	47.6	46.1	47.6	49.1
85°	27.6	27.6	27.6	29.2	29.2	29.2	29.2	29.2	29.2	29.2	30.7
87.5°	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	15.4	13.8	13.8
90°	19.2	19.1	19.0	18.9	19.0	19.3	19.5	19.8	20.0	17.2	14.4
92.5°	18.3	18.3	18.3	18.3	18.2	18.1	18.0	17.8	17.7	17.6	17.4
95°	35.9	36.2	36.5	36.6	36.6	36.6	36.6	36.6	36.6	36.3	36.1
97.5°	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	56.6	56.1
100°	78.6	78.7	78.8	78.9	78.9	78.9	78.9	78.9	78.9	78.5	78.1
102.5°	102.6	102.7	102.8	102.9	102.8	102.7	102.6	102.4	102.3	101.8	101.3
105°	126.9	126.9	126.9	126.9	126.8	126.5	126.2	126.0	125.7	125.5	125.2
107.5°	150.4	151.0	151.7	152.0	151.9	151.8	151.7	151.5	151.4	151.4	151.4
110°	176.8	177.1	177.5	177.7	177.7	177.7	177.7	177.7	177.7	177.7	177.7

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	202.2	202.4	202.7	202.8	203.0	203.4	203.8	204.2	204.6	204.7	204.8
115°	229.4	229.7	230.1	230.3	230.4	230.5	230.6	230.7	230.8	231.1	231.3
117.5°	254.5	254.8	255.2	255.4	255.6	256.0	256.3	256.7	257.1	257.7	258.4
120°	281.4	281.7	282.1	282.3	282.3	282.3	282.3	282.3	282.3	283.3	284.3
122.5°	307.3	307.6	307.9	308.0	308.2	308.6	308.9	309.3	309.7	310.3	311.0
125°	334.0	334.1	334.2	334.3	334.5	334.9	335.2	335.6	336.0	336.4	336.8
127.5°	358.5	358.8	359.2	359.4	359.7	360.2	360.7	361.2	361.7	362.2	362.7
130°	385.0	385.5	386.0	386.3	386.4	386.7	386.9	387.2	387.4	387.7	387.9
132.5°	409.9	410.2	410.6	410.8	411.1	411.8	412.4	413.1	413.7	413.6	413.4
135°	436.2	436.5	436.9	437.1	437.2	437.3	437.4	437.6	437.7	437.5	437.2
137.5°	459.8	460.3	460.8	461.1	461.2	461.3	461.4	461.6	461.7	461.4	461.2
140°	484.4	484.9	485.4	485.7	485.7	485.7	485.7	485.7	485.7	485.1	484.4
142.5°	506.7	507.2	507.7	508.0	507.9	507.8	507.7	507.5	507.4	507.0	506.6
145°	529.0	529.5	530.0	530.3	530.2	530.1	530.0	529.8	529.7	528.9	528.2
147.5°	549.0	549.5	550.0	550.3	550.2	549.9	549.6	549.4	549.1	548.6	548.1
150°	568.2	568.5	568.9	569.1	568.9	568.5	568.2	567.8	567.4	566.9	566.4
152.5°	586.7	587.2	587.7	588.0	587.7	587.2	586.7	586.2	585.7	585.1	584.4
155°	602.5	602.8	603.2	603.4	603.1	602.4	601.8	601.1	600.5	600.1	599.7
157.5°	617.2	617.9	618.5	618.8	618.4	617.5	616.6	615.7	614.8	614.6	614.3
160°	630.1	630.6	631.1	631.4	631.0	630.3	629.5	628.8	628.0	627.9	627.7
162.5°	641.8	642.4	643.1	643.4	643.0	642.1	641.2	640.3	639.4	639.3	639.1
165°	651.5	652.2	652.8	653.1	652.7	651.8	650.9	650.0	649.1	649.1	649.1
167.5°	660.1	660.7	661.4	661.7	661.3	660.4	659.5	658.6	657.7	657.7	657.7
170°	666.6	667.4	668.1	668.5	668.1	667.2	666.3	665.4	664.5	664.6	664.8
172.5°	671.8	672.6	673.3	673.7	673.3	672.4	671.5	670.6	669.7	669.8	670.0
175°	675.2	676.0	676.7	677.1	676.7	675.8	674.9	674.0	673.1	673.4	673.6
177.5°	676.9	677.7	678.4	678.8	678.4	677.7	676.9	676.2	675.4	675.6	675.9
180°	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2256.0	2248.3	2248.3	2243.7	2243.7	2219.1	2219.1	2226.8	2217.6	2206.8	2191.5
5°	2314.3	2297.4	2292.8	2286.7	2266.7	2236.0	2223.7	2219.1	2200.7	2177.7	2151.6
7.5°	2369.6	2342.0	2328.2	2314.3	2288.2	2245.2	2220.7	2203.8	2176.1	2140.8	2107.0
10°	2423.4	2388.1	2352.7	2335.8	2299.0	2245.2	2209.9	2182.3	2142.3	2094.7	2047.1
12.5°	2472.5	2398.8	2392.7	2358.9	2305.1	2243.7	2189.9	2150.0	2099.3	2044.1	1988.8
15°	2515.5	2440.3	2403.4	2372.7	2302.1	2225.3	2168.4	2119.3	2051.7	1988.8	1921.2
17.5°	2537.0	2455.6	2431.1	2380.4	2308.2	2208.4	2131.6	2071.7	1998.0	1922.7	1845.9
20°	2558.5	2463.3	2423.4	2388.1	2289.8	2176.1	2090.1	2021.0	1939.6	1850.6	1766.1
22.5°	2569.3	2463.3	2415.7	2366.6	2271.3	2140.8	2039.4	1958.1	1862.8	1772.2	1670.9
25°	2550.8	2454.1	2397.3	2346.6	2239.1	2097.8	1981.1	1888.9	1787.6	1684.7	1581.8
27.5°	2504.8	2432.6	2366.6	2314.3	2194.6	2042.5	1919.7	1815.2	1710.8	1595.6	1491.2
30°	2418.8	2386.5	2334.3	2275.9	2145.4	1993.4	1847.5	1740.0	1624.8	1509.6	1400.6
32.5°	2285.2	2312.8	2279.0	2228.3	2087.1	1925.8	1770.7	1661.7	1535.7	1411.3	1311.5
35°	2122.4	2220.7	2202.2	2166.9	2025.6	1853.6	1698.5	1566.4	1440.5	1314.6	1214.8
37.5°	1944.2	2093.2	2108.6	2087.1	1955.0	1779.9	1609.4	1480.4	1351.4	1224.0	1122.6
40°	1700.0	1928.9	1978.0	1987.2	1881.3	1690.8	1512.7	1386.8	1259.3	1134.9	1012.0
42.5°	1475.8	1764.5	1826.0	1864.4	1787.6	1603.3	1423.6	1283.9	1157.9	1045.8	923.0
45°	1265.4	1566.4	1666.3	1715.4	1681.6	1503.5	1317.7	1187.1	1071.9	969.0	850.8
47.5°	1048.9	1351.4	1491.2	1569.5	1569.5	1402.1	1216.3	1087.3	976.7	889.2	784.8
50°	904.5	1156.4	1300.8	1403.7	1431.3	1299.2	1124.2	998.2	893.8	798.6	718.7
52.5°	770.9	996.7	1116.5	1224.0	1303.8	1188.7	1021.3	907.6	804.7	715.6	652.7
55°	666.5	835.4	944.5	1062.7	1151.8	1076.5	921.4	810.9	721.8	648.1	594.3
57.5°	566.7	714.1	803.2	907.6	1002.8	946.0	821.6	726.4	648.1	583.6	536.0
60°	482.2	602.0	671.1	752.5	870.8	830.8	727.9	640.4	577.4	519.1	479.1
62.5°	410.0	505.3	563.6	622.0	729.5	711.0	631.2	563.6	509.9	460.7	426.9
65°	336.3	414.6	460.7	511.4	597.4	605.1	540.6	493.0	443.8	400.8	370.1
67.5°	271.8	333.3	374.7	417.7	486.8	508.3	463.8	423.9	382.4	347.1	319.4
70°	219.6	262.6	293.3	327.1	383.9	410.0	387.0	359.4	325.6	296.4	271.8
72.5°	173.5	201.2	219.6	245.7	291.8	317.9	316.4	291.8	267.2	247.3	227.3
75°	127.5	149.0	164.3	181.2	218.1	242.6	248.8	238.0	213.5	198.1	182.8
77.5°	96.8	109.0	116.7	129.0	155.1	176.6	185.8	182.8	165.9	153.6	142.8
80°	73.7	76.8	79.9	84.5	106.0	125.9	132.1	130.5	121.3	116.7	104.4
82.5°	52.2	53.8	55.3	56.8	64.5	81.4	87.5	90.6	82.9	78.3	67.6
85°	30.7	32.3	32.3	35.3	36.9	41.5	52.2	52.2	50.7	44.5	43.0
87.5°	15.4	15.4	13.8	13.8	15.4	16.9	20.0	23.0	20.0	18.4	16.9
90°	11.6	8.8	7.4	6.6	5.1	3.6	2.1	0.6	2.1	3.6	5.1
92.5°	17.3	17.2	17.1	16.6	15.6	14.6	13.6	12.6	13.6	14.6	15.6
95°	35.8	35.5	35.4	34.8	33.5	32.2	31.0	29.7	31.0	32.2	33.5
97.5°	55.6	55.1	54.9	54.3	53.2	52.0	50.9	49.7	50.9	52.0	53.2
100°	77.7	77.3	77.1	76.6	75.6	74.6	73.6	72.6	73.6	74.6	75.6
102.5°	100.8	100.3	100.0	99.6	98.9	98.1	97.4	96.6	97.4	98.1	98.9
105°	125.0	124.7	124.6	124.4	124.0	123.7	123.3	122.9	123.3	123.7	124.0
107.5°	151.4	151.4	151.4	151.1	150.6	150.1	149.6	149.1	149.6	150.1	150.6
110°	177.7	177.7	177.7	177.3	176.6	175.8	175.1	174.3	175.1	175.8	176.6

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	204.9	205.0	205.1	204.7	204.0	203.2	202.5	201.7	202.5	203.2	204.0
115°	231.6	231.9	232.0	231.6	230.9	230.1	229.4	228.6	229.4	230.1	230.9
117.5°	259.0	259.7	260.0	259.5	258.5	257.4	256.4	255.4	256.4	257.4	258.5
120°	285.3	286.3	286.8	286.3	285.3	284.3	283.3	282.3	283.3	284.3	285.3
122.5°	311.6	312.3	312.6	312.0	310.7	309.4	308.1	306.8	308.1	309.4	310.7
125°	337.1	337.5	337.7	337.1	336.0	334.9	333.7	332.6	333.7	334.9	336.0
127.5°	363.2	363.7	364.0	363.3	361.9	360.5	359.1	357.7	359.1	360.5	361.9
130°	388.2	388.5	388.6	387.8	386.1	384.4	382.8	381.1	382.8	384.4	386.1
132.5°	413.3	413.2	413.1	412.5	411.2	409.9	408.7	407.4	408.7	409.9	411.2
135°	437.0	436.7	436.6	435.9	434.5	433.1	431.7	430.3	431.7	433.1	434.5
137.5°	460.9	460.6	460.5	459.9	458.8	457.7	456.5	455.4	456.5	457.7	458.8
140°	483.8	483.1	482.8	482.2	481.1	480.0	478.8	477.7	478.8	480.0	481.1
142.5°	506.3	505.9	505.7	505.1	504.0	502.8	501.7	500.5	501.7	502.8	504.0
145°	527.4	526.7	526.3	525.9	525.0	524.1	523.2	522.3	523.2	524.1	525.0
147.5°	547.6	547.1	546.8	546.2	545.1	544.0	542.8	541.7	542.8	544.0	545.1
150°	565.9	565.4	565.1	564.7	564.0	563.2	562.5	561.7	562.5	563.2	564.0
152.5°	583.8	583.1	582.8	582.4	581.7	580.9	580.2	579.4	580.2	580.9	581.7
155°	599.4	599.0	598.8	598.6	598.2	597.9	597.5	597.1	597.5	597.9	598.2
157.5°	614.1	613.8	613.7	613.6	613.3	613.0	612.8	612.5	612.8	613.0	613.3
160°	627.6	627.5	627.4	627.3	627.0	626.8	626.5	626.3	626.5	626.8	627.0
162.5°	639.0	638.9	638.8	638.8	638.8	638.8	638.8	638.8	638.8	638.8	638.8
165°	649.1	649.1	649.1	649.2	649.3	649.4	649.6	649.7	649.6	649.4	649.3
167.5°	657.7	657.7	657.7	657.9	658.3	658.6	659.0	659.4	659.0	658.6	658.3
170°	664.9	665.0	665.1	665.3	665.7	666.0	666.4	666.8	666.4	666.0	665.7
172.5°	670.1	670.2	670.3	670.5	670.9	671.2	671.6	672.0	671.6	671.2	670.9
175°	673.9	674.2	674.3	674.5	674.9	675.2	675.6	676.0	675.6	675.2	674.9
177.5°	676.1	676.4	676.5	676.7	677.1	677.5	677.9	678.3	677.9	677.5	677.1
180°	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2185.3	2186.9	2191.5	2177.7	2156.2	2146.9	2119.3	2114.7	2110.1	2110.1	2114.7
5°	2136.2	2130.1	2131.6	2105.5	2074.8	2056.3	2017.9	2024.1	2004.1	1991.8	1994.9
7.5°	2082.4	2065.6	2064.0	2030.2	1991.8	1958.1	1918.1	1908.9	1890.5	1869.0	1859.8
10°	2014.9	2002.6	1979.6	1941.2	1892.0	1864.4	1810.6	1778.4	1773.8	1741.5	1729.2
12.5°	1945.8	1924.3	1901.2	1847.5	1792.2	1747.7	1707.7	1672.4	1647.8	1620.2	1601.8
15°	1865.9	1839.8	1813.7	1756.9	1692.4	1647.8	1587.9	1535.7	1463.5	1406.7	1374.5
17.5°	1778.4	1749.2	1713.9	1650.9	1587.9	1526.5	1415.9	1354.5	1303.8	1270.0	1250.1
20°	1687.8	1655.5	1620.2	1557.2	1448.2	1340.7	1279.3	1231.7	1200.9	1167.2	1142.6
22.5°	1592.5	1558.8	1520.4	1422.1	1306.9	1231.7	1184.0	1139.5	1095.0	1076.5	1064.3
25°	1503.5	1472.8	1423.6	1290.0	1199.4	1130.3	1076.5	1047.4	1024.3	999.8	976.7
27.5°	1411.3	1354.5	1285.4	1173.3	1116.5	1045.8	1007.4	985.9	946.0	929.1	918.4
30°	1300.8	1237.8	1171.8	1091.9	1025.9	976.7	941.4	906.1	883.0	866.1	847.7
32.5°	1188.7	1128.8	1087.3	1004.4	955.2	904.5	870.8	849.3	815.5	804.7	797.0
35°	1091.9	1041.2	1004.4	936.8	890.7	844.6	820.1	787.8	766.3	746.4	734.1
37.5°	996.7	969.0	930.7	873.8	824.7	787.8	754.0	743.3	714.1	703.4	691.1
40°	930.7	889.2	856.9	807.8	766.3	726.4	704.9	680.3	660.4	643.5	638.9
42.5°	850.8	820.1	801.6	747.9	704.9	681.9	655.8	628.1	612.8	598.9	582.0
45°	790.9	763.3	737.1	694.1	655.8	626.6	603.5	585.1	559.0	552.9	526.8
47.5°	727.9	700.3	680.3	637.3	602.0	574.4	557.5	532.9	511.4	497.6	485.3
50°	665.0	641.9	623.5	586.6	555.9	526.8	503.7	479.1	469.9	446.9	439.2
52.5°	605.1	589.7	569.8	534.4	503.7	479.1	454.6	434.6	420.8	408.5	399.3
55°	554.4	529.8	520.6	482.2	456.1	430.0	408.5	396.2	379.3	371.6	364.0
57.5°	497.6	483.8	468.4	439.2	410.0	385.5	370.1	351.7	342.5	333.3	327.1
60°	448.4	428.5	416.2	391.6	365.5	342.5	328.6	314.8	302.5	294.9	282.6
62.5°	391.6	376.3	368.6	342.5	321.0	299.5	287.2	273.4	264.1	250.3	235.0
65°	342.5	330.2	321.0	299.5	279.5	259.5	247.3	230.4	218.1	210.4	208.9
67.5°	299.5	290.3	276.4	256.5	236.5	221.1	207.3	193.5	192.0	188.9	188.9
70°	251.9	242.6	235.0	213.5	196.6	179.7	176.6	172.0	167.4	165.9	162.8
72.5°	210.4	202.7	193.5	175.1	158.2	153.6	150.5	147.4	142.8	141.3	139.8
75°	170.5	159.7	153.6	136.7	132.1	129.0	125.9	121.3	118.3	116.7	113.6
77.5°	130.5	119.8	119.8	110.6	107.5	102.9	99.8	96.8	95.2	92.1	92.1
80°	92.1	92.1	89.1	84.5	79.9	78.3	73.7	72.2	70.6	72.2	69.1
82.5°	67.6	61.4	61.4	58.4	55.3	53.8	50.7	50.7	49.1	49.1	49.1
85°	38.4	38.4	36.9	33.8	32.3	32.3	30.7	30.7	29.2	29.2	27.6
87.5°	15.4	13.8	15.4	13.8	13.8	12.3	12.3	12.3	10.8	12.3	10.8
90°	6.6	7.4	8.8	11.6	14.4	17.2	20.0	19.8	19.5	19.3	19.0
92.5°	16.6	17.1	17.2	17.3	17.4	17.6	17.7	17.8	18.0	18.1	18.2
95°	34.8	35.4	35.5	35.8	36.1	36.3	36.6	36.6	36.6	36.6	36.6
97.5°	54.3	54.9	55.1	55.6	56.1	56.6	57.1	57.1	57.1	57.1	57.1
100°	76.6	77.1	77.3	77.7	78.1	78.5	78.9	78.9	78.9	78.9	78.9
102.5°	99.6	100.0	100.3	100.8	101.3	101.8	102.3	102.4	102.6	102.7	102.8
105°	124.4	124.6	124.7	125.0	125.2	125.5	125.7	126.0	126.2	126.5	126.8
107.5°	151.1	151.4	151.4	151.4	151.4	151.4	151.4	151.5	151.7	151.8	151.9
110°	177.3	177.7	177.7	177.7	177.7	177.7	177.7	177.7	177.7	177.7	177.7

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	204.7	205.1	205.0	204.9	204.8	204.7	204.6	204.2	203.8	203.4	203.0
115°	231.6	232.0	231.9	231.6	231.3	231.1	230.8	230.7	230.6	230.5	230.4
117.5°	259.5	260.0	259.7	259.0	258.4	257.7	257.1	256.7	256.3	256.0	255.6
120°	286.3	286.8	286.3	285.3	284.3	283.3	282.3	282.3	282.3	282.3	282.3
122.5°	312.0	312.6	312.3	311.6	311.0	310.3	309.7	309.3	308.9	308.6	308.2
125°	337.1	337.7	337.5	337.1	336.8	336.4	336.0	335.6	335.2	334.9	334.5
127.5°	363.3	364.0	363.7	363.2	362.7	362.2	361.7	361.2	360.7	360.2	359.7
130°	387.8	388.6	388.5	388.2	387.9	387.7	387.4	387.2	386.9	386.7	386.4
132.5°	412.5	413.1	413.2	413.3	413.4	413.6	413.7	413.1	412.4	411.8	411.1
135°	435.9	436.6	436.7	437.0	437.2	437.5	437.7	437.6	437.4	437.3	437.2
137.5°	459.9	460.5	460.6	460.9	461.2	461.4	461.7	461.6	461.4	461.3	461.2
140°	482.2	482.8	483.1	483.8	484.4	485.1	485.7	485.7	485.7	485.7	485.7
142.5°	505.1	505.7	505.9	506.3	506.6	507.0	507.4	507.5	507.7	507.8	507.9
145°	525.9	526.3	526.7	527.4	528.2	528.9	529.7	529.8	530.0	530.1	530.2
147.5°	546.2	546.8	547.1	547.6	548.1	548.6	549.1	549.4	549.6	549.9	550.2
150°	564.7	565.1	565.4	565.9	566.4	566.9	567.4	567.8	568.2	568.5	568.9
152.5°	582.4	582.8	583.1	583.8	584.4	585.1	585.7	586.2	586.7	587.2	587.7
155°	598.6	598.8	599.0	599.4	599.7	600.1	600.5	601.1	601.8	602.4	603.1
157.5°	613.6	613.7	613.8	614.1	614.3	614.6	614.8	615.7	616.6	617.5	618.4
160°	627.3	627.4	627.5	627.6	627.7	627.9	628.0	628.8	629.5	630.3	631.0
162.5°	638.8	638.8	638.9	639.0	639.1	639.3	639.4	640.3	641.2	642.1	643.0
165°	649.2	649.1	649.1	649.1	649.1	649.1	649.1	650.0	650.9	651.8	652.7
167.5°	657.9	657.7	657.7	657.7	657.7	657.7	657.7	658.6	659.5	660.4	661.3
170°	665.3	665.1	665.0	664.9	664.8	664.6	664.5	665.4	666.3	667.2	668.1
172.5°	670.5	670.3	670.2	670.1	670.0	669.8	669.7	670.6	671.5	672.4	673.3
175°	674.5	674.3	674.2	673.9	673.6	673.4	673.1	674.0	674.9	675.8	676.7
177.5°	676.7	676.5	676.4	676.1	675.9	675.6	675.4	676.2	676.9	677.7	678.4
180°	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2114.7	2111.6	2102.4	2105.5	2100.9	2100.9	2097.8	2097.8	2097.8	2105.5	2100.9
5°	1999.5	1988.8	1978.0	1973.4	1968.8	1964.2	1964.2	1962.7	1976.5	1973.4	1985.7
7.5°	1856.7	1853.6	1832.1	1832.1	1824.4	1821.4	1829.1	1830.6	1832.1	1835.2	1842.9
10°	1729.2	1721.5	1690.8	1693.9	1689.3	1683.2	1687.8	1684.7	1695.4	1698.5	1695.4
12.5°	1578.7	1564.9	1531.1	1514.2	1495.8	1482.0	1498.9	1486.6	1529.6	1541.9	1575.7
15°	1379.1	1353.0	1329.9	1329.9	1313.0	1300.8	1308.4	1322.3	1331.5	1345.3	1351.4
17.5°	1245.5	1234.7	1216.3	1205.5	1200.9	1196.3	1196.3	1202.5	1222.4	1220.9	1233.2
20°	1131.8	1125.7	1116.5	1102.7	1098.0	1095.0	1095.0	1095.0	1108.8	1121.1	1128.8
22.5°	1053.5	1048.9	1042.8	1024.3	1015.1	1012.0	1019.7	1024.3	1035.1	1044.3	1052.0
25°	975.2	964.4	953.7	947.5	942.9	942.9	946.0	947.5	952.2	956.8	966.0
27.5°	910.7	903.0	887.7	870.8	870.8	866.1	869.2	872.3	883.0	898.4	906.1
30°	838.5	837.0	830.8	824.7	818.5	815.5	821.6	826.2	827.8	835.4	835.4
32.5°	786.3	775.5	764.8	758.6	755.6	754.0	755.6	761.7	761.7	770.9	781.7
35°	734.1	727.9	717.2	706.4	703.4	695.7	701.8	708.0	718.7	723.3	727.9
37.5°	677.3	669.6	665.0	661.9	655.8	657.3	652.7	661.9	671.1	669.6	672.6
40°	634.3	620.4	606.6	605.1	603.5	602.0	602.0	603.5	609.7	615.8	625.0
42.5°	579.0	574.4	562.1	549.8	546.7	543.6	540.6	546.7	559.0	569.8	574.4
45°	522.1	516.0	512.9	503.7	497.6	496.0	493.0	500.6	511.4	516.0	519.1
47.5°	469.9	468.4	459.2	460.7	456.1	457.6	456.1	460.7	460.7	465.3	468.4
50°	434.6	430.0	425.4	422.3	417.7	417.7	416.2	417.7	423.9	430.0	428.5
52.5°	399.3	391.6	390.1	388.5	385.5	388.5	383.9	385.5	391.6	394.7	393.1
55°	357.8	356.3	353.2	350.1	348.6	347.1	347.1	347.1	353.2	357.8	359.4
57.5°	325.6	317.9	311.8	311.8	305.6	304.1	307.1	308.7	313.3	316.4	319.4
60°	281.0	278.0	268.8	264.1	254.9	253.4	253.4	259.5	267.2	278.0	281.0
62.5°	233.4	228.8	227.3	227.3	227.3	227.3	227.3	227.3	227.3	228.8	228.8
65°	207.3	208.9	207.3	205.8	207.3	207.3	205.8	205.8	205.8	207.3	208.9
67.5°	185.8	184.3	185.8	184.3	182.8	182.8	181.2	182.8	184.3	185.8	185.8
70°	161.3	161.3	159.7	161.3	159.7	158.2	156.6	156.6	159.7	161.3	161.3
72.5°	138.2	138.2	136.7	136.7	133.6	133.6	135.1	133.6	133.6	138.2	138.2
75°	115.2	113.6	112.1	112.1	110.6	110.6	110.6	109.0	112.1	112.1	113.6
77.5°	90.6	90.6	90.6	89.1	89.1	87.5	87.5	89.1	89.1	89.1	90.6
80°	69.1	69.1	69.1	67.6	66.0	66.0	66.0	66.0	66.0	67.6	66.0
82.5°	47.6	47.6	47.6	47.6	47.6	46.1	46.1	46.1	47.6	47.6	46.1
85°	29.2	27.6	29.2	29.2	27.6	29.2	27.6	27.6	26.1	26.1	27.6
87.5°	12.3	10.8	9.2	9.2	10.8	9.2	9.2	9.2	10.8	9.2	9.2
90°	18.9	19.0	19.1	19.2	19.3	19.4	19.3	19.2	19.1	19.0	18.9
92.5°	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3
95°	36.6	36.5	36.2	35.9	35.7	35.4	35.7	35.9	36.2	36.5	36.6
97.5°	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1
100°	78.9	78.8	78.7	78.6	78.4	78.3	78.4	78.6	78.7	78.8	78.9
102.5°	102.9	102.8	102.7	102.6	102.4	102.3	102.4	102.6	102.7	102.8	102.9
105°	126.9	126.9	126.9	126.9	126.9	126.9	126.9	126.9	126.9	126.9	126.9
107.5°	152.0	151.7	151.0	150.4	149.7	149.1	149.7	150.4	151.0	151.7	152.0
110°	177.7	177.5	177.1	176.8	176.4	176.0	176.4	176.8	177.1	177.5	177.7

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	202.8	202.7	202.4	202.2	201.9	201.7	201.9	202.2	202.4	202.7	202.8
115°	230.3	230.1	229.7	229.4	229.0	228.6	229.0	229.4	229.7	230.1	230.3
117.5°	255.4	255.2	254.8	254.5	254.1	253.7	254.1	254.5	254.8	255.2	255.4
120°	282.3	282.1	281.7	281.4	281.0	280.6	281.0	281.4	281.7	282.1	282.3
122.5°	308.0	307.9	307.6	307.3	307.1	306.8	307.1	307.3	307.6	307.9	308.0
125°	334.3	334.2	334.1	334.0	333.8	333.7	333.8	334.0	334.1	334.2	334.3
127.5°	359.4	359.2	358.8	358.5	358.1	357.7	358.1	358.5	358.8	359.2	359.4
130°	386.3	386.0	385.5	385.0	384.5	384.0	384.5	385.0	385.5	386.0	386.3
132.5°	410.8	410.6	410.2	409.9	409.5	409.1	409.5	409.9	410.2	410.6	410.8
135°	437.1	436.9	436.5	436.2	435.8	435.4	435.8	436.2	436.5	436.9	437.1
137.5°	461.1	460.8	460.3	459.8	459.3	458.8	459.3	459.8	460.3	460.8	461.1
140°	485.7	485.4	484.9	484.4	483.9	483.4	483.9	484.4	484.9	485.4	485.7
142.5°	508.0	507.7	507.2	506.7	506.2	505.7	506.2	506.7	507.2	507.7	508.0
145°	530.3	530.0	529.5	529.0	528.5	528.0	528.5	529.0	529.5	530.0	530.3
147.5°	550.3	550.0	549.5	549.0	548.5	548.0	548.5	549.0	549.5	550.0	550.3
150°	569.1	568.9	568.5	568.2	567.8	567.4	567.8	568.2	568.5	568.9	569.1
152.5°	588.0	587.7	587.2	586.7	586.2	585.7	586.2	586.7	587.2	587.7	588.0
155°	603.4	603.2	602.8	602.5	602.1	601.7	602.1	602.5	602.8	603.2	603.4
157.5°	618.8	618.5	617.9	617.2	616.6	616.0	616.6	617.2	617.9	618.5	618.8
160°	631.4	631.1	630.6	630.1	629.6	629.1	629.6	630.1	630.6	631.1	631.4
162.5°	643.4	643.1	642.4	641.8	641.1	640.5	641.1	641.8	642.4	643.1	643.4
165°	653.1	652.8	652.2	651.5	650.9	650.3	650.9	651.5	652.2	652.8	653.1
167.5°	661.7	661.4	660.7	660.1	659.4	658.8	659.4	660.1	660.7	661.4	661.7
170°	668.5	668.1	667.4	666.6	665.9	665.1	665.9	666.6	667.4	668.1	668.5
172.5°	673.7	673.3	672.6	671.8	671.1	670.3	671.1	671.8	672.6	673.3	673.7
175°	677.1	676.7	676.0	675.2	674.5	673.7	674.5	675.2	676.0	676.7	677.1
177.5°	678.8	678.4	677.7	676.9	676.2	675.4	676.2	676.9	677.7	678.4	678.8
180°	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9	2209.9
2.5°	2105.5	2113.2	2110.1	2093.2	2110.1	2114.7	2123.9	2133.1	2139.3	2148.5	2156.2
5°	1973.4	1988.8	1998.0	1988.8	2019.5	2024.1	2045.6	2057.9	2076.3	2091.7	2103.9
7.5°	1849.0	1861.3	1879.7	1882.8	1901.2	1922.7	1953.4	1984.2	2013.3	2028.7	2042.5
10°	1715.4	1736.9	1764.5	1758.4	1786.1	1819.8	1852.1	1901.2	1925.8	1953.4	1978.0
12.5°	1581.8	1595.6	1632.5	1644.8	1684.7	1710.8	1755.3	1786.1	1847.5	1879.7	1901.2
15°	1348.4	1405.2	1451.3	1506.5	1558.8	1607.9	1647.8	1703.1	1756.9	1781.4	1816.8
17.5°	1242.4	1268.5	1296.2	1323.8	1391.4	1478.9	1549.5	1609.4	1655.5	1687.8	1729.2
20°	1131.8	1157.9	1188.7	1214.8	1256.2	1319.2	1406.7	1509.6	1564.9	1598.7	1638.6
22.5°	1053.5	1078.1	1098.0	1121.1	1153.3	1199.4	1265.4	1392.9	1466.6	1508.1	1543.4
25°	969.0	999.8	1021.3	1038.2	1064.3	1114.9	1168.7	1240.9	1372.9	1405.2	1454.3
27.5°	910.7	919.9	944.5	970.6	996.7	1024.3	1079.6	1141.0	1230.1	1300.8	1360.7
30°	841.6	864.6	887.7	898.4	921.4	961.4	995.2	1061.2	1130.3	1185.6	1257.8
32.5°	789.4	803.2	818.5	844.6	866.1	893.8	927.6	982.9	1041.2	1076.5	1131.8
35°	731.0	740.2	772.5	783.2	804.7	832.4	866.1	909.2	972.1	999.8	1039.7
37.5°	675.7	697.2	706.4	731.0	751.0	778.6	803.2	852.3	893.8	926.0	962.9
40°	632.7	641.9	658.8	680.3	697.2	718.7	749.4	784.8	829.3	855.4	887.7
42.5°	580.5	588.2	609.7	622.0	649.6	669.6	688.0	731.0	770.9	790.9	823.1
45°	523.7	542.1	555.9	580.5	595.9	620.4	643.5	674.2	711.0	734.1	752.5
47.5°	474.5	493.0	506.8	529.8	554.4	565.1	589.7	622.0	655.8	674.2	700.3
50°	434.6	440.8	466.9	477.6	503.7	525.2	542.1	569.8	606.6	617.4	638.9
52.5°	396.2	400.8	417.7	431.5	454.6	473.0	494.5	520.6	551.3	568.2	585.1
55°	362.4	365.5	373.2	388.5	403.9	426.9	446.9	471.5	497.6	516.0	531.4
57.5°	324.0	330.2	336.3	345.5	360.9	382.4	403.9	426.9	448.4	460.7	480.7
60°	279.5	288.7	299.5	310.2	321.0	336.3	360.9	382.4	402.4	413.1	428.5
62.5°	231.9	250.3	259.5	271.8	281.0	294.9	313.3	337.9	351.7	365.5	377.8
65°	208.9	210.4	211.9	224.2	241.1	254.9	271.8	290.3	311.8	321.0	330.2
67.5°	185.8	187.4	190.4	192.0	198.1	213.5	231.9	251.9	268.8	274.9	284.1
70°	162.8	162.8	168.9	170.5	172.0	173.5	188.9	208.9	224.2	231.9	242.6
72.5°	138.2	139.8	142.8	144.4	147.4	150.5	155.1	165.9	184.3	192.0	204.3
75°	113.6	115.2	116.7	118.3	122.9	124.4	129.0	135.1	142.8	152.0	159.7
77.5°	90.6	90.6	92.1	95.2	98.3	99.8	104.4	107.5	110.6	115.2	121.3
80°	67.6	69.1	69.1	72.2	72.2	73.7	75.3	79.9	82.9	86.0	89.1
82.5°	46.1	49.1	49.1	49.1	50.7	52.2	53.8	53.8	56.8	58.4	63.0
85°	27.6	29.2	29.2	29.2	27.6	30.7	30.7	32.3	32.3	32.3	33.8
87.5°	10.8	9.2	10.8	10.8	10.8	12.3	10.8	10.8	12.3	13.8	13.8
90°	19.0	19.3	19.5	19.8	20.0	17.2	14.4	11.6	8.8	7.4	6.6
92.5°	18.2	18.1	18.0	17.8	17.7	17.6	17.4	17.3	17.2	17.1	16.6
95°	36.6	36.6	36.6	36.6	36.6	36.3	36.1	35.8	35.5	35.4	34.8
97.5°	57.1	57.1	57.1	57.1	57.1	56.6	56.1	55.6	55.1	54.9	54.3
100°	78.9	78.9	78.9	78.9	78.9	78.5	78.1	77.7	77.3	77.1	76.6
102.5°	102.8	102.7	102.6	102.4	102.3	101.8	101.3	100.8	100.3	100.0	99.6
105°	126.8	126.5	126.2	126.0	125.7	125.5	125.2	125.0	124.7	124.6	124.4
107.5°	151.9	151.8	151.7	151.5	151.4	151.4	151.4	151.4	151.4	151.4	151.1
110°	177.7	177.7	177.7	177.7	177.7	177.7	177.7	177.7	177.7	177.7	177.3

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	203.0	203.4	203.8	204.2	204.6	204.7	204.8	204.9	205.0	205.1	204.7
115°	230.4	230.5	230.6	230.7	230.8	231.1	231.3	231.6	231.9	232.0	231.6
117.5°	255.6	256.0	256.3	256.7	257.1	257.7	258.4	259.0	259.7	260.0	259.5
120°	282.3	282.3	282.3	282.3	282.3	283.3	284.3	285.3	286.3	286.8	286.3
122.5°	308.2	308.6	308.9	309.3	309.7	310.3	311.0	311.6	312.3	312.6	312.0
125°	334.5	334.9	335.2	335.6	336.0	336.4	336.8	337.1	337.5	337.7	337.1
127.5°	359.7	360.2	360.7	361.2	361.7	362.2	362.7	363.2	363.7	364.0	363.3
130°	386.4	386.7	386.9	387.2	387.4	387.7	387.9	388.2	388.5	388.6	387.8
132.5°	411.1	411.8	412.4	413.1	413.7	413.6	413.4	413.3	413.2	413.1	412.5
135°	437.2	437.3	437.4	437.6	437.7	437.5	437.2	437.0	436.7	436.6	435.9
137.5°	461.2	461.3	461.4	461.6	461.7	461.4	461.2	460.9	460.6	460.5	459.9
140°	485.7	485.7	485.7	485.7	485.7	485.1	484.4	483.8	483.1	482.8	482.2
142.5°	507.9	507.8	507.7	507.5	507.4	507.0	506.6	506.3	505.9	505.7	505.1
145°	530.2	530.1	530.0	529.8	529.7	528.9	528.2	527.4	526.7	526.3	525.9
147.5°	550.2	549.9	549.6	549.4	549.1	548.6	548.1	547.6	547.1	546.8	546.2
150°	568.9	568.5	568.2	567.8	567.4	566.9	566.4	565.9	565.4	565.1	564.7
152.5°	587.7	587.2	586.7	586.2	585.7	585.1	584.4	583.8	583.1	582.8	582.4
155°	603.1	602.4	601.8	601.1	600.5	600.1	599.7	599.4	599.0	598.8	598.6
157.5°	618.4	617.5	616.6	615.7	614.8	614.6	614.3	614.1	613.8	613.7	613.6
160°	631.0	630.3	629.5	628.8	628.0	627.9	627.7	627.6	627.5	627.4	627.3
162.5°	643.0	642.1	641.2	640.3	639.4	639.3	639.1	639.0	638.9	638.8	638.8
165°	652.7	651.8	650.9	650.0	649.1	649.1	649.1	649.1	649.1	649.1	649.2
167.5°	661.3	660.4	659.5	658.6	657.7	657.7	657.7	657.7	657.7	657.7	657.9
170°	668.1	667.2	666.3	665.4	664.5	664.6	664.8	664.9	665.0	665.1	665.3
172.5°	673.3	672.4	671.5	670.6	669.7	669.8	670.0	670.1	670.2	670.3	670.5
175°	676.7	675.8	674.9	674.0	673.1	673.4	673.6	673.9	674.2	674.3	674.5
177.5°	678.4	677.7	676.9	676.2	675.4	675.6	675.9	676.1	676.4	676.5	676.7
180°	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1	677.1

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	2209.9	2209.9	2209.9	2209.9
2.5°	2170.0	2165.4	2193.0	2223.7
5°	2125.4	2133.1	2168.4	2211.4
7.5°	2079.4	2096.3	2137.7	2194.6
10°	2014.9	2045.6	2108.6	2166.9
12.5°	1951.9	1993.4	2053.3	2122.4
15°	1881.3	1927.3	2001.1	2084.0
17.5°	1802.9	1855.2	1941.2	2031.8
20°	1720.0	1789.1	1879.7	1978.0
22.5°	1627.9	1710.8	1804.5	1913.5
25°	1538.8	1629.4	1723.1	1849.0
27.5°	1451.3	1540.3	1644.8	1772.2
30°	1363.7	1445.1	1557.2	1693.9
32.5°	1270.0	1354.5	1472.8	1612.5
35°	1184.0	1268.5	1379.1	1517.3
37.5°	1091.9	1182.5	1288.5	1431.3
40°	984.4	1090.4	1193.3	1329.9
42.5°	895.3	1007.4	1107.3	1236.3
45°	824.7	930.7	1013.6	1139.5
47.5°	758.6	844.6	929.1	1045.8
50°	695.7	761.7	849.3	953.7
52.5°	631.2	688.0	763.3	861.5
55°	572.8	626.6	694.1	769.4
57.5°	519.1	557.5	625.0	692.6
60°	459.2	499.1	551.3	608.1
62.5°	408.5	439.2	488.4	536.0
65°	354.8	383.9	420.8	465.3
67.5°	305.6	331.7	360.9	396.2
70°	261.1	281.0	302.5	333.3
72.5°	213.5	235.0	254.9	279.5
75°	175.1	184.3	201.2	218.1
77.5°	135.1	147.4	156.6	170.5
80°	96.8	107.5	110.6	121.3
82.5°	64.5	70.6	76.8	79.9
85°	36.9	39.9	46.1	47.6
87.5°	13.8	15.4	18.4	21.5
90°	5.1	3.6	2.1	0.6
92.5°	15.6	14.6	13.6	12.6
95°	33.5	32.2	31.0	29.7
97.5°	53.2	52.0	50.9	49.7
100°	75.6	74.6	73.6	72.6
102.5°	98.9	98.1	97.4	96.6
105°	124.0	123.7	123.3	122.9
107.5°	150.6	150.1	149.6	149.1
110°	176.6	175.8	175.1	174.3

TEST NUMBER: P1009719

CATALOG NUMBER: S122RDIP-B1005D530UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	204.0	203.2	202.5	201.7
115°	230.9	230.1	229.4	228.6
117.5°	258.5	257.4	256.4	255.4
120°	285.3	284.3	283.3	282.3
122.5°	310.7	309.4	308.1	306.8
125°	336.0	334.9	333.7	332.6
127.5°	361.9	360.5	359.1	357.7
130°	386.1	384.4	382.8	381.1
132.5°	411.2	409.9	408.7	407.4
135°	434.5	433.1	431.7	430.3
137.5°	458.8	457.7	456.5	455.4
140°	481.1	480.0	478.8	477.7
142.5°	504.0	502.8	501.7	500.5
145°	525.0	524.1	523.2	522.3
147.5°	545.1	544.0	542.8	541.7
150°	564.0	563.2	562.5	561.7
152.5°	581.7	580.9	580.2	579.4
155°	598.2	597.9	597.5	597.1
157.5°	613.3	613.0	612.8	612.5
160°	627.0	626.8	626.5	626.3
162.5°	638.8	638.8	638.8	638.8
165°	649.3	649.4	649.6	649.7
167.5°	658.3	658.6	659.0	659.4
170°	665.7	666.0	666.4	666.8
172.5°	670.9	671.2	671.6	672.0
175°	674.9	675.2	675.6	676.0
177.5°	677.1	677.5	677.9	678.3
180°	677.1	677.1	677.1	677.1

(END OF REPORT)