

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1007364

Luminaire Tested: S122IP-B330UB2750-4F0-XX-W2A_3500K

Issue Date: 5/5/2025

Test Information

Test Method: LM-79-2019
Report Number: P1007364
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2)
Test Lab: INNOVATION CENTER
Issue Date: 5/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122IP-B330UB2750-4F0-XX-W2A_3500K
Description: Define 2 Indirect Pendant with 3500K BioUP LEDs {m-DER=0.721} {m-EER=0.792}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1324.0 lumens
Efficiency: N/A
Efficacy: 142.4 lumens/watt
Spacing Criteria (0/90/45): - / - / -
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Indirect

Input Watts (W): 9.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1007364

CATALOG NUMBER: S122IP-B330UB2750-4F0-XX-W2A_3500K

Luminous Intensity Polar Plot

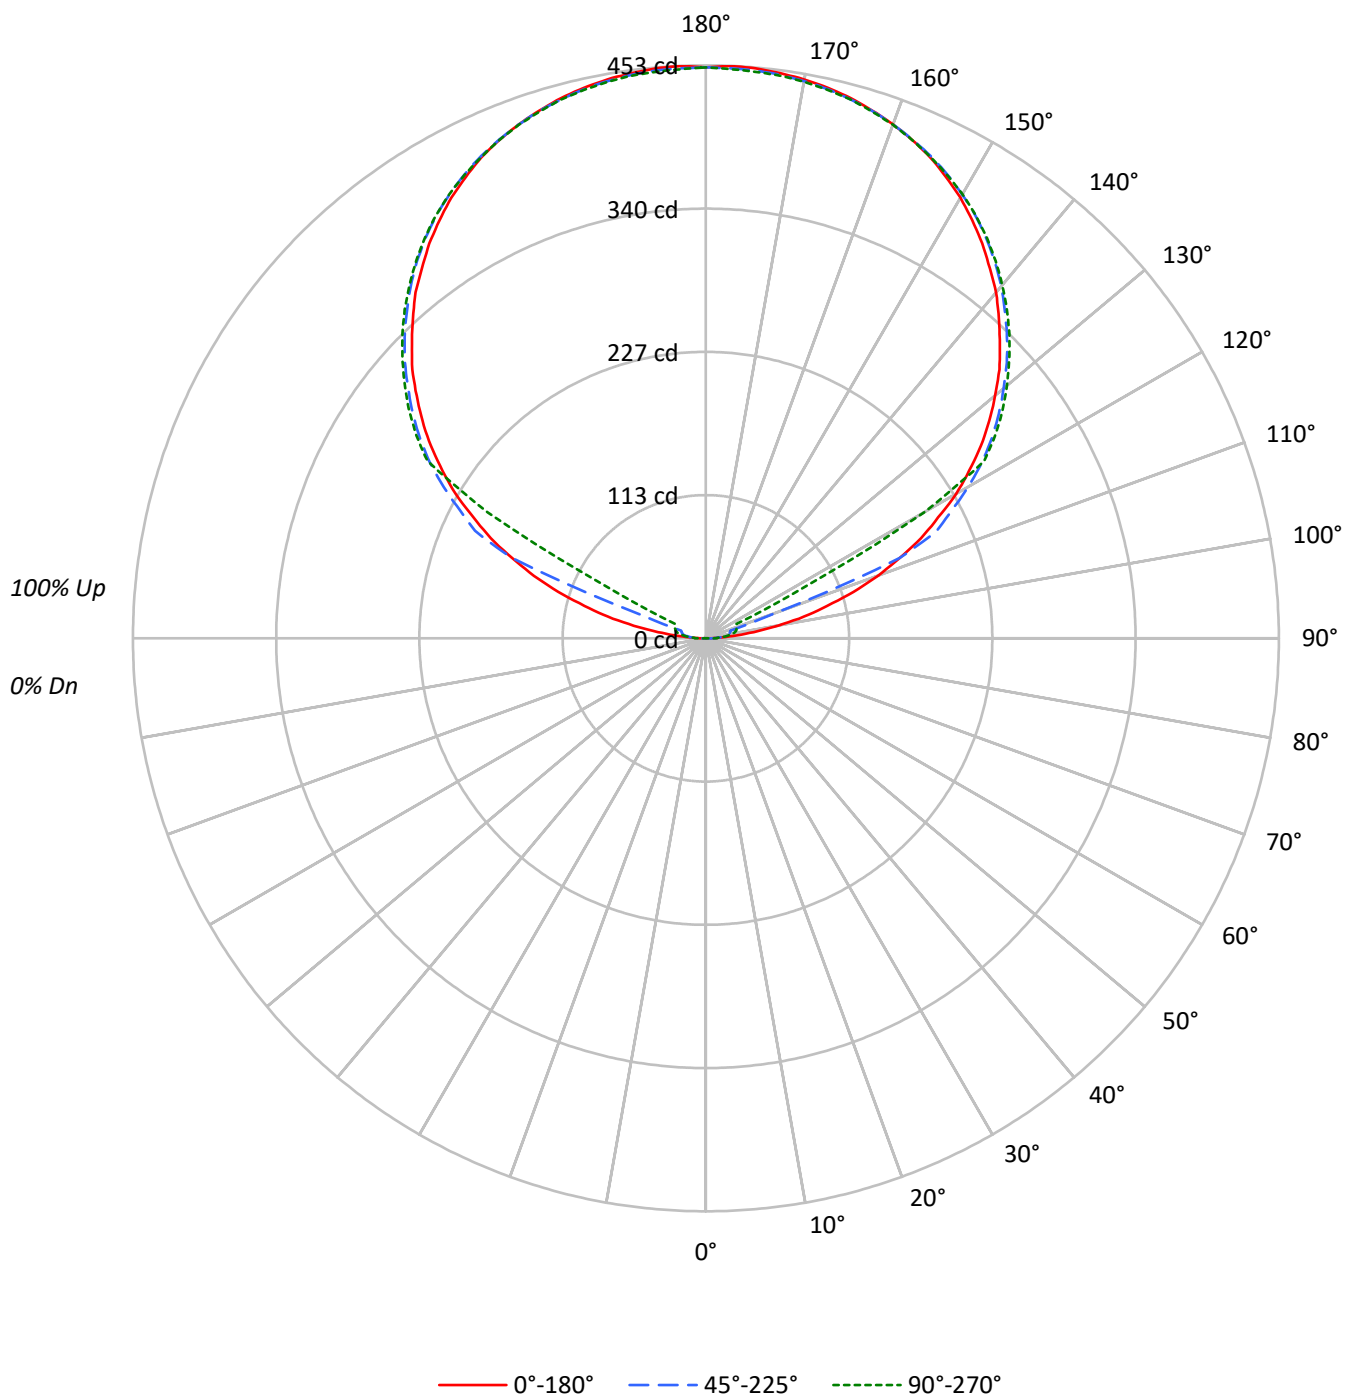



TEST NUMBER: P1007364

CATALOG NUMBER: S122IP-B330UB2750-4F0-XX-W2A_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	0	0	0
5°	0	0	0
10°	0	0	0
15°	0	0	0
20°	0	0	0
25°	0	0	0
30°	0	0	0
35°	0	0	0
40°	0	0	0
45°	0	0	0
50°	0	0	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 0°
Luminance: 0 cd/sqm

TEST NUMBER: P1007364

CATALOG NUMBER: S122IP-B330UB2750-4F0-XX-W2A_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.8	0.1
90°-100°	14.9	1.1
100°-110°	55.5	4.2
110°-120°	147.1	11.1
120°-130°	244.0	18.4
130°-140°	259.2	19.6
140°-150°	240.9	18.2
150°-160°	193.7	14.6
160°-170°	124.8	9.4
170°-180°	43.0	3.2
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.8	0.1
90°-120°	217.5	16.4
90°-150°	961.7	72.6
90°-180°	1323.0	99.9
0°-180°	1324.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	0	0	0	0	0	
5°	0	0	0	0	0	0
15°	0	0	0	0	0	0
25°	0	0	0	0	0	0
35°	0	0	0	0	0	0
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	4	6	8	9	1
95°	21	10	13	14	14	25
105°	99	109	20	24	25	106
115°	188	193	202	50	27	185
125°	266	270	276	278	279	237
135°	329	334	337	340	339	254
145°	381	381	386	389	387	238
155°	420	417	421	423	420	193
165°	442	440	441	444	441	125
175°	452	450	451	453	450	43
180°	451	451	451	451	451	

TEST NUMBER: P1007364

CATALOG NUMBER: S122IP-B330UB2750-4F0-XX-W2A_3500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	0.0	0.0	0.0	0.0	0.0
2.5°	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0
7.5°	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0
12.5°	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0
17.5°	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.3	3.9	6.5	8.2	8.8
92.5°	8.2	6.9	7.8	8.5	8.8
95°	21.2	10.5	12.7	14.4	14.0
97.5°	38.2	11.4	16.7	17.6	18.0
100°	57.8	13.1	18.6	21.2	21.9
102.5°	79.4	78.7	19.3	22.9	23.8
105°	99.3	109.1	19.9	23.5	24.8
107.5°	122.5	130.6	20.6	24.2	25.5
110°	144.7	151.5	57.2	24.5	25.8

TEST NUMBER: P1007364

CATALOG NUMBER: S122IP-B330UB2750-4F0-XX-W2A_3500K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	165.6	171.5	165.9	25.1	26.1
115°	187.8	193.3	201.5	50.3	26.8
117.5°	207.1	213.6	219.1	172.4	86.9
120°	228.6	233.5	239.4	243.3	199.2
122.5°	246.9	252.1	258.7	260.6	260.9
125°	265.5	269.8	276.0	278.3	279.2
127.5°	282.5	287.1	292.0	295.2	295.6
130°	298.5	303.7	307.3	310.9	310.6
132.5°	314.8	319.1	322.7	325.6	325.3
135°	328.6	333.8	336.7	340.0	339.3
137.5°	342.9	346.8	350.1	353.4	352.4
140°	357.0	359.6	363.2	366.1	364.5
142.5°	368.7	371.0	375.3	377.9	376.2
145°	381.1	380.8	386.4	388.6	387.0
147.5°	391.9	390.9	396.5	398.1	396.8
150°	402.4	400.1	405.3	407.3	405.6
152.5°	411.2	408.6	413.5	415.4	413.1
155°	419.7	416.7	420.7	422.6	420.0
157.5°	426.5	423.9	426.9	429.1	426.5
160°	432.4	430.5	432.4	434.4	432.1
162.5°	437.6	435.7	437.3	439.6	436.7
165°	442.2	440.2	441.2	443.5	441.2
167.5°	445.8	443.8	444.8	447.1	444.2
170°	448.7	446.8	447.4	449.7	446.8
172.5°	450.7	448.7	449.4	451.7	448.7
175°	452.3	450.0	450.7	453.0	449.7
177.5°	453.0	450.7	451.0	453.3	450.4
180°	451.4	451.4	451.4	451.4	451.4

(END OF REPORT)