

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1011101

Luminaire Tested: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1011101
REPORT IS A COMBINATION OF REPORTS P989131 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1
Description: Define 3 Direct/Indirect Pendant with 5000K BioUP LEDs {m-DER=1.015} {m-EER=1.115}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7993.0 lumens
Efficiency: N/A
Efficacy: 97.7 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.37 / 1.5
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 81.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

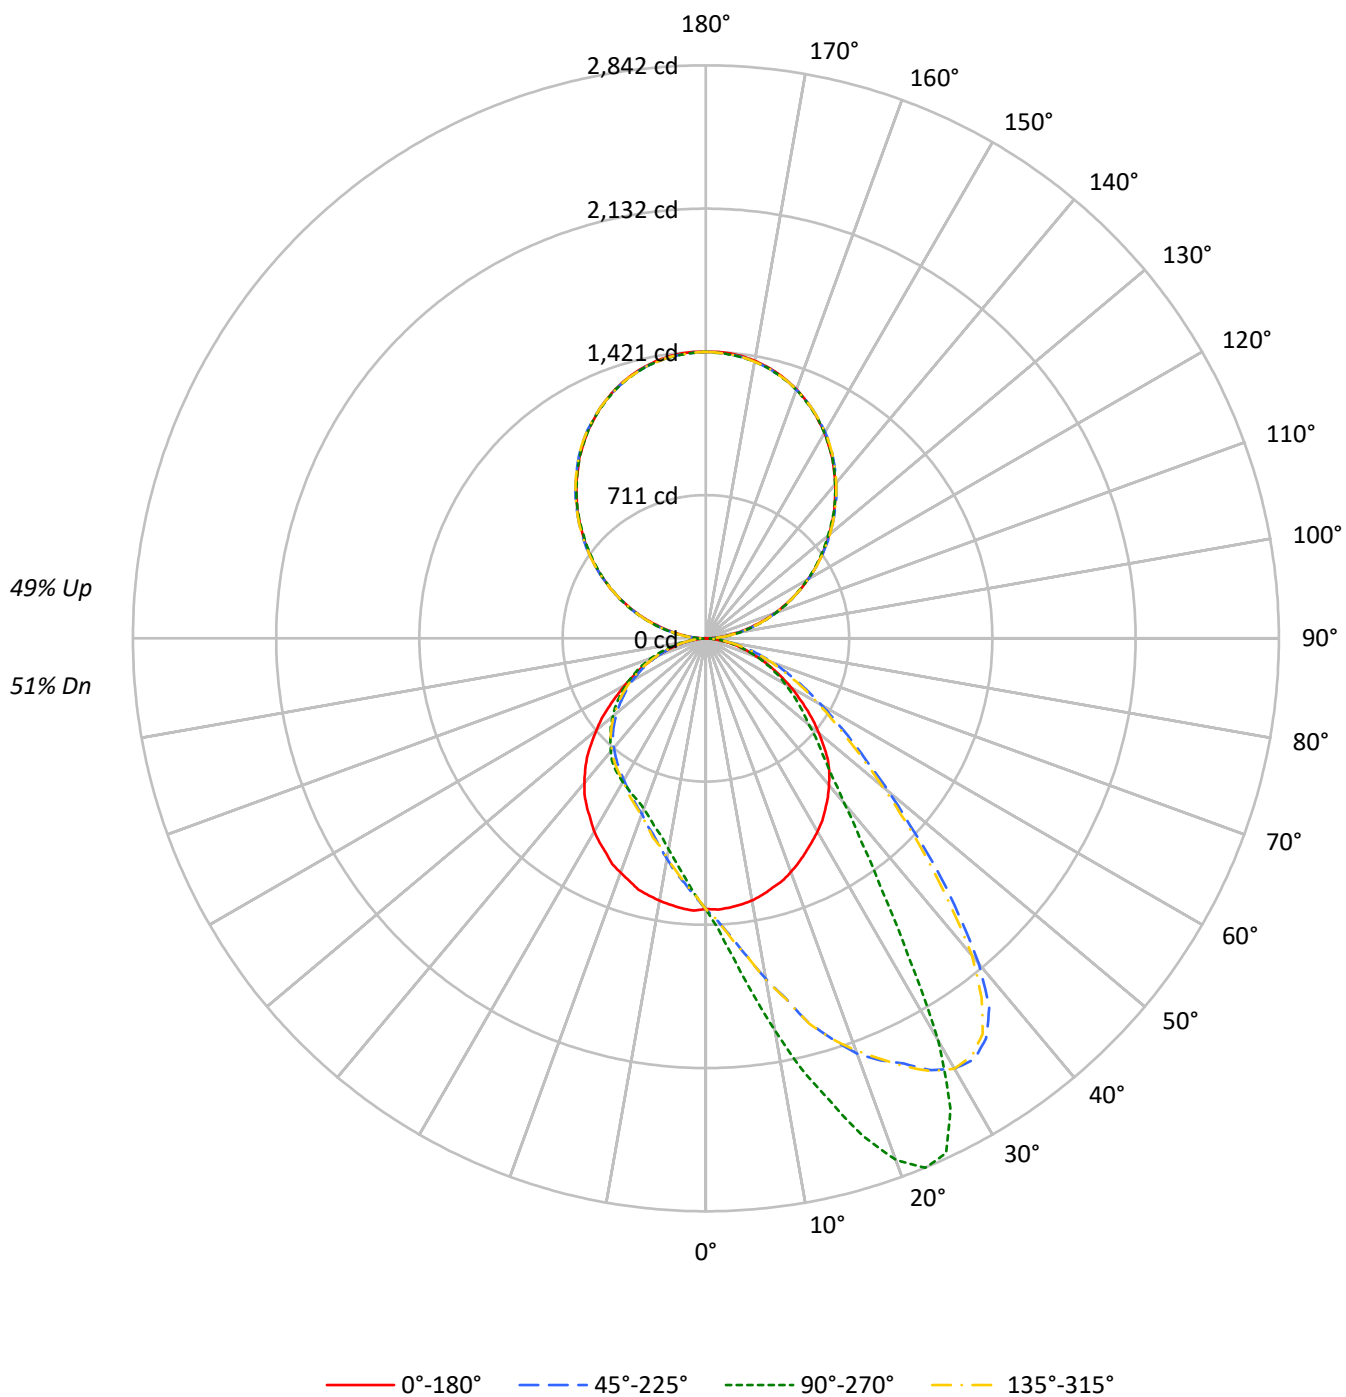

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	57	57	51
1	98	94	90	87	91	87	84	81	74	72	69	62	60	59	51	50	49	49	49	43
2	90	82	76	71	83	76	71	67	65	61	58	55	52	49	45	43	41	41	41	37
3	82	73	65	60	75	67	61	56	58	53	49	48	45	42	40	38	35	35	35	31
4	75	64	57	51	69	60	53	48	51	46	42	43	39	36	36	33	31	31	31	27
5	69	57	49	44	63	53	46	41	46	40	36	39	35	31	32	29	27	27	27	24
6	64	52	44	38	59	48	41	36	41	36	32	35	31	28	29	26	24	24	24	21
7	59	47	39	33	54	44	36	31	38	32	28	32	28	24	27	24	21	21	21	18
8	55	42	35	29	50	40	33	28	34	29	25	29	25	22	25	21	19	19	19	17
9	51	39	31	26	47	36	29	25	31	26	22	27	23	20	23	19	17	17	17	15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	21	18	15	15	15	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14451	14451	14451	14451
5°	14460	16650	14502	12426
10°	14369	20149	14383	10851
15°	14170	23896	14285	9768
20°	14000	27511	14029	8988
25°	13745	28205	13775	8581
30°	13564	23302	13564	8315
35°	13339	15585	13255	8080
40°	13070	11249	12909	7719
45°	12732	8912	12365	7271
50°	11910	7568	11487	6830
55°	11008	6650	10560	6340
60°	10092	5790	9556	5823
65°	9089	4959	8649	5137
70°	8045	4116	7509	4330
75°	6878	3103	6432	3342
80°	5440	2073	5016	2196
85°	3746	951	2997	864

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 23305 cd/sqm

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	132.0	1.7
10°-20°	424.1	5.3
20°-30°	713.6	8.9
30°-40°	806.4	10.1
40°-50°	722.2	9.0
50°-60°	583.0	7.3
60°-70°	406.3	5.1
70°-80°	213.2	2.7
80°-90°	54.1	0.7
90°-100°	91.5	1.1
100°-110°	276.9	3.5
110°-120°	471.4	5.9
120°-130°	620.2	7.8
130°-140°	697.1	8.7
140°-150°	685.3	8.6
150°-160°	577.0	7.2
160°-170°	384.1	4.8
170°-180°	134.5	1.7
0°-30°	1269.7	15.9
0°-40°	2076.1	26.0
0°-60°	3381.3	42.3
0°-90°	4055.0	50.7
90°-120°	839.8	10.5
90°-150°	2842.4	35.6
90°-180°	3938.0	49.3
0°-180°	7993.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1342	1342	1342	1342	1342	
5°	1341	1595	1345	1190	1341	127
15°	1280	2374	1290	970	1280	362
25°	1171	2818	1173	857	1171	540
35°	1033	1518	1026	787	1033	646
45°	857	820	833	669	857	656
55°	608	557	583	531	608	544
65°	376	362	358	375	376	374
75°	181	186	169	200	181	194
85°	39	43	31	39	39	45
90°	1	34	1	34	1	8
95°	66	87	66	87	66	73
105°	251	266	251	266	251	269
115°	474	476	474	476	474	470
125°	694	687	694	687	694	619
135°	901	900	901	900	901	694
145°	1093	1093	1093	1093	1093	683
155°	1252	1249	1252	1249	1252	576
165°	1363	1359	1363	1359	1363	384
175°	1418	1412	1418	1412	1418	135
180°	1421	1421	1421	1421	1421	

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5
2.5°	1346.4	1356.8	1362.1	1369.9	1377.7	1389.4	1393.3	1399.8	1397.2	1402.4	1405.0
5°	1341.2	1359.5	1375.1	1394.6	1412.8	1425.8	1438.8	1459.6	1475.2	1477.8	1489.5
7.5°	1332.1	1358.2	1385.5	1412.8	1447.9	1468.7	1492.1	1520.8	1544.2	1581.9	1596.2
10°	1320.4	1356.8	1395.9	1433.6	1481.7	1514.3	1542.9	1591.0	1639.1	1678.2	1714.6
12.5°	1302.2	1347.7	1398.5	1454.4	1516.9	1554.6	1593.6	1657.4	1730.2	1790.1	1829.1
15°	1280.1	1337.3	1402.4	1462.2	1531.2	1601.4	1643.0	1714.6	1818.7	1874.6	1974.8
17.5°	1261.9	1320.4	1385.5	1479.1	1572.8	1643.0	1673.0	1804.4	1875.9	1969.6	2082.8
20°	1233.3	1307.4	1390.7	1484.3	1605.3	1648.3	1709.4	1842.1	1930.6	2052.8	2192.0
22.5°	1203.3	1282.7	1382.9	1480.4	1615.7	1661.3	1744.5	1849.9	1990.4	2111.4	2264.9
25°	1170.8	1256.7	1358.2	1473.9	1606.6	1673.0	1751.0	1881.1	2033.3	2185.5	2327.3
27.5°	1138.3	1232.0	1337.3	1453.1	1581.9	1660.0	1738.0	1873.3	2068.4	2233.7	2414.5
30°	1107.1	1200.7	1306.1	1424.5	1559.8	1635.2	1709.4	1878.5	2095.8	2281.8	2463.9
32.5°	1073.3	1169.5	1280.1	1379.0	1515.6	1596.2	1679.5	1878.5	2112.7	2310.4	2476.9
35°	1032.9	1131.8	1226.8	1325.6	1460.9	1550.7	1644.4	1865.5	2128.3	2319.5	2422.3
37.5°	993.9	1081.1	1163.0	1259.3	1401.1	1497.3	1605.3	1849.9	2120.5	2280.5	2309.1
40°	949.7	1036.8	1103.2	1192.9	1342.5	1454.4	1563.7	1829.1	2086.7	2188.1	2104.9
42.5°	906.7	975.7	1032.9	1120.1	1282.7	1392.0	1510.4	1791.4	2020.3	2041.1	1853.8
45°	857.3	906.7	957.5	1056.3	1217.7	1329.5	1460.9	1736.7	1913.6	1853.8	1617.0
47.5°	793.6	837.8	893.7	984.8	1148.7	1264.5	1389.4	1666.5	1758.8	1633.9	1375.1
50°	732.4	770.1	822.2	910.6	1075.9	1189.0	1321.7	1555.9	1601.4	1405.0	1185.1
52.5°	671.3	699.9	750.6	839.1	1004.3	1113.6	1234.6	1442.7	1416.7	1205.9	1010.8
55°	607.5	632.2	680.4	767.5	921.0	1025.1	1140.9	1303.5	1235.9	1035.5	879.4
57.5°	545.1	571.1	620.5	693.4	837.8	939.3	1031.6	1159.1	1057.6	897.6	759.7
60°	489.1	511.3	549.0	620.5	751.9	833.9	918.4	1005.6	921.0	766.2	660.9
62.5°	430.6	451.4	486.5	551.6	664.8	737.6	805.3	876.8	783.1	670.0	576.3
65°	376.0	392.9	425.4	485.2	577.6	637.4	692.1	741.5	666.1	562.0	491.7
67.5°	326.5	340.8	368.2	421.5	499.5	542.5	586.7	628.3	564.6	481.3	421.5
70°	273.2	284.9	309.6	348.6	411.1	455.3	487.8	519.1	461.8	395.5	355.1
72.5°	226.4	238.1	253.7	294.0	336.9	364.3	399.4	416.3	383.8	329.1	288.8
75°	180.8	189.9	204.2	230.3	270.6	288.8	310.9	323.9	294.0	257.6	232.9
77.5°	141.8	145.7	156.1	174.3	201.6	222.5	239.4	247.2	226.4	202.9	182.1
80°	100.2	105.4	113.2	128.8	149.6	156.1	166.5	175.6	162.6	141.8	128.8
82.5°	66.3	72.9	76.8	83.3	96.3	104.1	106.7	114.5	102.8	95.0	89.8
85°	39.0	41.6	42.9	46.8	53.3	57.2	61.1	62.4	59.8	58.5	53.3
87.5°	19.5	19.5	19.5	22.1	23.4	26.0	27.3	27.3	27.3	26.0	24.7
90°	1.1	3.6	6.1	8.6	11.1	12.3	13.9	17.1	20.4	23.6	26.8
92.5°	33.5	35.0	36.5	38.0	39.5	40.2	40.9	42.4	43.9	45.4	46.9
95°	65.9	67.6	69.4	71.1	72.8	73.7	74.7	76.7	78.6	80.6	82.6
97.5°	108.3	109.5	110.8	112.0	113.3	113.9	114.6	116.1	117.6	119.1	120.6
100°	151.8	153.3	154.8	156.3	157.8	158.5	159.1	160.4	161.6	162.9	164.1
102.5°	202.1	202.8	203.6	204.3	205.0	205.4	206.3	208.0	209.7	211.5	213.2
105°	251.2	251.7	252.2	252.7	253.2	253.4	254.5	256.8	259.0	261.3	263.5
107.5°	309.3	309.5	309.8	310.0	310.3	310.4	310.9	311.9	312.8	313.8	314.8
110°	362.8	363.3	363.8	364.3	364.8	365.1	365.3	365.8	366.3	366.8	367.3

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	418.7	418.9	419.2	419.4	419.7	419.8	419.8	419.8	419.8	419.8	419.8
115°	474.5	475.2	476.0	476.7	477.4	477.8	477.6	477.1	476.6	476.1	475.6
117.5°	531.4	531.6	531.9	532.1	532.4	532.5	532.3	531.8	531.3	530.8	530.3
120°	583.9	585.4	586.9	588.4	589.9	590.6	590.0	588.7	587.5	586.2	585.0
122.5°	638.6	639.6	640.6	641.6	642.6	643.1	642.8	642.3	641.8	641.3	640.8
125°	694.4	695.2	695.9	696.7	697.4	697.8	697.5	697.0	696.5	696.0	695.5
127.5°	745.8	747.3	748.8	750.3	751.8	752.5	752.3	751.8	751.3	750.8	750.3
130°	797.1	799.1	801.1	803.1	805.1	806.1	805.7	805.0	804.2	803.5	802.7
132.5°	848.5	850.5	852.5	854.4	856.4	857.4	857.2	856.7	856.2	855.7	855.2
135°	901.0	902.5	904.0	905.5	907.0	907.7	907.6	907.3	907.1	906.8	906.6
137.5°	949.0	950.2	951.5	952.7	954.0	954.6	955.0	955.7	956.4	957.2	957.9
140°	999.2	1000.4	1001.7	1002.9	1004.2	1004.8	1004.9	1005.2	1005.4	1005.7	1005.9
142.5°	1045.0	1046.2	1047.5	1048.7	1050.0	1050.6	1050.8	1051.3	1051.8	1052.3	1052.8
145°	1093.0	1093.5	1094.0	1094.5	1095.0	1095.2	1095.6	1096.3	1097.1	1097.8	1098.6
147.5°	1134.3	1135.3	1136.3	1137.3	1138.3	1138.8	1139.2	1139.9	1140.6	1141.4	1142.1
150°	1177.9	1178.4	1178.9	1179.4	1179.9	1180.1	1180.3	1180.8	1181.3	1181.8	1182.3
152.5°	1213.6	1214.3	1215.1	1215.8	1216.5	1216.9	1217.0	1217.3	1217.5	1217.8	1218.0
155°	1251.5	1251.5	1251.5	1251.5	1251.5	1251.5	1251.6	1251.9	1252.2	1252.4	1252.7
157.5°	1283.9	1283.7	1283.4	1283.2	1282.9	1282.8	1282.9	1283.2	1283.4	1283.7	1283.9
160°	1314.1	1313.6	1313.1	1312.6	1312.1	1311.8	1311.8	1311.8	1311.8	1311.8	1311.8
162.5°	1340.9	1340.1	1339.4	1338.6	1337.9	1337.5	1337.6	1337.9	1338.1	1338.4	1338.6
165°	1363.2	1362.4	1361.7	1360.9	1360.2	1359.8	1359.8	1359.8	1359.8	1359.8	1359.8
167.5°	1382.2	1381.2	1380.2	1379.2	1378.2	1377.7	1377.8	1378.1	1378.3	1378.6	1378.8
170°	1397.8	1396.8	1395.8	1394.8	1393.8	1393.3	1393.3	1393.3	1393.3	1393.3	1393.3
172.5°	1410.1	1409.1	1408.1	1407.1	1406.1	1405.6	1405.6	1405.6	1405.6	1405.6	1405.6
175°	1417.9	1416.9	1415.9	1414.9	1413.9	1413.4	1413.4	1413.4	1413.4	1413.4	1413.4
177.5°	1422.4	1421.4	1420.4	1419.4	1418.4	1417.9	1417.9	1417.9	1417.9	1417.9	1417.9
180°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5
2.5°	1414.1	1416.7	1425.8	1432.3	1445.3	1444.0	1444.0	1442.7	1438.8	1445.3	1449.2
5°	1513.0	1535.1	1537.7	1566.3	1567.6	1579.3	1587.1	1580.6	1596.2	1594.9	1583.2
7.5°	1635.2	1665.2	1679.5	1706.8	1738.0	1730.2	1760.1	1765.3	1762.7	1775.7	1784.8
10°	1769.2	1821.3	1857.7	1908.4	1921.4	1929.3	1948.8	1965.7	1999.5	1973.5	1990.4
12.5°	1922.7	1960.5	2008.6	2089.3	2129.6	2155.6	2164.7	2176.4	2199.8	2185.5	2186.8
15°	2051.5	2102.3	2184.2	2284.4	2296.1	2328.6	2320.8	2391.1	2424.9	2374.2	2402.8
17.5°	2185.5	2253.2	2350.7	2437.9	2487.3	2509.5	2530.3	2597.9	2595.3	2587.5	2594.0
20°	2271.4	2382.0	2503.0	2618.7	2633.0	2650.0	2705.9	2734.5	2729.3	2751.4	2765.7
22.5°	2392.4	2509.5	2638.2	2715.0	2747.5	2767.0	2811.3	2829.5	2837.3	2842.5	2833.4
25°	2493.8	2618.7	2713.7	2781.3	2800.9	2811.3	2825.6	2830.8	2826.9	2817.8	2825.6
27.5°	2562.8	2663.0	2728.0	2759.2	2748.8	2731.9	2704.6	2686.4	2646.1	2626.5	2650.0
30°	2591.4	2635.6	2655.2	2603.1	2551.1	2509.5	2457.4	2361.2	2285.7	2307.8	2277.9
32.5°	2545.9	2517.3	2423.6	2289.6	2249.3	2181.6	2034.6	1921.4	1925.3	1865.5	1890.2
35°	2411.9	2281.8	2104.9	1901.9	1848.6	1812.2	1650.9	1626.1	1574.1	1518.2	1533.8
37.5°	2175.1	1985.2	1770.5	1620.9	1541.6	1462.2	1371.2	1316.5	1285.3	1261.9	1280.1
40°	1886.3	1654.8	1477.8	1343.8	1276.2	1225.5	1163.0	1108.4	1073.3	1069.3	1075.9
42.5°	1602.7	1407.6	1245.0	1117.5	1095.4	1035.5	995.2	952.3	941.9	924.9	934.1
45°	1356.8	1198.1	1064.1	960.1	934.1	918.4	869.0	841.7	830.0	819.6	835.2
47.5°	1178.6	1012.1	914.5	852.1	826.1	800.1	772.7	754.5	745.4	746.7	745.4
50°	1006.9	884.6	798.8	750.6	735.0	716.8	694.7	683.0	679.1	667.4	676.5
52.5°	866.4	777.9	718.1	672.6	660.9	647.9	629.6	623.1	614.0	611.4	611.4
55°	753.2	684.3	636.1	606.2	591.9	581.5	571.1	563.3	556.8	556.8	556.8
57.5°	664.8	604.9	569.8	543.8	538.6	528.2	516.5	516.5	507.4	506.1	510.0
60°	589.3	536.0	508.7	486.5	478.7	476.1	464.4	464.4	461.8	455.3	460.5
62.5°	512.6	473.5	450.1	433.2	425.4	425.4	416.3	409.8	409.8	411.1	408.5
65°	442.3	413.7	392.9	379.9	376.0	370.8	369.5	364.3	360.4	361.7	360.4
67.5°	379.9	357.8	343.4	333.0	326.5	323.9	320.0	320.0	317.4	318.7	312.2
70°	323.9	301.8	290.1	279.7	277.1	277.1	271.9	273.2	270.6	274.5	271.9
72.5°	266.7	249.8	240.7	236.8	234.2	232.9	230.3	227.7	226.4	229.0	227.7
75°	216.0	201.6	195.1	192.5	189.9	189.9	188.6	187.3	186.0	186.0	186.0
77.5°	167.8	158.7	150.9	153.5	149.6	150.9	147.0	147.0	148.3	147.0	147.0
80°	123.6	117.1	117.1	114.5	109.3	111.9	111.9	108.0	106.7	109.3	105.4
82.5°	82.0	80.7	78.1	76.8	74.2	75.5	74.2	72.9	71.6	74.2	71.6
85°	48.1	48.1	46.8	44.2	46.8	45.5	44.2	44.2	42.9	42.9	42.9
87.5°	24.7	22.1	22.1	20.8	22.1	19.5	20.8	19.5	18.2	19.5	18.2
90°	27.8	28.8	29.8	30.8	31.3	31.5	32.0	32.5	33.0	33.5	33.0
92.5°	47.6	48.4	49.1	49.8	50.2	50.0	49.5	49.0	48.5	48.0	48.5
95°	83.6	84.6	85.6	86.6	87.1	87.1	87.1	87.1	87.1	87.1	87.1
97.5°	121.8	123.1	124.3	125.6	126.2	126.1	125.8	125.5	125.3	125.0	125.3
100°	164.9	165.6	166.4	167.1	167.5	167.7	168.2	168.7	169.2	169.7	169.2
102.5°	214.0	214.7	215.5	216.2	216.6	216.5	216.2	216.0	215.7	215.5	215.7
105°	263.5	263.5	263.5	263.5	263.5	263.7	264.2	264.7	265.2	265.7	265.2
107.5°	315.6	316.3	317.1	317.8	318.2	318.1	317.8	317.6	317.3	317.1	317.3
110°	368.3	369.3	370.3	371.3	371.8	371.5	371.0	370.5	370.0	369.5	370.0

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	421.0	422.3	423.5	424.8	425.4	425.4	425.4	425.4	425.4	425.4	425.4
115°	475.8	476.1	476.3	476.6	476.7	476.6	476.3	476.1	475.8	475.6	475.8
117.5°	530.3	530.3	530.3	530.3	530.3	529.9	529.2	528.5	527.7	527.0	527.7
120°	584.8	584.5	584.3	584.0	583.9	583.7	583.2	582.7	582.2	581.7	582.2
122.5°	640.1	639.3	638.6	637.9	637.5	637.1	636.4	635.6	634.9	634.1	634.9
125°	694.5	693.5	692.6	691.6	691.1	690.6	689.6	688.6	687.6	686.6	687.6
127.5°	748.8	747.3	745.8	744.3	743.6	743.1	742.1	741.1	740.1	739.1	740.1
130°	801.7	800.7	799.8	798.8	798.3	797.4	795.7	793.9	792.2	790.4	792.2
132.5°	854.0	852.7	851.5	850.2	849.6	849.0	847.7	846.5	845.2	844.0	845.2
135°	905.6	904.6	903.6	902.6	902.1	901.9	901.4	900.9	900.4	899.9	900.4
137.5°	956.7	955.4	954.2	952.9	952.3	951.9	951.2	950.5	949.7	949.0	949.7
140°	1005.7	1005.4	1005.2	1004.9	1004.8	1003.9	1002.2	1000.5	998.7	997.0	998.7
142.5°	1052.6	1052.3	1052.1	1051.8	1051.7	1051.1	1049.8	1048.6	1047.3	1046.1	1047.3
145°	1098.4	1098.1	1097.9	1097.6	1097.5	1097.0	1096.0	1095.0	1094.0	1093.0	1094.0
147.5°	1142.1	1142.1	1142.1	1142.1	1142.1	1141.4	1139.9	1138.4	1136.9	1135.4	1136.9
150°	1182.3	1182.3	1182.3	1182.3	1182.3	1181.6	1180.1	1178.6	1177.1	1175.6	1177.1
152.5°	1218.5	1219.0	1219.5	1220.0	1220.3	1219.7	1218.4	1217.2	1215.9	1214.7	1215.9
155°	1253.7	1254.7	1255.6	1256.6	1257.1	1256.2	1254.5	1252.8	1251.0	1249.3	1251.0
157.5°	1284.9	1285.9	1286.9	1287.9	1288.4	1287.7	1286.2	1284.7	1283.2	1281.7	1283.2
160°	1313.0	1314.3	1315.5	1316.8	1317.4	1316.9	1315.9	1314.9	1313.9	1312.9	1313.9
162.5°	1339.8	1341.1	1342.3	1343.6	1344.2	1343.3	1341.6	1339.9	1338.1	1336.4	1338.1
165°	1361.3	1362.8	1364.3	1365.8	1366.5	1365.6	1363.9	1362.2	1360.4	1358.7	1360.4
167.5°	1380.3	1381.8	1383.3	1384.8	1385.5	1384.8	1383.3	1381.8	1380.3	1378.8	1380.3
170°	1395.0	1396.8	1398.5	1400.2	1401.1	1400.2	1398.5	1396.8	1395.0	1393.3	1395.0
172.5°	1407.1	1408.6	1410.1	1411.6	1412.3	1411.4	1409.7	1408.0	1406.2	1404.5	1406.2
175°	1414.9	1416.4	1417.9	1419.4	1420.1	1419.2	1417.5	1415.8	1414.0	1412.3	1414.0
177.5°	1419.4	1420.9	1422.4	1423.9	1424.6	1423.7	1422.0	1420.3	1418.5	1416.8	1418.5
180°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5
2.5°	1438.8	1442.7	1432.3	1429.7	1429.7	1434.9	1431.0	1395.9	1402.4	1394.6	1392.0
5°	1597.5	1589.7	1579.3	1574.1	1567.6	1549.4	1548.1	1507.8	1499.9	1473.9	1462.2
7.5°	1771.8	1765.3	1734.1	1730.2	1727.6	1710.7	1667.8	1624.8	1593.6	1563.7	1535.1
10°	1970.9	1951.4	1937.1	1908.4	1894.1	1870.7	1814.8	1774.4	1721.1	1675.6	1615.7
12.5°	2210.2	2188.1	2140.0	2119.2	2101.0	2035.9	1980.0	1934.5	1830.4	1799.2	1725.0
15°	2385.9	2339.0	2333.8	2288.3	2285.7	2214.1	2107.5	2058.0	1977.4	1862.9	1786.2
17.5°	2575.8	2534.2	2501.7	2447.0	2439.2	2371.6	2293.5	2172.5	2084.1	1974.8	1877.2
20°	2715.0	2692.9	2636.9	2614.8	2569.3	2512.1	2431.4	2281.8	2173.8	2064.5	1944.9
22.5°	2825.6	2803.5	2759.2	2729.3	2703.3	2629.1	2532.9	2405.4	2257.1	2114.0	1990.4
25°	2824.3	2817.8	2799.6	2785.2	2765.7	2711.1	2630.4	2508.2	2342.9	2185.5	2013.8
27.5°	2664.3	2682.5	2713.7	2729.3	2725.4	2717.6	2672.1	2569.3	2421.0	2233.7	2041.1
30°	2331.2	2397.6	2456.1	2534.2	2557.6	2614.8	2640.8	2582.3	2463.9	2289.6	2076.3
32.5°	1933.2	2029.4	2156.9	2199.8	2274.0	2384.6	2508.2	2530.3	2456.1	2322.1	2098.4
35°	1585.8	1665.2	1764.0	1831.7	1898.0	2077.6	2233.7	2369.0	2393.7	2305.2	2093.2
37.5°	1312.6	1368.6	1455.7	1513.0	1574.1	1727.6	1946.2	2121.8	2245.4	2248.0	2078.9
40°	1114.9	1139.6	1215.1	1256.7	1315.2	1447.9	1643.0	1872.0	2052.8	2136.1	2041.1
42.5°	944.5	977.0	1039.4	1070.6	1108.4	1224.2	1352.9	1570.2	1794.0	1972.2	1970.9
45°	843.0	866.4	895.0	921.0	964.0	1032.9	1179.9	1342.5	1557.2	1758.8	1838.2
47.5°	753.2	775.3	804.0	811.8	840.4	905.4	995.2	1137.0	1337.3	1537.7	1687.3
50°	677.8	696.0	715.5	729.8	742.8	796.2	863.8	983.5	1143.5	1337.3	1523.4
52.5°	619.2	632.2	649.2	657.0	668.7	707.7	759.7	848.2	979.6	1156.5	1337.3
55°	564.6	573.7	584.1	597.1	602.3	630.9	671.3	746.7	844.3	1003.0	1174.7
57.5°	513.9	517.8	524.3	532.1	538.6	563.3	598.4	649.2	735.0	857.3	1019.9
60°	456.6	467.0	470.9	478.7	482.6	502.2	529.5	572.4	638.7	744.1	866.4
62.5°	408.5	415.0	421.5	425.4	434.5	441.0	463.1	502.2	556.8	634.8	745.4
65°	365.6	368.2	372.1	376.0	378.6	386.4	407.2	433.2	474.8	543.8	629.6
67.5°	316.1	318.7	323.9	325.2	327.8	338.2	349.9	372.1	407.2	459.2	529.5
70°	268.0	271.9	274.5	277.1	281.0	284.9	297.9	316.1	343.4	379.9	434.5
72.5°	226.4	230.3	230.3	232.9	231.6	236.8	249.8	262.8	281.0	310.9	359.1
75°	184.7	184.7	187.3	188.6	189.9	195.1	200.3	210.7	225.1	248.5	278.4
77.5°	145.7	144.4	147.0	147.0	147.0	150.9	156.1	161.3	170.4	187.3	210.7
80°	106.7	106.7	109.3	110.6	108.0	109.3	111.9	117.1	123.6	135.3	148.3
82.5°	70.2	75.5	74.2	75.5	74.2	76.8	78.1	79.4	82.0	87.2	96.3
85°	42.9	42.9	42.9	44.2	42.9	44.2	44.2	44.2	45.5	48.1	52.0
87.5°	18.2	18.2	18.2	19.5	18.2	18.2	19.5	18.2	19.5	19.5	20.8
90°	32.5	32.0	31.5	31.3	30.8	29.8	28.8	27.8	26.8	23.6	20.4
92.5°	49.0	49.5	50.0	50.2	49.8	49.1	48.4	47.6	46.9	45.4	43.9
95°	87.1	87.1	87.1	87.1	86.6	85.6	84.6	83.6	82.6	80.6	78.6
97.5°	125.5	125.8	126.1	126.2	125.6	124.3	123.1	121.8	120.6	119.1	117.6
100°	168.7	168.2	167.7	167.5	167.1	166.4	165.6	164.9	164.1	162.9	161.6
102.5°	216.0	216.2	216.5	216.6	216.2	215.5	214.7	214.0	213.2	211.5	209.7
105°	264.7	264.2	263.7	263.5	263.5	263.5	263.5	263.5	263.5	261.3	259.0
107.5°	317.6	317.8	318.1	318.2	317.8	317.1	316.3	315.6	314.8	313.8	312.8
110°	370.5	371.0	371.5	371.8	371.3	370.3	369.3	368.3	367.3	366.8	366.3

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	425.4	425.4	425.4	425.4	424.8	423.5	422.3	421.0	419.8	419.8	419.8
115°	476.1	476.3	476.6	476.7	476.6	476.3	476.1	475.8	475.6	476.1	476.6
117.5°	528.5	529.2	529.9	530.3	530.3	530.3	530.3	530.3	530.3	530.8	531.3
120°	582.7	583.2	583.7	583.9	584.0	584.3	584.5	584.8	585.0	586.2	587.5
122.5°	635.6	636.4	637.1	637.5	637.9	638.6	639.3	640.1	640.8	641.3	641.8
125°	688.6	689.6	690.6	691.1	691.6	692.6	693.5	694.5	695.5	696.0	696.5
127.5°	741.1	742.1	743.1	743.6	744.3	745.8	747.3	748.8	750.3	750.8	751.3
130°	793.9	795.7	797.4	798.3	798.8	799.8	800.7	801.7	802.7	803.5	804.2
132.5°	846.5	847.7	849.0	849.6	850.2	851.5	852.7	854.0	855.2	855.7	856.2
135°	900.9	901.4	901.9	902.1	902.6	903.6	904.6	905.6	906.6	906.8	907.1
137.5°	950.5	951.2	951.9	952.3	952.9	954.2	955.4	956.7	957.9	957.2	956.4
140°	1000.5	1002.2	1003.9	1004.8	1004.9	1005.2	1005.4	1005.7	1005.9	1005.7	1005.4
142.5°	1048.6	1049.8	1051.1	1051.7	1051.8	1052.1	1052.3	1052.6	1052.8	1052.3	1051.8
145°	1095.0	1096.0	1097.0	1097.5	1097.6	1097.9	1098.1	1098.4	1098.6	1097.8	1097.1
147.5°	1138.4	1139.9	1141.4	1142.1	1142.1	1142.1	1142.1	1142.1	1142.1	1141.4	1140.6
150°	1178.6	1180.1	1181.6	1182.3	1182.3	1182.3	1182.3	1182.3	1182.3	1181.8	1181.3
152.5°	1217.2	1218.4	1219.7	1220.3	1220.0	1219.5	1219.0	1218.5	1218.0	1217.8	1217.5
155°	1252.8	1254.5	1256.2	1257.1	1256.6	1255.6	1254.7	1253.7	1252.7	1252.4	1252.2
157.5°	1284.7	1286.2	1287.7	1288.4	1287.9	1286.9	1285.9	1284.9	1283.9	1283.7	1283.4
160°	1314.9	1315.9	1316.9	1317.4	1316.8	1315.5	1314.3	1313.0	1311.8	1311.8	1311.8
162.5°	1339.9	1341.6	1343.3	1344.2	1343.6	1342.3	1341.1	1339.8	1338.6	1338.4	1338.1
165°	1362.2	1363.9	1365.6	1366.5	1365.8	1364.3	1362.8	1361.3	1359.8	1359.8	1359.8
167.5°	1381.8	1383.3	1384.8	1385.5	1384.8	1383.3	1381.8	1380.3	1378.8	1378.6	1378.3
170°	1396.8	1398.5	1400.2	1401.1	1400.2	1398.5	1396.8	1395.0	1393.3	1393.3	1393.3
172.5°	1408.0	1409.7	1411.4	1412.3	1411.6	1410.1	1408.6	1407.1	1405.6	1405.6	1405.6
175°	1415.8	1417.5	1419.2	1420.1	1419.4	1417.9	1416.4	1414.9	1413.4	1413.4	1413.4
177.5°	1420.3	1422.0	1423.7	1424.6	1423.9	1422.4	1420.9	1419.4	1417.9	1417.9	1417.9
180°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5
2.5°	1379.0	1375.1	1375.1	1372.5	1364.7	1350.3	1349.0	1351.6	1343.8	1336.0	1324.3
5°	1446.6	1421.9	1414.1	1406.3	1390.7	1364.7	1354.2	1345.1	1330.8	1313.9	1295.7
7.5°	1503.9	1468.7	1458.3	1444.0	1412.8	1376.4	1352.9	1333.4	1313.9	1290.5	1268.4
10°	1575.4	1524.7	1499.9	1479.1	1436.2	1385.5	1350.3	1321.7	1290.5	1261.9	1233.3
12.5°	1656.1	1574.1	1566.3	1515.6	1466.1	1390.7	1347.7	1306.1	1264.5	1229.4	1199.4
15°	1723.7	1633.9	1601.4	1567.6	1472.6	1379.0	1337.3	1290.5	1242.4	1204.6	1160.4
17.5°	1766.6	1692.5	1623.5	1578.0	1479.1	1395.9	1315.2	1261.9	1211.1	1159.1	1122.7
20°	1818.7	1710.7	1650.9	1589.7	1492.1	1382.9	1302.2	1235.9	1173.4	1126.6	1082.4
22.5°	1870.7	1725.0	1675.6	1609.2	1494.7	1369.9	1278.8	1212.4	1140.9	1094.1	1045.9
25°	1865.5	1745.8	1663.9	1607.9	1468.7	1358.2	1251.5	1173.4	1107.1	1047.2	999.1
27.5°	1869.4	1722.4	1639.1	1574.1	1450.5	1341.2	1222.9	1140.9	1072.0	1009.5	958.8
30°	1870.7	1687.3	1614.4	1536.4	1416.7	1300.9	1190.3	1107.1	1034.2	966.6	921.0
32.5°	1866.8	1658.7	1567.6	1497.3	1363.4	1261.9	1152.6	1064.1	990.0	927.5	884.6
35°	1857.7	1624.8	1519.5	1431.0	1308.7	1205.9	1117.5	1026.4	947.1	889.8	840.4
37.5°	1833.0	1588.4	1468.7	1381.6	1245.0	1140.9	1062.8	987.4	910.6	843.0	801.4
40°	1814.8	1539.0	1418.0	1323.0	1176.0	1074.6	1009.5	938.0	862.5	801.4	761.0
42.5°	1773.1	1492.1	1366.0	1252.8	1108.4	1004.3	943.2	885.9	820.9	761.0	724.6
45°	1705.5	1441.4	1302.2	1187.7	1034.2	935.4	879.4	832.6	775.3	718.1	681.7
47.5°	1610.5	1368.6	1234.6	1120.1	961.4	861.2	805.3	770.1	724.6	676.5	645.3
50°	1507.8	1289.2	1165.6	1052.4	891.1	793.6	738.9	706.4	676.5	632.2	602.3
52.5°	1373.8	1204.6	1086.3	978.3	815.7	722.0	673.9	650.5	619.2	588.0	562.0
55°	1243.7	1095.4	997.8	895.0	741.5	654.4	607.5	582.8	564.6	538.6	517.8
57.5°	1092.8	993.9	904.1	810.5	672.6	593.2	549.0	519.1	507.4	495.6	476.1
60°	953.6	878.1	805.3	727.2	601.0	529.5	486.5	463.1	451.4	443.6	430.6
62.5°	826.1	767.5	705.1	642.6	528.2	463.1	430.6	407.2	396.8	395.5	383.8
65°	703.8	662.2	611.4	550.3	460.5	403.3	372.1	357.8	346.0	346.0	336.9
67.5°	581.5	552.9	512.6	469.6	399.4	346.0	317.4	304.4	297.9	297.9	291.4
70°	483.9	464.4	428.0	390.3	329.1	288.8	266.7	255.0	251.1	252.4	247.2
72.5°	392.9	372.1	342.1	314.8	269.3	239.4	223.8	210.7	204.2	205.5	204.2
75°	304.4	294.0	268.0	247.2	210.7	189.9	175.6	169.1	163.9	165.2	162.6
77.5°	229.0	213.3	199.0	184.7	162.6	145.7	134.0	127.5	123.6	123.6	123.6
80°	156.1	153.5	141.8	134.0	115.8	102.8	93.7	92.4	88.5	88.5	88.5
82.5°	101.5	95.0	88.5	83.3	72.9	65.0	61.1	58.5	57.2	55.9	58.5
85°	55.9	52.0	49.4	44.2	40.3	36.4	32.5	31.2	29.9	31.2	29.9
87.5°	22.1	18.2	18.2	16.9	15.6	14.3	14.3	11.7	11.7	10.4	10.4
90°	17.1	13.9	12.3	11.1	8.6	6.1	3.6	1.1	3.6	6.1	8.6
92.5°	42.4	40.9	40.2	39.5	38.0	36.5	35.0	33.5	35.0	36.5	38.0
95°	76.7	74.7	73.7	72.8	71.1	69.4	67.6	65.9	67.6	69.4	71.1
97.5°	116.1	114.6	113.9	113.3	112.0	110.8	109.5	108.3	109.5	110.8	112.0
100°	160.4	159.1	158.5	157.8	156.3	154.8	153.3	151.8	153.3	154.8	156.3
102.5°	208.0	206.3	205.4	205.0	204.3	203.6	202.8	202.1	202.8	203.6	204.3
105°	256.8	254.5	253.4	253.2	252.7	252.2	251.7	251.2	251.7	252.2	252.7
107.5°	311.9	310.9	310.4	310.3	310.0	309.8	309.5	309.3	309.5	309.8	310.0
110°	365.8	365.3	365.1	364.8	364.3	363.8	363.3	362.8	363.3	363.8	364.3

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	419.8	419.8	419.8	419.7	419.4	419.2	418.9	418.7	418.9	419.2	419.4
115°	477.1	477.6	477.8	477.4	476.7	476.0	475.2	474.5	475.2	476.0	476.7
117.5°	531.8	532.3	532.5	532.4	532.1	531.9	531.6	531.4	531.6	531.9	532.1
120°	588.7	590.0	590.6	589.9	588.4	586.9	585.4	583.9	585.4	586.9	588.4
122.5°	642.3	642.8	643.1	642.6	641.6	640.6	639.6	638.6	639.6	640.6	641.6
125°	697.0	697.5	697.8	697.4	696.7	695.9	695.2	694.4	695.2	695.9	696.7
127.5°	751.8	752.3	752.5	751.8	750.3	748.8	747.3	745.8	747.3	748.8	750.3
130°	805.0	805.7	806.1	805.1	803.1	801.1	799.1	797.1	799.1	801.1	803.1
132.5°	856.7	857.2	857.4	856.4	854.4	852.5	850.5	848.5	850.5	852.5	854.4
135°	907.3	907.6	907.7	907.0	905.5	904.0	902.5	901.0	902.5	904.0	905.5
137.5°	955.7	955.0	954.6	954.0	952.7	951.5	950.2	949.0	950.2	951.5	952.7
140°	1005.2	1004.9	1004.8	1004.2	1002.9	1001.7	1000.4	999.2	1000.4	1001.7	1002.9
142.5°	1051.3	1050.8	1050.6	1050.0	1048.7	1047.5	1046.2	1045.0	1046.2	1047.5	1048.7
145°	1096.3	1095.6	1095.2	1095.0	1094.5	1094.0	1093.5	1093.0	1093.5	1094.0	1094.5
147.5°	1139.9	1139.2	1138.8	1138.3	1137.3	1136.3	1135.3	1134.3	1135.3	1136.3	1137.3
150°	1180.8	1180.3	1180.1	1179.9	1179.4	1178.9	1178.4	1177.9	1178.4	1178.9	1179.4
152.5°	1217.3	1217.0	1216.9	1216.5	1215.8	1215.1	1214.3	1213.6	1214.3	1215.1	1215.8
155°	1251.9	1251.6	1251.5	1251.5	1251.5	1251.5	1251.5	1251.5	1251.5	1251.5	1251.5
157.5°	1283.2	1282.9	1282.8	1282.9	1283.2	1283.4	1283.7	1283.9	1283.7	1283.4	1283.2
160°	1311.8	1311.8	1311.8	1312.1	1312.6	1313.1	1313.6	1314.1	1313.6	1313.1	1312.6
162.5°	1337.9	1337.6	1337.5	1337.9	1338.6	1339.4	1340.1	1340.9	1340.1	1339.4	1338.6
165°	1359.8	1359.8	1359.8	1360.2	1360.9	1361.7	1362.4	1363.2	1362.4	1361.7	1360.9
167.5°	1378.1	1377.8	1377.7	1378.2	1379.2	1380.2	1381.2	1382.2	1381.2	1380.2	1379.2
170°	1393.3	1393.3	1393.3	1393.8	1394.8	1395.8	1396.8	1397.8	1396.8	1395.8	1394.8
172.5°	1405.6	1405.6	1405.6	1406.1	1407.1	1408.1	1409.1	1410.1	1409.1	1408.1	1407.1
175°	1413.4	1413.4	1413.4	1413.9	1414.9	1415.9	1416.9	1417.9	1416.9	1415.9	1414.9
177.5°	1417.9	1417.9	1417.9	1418.4	1419.4	1420.4	1421.4	1422.4	1421.4	1420.4	1419.4
180°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5
2.5°	1321.7	1320.4	1323.0	1315.2	1302.2	1295.7	1277.5	1273.6	1272.3	1273.6	1274.9
5°	1285.3	1284.0	1280.1	1267.1	1251.5	1239.8	1217.7	1216.4	1208.5	1200.7	1204.6
7.5°	1250.2	1245.0	1237.2	1220.3	1199.4	1186.4	1168.2	1155.2	1144.8	1138.3	1133.1
10°	1215.1	1207.2	1199.4	1177.3	1151.3	1131.8	1109.7	1099.3	1087.6	1082.4	1077.2
12.5°	1169.5	1161.7	1147.4	1121.4	1105.8	1081.1	1058.9	1048.5	1042.0	1031.6	1025.1
15°	1133.1	1117.5	1109.7	1082.4	1049.8	1047.2	1006.9	1004.3	991.3	991.3	980.9
17.5°	1091.5	1079.8	1065.4	1038.1	1014.7	991.3	970.5	962.7	951.0	948.4	943.2
20°	1051.1	1035.5	1030.3	1003.0	978.3	949.7	927.5	919.7	914.5	909.3	913.2
22.5°	1009.5	996.5	983.5	958.8	940.6	911.9	898.9	891.1	883.3	880.7	882.0
25°	969.2	957.5	944.5	919.7	900.2	876.8	865.1	861.2	857.3	857.3	856.0
27.5°	930.2	918.4	906.7	884.6	865.1	848.2	839.1	835.2	831.3	833.9	836.5
30°	889.8	879.4	869.0	849.5	833.9	818.3	813.1	810.5	809.2	815.7	815.7
32.5°	853.4	844.3	836.5	818.3	802.7	789.7	785.7	787.1	788.4	792.3	794.9
35°	815.7	809.2	801.4	785.7	772.7	761.0	762.3	762.3	764.9	771.4	776.6
37.5°	781.8	772.7	766.2	753.2	742.8	732.4	736.3	740.2	742.8	750.6	753.2
40°	741.5	737.6	732.4	719.4	710.3	709.0	710.3	712.9	718.1	722.0	725.9
42.5°	709.0	703.8	697.3	686.9	679.1	680.4	681.7	684.3	686.9	693.4	697.3
45°	672.6	668.7	663.5	654.4	647.9	649.2	650.5	650.5	653.1	660.9	663.5
47.5°	632.2	633.5	627.0	617.9	614.0	614.0	614.0	616.6	623.1	625.7	627.0
50°	593.2	590.6	589.3	580.2	577.6	576.3	577.6	578.9	588.0	586.7	590.6
52.5°	551.6	551.6	550.3	545.1	541.2	541.2	538.6	545.1	547.7	550.3	554.2
55°	511.3	507.4	506.1	503.5	498.2	496.9	499.5	507.4	510.0	512.6	516.5
57.5°	467.0	467.0	464.4	460.5	460.5	460.5	460.5	465.7	469.6	472.2	480.0
60°	426.7	421.5	417.6	417.6	417.6	416.3	424.1	424.1	431.9	433.2	435.8
62.5°	378.6	376.0	373.4	374.7	373.4	376.0	378.6	383.8	385.1	389.0	392.9
65°	333.0	333.0	330.4	338.2	333.0	333.0	339.5	339.5	342.1	346.0	351.2
67.5°	288.8	290.1	287.5	287.5	290.1	291.4	292.7	297.9	299.2	304.4	310.9
70°	243.3	245.9	247.2	244.6	247.2	249.8	252.4	253.7	258.9	261.5	265.4
72.5°	202.9	205.5	201.6	202.9	204.2	206.8	208.1	210.7	213.3	221.2	223.8
75°	162.6	161.3	160.0	165.2	162.6	167.8	169.1	169.1	171.7	178.2	180.8
77.5°	124.9	124.9	126.2	123.6	127.5	126.2	127.5	131.4	135.3	135.3	145.7
80°	87.2	89.8	89.8	89.8	91.1	92.4	89.8	96.3	97.6	97.6	101.5
82.5°	55.9	57.2	55.9	58.5	58.5	61.1	59.8	61.1	63.7	66.3	67.6
85°	29.9	29.9	32.5	32.5	31.2	32.5	31.2	32.5	35.1	35.1	36.4
87.5°	10.4	10.4	10.4	10.4	11.7	10.4	11.7	11.7	10.4	10.4	14.3
90°	11.1	12.3	13.9	17.1	20.4	23.6	26.8	27.8	28.8	29.8	30.8
92.5°	39.5	40.2	40.9	42.4	43.9	45.4	46.9	47.6	48.4	49.1	49.8
95°	72.8	73.7	74.7	76.7	78.6	80.6	82.6	83.6	84.6	85.6	86.6
97.5°	113.3	113.9	114.6	116.1	117.6	119.1	120.6	121.8	123.1	124.3	125.6
100°	157.8	158.5	159.1	160.4	161.6	162.9	164.1	164.9	165.6	166.4	167.1
102.5°	205.0	205.4	206.3	208.0	209.7	211.5	213.2	214.0	214.7	215.5	216.2
105°	253.2	253.4	254.5	256.8	259.0	261.3	263.5	263.5	263.5	263.5	263.5
107.5°	310.3	310.4	310.9	311.9	312.8	313.8	314.8	315.6	316.3	317.1	317.8
110°	364.8	365.1	365.3	365.8	366.3	366.8	367.3	368.3	369.3	370.3	371.3

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	419.7	419.8	419.8	419.8	419.8	419.8	419.8	421.0	422.3	423.5	424.8
115°	477.4	477.8	477.6	477.1	476.6	476.1	475.6	475.8	476.1	476.3	476.6
117.5°	532.4	532.5	532.3	531.8	531.3	530.8	530.3	530.3	530.3	530.3	530.3
120°	589.9	590.6	590.0	588.7	587.5	586.2	585.0	584.8	584.5	584.3	584.0
122.5°	642.6	643.1	642.8	642.3	641.8	641.3	640.8	640.1	639.3	638.6	637.9
125°	697.4	697.8	697.5	697.0	696.5	696.0	695.5	694.5	693.5	692.6	691.6
127.5°	751.8	752.5	752.3	751.8	751.3	750.8	750.3	748.8	747.3	745.8	744.3
130°	805.1	806.1	805.7	805.0	804.2	803.5	802.7	801.7	800.7	799.8	798.8
132.5°	856.4	857.4	857.2	856.7	856.2	855.7	855.2	854.0	852.7	851.5	850.2
135°	907.0	907.7	907.6	907.3	907.1	906.8	906.6	905.6	904.6	903.6	902.6
137.5°	954.0	954.6	955.0	955.7	956.4	957.2	957.9	956.7	955.4	954.2	952.9
140°	1004.2	1004.8	1004.9	1005.2	1005.4	1005.7	1005.9	1005.7	1005.4	1005.2	1004.9
142.5°	1050.0	1050.6	1050.8	1051.3	1051.8	1052.3	1052.8	1052.6	1052.3	1052.1	1051.8
145°	1095.0	1095.2	1095.6	1096.3	1097.1	1097.8	1098.6	1098.4	1098.1	1097.9	1097.6
147.5°	1138.3	1138.8	1139.2	1139.9	1140.6	1141.4	1142.1	1142.1	1142.1	1142.1	1142.1
150°	1179.9	1180.1	1180.3	1180.8	1181.3	1181.8	1182.3	1182.3	1182.3	1182.3	1182.3
152.5°	1216.5	1216.9	1217.0	1217.3	1217.5	1217.8	1218.0	1218.5	1219.0	1219.5	1220.0
155°	1251.5	1251.5	1251.6	1251.9	1252.2	1252.4	1252.7	1253.7	1254.7	1255.6	1256.6
157.5°	1282.9	1282.8	1282.9	1283.2	1283.4	1283.7	1283.9	1284.9	1285.9	1286.9	1287.9
160°	1312.1	1311.8	1311.8	1311.8	1311.8	1311.8	1311.8	1313.0	1314.3	1315.5	1316.8
162.5°	1337.9	1337.5	1337.6	1337.9	1338.1	1338.4	1338.6	1339.8	1341.1	1342.3	1343.6
165°	1360.2	1359.8	1359.8	1359.8	1359.8	1359.8	1359.8	1361.3	1362.8	1364.3	1365.8
167.5°	1378.2	1377.7	1377.8	1378.1	1378.3	1378.6	1378.8	1380.3	1381.8	1383.3	1384.8
170°	1393.8	1393.3	1393.3	1393.3	1393.3	1393.3	1393.3	1395.0	1396.8	1398.5	1400.2
172.5°	1406.1	1405.6	1405.6	1405.6	1405.6	1405.6	1405.6	1407.1	1408.6	1410.1	1411.6
175°	1413.9	1413.4	1413.4	1413.4	1413.4	1413.4	1413.4	1414.9	1416.4	1417.9	1419.4
177.5°	1418.4	1417.9	1417.9	1417.9	1417.9	1417.9	1417.9	1419.4	1420.9	1422.4	1423.9
180°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5
2.5°	1273.6	1274.9	1269.7	1265.8	1276.2	1269.7	1269.7	1271.0	1268.4	1272.3	1271.0
5°	1202.0	1203.3	1194.2	1196.8	1191.6	1190.3	1189.0	1196.8	1195.5	1194.2	1196.8
7.5°	1131.8	1131.8	1127.9	1125.3	1125.3	1121.4	1126.6	1125.3	1127.9	1127.9	1131.8
10°	1073.3	1075.9	1069.3	1062.8	1061.5	1062.8	1062.8	1064.1	1065.4	1074.6	1073.3
12.5°	1025.1	1021.2	1019.9	1016.0	1009.5	1006.9	1004.3	1018.6	1014.7	1014.7	1014.7
15°	971.8	980.9	979.6	967.9	965.3	970.5	967.9	967.9	980.9	979.6	978.3
17.5°	943.2	940.6	938.0	931.5	932.8	931.5	932.8	932.8	940.6	940.6	940.6
20°	910.6	905.4	905.4	902.8	902.8	898.9	904.1	905.4	910.6	910.6	911.9
22.5°	882.0	878.1	878.1	876.8	879.4	874.2	879.4	880.7	880.7	884.6	884.6
25°	857.3	854.7	854.7	857.3	857.3	857.3	857.3	862.5	858.6	859.9	858.6
27.5°	835.2	836.5	837.8	839.1	837.8	839.1	840.4	843.0	844.3	843.0	840.4
30°	814.4	818.3	819.6	819.6	822.2	823.5	824.8	824.8	826.1	822.2	824.8
32.5°	798.8	798.8	801.4	802.7	805.3	806.6	806.6	809.2	807.9	804.0	805.3
35°	776.6	776.6	781.8	784.4	788.4	787.1	788.4	788.4	789.7	787.1	783.1
37.5°	754.5	757.1	757.1	762.3	763.6	764.9	763.6	766.2	764.9	762.3	761.0
40°	728.5	727.2	728.5	732.4	733.7	733.7	733.7	736.3	736.3	736.3	735.0
42.5°	696.0	699.9	698.6	702.5	701.2	701.2	703.8	706.4	707.7	703.8	705.1
45°	664.8	664.8	667.4	667.4	668.7	668.7	673.9	671.3	673.9	671.3	672.6
47.5°	630.9	632.2	632.2	633.5	636.1	638.7	636.1	637.4	637.4	638.7	636.1
50°	593.2	593.2	595.8	599.7	604.9	602.3	601.0	606.2	602.3	602.3	599.7
52.5°	554.2	558.1	559.4	563.3	567.2	568.5	569.8	567.2	568.5	564.6	565.9
55°	516.5	517.8	523.0	526.9	530.8	530.8	529.5	530.8	532.1	526.9	526.9
57.5°	478.7	482.6	487.8	487.8	493.0	493.0	491.7	491.7	493.0	489.1	487.8
60°	438.4	442.3	448.8	448.8	456.6	457.9	455.3	452.7	452.7	448.8	450.1
62.5°	395.5	399.4	403.3	409.8	415.0	412.4	417.6	412.4	413.7	405.9	405.9
65°	357.8	359.1	365.6	372.1	372.1	374.7	372.1	373.4	369.5	369.5	364.3
67.5°	313.5	313.5	320.0	326.5	333.0	333.0	333.0	329.1	329.1	325.2	325.2
70°	274.5	273.2	279.7	283.6	287.5	288.8	286.2	284.9	282.3	278.4	277.1
72.5°	226.4	229.0	235.5	238.1	244.6	243.3	249.8	242.0	242.0	235.5	234.2
75°	183.4	186.0	192.5	196.4	200.3	200.3	204.2	200.3	195.1	192.5	191.2
77.5°	145.7	144.4	149.6	156.1	157.4	156.1	158.7	157.4	152.2	152.2	149.6
80°	104.1	108.0	113.2	111.9	117.1	115.8	115.8	113.2	113.2	109.3	111.9
82.5°	68.9	72.9	74.2	72.9	74.2	76.8	78.1	76.8	76.8	74.2	75.5
85°	36.4	36.4	39.0	40.3	39.0	39.0	40.3	44.2	41.6	39.0	41.6
87.5°	11.7	10.4	10.4	11.7	10.4	10.4	11.7	11.7	13.0	13.0	13.0
90°	31.3	31.5	32.0	32.5	33.0	33.5	33.0	32.5	32.0	31.5	31.3
92.5°	50.2	50.0	49.5	49.0	48.5	48.0	48.5	49.0	49.5	50.0	50.2
95°	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1
97.5°	126.2	126.1	125.8	125.5	125.3	125.0	125.3	125.5	125.8	126.1	126.2
100°	167.5	167.7	168.2	168.7	169.2	169.7	169.2	168.7	168.2	167.7	167.5
102.5°	216.6	216.5	216.2	216.0	215.7	215.5	215.7	216.0	216.2	216.5	216.6
105°	263.5	263.7	264.2	264.7	265.2	265.7	265.2	264.7	264.2	263.7	263.5
107.5°	318.2	318.1	317.8	317.6	317.3	317.1	317.3	317.6	317.8	318.1	318.2
110°	371.8	371.5	371.0	370.5	370.0	369.5	370.0	370.5	371.0	371.5	371.8

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	425.4	425.4	425.4	425.4	425.4	425.4	425.4	425.4	425.4	425.4	425.4
115°	476.7	476.6	476.3	476.1	475.8	475.6	475.8	476.1	476.3	476.6	476.7
117.5°	530.3	529.9	529.2	528.5	527.7	527.0	527.7	528.5	529.2	529.9	530.3
120°	583.9	583.7	583.2	582.7	582.2	581.7	582.2	582.7	583.2	583.7	583.9
122.5°	637.5	637.1	636.4	635.6	634.9	634.1	634.9	635.6	636.4	637.1	637.5
125°	691.1	690.6	689.6	688.6	687.6	686.6	687.6	688.6	689.6	690.6	691.1
127.5°	743.6	743.1	742.1	741.1	740.1	739.1	740.1	741.1	742.1	743.1	743.6
130°	798.3	797.4	795.7	793.9	792.2	790.4	792.2	793.9	795.7	797.4	798.3
132.5°	849.6	849.0	847.7	846.5	845.2	844.0	845.2	846.5	847.7	849.0	849.6
135°	902.1	901.9	901.4	900.9	900.4	899.9	900.4	900.9	901.4	901.9	902.1
137.5°	952.3	951.9	951.2	950.5	949.7	949.0	949.7	950.5	951.2	951.9	952.3
140°	1004.8	1003.9	1002.2	1000.5	998.7	997.0	998.7	1000.5	1002.2	1003.9	1004.8
142.5°	1051.7	1051.1	1049.8	1048.6	1047.3	1046.1	1047.3	1048.6	1049.8	1051.1	1051.7
145°	1097.5	1097.0	1096.0	1095.0	1094.0	1093.0	1094.0	1095.0	1096.0	1097.0	1097.5
147.5°	1142.1	1141.4	1139.9	1138.4	1136.9	1135.4	1136.9	1138.4	1139.9	1141.4	1142.1
150°	1182.3	1181.6	1180.1	1178.6	1177.1	1175.6	1177.1	1178.6	1180.1	1181.6	1182.3
152.5°	1220.3	1219.7	1218.4	1217.2	1215.9	1214.7	1215.9	1217.2	1218.4	1219.7	1220.3
155°	1257.1	1256.2	1254.5	1252.8	1251.0	1249.3	1251.0	1252.8	1254.5	1256.2	1257.1
157.5°	1288.4	1287.7	1286.2	1284.7	1283.2	1281.7	1283.2	1284.7	1286.2	1287.7	1288.4
160°	1317.4	1316.9	1315.9	1314.9	1313.9	1312.9	1313.9	1314.9	1315.9	1316.9	1317.4
162.5°	1344.2	1343.3	1341.6	1339.9	1338.1	1336.4	1338.1	1339.9	1341.6	1343.3	1344.2
165°	1366.5	1365.6	1363.9	1362.2	1360.4	1358.7	1360.4	1362.2	1363.9	1365.6	1366.5
167.5°	1385.5	1384.8	1383.3	1381.8	1380.3	1378.8	1380.3	1381.8	1383.3	1384.8	1385.5
170°	1401.1	1400.2	1398.5	1396.8	1395.0	1393.3	1395.0	1396.8	1398.5	1400.2	1401.1
172.5°	1412.3	1411.4	1409.7	1408.0	1406.2	1404.5	1406.2	1408.0	1409.7	1411.4	1412.3
175°	1420.1	1419.2	1417.5	1415.8	1414.0	1412.3	1414.0	1415.8	1417.5	1419.2	1420.1
177.5°	1424.6	1423.7	1422.0	1420.3	1418.5	1416.8	1418.5	1420.3	1422.0	1423.7	1424.6
180°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5	1342.5
2.5°	1274.9	1277.5	1278.8	1273.6	1269.7	1276.2	1285.3	1291.8	1297.0	1303.5	1307.4
5°	1199.4	1208.5	1208.5	1211.1	1215.1	1221.6	1238.5	1250.2	1260.6	1268.4	1274.9
7.5°	1135.7	1142.2	1146.1	1152.6	1159.1	1168.2	1187.7	1204.6	1220.3	1229.4	1239.8
10°	1078.5	1083.7	1090.2	1094.1	1105.8	1118.8	1143.5	1157.8	1176.0	1190.3	1203.3
12.5°	1023.8	1042.0	1045.9	1044.6	1055.0	1069.3	1094.1	1116.2	1135.7	1150.0	1164.3
15°	984.8	991.3	999.1	997.8	1019.9	1023.8	1044.6	1070.6	1096.7	1105.8	1118.8
17.5°	941.9	952.3	960.1	964.0	970.5	984.8	1004.3	1023.8	1057.6	1058.9	1092.8
20°	908.0	918.4	923.6	928.9	932.8	949.7	966.6	988.7	1016.0	1030.3	1048.5
22.5°	885.9	891.1	895.0	898.9	904.1	913.2	934.1	958.8	977.0	992.6	1004.3
25°	859.9	865.1	870.3	872.9	876.8	882.0	897.6	917.1	943.2	953.6	965.3
27.5°	841.7	841.7	844.3	844.3	849.5	854.7	866.4	884.6	905.4	918.4	934.1
30°	822.2	820.9	822.2	820.9	819.6	827.4	837.8	853.4	867.7	883.3	893.7
32.5°	802.7	801.4	801.4	802.7	797.5	801.4	806.6	820.9	836.5	844.3	856.0
35°	781.8	779.2	779.2	779.2	776.6	774.0	779.2	792.3	802.7	813.1	822.2
37.5°	761.0	757.1	757.1	754.5	751.9	748.0	748.0	758.4	772.7	776.6	788.4
40°	732.4	732.4	729.8	728.5	725.9	723.3	719.4	728.5	741.5	745.4	754.5
42.5°	703.8	699.9	698.6	698.6	698.6	694.7	692.1	698.6	706.4	712.9	718.1
45°	671.3	668.7	670.0	668.7	666.1	664.8	663.5	666.1	675.2	677.8	684.3
47.5°	636.1	634.8	634.8	633.5	632.2	633.5	628.3	634.8	637.4	640.0	645.3
50°	599.7	598.4	597.1	595.8	595.8	597.1	595.8	595.8	601.0	603.6	608.8
52.5°	563.3	559.4	559.4	558.1	558.1	555.5	558.1	559.4	562.0	564.6	567.2
55°	524.3	524.3	520.4	520.4	517.8	517.8	519.1	517.8	523.0	525.6	525.6
57.5°	486.5	481.3	482.6	480.0	477.4	476.1	476.1	478.7	481.3	481.3	483.9
60°	446.2	441.0	439.7	434.5	437.1	433.2	434.5	434.5	439.7	437.1	439.7
62.5°	405.9	399.4	395.5	392.9	392.9	394.2	391.6	390.3	392.9	395.5	400.7
65°	363.0	359.1	355.1	351.2	351.2	349.9	352.5	348.6	347.3	348.6	351.2
67.5°	318.7	314.8	310.9	307.0	308.3	304.4	301.8	305.7	303.1	304.4	307.0
70°	275.8	273.2	265.4	262.8	261.5	262.8	261.5	258.9	262.8	261.5	262.8
72.5°	232.9	230.3	226.4	219.9	219.9	218.6	217.3	217.3	216.0	216.0	216.0
75°	191.2	186.0	182.1	180.8	178.2	176.9	175.6	173.0	174.3	175.6	173.0
77.5°	148.3	141.8	140.5	140.5	136.6	136.6	137.9	136.6	135.3	135.3	135.3
80°	109.3	104.1	104.1	101.5	98.9	98.9	98.9	98.9	97.6	96.3	97.6
82.5°	70.2	68.9	67.6	67.6	70.2	65.0	67.6	66.3	65.0	65.0	63.7
85°	39.0	40.3	39.0	40.3	37.7	39.0	39.0	39.0	37.7	39.0	36.4
87.5°	14.3	14.3	14.3	15.6	15.6	15.6	15.6	15.6	16.9	15.6	15.6
90°	30.8	29.8	28.8	27.8	26.8	23.6	20.4	17.1	13.9	12.3	11.1
92.5°	49.8	49.1	48.4	47.6	46.9	45.4	43.9	42.4	40.9	40.2	39.5
95°	86.6	85.6	84.6	83.6	82.6	80.6	78.6	76.7	74.7	73.7	72.8
97.5°	125.6	124.3	123.1	121.8	120.6	119.1	117.6	116.1	114.6	113.9	113.3
100°	167.1	166.4	165.6	164.9	164.1	162.9	161.6	160.4	159.1	158.5	157.8
102.5°	216.2	215.5	214.7	214.0	213.2	211.5	209.7	208.0	206.3	205.4	205.0
105°	263.5	263.5	263.5	263.5	263.5	261.3	259.0	256.8	254.5	253.4	253.2
107.5°	317.8	317.1	316.3	315.6	314.8	313.8	312.8	311.9	310.9	310.4	310.3
110°	371.3	370.3	369.3	368.3	367.3	366.8	366.3	365.8	365.3	365.1	364.8

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	424.8	423.5	422.3	421.0	419.8	419.8	419.8	419.8	419.8	419.8	419.7
115°	476.6	476.3	476.1	475.8	475.6	476.1	476.6	477.1	477.6	477.8	477.4
117.5°	530.3	530.3	530.3	530.3	530.3	530.8	531.3	531.8	532.3	532.5	532.4
120°	584.0	584.3	584.5	584.8	585.0	586.2	587.5	588.7	590.0	590.6	589.9
122.5°	637.9	638.6	639.3	640.1	640.8	641.3	641.8	642.3	642.8	643.1	642.6
125°	691.6	692.6	693.5	694.5	695.5	696.0	696.5	697.0	697.5	697.8	697.4
127.5°	744.3	745.8	747.3	748.8	750.3	750.8	751.3	751.8	752.3	752.5	751.8
130°	798.8	799.8	800.7	801.7	802.7	803.5	804.2	805.0	805.7	806.1	805.1
132.5°	850.2	851.5	852.7	854.0	855.2	855.7	856.2	856.7	857.2	857.4	856.4
135°	902.6	903.6	904.6	905.6	906.6	906.8	907.1	907.3	907.6	907.7	907.0
137.5°	952.9	954.2	955.4	956.7	957.9	957.2	956.4	955.7	955.0	954.6	954.0
140°	1004.9	1005.2	1005.4	1005.7	1005.9	1005.7	1005.4	1005.2	1004.9	1004.8	1004.2
142.5°	1051.8	1052.1	1052.3	1052.6	1052.8	1052.3	1051.8	1051.3	1050.8	1050.6	1050.0
145°	1097.6	1097.9	1098.1	1098.4	1098.6	1097.8	1097.1	1096.3	1095.6	1095.2	1095.0
147.5°	1142.1	1142.1	1142.1	1142.1	1142.1	1141.4	1140.6	1139.9	1139.2	1138.8	1138.3
150°	1182.3	1182.3	1182.3	1182.3	1182.3	1181.8	1181.3	1180.8	1180.3	1180.1	1179.9
152.5°	1220.0	1219.5	1219.0	1218.5	1218.0	1217.8	1217.5	1217.3	1217.0	1216.9	1216.5
155°	1256.6	1255.6	1254.7	1253.7	1252.7	1252.4	1252.2	1251.9	1251.6	1251.5	1251.5
157.5°	1287.9	1286.9	1285.9	1284.9	1283.9	1283.7	1283.4	1283.2	1282.9	1282.8	1282.9
160°	1316.8	1315.5	1314.3	1313.0	1311.8	1311.8	1311.8	1311.8	1311.8	1311.8	1312.1
162.5°	1343.6	1342.3	1341.1	1339.8	1338.6	1338.4	1338.1	1337.9	1337.6	1337.5	1337.9
165°	1365.8	1364.3	1362.8	1361.3	1359.8	1359.8	1359.8	1359.8	1359.8	1359.8	1360.2
167.5°	1384.8	1383.3	1381.8	1380.3	1378.8	1378.6	1378.3	1378.1	1377.8	1377.7	1378.2
170°	1400.2	1398.5	1396.8	1395.0	1393.3	1393.3	1393.3	1393.3	1393.3	1393.3	1393.8
172.5°	1411.6	1410.1	1408.6	1407.1	1405.6	1405.6	1405.6	1405.6	1405.6	1405.6	1406.1
175°	1419.4	1417.9	1416.4	1414.9	1413.4	1413.4	1413.4	1413.4	1413.4	1413.4	1413.9
177.5°	1423.9	1422.4	1420.9	1419.4	1417.9	1417.9	1417.9	1417.9	1417.9	1417.9	1418.4
180°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1342.5	1342.5	1342.5	1342.5
2.5°	1313.9	1317.8	1330.8	1346.4
5°	1287.9	1298.3	1316.5	1341.2
7.5°	1259.3	1274.9	1300.9	1332.1
10°	1226.8	1248.9	1281.4	1320.4
12.5°	1191.6	1220.3	1261.9	1302.2
15°	1169.5	1198.1	1235.9	1280.1
17.5°	1126.6	1160.4	1199.4	1261.9
20°	1082.4	1120.1	1170.8	1233.3
22.5°	1048.5	1088.9	1137.0	1203.3
25°	1008.2	1049.8	1101.9	1170.8
27.5°	965.3	1006.9	1065.4	1138.3
30°	932.8	973.1	1029.0	1107.1
32.5°	893.7	932.8	991.3	1073.3
35°	849.5	893.7	949.7	1032.9
37.5°	815.7	856.0	914.5	993.9
40°	779.2	814.4	871.6	949.7
42.5°	740.2	779.2	828.7	906.7
45°	703.8	732.4	783.1	857.3
47.5°	664.8	697.3	736.3	793.6
50°	623.1	650.5	693.4	732.4
52.5°	582.8	604.9	641.3	671.3
55°	539.9	562.0	589.3	607.5
57.5°	499.5	515.2	533.4	545.1
60°	450.1	465.7	477.4	489.1
62.5°	405.9	417.6	424.1	430.6
65°	360.4	366.9	370.8	376.0
67.5°	310.9	317.4	318.7	326.5
70°	265.4	266.7	269.3	273.2
72.5°	222.5	225.1	223.8	226.4
75°	178.2	180.8	178.2	180.8
77.5°	135.3	137.9	137.9	141.8
80°	97.6	98.9	100.2	100.2
82.5°	63.7	67.6	65.0	66.3
85°	36.4	37.7	37.7	39.0
87.5°	16.9	18.2	16.9	19.5
90°	8.6	6.1	3.6	1.1
92.5°	38.0	36.5	35.0	33.5
95°	71.1	69.4	67.6	65.9
97.5°	112.0	110.8	109.5	108.3
100°	156.3	154.8	153.3	151.8
102.5°	204.3	203.6	202.8	202.1
105°	252.7	252.2	251.7	251.2
107.5°	310.0	309.8	309.5	309.3
110°	364.3	363.8	363.3	362.8

TEST NUMBER: P1011101

CATALOG NUMBER: S123DIP-B1000D1195UB50-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	419.4	419.2	418.9	418.7
115°	476.7	476.0	475.2	474.5
117.5°	532.1	531.9	531.6	531.4
120°	588.4	586.9	585.4	583.9
122.5°	641.6	640.6	639.6	638.6
125°	696.7	695.9	695.2	694.4
127.5°	750.3	748.8	747.3	745.8
130°	803.1	801.1	799.1	797.1
132.5°	854.4	852.5	850.5	848.5
135°	905.5	904.0	902.5	901.0
137.5°	952.7	951.5	950.2	949.0
140°	1002.9	1001.7	1000.4	999.2
142.5°	1048.7	1047.5	1046.2	1045.0
145°	1094.5	1094.0	1093.5	1093.0
147.5°	1137.3	1136.3	1135.3	1134.3
150°	1179.4	1178.9	1178.4	1177.9
152.5°	1215.8	1215.1	1214.3	1213.6
155°	1251.5	1251.5	1251.5	1251.5
157.5°	1283.2	1283.4	1283.7	1283.9
160°	1312.6	1313.1	1313.6	1314.1
162.5°	1338.6	1339.4	1340.1	1340.9
165°	1360.9	1361.7	1362.4	1363.2
167.5°	1379.2	1380.2	1381.2	1382.2
170°	1394.8	1395.8	1396.8	1397.8
172.5°	1407.1	1408.1	1409.1	1410.1
175°	1414.9	1415.9	1416.9	1417.9
177.5°	1419.4	1420.4	1421.4	1422.4
180°	1421.2	1421.2	1421.2	1421.2

(END OF REPORT)