

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1011450

Luminaire Tested: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1011450
REPORT IS A COMBINATION OF REPORTS P989612 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-B1165D805UB50-4F0-XX-W2A-A4
Description: Define 3 Direct/Indirect Pendant with 5000K BioUP LEDs {m-DER=1.015} {m-EER=1.115}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7448.0 lumens
Efficiency: N/A
Efficacy: 90.4 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.37 / 1.5
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 82.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

Luminous Intensity Polar Plot

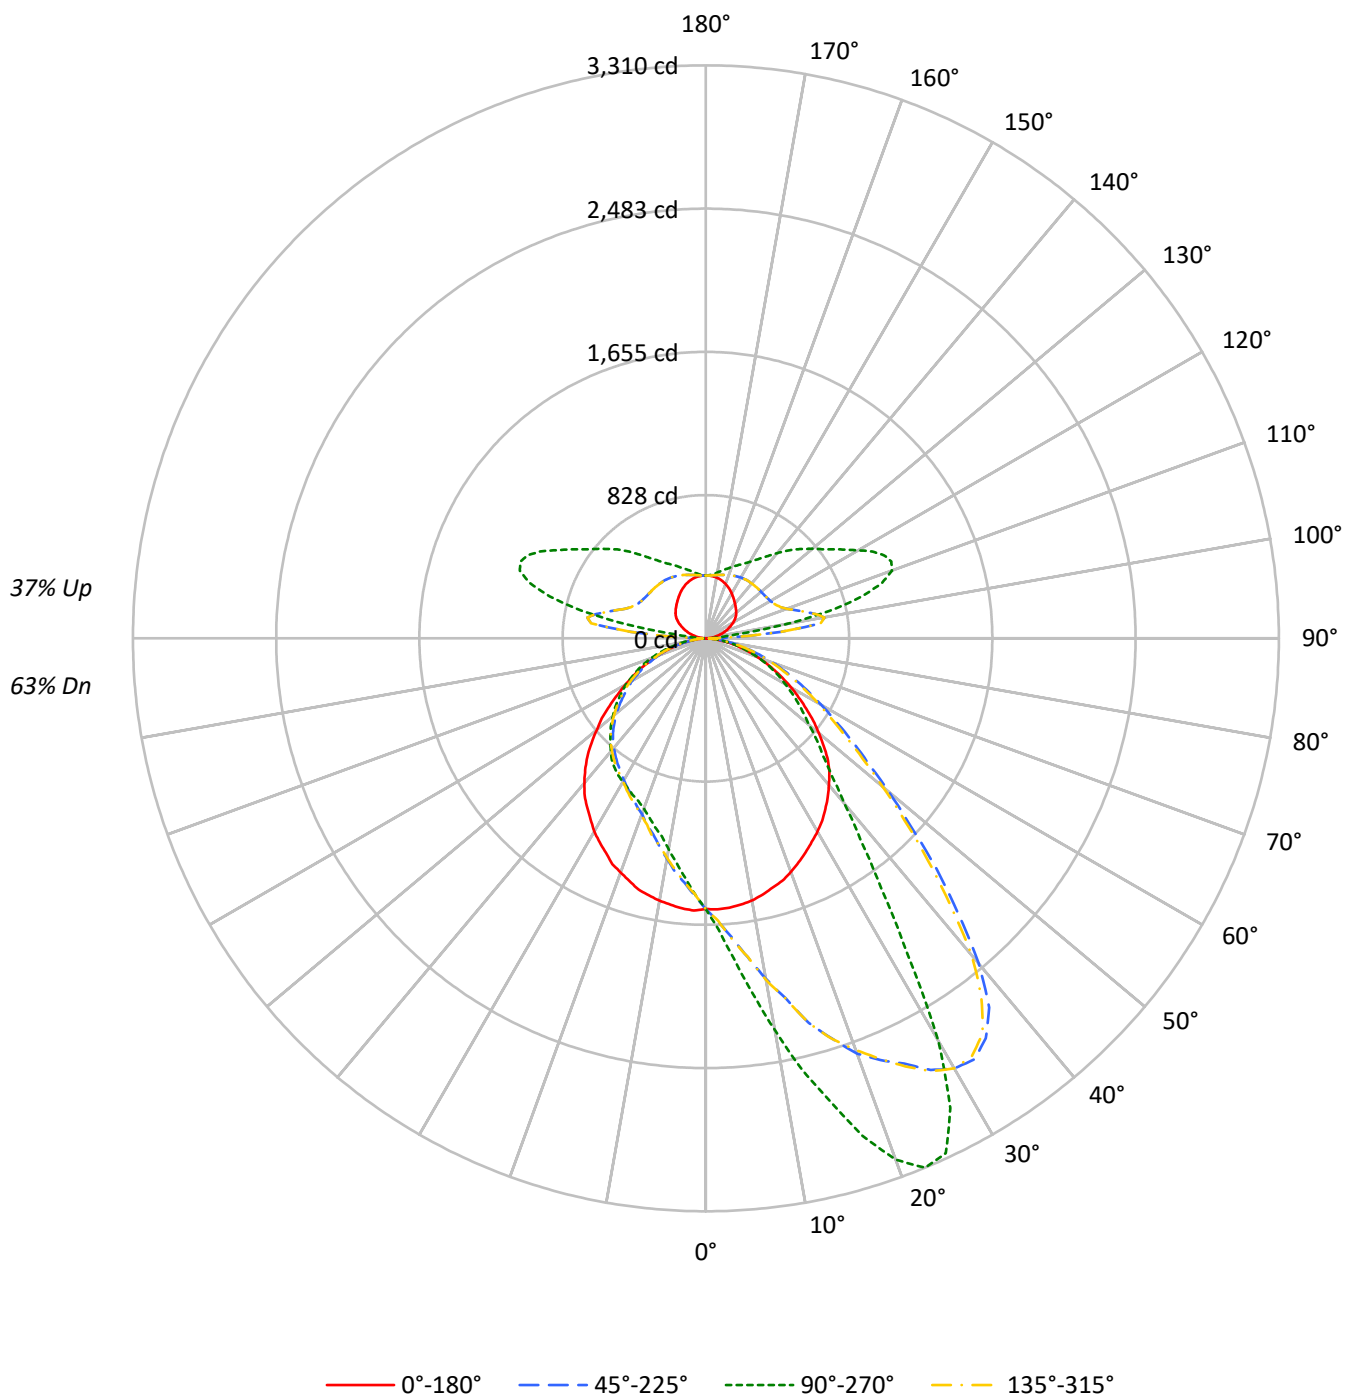

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	80	78	75	70	68	67	61	60	59
2	92	85	79	74	86	80	75	70	71	67	63	62	59	56	54	52	50
3	84	75	68	62	79	71	64	59	63	58	53	55	51	48	48	45	43
4	77	67	59	53	72	63	56	50	56	50	46	49	45	41	43	40	37
5	71	60	51	45	67	56	49	43	50	44	40	44	40	36	39	35	32
6	66	54	45	40	62	51	43	38	45	39	35	40	35	32	36	32	29
7	61	48	40	35	57	46	39	33	41	35	31	37	32	28	32	29	26
8	57	44	36	31	53	42	35	30	38	32	27	34	29	25	30	26	23
9	53	40	33	28	49	38	31	27	35	29	25	31	26	23	28	24	21
10	49	37	30	25	46	35	29	24	32	26	22	29	24	21	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	16826	16826	16826	16826
5°	16837	19388	16886	14469
10°	16731	23460	16747	12635
15°	16499	27823	16633	11373
20°	16301	32034	16335	10466
25°	16005	32841	16040	9992
30°	15793	27132	15793	9681
35°	15532	18146	15434	9407
40°	15219	13099	15030	8987
45°	14824	10376	14397	8466
50°	13868	8812	13375	7953
55°	12818	7743	12296	7381
60°	11751	6743	11126	6781
65°	10583	5773	10071	5980
70°	9368	4792	8743	5042
75°	8007	3614	7490	3892
80°	6330	2412	5836	2556
85°	4361	1108	3496	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 27137 cd/sqm

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.7	2.1
10°-20°	493.8	6.6
20°-30°	830.9	11.2
30°-40°	938.9	12.6
40°-50°	841.0	11.3
50°-60°	678.9	9.1
60°-70°	473.1	6.4
70°-80°	248.3	3.3
80°-90°	61.5	0.8
90°-100°	196.8	2.6
100°-110°	576.2	7.7
110°-120°	562.6	7.6
120°-130°	448.1	6.0
130°-140°	353.5	4.7
140°-150°	263.7	3.5
150°-160°	183.9	2.5
160°-170°	108.0	1.5
170°-180°	35.1	0.5
0°-30°	1478.4	19.8
0°-40°	2417.3	32.5
0°-60°	3937.1	52.9
0°-90°	4720.0	63.4
90°-120°	1335.6	17.9
90°-150°	2400.9	32.2
90°-180°	2728.0	36.6
0°-180°	7448.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1563	1563	1563	1563	1563	
5°	1562	1857	1566	1386	1562	148
15°	1490	2764	1503	1130	1490	421
25°	1363	3281	1366	998	1363	629
35°	1203	1768	1195	916	1203	753
45°	998	954	969	779	998	763
55°	707	648	679	618	707	633
65°	438	421	417	436	438	436
75°	210	217	197	233	210	226
85°	45	50	36	45	45	52
90°	2	21	2	21	2	5
95°	25	85	25	85	25	26
105°	85	934	85	934	85	90
115°	150	1136	150	1136	150	149
125°	209	896	209	896	209	186
135°	245	726	245	726	245	189
145°	280	568	280	568	280	175
155°	318	471	318	471	318	146
165°	347	410	347	410	347	98
175°	362	369	362	369	362	34
180°	363	363	363	363	363	

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2
2.5°	1567.7	1579.9	1585.9	1595.0	1604.1	1617.7	1622.3	1629.9	1626.8	1632.9	1635.9
5°	1561.7	1582.9	1601.1	1623.8	1645.0	1660.1	1675.3	1699.5	1717.7	1720.7	1734.4
7.5°	1551.1	1581.4	1613.2	1645.0	1685.9	1710.1	1737.4	1770.7	1798.0	1841.9	1858.6
10°	1537.5	1579.9	1625.3	1669.2	1725.3	1763.1	1796.5	1852.5	1908.6	1954.0	1996.4
12.5°	1516.2	1569.3	1628.3	1693.5	1766.2	1810.1	1855.5	1929.8	2014.6	2084.3	2129.7
15°	1490.5	1557.1	1632.9	1702.6	1782.8	1864.6	1913.1	1996.4	2117.6	2182.7	2299.4
17.5°	1469.3	1537.5	1613.2	1722.3	1831.3	1913.1	1947.9	2100.9	2184.2	2293.3	2425.1
20°	1436.0	1522.3	1619.2	1728.3	1869.2	1919.2	1990.4	2144.9	2247.9	2390.2	2552.3
22.5°	1401.1	1493.5	1610.2	1723.8	1881.3	1934.3	2031.3	2153.9	2317.5	2458.4	2637.1
25°	1363.3	1463.2	1581.4	1716.2	1870.7	1947.9	2038.8	2190.3	2367.5	2544.8	2709.9
27.5°	1325.4	1434.5	1557.1	1692.0	1841.9	1932.8	2023.7	2181.2	2408.4	2600.8	2811.3
30°	1289.0	1398.1	1520.8	1658.6	1816.2	1904.0	1990.4	2187.3	2440.2	2656.8	2868.9
32.5°	1249.7	1361.7	1490.5	1605.6	1764.7	1858.6	1955.5	2187.3	2459.9	2690.2	2884.1
35°	1202.7	1317.8	1428.4	1543.5	1701.0	1805.6	1914.6	2172.1	2478.1	2700.8	2820.4
37.5°	1157.3	1258.7	1354.2	1466.3	1631.4	1743.5	1869.2	2153.9	2469.0	2655.3	2688.6
40°	1105.8	1207.2	1284.5	1389.0	1563.2	1693.5	1820.7	2129.7	2429.6	2547.8	2450.8
42.5°	1055.8	1136.0	1202.7	1304.2	1493.5	1620.8	1758.6	2085.8	2352.4	2376.6	2158.5
45°	998.2	1055.8	1114.8	1230.0	1417.8	1548.1	1701.0	2022.2	2228.2	2158.5	1882.8
47.5°	924.0	975.5	1040.6	1146.7	1337.5	1472.3	1617.7	1940.4	2047.9	1902.5	1601.1
50°	852.8	896.7	957.3	1060.3	1252.7	1384.5	1539.0	1811.6	1864.6	1635.9	1379.9
52.5°	781.6	814.9	874.0	977.0	1169.4	1296.6	1437.5	1679.8	1649.5	1404.2	1176.9
55°	707.4	736.2	792.2	893.7	1072.4	1193.6	1328.4	1517.8	1439.0	1205.7	1024.0
57.5°	634.7	665.0	722.5	807.4	975.5	1093.6	1201.2	1349.6	1231.5	1045.2	884.6
60°	569.5	595.3	639.2	722.5	875.5	970.9	1069.4	1170.9	1072.4	892.2	769.5
62.5°	501.4	525.6	566.5	642.2	774.0	858.9	937.6	1020.9	911.9	780.1	671.0
65°	437.8	457.4	495.3	565.0	672.5	742.2	805.8	863.4	775.5	654.4	572.6
67.5°	380.2	396.9	428.7	490.8	581.7	631.6	683.1	731.6	657.4	560.5	490.8
70°	318.1	331.7	360.5	405.9	478.7	530.2	568.0	604.4	537.7	460.5	413.5
72.5°	263.6	277.2	295.4	342.3	392.3	424.1	465.0	484.7	446.8	383.2	336.3
75°	210.5	221.2	237.8	268.1	315.1	336.3	362.0	377.2	342.3	299.9	271.1
77.5°	165.1	169.7	181.8	203.0	234.8	259.0	278.7	287.8	263.6	236.3	212.1
80°	116.6	122.7	131.8	150.0	174.2	181.8	193.9	204.5	189.3	165.1	150.0
82.5°	77.3	84.8	89.4	96.9	112.1	121.2	124.2	133.3	119.7	110.6	104.5
85°	45.4	48.5	50.0	54.5	62.1	66.6	71.2	72.7	69.7	68.2	62.1
87.5°	22.7	22.7	22.7	25.8	27.3	30.3	31.8	31.8	31.8	30.3	28.8
90°	1.5	2.9	4.4	6.6	8.1	8.8	9.5	11.7	13.9	16.2	18.4
92.5°	11.0	16.2	23.5	30.1	37.4	44.0	50.7	74.1	113.1	151.2	136.5
95°	25.0	27.2	35.2	47.7	66.8	81.1	95.4	157.8	267.2	387.6	435.3
97.5°	39.6	40.4	47.0	58.0	77.1	92.9	108.7	170.3	297.3	499.9	669.5
100°	54.3	55.1	60.2	70.5	88.1	102.4	116.7	168.1	276.8	469.8	695.2
102.5°	69.7	71.2	75.6	85.2	100.6	113.4	126.3	171.1	259.2	425.8	647.5
105°	85.2	87.4	91.8	100.6	114.5	125.9	137.3	176.9	252.5	391.3	590.2
107.5°	101.3	103.5	107.9	116.7	129.9	140.6	151.2	186.5	251.1	366.3	539.6
110°	118.9	121.1	124.8	132.9	145.4	155.6	165.9	199.0	254.7	353.1	497.7



TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	135.1	137.3	141.0	149.0	161.5	171.4	181.3	211.4	262.1	345.8	469.8
115°	150.5	153.4	157.8	165.2	177.7	187.6	197.5	225.4	270.2	345.0	451.5
117.5°	165.9	169.6	173.3	179.9	193.8	203.0	212.2	240.1	280.4	345.8	439.0
120°	182.1	184.3	187.9	195.3	209.2	218.4	227.6	254.0	292.2	348.7	430.9
122.5°	196.0	198.2	201.9	210.0	223.2	233.1	243.0	268.7	303.2	353.9	425.8
125°	209.2	210.7	215.1	223.2	237.1	247.0	256.9	282.6	314.9	359.0	421.4
127.5°	219.5	221.7	226.8	234.9	250.3	260.2	270.2	295.1	324.5	364.9	419.2
130°	229.1	231.3	237.9	246.7	262.1	272.0	281.9	306.1	334.0	370.7	417.0
132.5°	236.4	239.3	246.7	257.7	273.1	282.6	292.2	315.7	342.8	375.1	416.3
135°	245.2	248.1	256.2	267.2	282.6	292.6	302.5	325.2	350.2	379.5	415.5
137.5°	253.3	256.2	264.3	276.0	291.5	300.6	309.8	331.8	356.1	382.5	414.1
140°	261.4	265.0	272.4	284.1	298.8	308.0	317.1	338.4	360.5	385.4	413.3
142.5°	270.2	273.1	281.2	291.5	306.1	314.6	323.0	343.6	364.9	387.6	411.9
145°	279.7	281.9	288.5	299.5	312.0	320.4	328.9	348.0	367.8	388.4	410.4
147.5°	289.2	290.7	297.3	306.9	319.3	326.6	334.0	351.7	370.0	388.4	408.2
150°	298.8	299.5	305.4	314.9	325.2	331.8	338.4	355.3	370.7	388.4	405.2
152.5°	308.3	308.3	314.2	322.3	331.1	337.4	343.6	357.5	372.2	386.2	401.6
155°	317.9	317.9	322.3	329.6	337.7	342.8	348.0	360.5	372.2	384.7	397.2
157.5°	325.2	326.0	329.6	336.2	343.6	347.6	351.7	361.9	372.9	382.5	393.5
160°	334.0	334.0	337.0	342.8	348.0	351.6	355.3	364.1	372.9	381.0	389.1
162.5°	340.6	340.6	342.8	347.2	351.7	354.6	357.5	364.9	372.2	378.1	384.7
165°	347.2	346.5	348.0	351.7	354.6	357.2	359.7	365.6	370.7	375.1	380.3
167.5°	352.4	351.7	352.4	355.3	357.5	359.4	361.2	365.6	370.0	372.2	375.9
170°	356.8	355.3	356.1	358.3	359.7	360.4	361.2	364.9	367.8	369.3	371.5
172.5°	359.7	359.0	359.0	360.5	361.2	361.5	361.9	364.9	367.1	367.1	367.8
175°	361.9	361.2	360.5	361.9	361.9	362.3	362.7	364.1	365.6	364.9	364.9
177.5°	363.4	362.7	361.9	362.7	362.7	362.7	362.7	363.4	364.9	363.4	362.7
180°	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2
2.5°	1646.5	1649.5	1660.1	1667.7	1682.9	1681.4	1681.4	1679.8	1675.3	1682.9	1687.4
5°	1761.6	1787.4	1790.4	1823.7	1825.3	1838.9	1848.0	1840.4	1858.6	1857.1	1843.4
7.5°	1904.0	1938.9	1955.5	1987.3	2023.7	2014.6	2049.4	2055.5	2052.5	2067.6	2078.2
10°	2060.0	2120.6	2163.0	2222.1	2237.3	2246.3	2269.1	2288.8	2328.1	2297.8	2317.5
12.5°	2238.8	2282.7	2338.7	2432.7	2479.6	2509.9	2520.5	2534.1	2561.4	2544.8	2546.3
15°	2388.7	2447.8	2543.2	2659.9	2673.5	2711.4	2702.3	2784.1	2823.5	2764.4	2797.7
17.5°	2544.8	2623.5	2737.1	2838.6	2896.2	2921.9	2946.2	3024.9	3021.9	3012.8	3020.4
20°	2644.7	2773.5	2914.3	3049.2	3065.8	3085.5	3150.6	3184.0	3177.9	3203.7	3220.3
22.5°	2785.6	2921.9	3071.9	3161.2	3199.1	3221.8	3273.3	3294.5	3303.6	3309.7	3299.1
25°	2903.7	3049.2	3159.7	3238.5	3261.2	3273.3	3290.0	3296.1	3291.5	3280.9	3290.0
27.5°	2984.0	3100.7	3176.4	3212.7	3200.6	3180.9	3149.1	3127.9	3081.0	3058.2	3085.5
30°	3017.3	3068.8	3091.6	3031.0	2970.4	2921.9	2861.3	2749.2	2661.4	2687.1	2652.3
32.5°	2964.3	2931.0	2821.9	2665.9	2619.0	2540.2	2369.0	2237.3	2241.8	2172.1	2200.9
35°	2808.3	2656.8	2450.8	2214.5	2152.4	2110.0	1922.2	1893.4	1832.8	1767.7	1785.9
37.5°	2532.6	2311.5	2061.6	1887.4	1795.0	1702.6	1596.5	1532.9	1496.6	1469.3	1490.5
40°	2196.4	1926.7	1720.7	1564.7	1486.0	1426.9	1354.2	1290.6	1249.7	1245.1	1252.7
42.5°	1866.2	1638.9	1449.6	1301.2	1275.4	1205.7	1158.8	1108.8	1096.7	1077.0	1087.6
45°	1579.9	1395.1	1239.1	1117.9	1087.6	1069.4	1011.8	980.0	966.4	954.3	972.5
47.5°	1372.3	1178.5	1064.9	992.1	961.9	931.6	899.8	878.5	867.9	869.5	867.9
50°	1172.4	1030.0	930.0	874.0	855.8	834.6	808.9	795.2	790.7	777.1	787.7
52.5°	1008.8	905.8	836.1	783.1	769.5	754.3	733.1	725.6	715.0	711.9	711.9
55°	877.0	796.7	740.7	705.9	689.2	677.1	665.0	655.9	648.3	648.3	648.3
57.5°	774.0	704.4	663.5	633.2	627.1	615.0	601.3	601.3	590.7	589.2	593.8
60°	686.2	624.1	592.3	566.5	557.4	554.4	540.8	540.8	537.7	530.2	536.2
62.5°	596.8	551.4	524.1	504.4	495.3	495.3	484.7	477.1	477.1	478.7	475.6
65°	515.0	481.7	457.4	442.3	437.8	431.7	430.2	424.1	419.6	421.1	419.6
67.5°	442.3	416.6	399.9	387.8	380.2	377.2	372.6	372.6	369.6	371.1	363.5
70°	377.2	351.4	337.8	325.7	322.6	322.6	316.6	318.1	315.1	319.6	316.6
72.5°	310.5	290.8	280.2	275.7	272.7	271.1	268.1	265.1	263.6	266.6	265.1
75°	251.4	234.8	227.2	224.2	221.2	221.2	219.6	218.1	216.6	216.6	216.6
77.5°	195.4	184.8	175.7	178.7	174.2	175.7	171.2	171.2	172.7	171.2	171.2
80°	143.9	136.3	136.3	133.3	127.2	130.3	130.3	125.7	124.2	127.2	122.7
82.5°	95.4	93.9	90.9	89.4	86.3	87.9	86.3	84.8	83.3	86.3	83.3
85°	56.0	56.0	54.5	51.5	54.5	53.0	51.5	51.5	50.0	50.0	50.0
87.5°	28.8	25.8	25.8	24.2	25.8	22.7	24.2	22.7	21.2	22.7	21.2
90°	17.6	18.4	19.1	19.8	20.6	21.3	20.6	21.3	22.0	21.3	22.0
92.5°	102.0	72.7	56.5	49.2	46.6	44.0	42.6	39.6	40.4	38.9	40.4
95°	353.1	264.3	179.1	140.2	127.0	113.8	99.8	93.2	88.1	85.2	88.1
97.5°	692.3	607.1	458.1	361.2	319.4	277.5	228.3	200.4	182.8	174.7	182.8
100°	839.9	865.5	806.1	720.2	668.0	615.9	541.8	488.2	459.6	460.3	459.6
102.5°	847.2	951.4	963.9	922.8	894.6	866.3	812.7	773.0	750.3	729.0	750.3
105°	800.9	954.4	1027.8	1041.7	1032.2	1022.7	988.9	961.0	937.5	933.8	937.5
107.5°	734.9	910.3	1025.6	1082.9	1092.8	1102.7	1098.3	1085.1	1075.5	1067.4	1075.5
110°	673.2	841.3	976.4	1068.9	1094.6	1120.3	1140.8	1146.7	1145.3	1143.8	1145.3

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	619.6	773.0	911.8	1018.2	1053.1	1088.0	1129.8	1151.1	1158.5	1159.2	1158.5
115°	578.5	714.3	842.1	950.0	990.0	1030.0	1085.1	1117.4	1132.0	1135.7	1132.0
117.5°	551.3	668.8	781.9	881.0	922.4	963.9	1021.2	1057.2	1079.2	1084.3	1079.2
120°	530.8	634.3	733.4	821.5	858.6	895.6	953.6	994.8	1012.4	1016.8	1012.4
122.5°	513.9	607.1	694.5	774.5	808.3	842.1	892.0	927.9	947.8	953.6	947.8
125°	499.9	583.6	663.7	734.1	763.5	792.9	839.9	872.2	890.5	895.6	890.5
127.5°	486.7	562.3	635.0	699.6	726.8	754.0	796.5	824.4	841.3	845.7	841.3
130°	476.5	542.5	608.6	668.1	693.0	718.0	756.9	783.3	798.7	804.6	798.7
132.5°	466.9	524.2	583.6	638.0	661.4	684.9	720.9	747.4	760.6	764.2	760.6
135°	458.8	508.0	560.1	607.9	628.8	649.7	685.7	707.7	720.9	726.1	720.9
137.5°	451.5	492.6	536.7	579.2	598.0	616.7	647.5	670.3	681.3	685.7	681.3
140°	444.9	479.4	516.8	552.1	567.8	583.6	611.5	632.1	643.8	643.1	643.8
142.5°	439.0	466.9	497.7	527.1	540.3	553.5	576.3	593.9	604.2	603.5	604.2
145°	433.9	457.4	481.6	505.1	515.8	526.4	544.7	560.1	566.0	567.5	566.0
147.5°	428.7	449.3	469.1	488.9	496.6	504.4	519.0	530.0	535.9	536.7	535.9
150°	423.6	440.5	457.4	472.8	479.8	486.7	497.7	505.8	510.2	510.2	510.2
152.5°	417.7	432.4	446.4	459.6	465.1	470.6	478.7	486.0	488.2	488.2	488.2
155°	411.9	424.3	436.1	447.1	451.5	455.9	462.5	468.4	469.8	470.6	469.8
157.5°	405.2	415.5	425.8	434.6	438.3	442.0	447.8	452.2	453.7	453.7	453.7
160°	398.6	408.2	416.3	423.6	426.2	428.7	433.9	438.3	438.3	437.5	438.3
162.5°	392.0	399.4	406.0	412.6	414.8	417.0	419.9	423.6	423.6	422.9	423.6
165°	386.2	392.0	396.4	401.6	403.4	405.2	408.2	411.1	410.4	410.4	410.4
167.5°	380.3	385.4	389.1	392.0	393.5	395.0	396.4	398.6	397.9	397.9	397.9
170°	375.1	378.8	381.0	384.0	384.7	385.4	386.2	387.6	386.9	386.9	386.9
172.5°	370.0	372.9	374.4	376.6	377.0	377.3	377.3	378.8	377.3	376.6	377.3
175°	366.3	367.8	368.5	370.0	370.0	370.0	370.0	370.7	370.0	369.3	370.0
177.5°	363.4	364.1	364.9	365.6	365.6	365.6	364.9	365.6	364.1	364.1	364.1
180°	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2
2.5°	1675.3	1679.8	1667.7	1664.7	1664.7	1670.7	1666.2	1625.3	1632.9	1623.8	1620.8
5°	1860.1	1851.0	1838.9	1832.8	1825.3	1804.0	1802.5	1755.6	1746.5	1716.2	1702.6
7.5°	2063.1	2055.5	2019.1	2014.6	2011.6	1991.9	1941.9	1891.9	1855.5	1820.7	1787.4
10°	2294.8	2272.1	2255.4	2222.1	2205.5	2178.2	2113.1	2066.1	2004.0	1951.0	1881.3
12.5°	2573.5	2547.8	2491.7	2467.5	2446.3	2370.6	2305.4	2252.4	2131.2	2094.9	2008.5
15°	2778.0	2723.5	2717.4	2664.4	2661.4	2578.1	2453.9	2396.3	2302.4	2169.1	2079.7
17.5°	2999.2	2950.7	2912.8	2849.2	2840.1	2761.4	2670.5	2529.6	2426.6	2299.4	2185.8
20°	3161.2	3135.5	3070.4	3044.6	2991.6	2924.9	2831.0	2656.8	2531.1	2403.9	2264.5
22.5°	3290.0	3264.2	3212.7	3177.9	3147.6	3061.3	2949.2	2800.7	2628.1	2461.4	2317.5
25°	3288.5	3280.9	3259.7	3243.0	3220.3	3156.7	3062.8	2920.4	2728.0	2544.8	2344.8
27.5°	3102.2	3123.4	3159.7	3177.9	3173.4	3164.3	3111.3	2991.6	2818.9	2600.8	2376.6
30°	2714.4	2791.7	2859.8	2950.7	2978.0	3044.6	3074.9	3006.7	2868.9	2665.9	2417.5
32.5°	2250.9	2363.0	2511.4	2561.4	2647.8	2776.5	2920.4	2946.2	2859.8	2703.8	2443.3
35°	1846.5	1938.9	2054.0	2132.7	2210.0	2419.0	2600.8	2758.3	2787.1	2684.1	2437.2
37.5°	1528.4	1593.5	1695.0	1761.6	1832.8	2011.6	2266.0	2470.5	2614.4	2617.5	2420.5
40°	1298.1	1326.9	1414.8	1463.2	1531.4	1685.9	1913.1	2179.7	2390.2	2487.2	2376.6
42.5°	1099.7	1137.6	1210.3	1246.6	1290.6	1425.4	1575.3	1828.3	2088.8	2296.3	2294.8
45°	981.5	1008.8	1042.1	1072.4	1122.4	1202.7	1373.9	1563.2	1813.1	2047.9	2140.3
47.5°	877.0	902.8	936.1	945.2	978.5	1054.3	1158.8	1323.9	1557.1	1790.4	1964.6
50°	789.2	810.4	833.1	849.8	864.9	927.0	1005.8	1145.1	1331.4	1557.1	1773.8
52.5°	721.0	736.2	755.9	764.9	778.6	824.0	884.6	987.6	1140.6	1346.6	1557.1
55°	657.4	668.0	680.1	695.3	701.3	734.6	781.6	869.5	983.1	1167.9	1367.8
57.5°	598.3	602.9	610.4	619.5	627.1	655.9	696.8	755.9	855.8	998.2	1187.6
60°	531.7	543.8	548.3	557.4	562.0	584.7	616.5	666.5	743.7	866.4	1008.8
62.5°	475.6	483.2	490.8	495.3	505.9	513.5	539.2	584.7	648.3	739.2	867.9
65°	425.6	428.7	433.2	437.8	440.8	449.9	474.1	504.4	552.9	633.2	733.1
67.5°	368.1	371.1	377.2	378.7	381.7	393.8	407.5	433.2	474.1	534.7	616.5
70°	312.0	316.6	319.6	322.6	327.2	331.7	346.9	368.1	399.9	442.3	505.9
72.5°	263.6	268.1	268.1	271.1	269.6	275.7	290.8	306.0	327.2	362.0	418.1
75°	215.1	215.1	218.1	219.6	221.2	227.2	233.3	245.4	262.0	289.3	324.2
77.5°	169.7	168.1	171.2	171.2	171.2	175.7	181.8	187.8	198.4	218.1	245.4
80°	124.2	124.2	127.2	128.8	125.7	127.2	130.3	136.3	143.9	157.5	172.7
82.5°	81.8	87.9	86.3	87.9	86.3	89.4	90.9	92.4	95.4	101.5	112.1
85°	50.0	50.0	50.0	51.5	50.0	51.5	51.5	51.5	53.0	56.0	60.6
87.5°	21.2	21.2	21.2	22.7	21.2	21.2	22.7	21.2	22.7	22.7	24.2
90°	21.3	20.6	21.3	20.6	19.8	19.1	18.4	17.6	18.4	16.2	13.9
92.5°	39.6	42.6	44.0	46.6	49.2	56.5	72.7	102.0	136.5	151.2	113.1
95°	93.2	99.8	113.8	127.0	140.2	179.1	264.3	353.1	435.3	387.6	267.2
97.5°	200.4	228.3	277.5	319.4	361.2	458.1	607.1	692.3	669.5	499.9	297.3
100°	488.2	541.8	615.9	668.0	720.2	806.1	865.5	839.9	695.2	469.8	276.8
102.5°	773.0	812.7	866.3	894.6	922.8	963.9	951.4	847.2	647.5	425.8	259.2
105°	961.0	988.9	1022.7	1032.2	1041.7	1027.8	954.4	800.9	590.2	391.3	252.5
107.5°	1085.1	1098.3	1102.7	1092.8	1082.9	1025.6	910.3	734.9	539.6	366.3	251.1
110°	1146.7	1140.8	1120.3	1094.6	1068.9	976.4	841.3	673.2	497.7	353.1	254.7

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	1151.1	1129.8	1088.0	1053.1	1018.2	911.8	773.0	619.6	469.8	345.8	262.1
115°	1117.4	1085.1	1030.0	990.0	950.0	842.1	714.3	578.5	451.5	345.0	270.2
117.5°	1057.2	1021.2	963.9	922.4	881.0	781.9	668.8	551.3	439.0	345.8	280.4
120°	994.8	953.6	895.6	858.6	821.5	733.4	634.3	530.8	430.9	348.7	292.2
122.5°	927.9	892.0	842.1	808.3	774.5	694.5	607.1	513.9	425.8	353.9	303.2
125°	872.2	839.9	792.9	763.5	734.1	663.7	583.6	499.9	421.4	359.0	314.9
127.5°	824.4	796.5	754.0	726.8	699.6	635.0	562.3	486.7	419.2	364.9	324.5
130°	783.3	756.9	718.0	693.0	668.1	608.6	542.5	476.5	417.0	370.7	334.0
132.5°	747.4	720.9	684.9	661.4	638.0	583.6	524.2	466.9	416.3	375.1	342.8
135°	707.7	685.7	649.7	628.8	607.9	560.1	508.0	458.8	415.5	379.5	350.2
137.5°	670.3	647.5	616.7	598.0	579.2	536.7	492.6	451.5	414.1	382.5	356.1
140°	632.1	611.5	583.6	567.8	552.1	516.8	479.4	444.9	413.3	385.4	360.5
142.5°	593.9	576.3	553.5	540.3	527.1	497.7	466.9	439.0	411.9	387.6	364.9
145°	560.1	544.7	526.4	515.8	505.1	481.6	457.4	433.9	410.4	388.4	367.8
147.5°	530.0	519.0	504.4	496.6	488.9	469.1	449.3	428.7	408.2	388.4	370.0
150°	505.8	497.7	486.7	479.8	472.8	457.4	440.5	423.6	405.2	388.4	370.7
152.5°	486.0	478.7	470.6	465.1	459.6	446.4	432.4	417.7	401.6	386.2	372.2
155°	468.4	462.5	455.9	451.5	447.1	436.1	424.3	411.9	397.2	384.7	372.2
157.5°	452.2	447.8	442.0	438.3	434.6	425.8	415.5	405.2	393.5	382.5	372.9
160°	438.3	433.9	428.7	426.2	423.6	416.3	408.2	398.6	389.1	381.0	372.9
162.5°	423.6	419.9	417.0	414.8	412.6	406.0	399.4	392.0	384.7	378.1	372.2
165°	411.1	408.2	405.2	403.4	401.6	396.4	392.0	386.2	380.3	375.1	370.7
167.5°	398.6	396.4	395.0	393.5	392.0	389.1	385.4	380.3	375.9	372.2	370.0
170°	387.6	386.2	385.4	384.7	384.0	381.0	378.8	375.1	371.5	369.3	367.8
172.5°	378.8	377.3	377.3	377.0	376.6	374.4	372.9	370.0	367.8	367.1	367.1
175°	370.7	370.0	370.0	370.0	370.0	368.5	367.8	366.3	364.9	364.9	365.6
177.5°	365.6	364.9	365.6	365.6	365.6	364.9	364.1	363.4	362.7	363.4	364.9
180°	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2
2.5°	1605.6	1601.1	1601.1	1598.0	1589.0	1572.3	1570.8	1573.8	1564.7	1555.6	1542.0
5°	1684.4	1655.6	1646.5	1637.4	1619.2	1589.0	1576.8	1566.2	1549.6	1529.9	1508.7
7.5°	1751.0	1710.1	1698.0	1681.4	1645.0	1602.6	1575.3	1552.6	1529.9	1502.6	1476.9
10°	1834.3	1775.3	1746.5	1722.3	1672.3	1613.2	1572.3	1539.0	1502.6	1469.3	1436.0
12.5°	1928.3	1832.8	1823.7	1764.7	1707.1	1619.2	1569.3	1520.8	1472.3	1431.4	1396.6
15°	2007.0	1902.5	1864.6	1825.3	1714.7	1605.6	1557.1	1502.6	1446.6	1402.6	1351.1
17.5°	2057.0	1970.7	1890.4	1837.4	1722.3	1625.3	1531.4	1469.3	1410.2	1349.6	1307.2
20°	2117.6	1991.9	1922.2	1851.0	1737.4	1610.2	1516.2	1439.0	1366.3	1311.8	1260.3
22.5°	2178.2	2008.5	1951.0	1873.7	1740.4	1595.0	1489.0	1411.7	1328.4	1273.9	1217.8
25°	2172.1	2032.8	1937.3	1872.2	1710.1	1581.4	1457.2	1366.3	1289.0	1219.4	1163.3
27.5°	2176.7	2005.5	1908.6	1832.8	1688.9	1561.7	1423.8	1328.4	1248.1	1175.4	1116.4
30°	2178.2	1964.6	1879.8	1788.9	1649.5	1514.7	1386.0	1289.0	1204.2	1125.4	1072.4
32.5°	2173.6	1931.3	1825.3	1743.5	1587.4	1469.3	1342.1	1239.1	1152.7	1080.0	1030.0
35°	2163.0	1891.9	1769.2	1666.2	1523.8	1404.2	1301.2	1195.1	1102.7	1036.1	978.5
37.5°	2134.3	1849.5	1710.1	1608.6	1449.6	1328.4	1237.5	1149.7	1060.3	981.5	933.1
40°	2113.1	1791.9	1651.1	1540.5	1369.3	1251.2	1175.4	1092.1	1004.3	933.1	886.1
42.5°	2064.6	1737.4	1590.5	1458.7	1290.6	1169.4	1098.2	1031.5	955.8	886.1	843.7
45°	1985.8	1678.3	1516.2	1383.0	1204.2	1089.1	1024.0	969.4	902.8	836.1	793.7
47.5°	1875.2	1593.5	1437.5	1304.2	1119.4	1002.8	937.6	896.7	843.7	787.7	751.3
50°	1755.6	1501.1	1357.2	1225.4	1037.6	924.0	860.4	822.5	787.7	736.2	701.3
52.5°	1599.6	1402.6	1264.8	1139.1	949.7	840.7	784.6	757.4	721.0	684.7	654.4
55°	1448.1	1275.4	1161.8	1042.1	863.4	761.9	707.4	678.6	657.4	627.1	602.9
57.5°	1272.4	1157.3	1052.7	943.7	783.1	690.7	639.2	604.4	590.7	577.1	554.4
60°	1110.3	1022.4	937.6	846.7	699.8	616.5	566.5	539.2	525.6	516.5	501.4
62.5°	961.9	893.7	821.0	748.3	615.0	539.2	501.4	474.1	462.0	460.5	446.8
65°	819.5	771.0	711.9	640.7	536.2	469.6	433.2	416.6	402.9	402.9	392.3
67.5°	677.1	643.8	596.8	546.8	465.0	402.9	369.6	354.4	346.9	346.9	339.3
70°	563.5	540.8	498.3	454.4	383.2	336.3	310.5	296.9	292.3	293.9	287.8
72.5°	457.4	433.2	398.4	366.6	313.5	278.7	260.5	245.4	237.8	239.3	237.8
75°	354.4	342.3	312.0	287.8	245.4	221.2	204.5	196.9	190.9	192.4	189.3
77.5°	266.6	248.4	231.8	215.1	189.3	169.7	156.0	148.4	143.9	143.9	143.9
80°	181.8	178.7	165.1	156.0	134.8	119.7	109.1	107.5	103.0	103.0	103.0
82.5°	118.1	110.6	103.0	96.9	84.8	75.7	71.2	68.2	66.6	65.1	68.2
85°	65.1	60.6	57.6	51.5	47.0	42.4	37.9	36.4	34.8	36.4	34.8
87.5°	25.8	21.2	21.2	19.7	18.2	16.7	16.7	13.6	13.6	12.1	12.1
90°	11.7	9.5	8.8	8.1	6.6	4.4	2.9	1.5	2.9	4.4	6.6
92.5°	74.1	50.7	44.0	37.4	30.1	23.5	16.2	11.0	16.2	23.5	30.1
95°	157.8	95.4	81.1	66.8	47.7	35.2	27.2	25.0	27.2	35.2	47.7
97.5°	170.3	108.7	92.9	77.1	58.0	47.0	40.4	39.6	40.4	47.0	58.0
100°	168.1	116.7	102.4	88.1	70.5	60.2	55.1	54.3	55.1	60.2	70.5
102.5°	171.1	126.3	113.4	100.6	85.2	75.6	71.2	69.7	71.2	75.6	85.2
105°	176.9	137.3	125.9	114.5	100.6	91.8	87.4	85.2	87.4	91.8	100.6
107.5°	186.5	151.2	140.6	129.9	116.7	107.9	103.5	101.3	103.5	107.9	116.7
110°	199.0	165.9	155.6	145.4	132.9	124.8	121.1	118.9	121.1	124.8	132.9

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	211.4	181.3	171.4	161.5	149.0	141.0	137.3	135.1	137.3	141.0	149.0
115°	225.4	197.5	187.6	177.7	165.2	157.8	153.4	150.5	153.4	157.8	165.2
117.5°	240.1	212.2	203.0	193.8	179.9	173.3	169.6	165.9	169.6	173.3	179.9
120°	254.0	227.6	218.4	209.2	195.3	187.9	184.3	182.1	184.3	187.9	195.3
122.5°	268.7	243.0	233.1	223.2	210.0	201.9	198.2	196.0	198.2	201.9	210.0
125°	282.6	256.9	247.0	237.1	223.2	215.1	210.7	209.2	210.7	215.1	223.2
127.5°	295.1	270.2	260.2	250.3	234.9	226.8	221.7	219.5	221.7	226.8	234.9
130°	306.1	281.9	272.0	262.1	246.7	237.9	231.3	229.1	231.3	237.9	246.7
132.5°	315.7	292.2	282.6	273.1	257.7	246.7	239.3	236.4	239.3	246.7	257.7
135°	325.2	302.5	292.6	282.6	267.2	256.2	248.1	245.2	248.1	256.2	267.2
137.5°	331.8	309.8	300.6	291.5	276.0	264.3	256.2	253.3	256.2	264.3	276.0
140°	338.4	317.1	308.0	298.8	284.1	272.4	265.0	261.4	265.0	272.4	284.1
142.5°	343.6	323.0	314.6	306.1	291.5	281.2	273.1	270.2	273.1	281.2	291.5
145°	348.0	328.9	320.4	312.0	299.5	288.5	281.9	279.7	281.9	288.5	299.5
147.5°	351.7	334.0	326.6	319.3	306.9	297.3	290.7	289.2	290.7	297.3	306.9
150°	355.3	338.4	331.8	325.2	314.9	305.4	299.5	298.8	299.5	305.4	314.9
152.5°	357.5	343.6	337.4	331.1	322.3	314.2	308.3	308.3	308.3	314.2	322.3
155°	360.5	348.0	342.8	337.7	329.6	322.3	317.9	317.9	317.9	322.3	329.6
157.5°	361.9	351.7	347.6	343.6	336.2	329.6	326.0	325.2	326.0	329.6	336.2
160°	364.1	355.3	351.6	348.0	342.8	337.0	334.0	334.0	334.0	337.0	342.8
162.5°	364.9	357.5	354.6	351.7	347.2	342.8	340.6	340.6	340.6	342.8	347.2
165°	365.6	359.7	357.2	354.6	351.7	348.0	346.5	347.2	346.5	348.0	351.7
167.5°	365.6	361.2	359.4	357.5	355.3	352.4	351.7	352.4	351.7	352.4	355.3
170°	364.9	361.2	360.4	359.7	358.3	356.1	355.3	356.8	355.3	356.1	358.3
172.5°	364.9	361.9	361.5	361.2	360.5	359.0	359.0	359.7	359.0	359.0	360.5
175°	364.1	362.7	362.3	361.9	361.9	360.5	361.2	361.9	361.2	360.5	361.9
177.5°	363.4	362.7	362.7	362.7	362.7	361.9	362.7	363.4	362.7	361.9	362.7
180°	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2
2.5°	1539.0	1537.5	1540.5	1531.4	1516.2	1508.7	1487.5	1482.9	1481.4	1482.9	1484.4
5°	1496.6	1495.0	1490.5	1475.3	1457.2	1443.5	1417.8	1416.3	1407.2	1398.1	1402.6
7.5°	1455.7	1449.6	1440.5	1420.8	1396.6	1381.4	1360.2	1345.1	1333.0	1325.4	1319.3
10°	1414.8	1405.7	1396.6	1370.8	1340.5	1317.8	1292.1	1279.9	1266.3	1260.3	1254.2
12.5°	1361.7	1352.7	1336.0	1305.7	1287.5	1258.7	1233.0	1220.9	1213.3	1201.2	1193.6
15°	1319.3	1301.2	1292.1	1260.3	1222.4	1219.4	1172.4	1169.4	1154.2	1154.2	1142.1
17.5°	1270.9	1257.2	1240.6	1208.8	1181.5	1154.2	1130.0	1120.9	1107.3	1104.2	1098.2
20°	1223.9	1205.7	1199.7	1167.9	1139.1	1105.8	1080.0	1070.9	1064.9	1058.8	1063.3
22.5°	1175.4	1160.3	1145.1	1116.4	1095.2	1061.8	1046.7	1037.6	1028.5	1025.5	1027.0
25°	1128.5	1114.8	1099.7	1070.9	1048.2	1020.9	1007.3	1002.8	998.2	998.2	996.7
27.5°	1083.0	1069.4	1055.8	1030.0	1007.3	987.6	977.0	972.5	967.9	970.9	974.0
30°	1036.1	1024.0	1011.8	989.1	970.9	952.8	946.7	943.7	942.2	949.7	949.7
32.5°	993.7	983.1	974.0	952.8	934.6	919.4	914.9	916.4	917.9	922.5	925.5
35°	949.7	942.2	933.1	914.9	899.8	886.1	887.6	887.6	890.7	898.2	904.3
37.5°	910.4	899.8	892.2	877.0	864.9	852.8	857.3	861.9	864.9	874.0	877.0
40°	863.4	858.9	852.8	837.6	827.0	825.5	827.0	830.1	836.1	840.7	845.2
42.5°	825.5	819.5	811.9	799.8	790.7	792.2	793.7	796.7	799.8	807.4	811.9
45°	783.1	778.6	772.5	761.9	754.3	755.9	757.4	757.4	760.4	769.5	772.5
47.5°	736.2	737.7	730.1	719.5	715.0	715.0	715.0	718.0	725.6	728.6	730.1
50°	690.7	687.7	686.2	675.6	672.5	671.0	672.5	674.1	684.7	683.1	687.7
52.5°	642.2	642.2	640.7	634.7	630.1	630.1	627.1	634.7	637.7	640.7	645.3
55°	595.3	590.7	589.2	586.2	580.1	578.6	581.7	590.7	593.8	596.8	601.3
57.5°	543.8	543.8	540.8	536.2	536.2	536.2	536.2	542.3	546.8	549.8	558.9
60°	496.8	490.8	486.2	486.2	486.2	484.7	493.8	493.8	502.9	504.4	507.4
62.5°	440.8	437.8	434.7	436.2	434.7	437.8	440.8	446.8	448.4	452.9	457.4
65°	387.8	387.8	384.7	393.8	387.8	387.8	395.3	395.3	398.4	402.9	409.0
67.5°	336.3	337.8	334.8	334.8	337.8	339.3	340.8	346.9	348.4	354.4	362.0
70°	283.3	286.3	287.8	284.8	287.8	290.8	293.9	295.4	301.4	304.5	309.0
72.5°	236.3	239.3	234.8	236.3	237.8	240.8	242.4	245.4	248.4	257.5	260.5
75°	189.3	187.8	186.3	192.4	189.3	195.4	196.9	196.9	199.9	207.5	210.5
77.5°	145.4	145.4	146.9	143.9	148.4	146.9	148.4	153.0	157.5	157.5	169.7
80°	101.5	104.5	104.5	104.5	106.0	107.5	104.5	112.1	113.6	113.6	118.1
82.5°	65.1	66.6	65.1	68.2	68.2	71.2	69.7	71.2	74.2	77.3	78.8
85°	34.8	34.8	37.9	37.9	36.4	37.9	36.4	37.9	40.9	40.9	42.4
87.5°	12.1	12.1	12.1	12.1	13.6	12.1	13.6	13.6	12.1	12.1	16.7
90°	8.1	8.8	9.5	11.7	13.9	16.2	18.4	17.6	18.4	19.1	19.8
92.5°	37.4	44.0	50.7	74.1	113.1	151.2	136.5	102.0	72.7	56.5	49.2
95°	66.8	81.1	95.4	157.8	267.2	387.6	435.3	353.1	264.3	179.1	140.2
97.5°	77.1	92.9	108.7	170.3	297.3	499.9	669.5	692.3	607.1	458.1	361.2
100°	88.1	102.4	116.7	168.1	276.8	469.8	695.2	839.9	865.5	806.1	720.2
102.5°	100.6	113.4	126.3	171.1	259.2	425.8	647.5	847.2	951.4	963.9	922.8
105°	114.5	125.9	137.3	176.9	252.5	391.3	590.2	800.9	954.4	1027.8	1041.7
107.5°	129.9	140.6	151.2	186.5	251.1	366.3	539.6	734.9	910.3	1025.6	1082.9
110°	145.4	155.6	165.9	199.0	254.7	353.1	497.7	673.2	841.3	976.4	1068.9

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	161.5	171.4	181.3	211.4	262.1	345.8	469.8	619.6	773.0	911.8	1018.2
115°	177.7	187.6	197.5	225.4	270.2	345.0	451.5	578.5	714.3	842.1	950.0
117.5°	193.8	203.0	212.2	240.1	280.4	345.8	439.0	551.3	668.8	781.9	881.0
120°	209.2	218.4	227.6	254.0	292.2	348.7	430.9	530.8	634.3	733.4	821.5
122.5°	223.2	233.1	243.0	268.7	303.2	353.9	425.8	513.9	607.1	694.5	774.5
125°	237.1	247.0	256.9	282.6	314.9	359.0	421.4	499.9	583.6	663.7	734.1
127.5°	250.3	260.2	270.2	295.1	324.5	364.9	419.2	486.7	562.3	635.0	699.6
130°	262.1	272.0	281.9	306.1	334.0	370.7	417.0	476.5	542.5	608.6	668.1
132.5°	273.1	282.6	292.2	315.7	342.8	375.1	416.3	466.9	524.2	583.6	638.0
135°	282.6	292.6	302.5	325.2	350.2	379.5	415.5	458.8	508.0	560.1	607.9
137.5°	291.5	300.6	309.8	331.8	356.1	382.5	414.1	451.5	492.6	536.7	579.2
140°	298.8	308.0	317.1	338.4	360.5	385.4	413.3	444.9	479.4	516.8	552.1
142.5°	306.1	314.6	323.0	343.6	364.9	387.6	411.9	439.0	466.9	497.7	527.1
145°	312.0	320.4	328.9	348.0	367.8	388.4	410.4	433.9	457.4	481.6	505.1
147.5°	319.3	326.6	334.0	351.7	370.0	388.4	408.2	428.7	449.3	469.1	488.9
150°	325.2	331.8	338.4	355.3	370.7	388.4	405.2	423.6	440.5	457.4	472.8
152.5°	331.1	337.4	343.6	357.5	372.2	386.2	401.6	417.7	432.4	446.4	459.6
155°	337.7	342.8	348.0	360.5	372.2	384.7	397.2	411.9	424.3	436.1	447.1
157.5°	343.6	347.6	351.7	361.9	372.9	382.5	393.5	405.2	415.5	425.8	434.6
160°	348.0	351.6	355.3	364.1	372.9	381.0	389.1	398.6	408.2	416.3	423.6
162.5°	351.7	354.6	357.5	364.9	372.2	378.1	384.7	392.0	399.4	406.0	412.6
165°	354.6	357.2	359.7	365.6	370.7	375.1	380.3	386.2	392.0	396.4	401.6
167.5°	357.5	359.4	361.2	365.6	370.0	372.2	375.9	380.3	385.4	389.1	392.0
170°	359.7	360.4	361.2	364.9	367.8	369.3	371.5	375.1	378.8	381.0	384.0
172.5°	361.2	361.5	361.9	364.9	367.1	367.1	367.8	370.0	372.9	374.4	376.6
175°	361.9	362.3	362.7	364.1	365.6	364.9	364.9	366.3	367.8	368.5	370.0
177.5°	362.7	362.7	362.7	363.4	364.9	363.4	362.7	363.4	364.1	364.9	365.6
180°	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2
2.5°	1482.9	1484.4	1478.4	1473.8	1486.0	1478.4	1478.4	1479.9	1476.9	1481.4	1479.9
5°	1399.6	1401.1	1390.5	1393.6	1387.5	1386.0	1384.5	1393.6	1392.0	1390.5	1393.6
7.5°	1317.8	1317.8	1313.3	1310.2	1310.2	1305.7	1311.8	1310.2	1313.3	1313.3	1317.8
10°	1249.7	1252.7	1245.1	1237.5	1236.0	1237.5	1237.5	1239.1	1240.6	1251.2	1249.7
12.5°	1193.6	1189.1	1187.6	1183.0	1175.4	1172.4	1169.4	1186.0	1181.5	1181.5	1181.5
15°	1131.5	1142.1	1140.6	1127.0	1123.9	1130.0	1127.0	1127.0	1142.1	1140.6	1139.1
17.5°	1098.2	1095.2	1092.1	1084.5	1086.1	1084.5	1086.1	1086.1	1095.2	1095.2	1095.2
20°	1060.3	1054.3	1054.3	1051.2	1051.2	1046.7	1052.7	1054.3	1060.3	1060.3	1061.8
22.5°	1027.0	1022.4	1022.4	1020.9	1024.0	1017.9	1024.0	1025.5	1025.5	1030.0	1030.0
25°	998.2	995.2	995.2	998.2	998.2	998.2	998.2	1004.3	999.7	1001.2	999.7
27.5°	972.5	974.0	975.5	977.0	975.5	977.0	978.5	981.5	983.1	981.5	978.5
30°	948.2	952.8	954.3	954.3	957.3	958.8	960.3	960.3	961.9	957.3	960.3
32.5°	930.0	930.0	933.1	934.6	937.6	939.1	939.1	942.2	940.6	936.1	937.6
35°	904.3	904.3	910.4	913.4	917.9	916.4	917.9	917.9	919.4	916.4	911.9
37.5°	878.5	881.6	881.6	887.6	889.1	890.7	889.1	892.2	890.7	887.6	886.1
40°	848.3	846.7	848.3	852.8	854.3	854.3	854.3	857.3	857.3	857.3	855.8
42.5°	810.4	814.9	813.4	818.0	816.4	816.4	819.5	822.5	824.0	819.5	821.0
45°	774.0	774.0	777.1	777.1	778.6	778.6	784.6	781.6	784.6	781.6	783.1
47.5°	734.6	736.2	736.2	737.7	740.7	743.7	740.7	742.2	742.2	743.7	740.7
50°	690.7	690.7	693.7	698.3	704.4	701.3	699.8	705.9	701.3	701.3	698.3
52.5°	645.3	649.8	651.3	655.9	660.4	661.9	663.5	660.4	661.9	657.4	658.9
55°	601.3	602.9	608.9	613.5	618.0	618.0	616.5	618.0	619.5	613.5	613.5
57.5°	557.4	562.0	568.0	568.0	574.1	574.1	572.6	572.6	574.1	569.5	568.0
60°	510.5	515.0	522.6	522.6	531.7	533.2	530.2	527.1	527.1	522.6	524.1
62.5°	460.5	465.0	469.6	477.1	483.2	480.2	486.2	480.2	481.7	472.6	472.6
65°	416.6	418.1	425.6	433.2	433.2	436.2	433.2	434.7	430.2	430.2	424.1
67.5°	365.1	365.1	372.6	380.2	387.8	387.8	387.8	383.2	383.2	378.7	378.7
70°	319.6	318.1	325.7	330.2	334.8	336.3	333.2	331.7	328.7	324.2	322.6
72.5°	263.6	266.6	274.2	277.2	284.8	283.3	290.8	281.7	281.7	274.2	272.7
75°	213.6	216.6	224.2	228.7	233.3	233.3	237.8	233.3	227.2	224.2	222.7
77.5°	169.7	168.1	174.2	181.8	183.3	181.8	184.8	183.3	177.2	177.2	174.2
80°	121.2	125.7	131.8	130.3	136.3	134.8	134.8	131.8	131.8	127.2	130.3
82.5°	80.3	84.8	86.3	84.8	86.3	89.4	90.9	89.4	89.4	86.3	87.9
85°	42.4	42.4	45.4	47.0	45.4	45.4	47.0	51.5	48.5	45.4	48.5
87.5°	13.6	12.1	12.1	13.6	12.1	12.1	13.6	13.6	15.1	15.1	15.1
90°	20.6	21.3	20.6	21.3	22.0	21.3	22.0	21.3	20.6	21.3	20.6
92.5°	46.6	44.0	42.6	39.6	40.4	38.9	40.4	39.6	42.6	44.0	46.6
95°	127.0	113.8	99.8	93.2	88.1	85.2	88.1	93.2	99.8	113.8	127.0
97.5°	319.4	277.5	228.3	200.4	182.8	174.7	182.8	200.4	228.3	277.5	319.4
100°	668.0	615.9	541.8	488.2	459.6	460.3	459.6	488.2	541.8	615.9	668.0
102.5°	894.6	866.3	812.7	773.0	750.3	729.0	750.3	773.0	812.7	866.3	894.6
105°	1032.2	1022.7	988.9	961.0	937.5	933.8	937.5	961.0	988.9	1022.7	1032.2
107.5°	1092.8	1102.7	1098.3	1085.1	1075.5	1067.4	1075.5	1085.1	1098.3	1102.7	1092.8
110°	1094.6	1120.3	1140.8	1146.7	1145.3	1143.8	1145.3	1146.7	1140.8	1120.3	1094.6

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	1053.1	1088.0	1129.8	1151.1	1158.5	1159.2	1158.5	1151.1	1129.8	1088.0	1053.1
115°	990.0	1030.0	1085.1	1117.4	1132.0	1135.7	1132.0	1117.4	1085.1	1030.0	990.0
117.5°	922.4	963.9	1021.2	1057.2	1079.2	1084.3	1079.2	1057.2	1021.2	963.9	922.4
120°	858.6	895.6	953.6	994.8	1012.4	1016.8	1012.4	994.8	953.6	895.6	858.6
122.5°	808.3	842.1	892.0	927.9	947.8	953.6	947.8	927.9	892.0	842.1	808.3
125°	763.5	792.9	839.9	872.2	890.5	895.6	890.5	872.2	839.9	792.9	763.5
127.5°	726.8	754.0	796.5	824.4	841.3	845.7	841.3	824.4	796.5	754.0	726.8
130°	693.0	718.0	756.9	783.3	798.7	804.6	798.7	783.3	756.9	718.0	693.0
132.5°	661.4	684.9	720.9	747.4	760.6	764.2	760.6	747.4	720.9	684.9	661.4
135°	628.8	649.7	685.7	707.7	720.9	726.1	720.9	707.7	685.7	649.7	628.8
137.5°	598.0	616.7	647.5	670.3	681.3	685.7	681.3	670.3	647.5	616.7	598.0
140°	567.8	583.6	611.5	632.1	643.8	643.1	643.8	632.1	611.5	583.6	567.8
142.5°	540.3	553.5	576.3	593.9	604.2	603.5	604.2	593.9	576.3	553.5	540.3
145°	515.8	526.4	544.7	560.1	566.0	567.5	566.0	560.1	544.7	526.4	515.8
147.5°	496.6	504.4	519.0	530.0	535.9	536.7	535.9	530.0	519.0	504.4	496.6
150°	479.8	486.7	497.7	505.8	510.2	510.2	510.2	505.8	497.7	486.7	479.8
152.5°	465.1	470.6	478.7	486.0	488.2	488.2	488.2	486.0	478.7	470.6	465.1
155°	451.5	455.9	462.5	468.4	469.8	470.6	469.8	468.4	462.5	455.9	451.5
157.5°	438.3	442.0	447.8	452.2	453.7	453.7	453.7	452.2	447.8	442.0	438.3
160°	426.2	428.7	433.9	438.3	438.3	437.5	438.3	438.3	433.9	428.7	426.2
162.5°	414.8	417.0	419.9	423.6	423.6	422.9	423.6	423.6	419.9	417.0	414.8
165°	403.4	405.2	408.2	411.1	410.4	410.4	410.4	411.1	408.2	405.2	403.4
167.5°	393.5	395.0	396.4	398.6	397.9	397.9	397.9	398.6	396.4	395.0	393.5
170°	384.7	385.4	386.2	387.6	386.9	386.9	386.9	387.6	386.2	385.4	384.7
172.5°	377.0	377.3	377.3	378.8	377.3	376.6	377.3	378.8	377.3	377.3	377.0
175°	370.0	370.0	370.0	370.7	370.0	369.3	370.0	370.7	370.0	370.0	370.0
177.5°	365.6	365.6	364.9	365.6	364.1	364.1	364.1	365.6	364.9	365.6	365.6
180°	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2	1563.2
2.5°	1484.4	1487.5	1489.0	1482.9	1478.4	1486.0	1496.6	1504.1	1510.2	1517.8	1522.3
5°	1396.6	1407.2	1407.2	1410.2	1414.8	1422.3	1442.0	1455.7	1467.8	1476.9	1484.4
7.5°	1322.4	1329.9	1334.5	1342.1	1349.6	1360.2	1383.0	1402.6	1420.8	1431.4	1443.5
10°	1255.7	1261.8	1269.3	1273.9	1287.5	1302.7	1331.4	1348.1	1369.3	1386.0	1401.1
12.5°	1192.1	1213.3	1217.8	1216.3	1228.4	1245.1	1273.9	1299.6	1322.4	1339.0	1355.7
15°	1146.7	1154.2	1163.3	1161.8	1187.6	1192.1	1216.3	1246.6	1276.9	1287.5	1302.7
17.5°	1096.7	1108.8	1117.9	1122.4	1130.0	1146.7	1169.4	1192.1	1231.5	1233.0	1272.4
20°	1057.3	1069.4	1075.5	1081.5	1086.1	1105.8	1125.4	1151.2	1183.0	1199.7	1220.9
22.5°	1031.5	1037.6	1042.1	1046.7	1052.7	1063.3	1087.6	1116.4	1137.6	1155.7	1169.4
25°	1001.2	1007.3	1013.4	1016.4	1020.9	1027.0	1045.2	1067.9	1098.2	1110.3	1123.9
27.5°	980.0	980.0	983.1	983.1	989.1	995.2	1008.8	1030.0	1054.3	1069.4	1087.6
30°	957.3	955.8	957.3	955.8	954.3	963.4	975.5	993.7	1010.3	1028.5	1040.6
32.5°	934.6	933.1	933.1	934.6	928.5	933.1	939.1	955.8	974.0	983.1	996.7
35°	910.4	907.3	907.3	907.3	904.3	901.3	907.3	922.5	934.6	946.7	957.3
37.5°	886.1	881.6	881.6	878.5	875.5	871.0	871.0	883.1	899.8	904.3	917.9
40°	852.8	852.8	849.8	848.3	845.2	842.2	837.6	848.3	863.4	867.9	878.5
42.5°	819.5	814.9	813.4	813.4	813.4	808.9	805.8	813.4	822.5	830.1	836.1
45°	781.6	778.6	780.1	778.6	775.5	774.0	772.5	775.5	786.1	789.2	796.7
47.5°	740.7	739.2	739.2	737.7	736.2	737.7	731.6	739.2	742.2	745.2	751.3
50°	698.3	696.8	695.3	693.7	693.7	695.3	693.7	693.7	699.8	702.8	708.9
52.5°	655.9	651.3	651.3	649.8	649.8	646.8	649.8	651.3	654.4	657.4	660.4
55°	610.4	610.4	605.9	605.9	602.9	602.9	604.4	602.9	608.9	612.0	612.0
57.5°	566.5	560.5	562.0	558.9	555.9	554.4	554.4	557.4	560.5	560.5	563.5
60°	519.6	513.5	512.0	505.9	509.0	504.4	505.9	505.9	512.0	509.0	512.0
62.5°	472.6	465.0	460.5	457.4	457.4	459.0	455.9	454.4	457.4	460.5	466.5
65°	422.6	418.1	413.5	409.0	409.0	407.5	410.5	405.9	404.4	405.9	409.0
67.5°	371.1	366.6	362.0	357.5	359.0	354.4	351.4	356.0	352.9	354.4	357.5
70°	321.1	318.1	309.0	306.0	304.5	306.0	304.5	301.4	306.0	304.5	306.0
72.5°	271.1	268.1	263.6	256.0	256.0	254.5	253.0	253.0	251.4	251.4	251.4
75°	222.7	216.6	212.1	210.5	207.5	206.0	204.5	201.5	203.0	204.5	201.5
77.5°	172.7	165.1	163.6	163.6	159.0	159.0	160.6	159.0	157.5	157.5	157.5
80°	127.2	121.2	121.2	118.1	115.1	115.1	115.1	115.1	113.6	112.1	113.6
82.5°	81.8	80.3	78.8	78.8	81.8	75.7	78.8	77.3	75.7	75.7	74.2
85°	45.4	47.0	45.4	47.0	43.9	45.4	45.4	45.4	43.9	45.4	42.4
87.5°	16.7	16.7	16.7	18.2	18.2	18.2	18.2	18.2	19.7	18.2	18.2
90°	19.8	19.1	18.4	17.6	18.4	16.2	13.9	11.7	9.5	8.8	8.1
92.5°	49.2	56.5	72.7	102.0	136.5	151.2	113.1	74.1	50.7	44.0	37.4
95°	140.2	179.1	264.3	353.1	435.3	387.6	267.2	157.8	95.4	81.1	66.8
97.5°	361.2	458.1	607.1	692.3	669.5	499.9	297.3	170.3	108.7	92.9	77.1
100°	720.2	806.1	865.5	839.9	695.2	469.8	276.8	168.1	116.7	102.4	88.1
102.5°	922.8	963.9	951.4	847.2	647.5	425.8	259.2	171.1	126.3	113.4	100.6
105°	1041.7	1027.8	954.4	800.9	590.2	391.3	252.5	176.9	137.3	125.9	114.5
107.5°	1082.9	1025.6	910.3	734.9	539.6	366.3	251.1	186.5	151.2	140.6	129.9
110°	1068.9	976.4	841.3	673.2	497.7	353.1	254.7	199.0	165.9	155.6	145.4

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	1018.2	911.8	773.0	619.6	469.8	345.8	262.1	211.4	181.3	171.4	161.5
115°	950.0	842.1	714.3	578.5	451.5	345.0	270.2	225.4	197.5	187.6	177.7
117.5°	881.0	781.9	668.8	551.3	439.0	345.8	280.4	240.1	212.2	203.0	193.8
120°	821.5	733.4	634.3	530.8	430.9	348.7	292.2	254.0	227.6	218.4	209.2
122.5°	774.5	694.5	607.1	513.9	425.8	353.9	303.2	268.7	243.0	233.1	223.2
125°	734.1	663.7	583.6	499.9	421.4	359.0	314.9	282.6	256.9	247.0	237.1
127.5°	699.6	635.0	562.3	486.7	419.2	364.9	324.5	295.1	270.2	260.2	250.3
130°	668.1	608.6	542.5	476.5	417.0	370.7	334.0	306.1	281.9	272.0	262.1
132.5°	638.0	583.6	524.2	466.9	416.3	375.1	342.8	315.7	292.2	282.6	273.1
135°	607.9	560.1	508.0	458.8	415.5	379.5	350.2	325.2	302.5	292.6	282.6
137.5°	579.2	536.7	492.6	451.5	414.1	382.5	356.1	331.8	309.8	300.6	291.5
140°	552.1	516.8	479.4	444.9	413.3	385.4	360.5	338.4	317.1	308.0	298.8
142.5°	527.1	497.7	466.9	439.0	411.9	387.6	364.9	343.6	323.0	314.6	306.1
145°	505.1	481.6	457.4	433.9	410.4	388.4	367.8	348.0	328.9	320.4	312.0
147.5°	488.9	469.1	449.3	428.7	408.2	388.4	370.0	351.7	334.0	326.6	319.3
150°	472.8	457.4	440.5	423.6	405.2	388.4	370.7	355.3	338.4	331.8	325.2
152.5°	459.6	446.4	432.4	417.7	401.6	386.2	372.2	357.5	343.6	337.4	331.1
155°	447.1	436.1	424.3	411.9	397.2	384.7	372.2	360.5	348.0	342.8	337.7
157.5°	434.6	425.8	415.5	405.2	393.5	382.5	372.9	361.9	351.7	347.6	343.6
160°	423.6	416.3	408.2	398.6	389.1	381.0	372.9	364.1	355.3	351.6	348.0
162.5°	412.6	406.0	399.4	392.0	384.7	378.1	372.2	364.9	357.5	354.6	351.7
165°	401.6	396.4	392.0	386.2	380.3	375.1	370.7	365.6	359.7	357.2	354.6
167.5°	392.0	389.1	385.4	380.3	375.9	372.2	370.0	365.6	361.2	359.4	357.5
170°	384.0	381.0	378.8	375.1	371.5	369.3	367.8	364.9	361.2	360.4	359.7
172.5°	376.6	374.4	372.9	370.0	367.8	367.1	367.1	364.9	361.9	361.5	361.2
175°	370.0	368.5	367.8	366.3	364.9	364.9	365.6	364.1	362.7	362.3	361.9
177.5°	365.6	364.9	364.1	363.4	362.7	363.4	364.9	363.4	362.7	362.7	362.7
180°	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7	362.7

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1563.2	1563.2	1563.2	1563.2
2.5°	1529.9	1534.4	1549.6	1567.7
5°	1499.6	1511.7	1532.9	1561.7
7.5°	1466.3	1484.4	1514.7	1551.1
10°	1428.4	1454.1	1492.0	1537.5
12.5°	1387.5	1420.8	1469.3	1516.2
15°	1361.7	1395.1	1439.0	1490.5
17.5°	1311.8	1351.1	1396.6	1469.3
20°	1260.3	1304.2	1363.3	1436.0
22.5°	1220.9	1267.8	1323.9	1401.1
25°	1173.9	1222.4	1283.0	1363.3
27.5°	1123.9	1172.4	1240.6	1325.4
30°	1086.1	1133.0	1198.2	1289.0
32.5°	1040.6	1086.1	1154.2	1249.7
35°	989.1	1040.6	1105.8	1202.7
37.5°	949.7	996.7	1064.9	1157.3
40°	907.3	948.2	1014.9	1105.8
42.5°	861.9	907.3	964.9	1055.8
45°	819.5	852.8	911.9	998.2
47.5°	774.0	811.9	857.3	924.0
50°	725.6	757.4	807.4	852.8
52.5°	678.6	704.4	746.8	781.6
55°	628.6	654.4	686.2	707.4
57.5°	581.7	599.8	621.0	634.7
60°	524.1	542.3	555.9	569.5
62.5°	472.6	486.2	493.8	501.4
65°	419.6	427.2	431.7	437.8
67.5°	362.0	369.6	371.1	380.2
70°	309.0	310.5	313.5	318.1
72.5°	259.0	262.0	260.5	263.6
75°	207.5	210.5	207.5	210.5
77.5°	157.5	160.6	160.6	165.1
80°	113.6	115.1	116.6	116.6
82.5°	74.2	78.8	75.7	77.3
85°	42.4	43.9	43.9	45.4
87.5°	19.7	21.2	19.7	22.7
90°	6.6	4.4	2.9	1.5
92.5°	30.1	23.5	16.2	11.0
95°	47.7	35.2	27.2	25.0
97.5°	58.0	47.0	40.4	39.6
100°	70.5	60.2	55.1	54.3
102.5°	85.2	75.6	71.2	69.7
105°	100.6	91.8	87.4	85.2
107.5°	116.7	107.9	103.5	101.3
110°	132.9	124.8	121.1	118.9

TEST NUMBER: P1011450

CATALOG NUMBER: S123DIP-B1165D805UB50-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	149.0	141.0	137.3	135.1
115°	165.2	157.8	153.4	150.5
117.5°	179.9	173.3	169.6	165.9
120°	195.3	187.9	184.3	182.1
122.5°	210.0	201.9	198.2	196.0
125°	223.2	215.1	210.7	209.2
127.5°	234.9	226.8	221.7	219.5
130°	246.7	237.9	231.3	229.1
132.5°	257.7	246.7	239.3	236.4
135°	267.2	256.2	248.1	245.2
137.5°	276.0	264.3	256.2	253.3
140°	284.1	272.4	265.0	261.4
142.5°	291.5	281.2	273.1	270.2
145°	299.5	288.5	281.9	279.7
147.5°	306.9	297.3	290.7	289.2
150°	314.9	305.4	299.5	298.8
152.5°	322.3	314.2	308.3	308.3
155°	329.6	322.3	317.9	317.9
157.5°	336.2	329.6	326.0	325.2
160°	342.8	337.0	334.0	334.0
162.5°	347.2	342.8	340.6	340.6
165°	351.7	348.0	346.5	347.2
167.5°	355.3	352.4	351.7	352.4
170°	358.3	356.1	355.3	356.8
172.5°	360.5	359.0	359.0	359.7
175°	361.9	360.5	361.2	361.9
177.5°	362.7	361.9	362.7	363.4
180°	362.7	362.7	362.7	362.7

(END OF REPORT)