

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1011878

Luminaire Tested: S123DIP-B560D805UB40-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1011878
REPORT IS A COMBINATION OF REPORTS P990202 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-B560D805UB40-4F0-XX-W2A-A1
Description: Define 3 Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865} {m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5043.0 lumens
Efficiency: N/A
Efficacy: 111.8 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.37 / 1.5
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 45.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

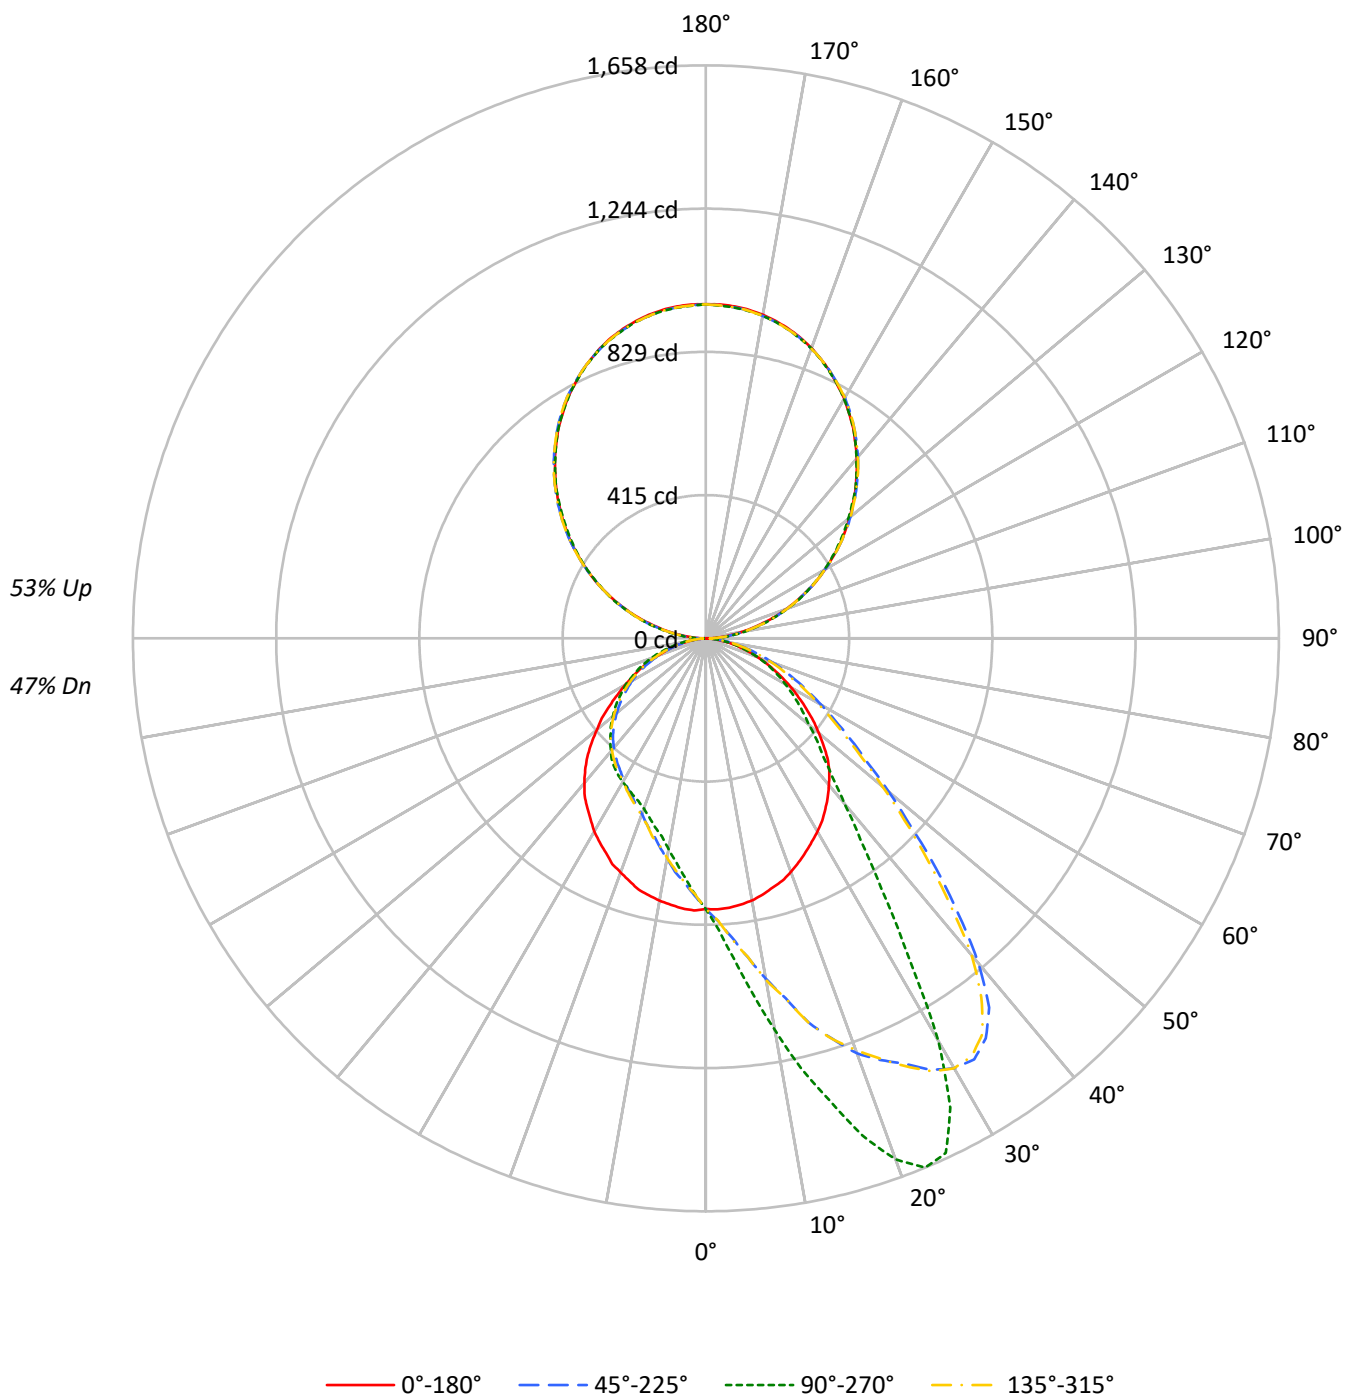

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53
1	97	93	89	86	89	86	83	80	72	70	68	59	58	56	47	46	46
2	89	82	76	71	81	75	70	66	63	60	56	52	50	47	42	40	39
3	81	72	65	59	74	66	60	55	56	51	48	46	43	40	37	35	33
4	74	64	56	50	68	59	52	47	50	45	41	41	38	35	34	31	29
5	68	57	49	43	63	53	46	40	45	39	35	37	33	30	30	27	25
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	28	25	22
7	58	46	38	33	53	43	36	31	37	31	27	31	26	23	25	22	20
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	23	20	18
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	21	18	16
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8427	8427	8427	8427
5°	8433	9710	8457	7247
10°	8379	11751	8388	6328
15°	8263	13935	8331	5697
20°	8164	16043	8181	5241
25°	8016	16448	8034	5005
30°	7910	13589	7910	4849
35°	7780	9088	7730	4712
40°	7622	6560	7528	4502
45°	7426	5196	7210	4239
50°	6945	4413	6698	3984
55°	6420	3878	6159	3697
60°	5887	3376	5573	3395
65°	5299	2891	5043	2996
70°	4691	2400	4379	2525
75°	4013	1810	3751	1949
80°	3171	1208	2926	1280
85°	2190	554	1748	505

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 13592 cd/sqm

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.0	1.5
10°-20°	247.3	4.9
20°-30°	416.1	8.3
30°-40°	470.3	9.3
40°-50°	421.2	8.4
50°-60°	340.0	6.7
60°-70°	236.9	4.7
70°-80°	124.3	2.5
80°-90°	31.9	0.6
90°-100°	62.2	1.2
100°-110°	188.3	3.7
110°-120°	320.6	6.4
120°-130°	421.7	8.4
130°-140°	474.0	9.4
140°-150°	466.0	9.2
150°-160°	392.4	7.8
160°-170°	261.2	5.2
170°-180°	91.5	1.8
0°-30°	740.4	14.7
0°-40°	1210.7	24.0
0°-60°	1971.9	39.1
0°-90°	2365.0	46.9
90°-120°	571.1	11.3
90°-150°	1932.9	38.3
90°-180°	2678.0	53.1
0°-180°	5043.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	783	783	783	783	783	
5°	782	930	784	694	782	74
15°	746	1384	753	566	746	211
25°	683	1643	684	500	683	315
35°	602	885	599	459	602	377
45°	500	478	486	390	500	382
55°	354	325	340	310	354	317
65°	219	211	209	218	219	218
75°	106	108	99	117	106	113
85°	23	25	18	23	23	26
90°	1	23	1	23	1	5
95°	45	59	45	59	45	49
105°	171	181	171	181	171	183
115°	323	323	323	323	323	319
125°	472	467	472	467	472	421
135°	613	612	613	612	613	472
145°	743	743	743	743	743	464
155°	851	850	851	850	851	392
165°	927	924	927	924	927	261
175°	964	960	964	960	964	92
180°	966	966	966	966	966	

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9
2.5°	785.2	791.3	794.3	798.9	803.4	810.2	812.5	816.3	814.8	817.8	819.3
5°	782.2	792.8	801.9	813.3	823.9	831.5	839.1	851.2	860.3	861.8	868.7
7.5°	776.9	792.0	808.0	823.9	844.4	856.5	870.2	886.9	900.5	922.5	930.9
10°	770.0	791.3	814.0	836.0	864.1	883.1	899.8	927.8	955.9	978.7	999.9
12.5°	759.4	786.0	815.5	848.2	884.6	906.6	929.3	966.5	1009.0	1043.9	1066.7
15°	746.5	779.9	817.8	852.7	892.9	933.9	958.2	999.9	1060.6	1093.2	1151.6
17.5°	735.9	770.0	808.0	862.6	917.2	958.2	975.6	1052.2	1094.0	1148.6	1214.6
20°	719.2	762.4	811.0	865.6	936.2	961.2	996.9	1074.2	1125.8	1197.2	1278.3
22.5°	701.8	748.0	806.4	863.3	942.2	968.8	1017.4	1078.8	1160.7	1231.3	1320.8
25°	682.8	732.9	792.0	859.6	936.9	975.6	1021.1	1097.0	1185.8	1274.5	1357.2
27.5°	663.8	718.4	779.9	847.4	922.5	968.0	1013.6	1092.5	1206.3	1302.6	1408.1
30°	645.6	700.2	761.7	830.7	909.6	953.6	996.9	1095.5	1222.2	1330.7	1436.9
32.5°	625.9	682.0	746.5	804.2	883.8	930.9	979.4	1095.5	1232.0	1347.4	1444.5
35°	602.4	660.0	715.4	773.1	852.0	904.3	958.9	1087.9	1241.2	1352.7	1412.6
37.5°	579.6	630.4	678.2	734.4	817.1	873.2	936.2	1078.8	1236.6	1329.9	1346.6
40°	553.8	604.6	643.3	695.7	782.9	848.2	911.9	1066.7	1216.9	1276.0	1227.5
42.5°	528.8	569.0	602.4	653.2	748.0	811.8	880.8	1044.7	1178.2	1190.3	1081.1
45°	500.0	528.8	558.4	616.0	710.1	775.3	852.0	1012.8	1116.0	1081.1	943.0
47.5°	462.8	488.6	521.2	574.3	669.9	737.4	810.2	971.8	1025.7	952.9	801.9
50°	427.1	449.1	479.5	531.1	627.4	693.4	770.8	907.3	933.9	819.3	691.1
52.5°	391.5	408.2	437.7	489.3	585.7	649.4	720.0	841.3	826.2	703.3	589.5
55°	354.3	368.7	396.8	447.6	537.1	597.8	665.3	760.2	720.7	603.9	512.8
57.5°	317.9	333.0	361.9	404.4	488.6	547.7	601.6	676.0	616.8	523.5	443.1
60°	285.3	298.1	320.2	361.9	438.5	486.3	535.6	586.4	537.1	446.8	385.4
62.5°	251.1	263.3	283.7	321.7	387.7	430.2	469.6	511.3	456.7	390.7	336.1
65°	219.2	229.1	248.1	283.0	336.8	371.7	403.6	432.4	388.4	327.7	286.8
67.5°	190.4	198.8	214.7	245.8	291.3	316.4	342.2	366.4	329.3	280.7	245.8
70°	159.3	166.1	180.6	203.3	239.7	265.5	284.5	302.7	269.3	230.6	207.1
72.5°	132.0	138.8	147.9	171.5	196.5	212.4	232.9	242.8	223.8	191.9	168.4
75°	105.5	110.8	119.1	134.3	157.8	168.4	181.3	188.9	171.5	150.2	135.8
77.5°	82.7	85.0	91.0	101.7	117.6	129.7	139.6	144.1	132.0	118.3	106.2
80°	58.4	61.5	66.0	75.1	87.2	91.0	97.1	102.4	94.8	82.7	75.1
82.5°	38.7	42.5	44.8	48.6	56.1	60.7	62.2	66.8	59.9	55.4	52.3
85°	22.8	24.3	25.0	27.3	31.1	33.4	35.7	36.4	34.9	34.1	31.1
87.5°	11.4	11.4	11.4	12.9	13.7	15.2	15.9	15.9	15.9	15.2	14.4
90°	0.8	2.5	4.2	5.9	7.6	8.4	9.5	11.7	13.8	16.0	18.2
92.5°	22.8	23.8	24.8	25.8	26.8	27.3	27.8	28.8	29.9	30.9	31.9
95°	44.8	46.0	47.2	48.3	49.5	50.1	50.8	52.1	53.5	54.8	56.2
97.5°	73.6	74.4	75.3	76.1	77.0	77.4	77.9	78.9	80.0	81.0	82.0
100°	103.3	104.3	105.3	106.3	107.3	107.8	108.2	109.1	109.9	110.8	111.6
102.5°	137.4	137.9	138.4	138.9	139.4	139.7	140.3	141.5	142.6	143.8	145.0
105°	170.8	171.1	171.5	171.8	172.1	172.3	173.1	174.6	176.1	177.7	179.2
107.5°	210.3	210.5	210.7	210.8	211.0	211.1	211.4	212.1	212.8	213.4	214.1
110°	246.7	247.1	247.4	247.8	248.1	248.3	248.5	248.8	249.1	249.5	249.8



TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	284.7	284.9	285.1	285.2	285.4	285.5	285.5	285.5	285.5	285.5	285.5
115°	322.7	323.2	323.7	324.2	324.7	324.9	324.7	324.4	324.1	323.7	323.4
117.5°	361.4	361.6	361.7	361.9	362.0	362.1	361.9	361.6	361.3	360.9	360.6
120°	397.1	398.1	399.1	400.1	401.1	401.6	401.2	400.3	399.5	398.6	397.8
122.5°	434.3	435.0	435.6	436.3	437.0	437.3	437.1	436.8	436.5	436.1	435.8
125°	472.2	472.7	473.2	473.7	474.2	474.5	474.3	474.0	473.7	473.3	473.0
127.5°	507.2	508.2	509.2	510.2	511.2	511.7	511.5	511.2	510.9	510.5	510.2
130°	542.1	543.5	544.8	546.2	547.5	548.2	547.9	547.4	546.9	546.4	545.9
132.5°	577.0	578.4	579.7	581.1	582.4	583.1	582.9	582.6	582.3	581.9	581.6
135°	612.7	613.7	614.7	615.7	616.7	617.2	617.1	617.0	616.8	616.7	616.5
137.5°	645.3	646.1	647.0	647.8	648.7	649.1	649.4	649.9	650.4	650.9	651.4
140°	679.5	680.3	681.2	682.0	682.9	683.3	683.4	683.6	683.7	683.9	684.1
142.5°	710.6	711.4	712.3	713.1	714.0	714.4	714.6	714.9	715.2	715.6	715.9
145°	743.3	743.6	744.0	744.3	744.6	744.8	745.1	745.6	746.1	746.6	747.1
147.5°	771.4	772.1	772.7	773.4	774.1	774.4	774.7	775.2	775.7	776.2	776.7
150°	801.0	801.3	801.7	802.0	802.3	802.5	802.7	803.0	803.3	803.7	804.0
152.5°	825.3	825.8	826.3	826.8	827.3	827.5	827.6	827.8	827.9	828.1	828.3
155°	851.1	851.1	851.1	851.1	851.1	851.1	851.2	851.3	851.5	851.6	851.8
157.5°	873.1	872.9	872.7	872.6	872.4	872.3	872.4	872.6	872.7	872.9	873.1
160°	893.6	893.3	892.9	892.6	892.3	892.1	892.1	892.1	892.1	892.1	892.1
162.5°	911.8	911.3	910.8	910.3	909.8	909.5	909.6	909.8	909.9	910.1	910.3
165°	927.0	926.5	926.0	925.5	925.0	924.7	924.7	924.7	924.7	924.7	924.7
167.5°	939.9	939.2	938.6	937.9	937.2	936.9	937.0	937.1	937.3	937.4	937.6
170°	950.5	949.8	949.2	948.5	947.8	947.5	947.5	947.5	947.5	947.5	947.5
172.5°	958.9	958.2	957.6	956.9	956.2	955.9	955.9	955.9	955.9	955.9	955.9
175°	964.2	963.5	962.9	962.2	961.5	961.2	961.2	961.2	961.2	961.2	961.2
177.5°	967.2	966.5	965.9	965.2	964.5	964.2	964.2	964.2	964.2	964.2	964.2
180°	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9
2.5°	824.7	826.2	831.5	835.3	842.9	842.1	842.1	841.3	839.1	842.9	845.1
5°	882.3	895.2	896.7	913.4	914.2	921.0	925.6	921.8	930.9	930.1	923.3
7.5°	953.6	971.1	979.4	995.3	1013.6	1009.0	1026.5	1029.5	1028.0	1035.6	1040.9
10°	1031.8	1062.1	1083.4	1112.9	1120.5	1125.1	1136.5	1146.3	1166.0	1150.9	1160.7
12.5°	1121.3	1143.3	1171.4	1218.4	1241.9	1257.1	1262.4	1269.2	1282.9	1274.5	1275.3
15°	1196.4	1226.0	1273.8	1332.2	1339.0	1358.0	1353.4	1394.4	1414.1	1384.5	1401.2
17.5°	1274.5	1314.0	1370.9	1421.7	1450.5	1463.4	1475.6	1515.0	1513.5	1509.0	1512.7
20°	1324.6	1389.1	1459.6	1527.2	1535.5	1545.4	1578.0	1594.7	1591.6	1604.5	1612.9
22.5°	1395.2	1463.4	1538.5	1583.3	1602.3	1613.6	1639.4	1650.1	1654.6	1657.7	1652.3
25°	1454.3	1527.2	1582.5	1622.0	1633.4	1639.4	1647.8	1650.8	1648.5	1643.2	1647.8
27.5°	1494.5	1553.0	1590.9	1609.1	1603.0	1593.2	1577.2	1566.6	1543.1	1531.7	1545.4
30°	1511.2	1537.0	1548.4	1518.1	1487.7	1463.4	1433.1	1377.0	1332.9	1345.8	1328.4
32.5°	1484.7	1468.0	1413.4	1335.2	1311.7	1272.3	1186.5	1120.5	1122.8	1087.9	1102.3
35°	1406.5	1330.7	1227.5	1109.1	1078.0	1056.8	962.7	948.3	918.0	885.3	894.4
37.5°	1268.5	1157.7	1032.5	945.3	899.0	852.7	799.6	767.8	749.5	735.9	746.5
40°	1100.0	965.0	861.8	783.7	744.2	714.6	678.2	646.4	625.9	623.6	627.4
42.5°	934.7	820.9	726.0	651.7	638.8	603.9	580.4	555.3	549.3	539.4	544.7
45°	791.3	698.7	620.6	559.9	544.7	535.6	506.8	490.8	484.0	477.9	487.1
47.5°	687.3	590.2	533.3	496.9	481.7	466.6	450.6	440.0	434.7	435.5	434.7
50°	587.2	515.9	465.8	437.7	428.6	418.0	405.1	398.3	396.0	389.2	394.5
52.5°	505.3	453.7	418.8	392.2	385.4	377.8	367.2	363.4	358.1	356.6	356.6
55°	439.3	399.1	371.0	353.5	345.2	339.1	333.0	328.5	324.7	324.7	324.7
57.5°	387.7	352.8	332.3	317.1	314.1	308.0	301.2	301.2	295.9	295.1	297.4
60°	343.7	312.6	296.6	283.7	279.2	277.7	270.8	270.8	269.3	265.5	268.6
62.5°	298.9	276.1	262.5	252.6	248.1	248.1	242.8	239.0	239.0	239.7	238.2
65°	257.9	241.3	229.1	221.5	219.2	216.2	215.5	212.4	210.1	210.9	210.1
67.5°	221.5	208.6	200.3	194.2	190.4	188.9	186.6	186.6	185.1	185.9	182.1
70°	188.9	176.0	169.2	163.1	161.6	161.6	158.6	159.3	157.8	160.1	158.6
72.5°	155.5	145.7	140.4	138.1	136.6	135.8	134.3	132.8	132.0	133.5	132.8
75°	125.9	117.6	113.8	112.3	110.8	110.8	110.0	109.2	108.5	108.5	108.5
77.5°	97.9	92.6	88.0	89.5	87.2	88.0	85.7	85.7	86.5	85.7	85.7
80°	72.1	68.3	68.3	66.8	63.7	65.2	65.2	63.0	62.2	63.7	61.5
82.5°	47.8	47.0	45.5	44.8	43.2	44.0	43.2	42.5	41.7	43.2	41.7
85°	28.1	28.1	27.3	25.8	27.3	26.6	25.8	25.8	25.0	25.0	25.0
87.5°	14.4	12.9	12.9	12.1	12.9	11.4	12.1	11.4	10.6	11.4	10.6
90°	18.9	19.6	20.3	21.0	21.3	21.5	21.8	22.1	22.5	22.8	22.5
92.5°	32.4	32.9	33.4	33.9	34.2	34.0	33.7	33.3	33.0	32.6	33.0
95°	56.9	57.5	58.2	58.9	59.2	59.2	59.2	59.2	59.2	59.2	59.2
97.5°	82.8	83.7	84.5	85.4	85.8	85.7	85.5	85.4	85.2	85.0	85.2
100°	112.1	112.6	113.1	113.6	113.9	114.1	114.4	114.7	115.1	115.4	115.1
102.5°	145.5	146.0	146.5	147.0	147.3	147.2	147.0	146.9	146.7	146.5	146.7
105°	179.2	179.2	179.2	179.2	179.2	179.4	179.7	180.0	180.4	180.7	180.4
107.5°	214.6	215.1	215.6	216.1	216.4	216.3	216.1	216.0	215.8	215.6	215.8
110°	250.5	251.1	251.8	252.5	252.8	252.6	252.3	252.0	251.6	251.3	251.6

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	286.3	287.2	288.0	288.9	289.3	289.3	289.3	289.3	289.3	289.3	289.3
115°	323.6	323.8	323.9	324.1	324.2	324.1	323.9	323.8	323.6	323.4	323.6
117.5°	360.6	360.6	360.6	360.6	360.6	360.4	359.9	359.4	358.9	358.4	358.9
120°	397.6	397.5	397.3	397.2	397.1	396.9	396.6	396.3	395.9	395.6	395.9
122.5°	435.3	434.8	434.3	433.8	433.5	433.2	432.7	432.2	431.7	431.2	431.7
125°	472.3	471.7	471.0	470.3	470.0	469.7	469.0	468.3	467.6	466.9	467.6
127.5°	509.2	508.2	507.1	506.1	505.6	505.3	504.6	503.9	503.3	502.6	503.3
130°	545.2	544.5	543.8	543.1	542.8	542.2	541.0	539.9	538.7	537.5	538.7
132.5°	580.8	579.9	579.1	578.2	577.8	577.4	576.5	575.7	574.8	574.0	574.8
135°	615.8	615.1	614.4	613.7	613.4	613.2	612.9	612.6	612.2	611.9	612.2
137.5°	650.6	649.7	648.9	648.0	647.6	647.3	646.8	646.3	645.8	645.3	645.8
140°	683.9	683.7	683.6	683.4	683.3	682.7	681.5	680.4	679.2	678.0	679.2
142.5°	715.7	715.6	715.4	715.3	715.2	714.8	713.9	713.1	712.2	711.4	712.2
145°	746.9	746.7	746.6	746.4	746.3	746.0	745.3	744.6	744.0	743.3	744.0
147.5°	776.7	776.7	776.7	776.7	776.7	776.2	775.2	774.1	773.1	772.1	773.1
150°	804.0	804.0	804.0	804.0	804.0	803.5	802.5	801.5	800.5	799.5	800.5
152.5°	828.6	829.0	829.3	829.6	829.8	829.4	828.5	827.7	826.8	826.0	826.8
155°	852.5	853.2	853.9	854.6	854.9	854.3	853.1	852.0	850.8	849.6	850.8
157.5°	873.8	874.4	875.1	875.8	876.1	875.6	874.6	873.6	872.6	871.6	872.6
160°	892.9	893.8	894.6	895.5	895.9	895.6	894.9	894.2	893.5	892.8	893.5
162.5°	911.1	912.0	912.8	913.7	914.1	913.5	912.3	911.2	910.0	908.8	910.0
165°	925.7	926.7	927.8	928.8	929.3	928.7	927.5	926.4	925.2	924.0	925.2
167.5°	938.6	939.6	940.7	941.7	942.2	941.7	940.7	939.6	938.6	937.6	938.6
170°	948.7	949.9	951.0	952.2	952.8	952.2	951.0	949.9	948.7	947.5	948.7
172.5°	956.9	957.9	958.9	959.9	960.4	959.8	958.6	957.5	956.3	955.1	956.3
175°	962.2	963.2	964.2	965.2	965.7	965.1	963.9	962.8	961.6	960.4	961.6
177.5°	965.2	966.2	967.3	968.3	968.8	968.2	967.0	965.8	964.6	963.4	964.6
180°	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9
2.5°	839.1	841.3	835.3	833.8	833.8	836.8	834.5	814.0	817.8	813.3	811.8
5°	931.6	927.1	921.0	918.0	914.2	903.6	902.8	879.3	874.7	859.6	852.7
7.5°	1033.3	1029.5	1011.3	1009.0	1007.5	997.6	972.6	947.6	929.3	911.9	895.2
10°	1149.4	1138.0	1129.6	1112.9	1104.6	1090.9	1058.3	1034.8	1003.7	977.1	942.2
12.5°	1288.9	1276.0	1248.0	1235.8	1225.2	1187.3	1154.7	1128.1	1067.4	1049.2	1006.0
15°	1391.4	1364.1	1361.0	1334.5	1332.9	1291.2	1229.0	1200.2	1153.1	1086.4	1041.6
17.5°	1502.1	1477.9	1458.9	1427.0	1422.5	1383.0	1337.5	1266.9	1215.4	1151.6	1094.7
20°	1583.3	1570.4	1537.8	1524.9	1498.3	1465.0	1417.9	1330.7	1267.7	1204.0	1134.2
22.5°	1647.8	1634.9	1609.1	1591.6	1576.5	1533.2	1477.1	1402.7	1316.3	1232.8	1160.7
25°	1647.0	1643.2	1632.6	1624.3	1612.9	1581.0	1534.0	1462.7	1366.3	1274.5	1174.4
27.5°	1553.7	1564.3	1582.5	1591.6	1589.4	1584.8	1558.3	1498.3	1411.8	1302.6	1190.3
30°	1359.5	1398.2	1432.3	1477.9	1491.5	1524.9	1540.1	1505.9	1436.9	1335.2	1210.8
32.5°	1127.4	1183.5	1257.8	1282.9	1326.1	1390.6	1462.7	1475.6	1432.3	1354.2	1223.7
35°	924.8	971.1	1028.7	1068.2	1106.9	1211.6	1302.6	1381.5	1395.9	1344.3	1220.7
37.5°	765.5	798.1	848.9	882.3	918.0	1007.5	1134.9	1237.4	1309.4	1310.9	1212.3
40°	650.2	664.6	708.6	732.9	767.0	844.4	958.2	1091.7	1197.2	1245.7	1190.3
42.5°	550.8	569.7	606.2	624.4	646.4	713.9	789.0	915.7	1046.2	1150.1	1149.4
45°	491.6	505.3	522.0	537.1	562.2	602.4	688.1	782.9	908.1	1025.7	1072.0
47.5°	439.3	452.2	468.8	473.4	490.1	528.0	580.4	663.1	779.9	896.7	984.0
50°	395.3	405.9	417.3	425.6	433.2	464.3	503.7	573.5	666.9	779.9	888.4
52.5°	361.1	368.7	378.6	383.1	389.9	412.7	443.1	494.6	571.3	674.4	779.9
55°	329.3	334.6	340.6	348.2	351.3	367.9	391.5	435.5	492.4	584.9	685.1
57.5°	299.7	301.9	305.7	310.3	314.1	328.5	349.0	378.6	428.6	500.0	594.8
60°	266.3	272.4	274.6	279.2	281.5	292.8	308.8	333.8	372.5	433.9	505.3
62.5°	238.2	242.0	245.8	248.1	253.4	257.2	270.1	292.8	324.7	370.2	434.7
65°	213.2	214.7	217.0	219.2	220.8	225.3	237.5	252.6	276.9	317.1	367.2
67.5°	184.4	185.9	188.9	189.7	191.2	197.2	204.1	217.0	237.5	267.8	308.8
70°	156.3	158.6	160.1	161.6	163.9	166.1	173.7	184.4	200.3	221.5	253.4
72.5°	132.0	134.3	134.3	135.8	135.0	138.1	145.7	153.2	163.9	181.3	209.4
75°	107.7	107.7	109.2	110.0	110.8	113.8	116.8	122.9	131.2	144.9	162.4
77.5°	85.0	84.2	85.7	85.7	85.7	88.0	91.0	94.1	99.4	109.2	122.9
80°	62.2	62.2	63.7	64.5	63.0	63.7	65.2	68.3	72.1	78.9	86.5
82.5°	41.0	44.0	43.2	44.0	43.2	44.8	45.5	46.3	47.8	50.8	56.1
85°	25.0	25.0	25.0	25.8	25.0	25.8	25.8	25.8	26.6	28.1	30.3
87.5°	10.6	10.6	10.6	11.4	10.6	10.6	11.4	10.6	11.4	11.4	12.1
90°	22.1	21.8	21.5	21.3	21.0	20.3	19.6	18.9	18.2	16.0	13.8
92.5°	33.3	33.7	34.0	34.2	33.9	33.4	32.9	32.4	31.9	30.9	29.9
95°	59.2	59.2	59.2	59.2	58.9	58.2	57.5	56.9	56.2	54.8	53.5
97.5°	85.4	85.5	85.7	85.8	85.4	84.5	83.7	82.8	82.0	81.0	80.0
100°	114.7	114.4	114.1	113.9	113.6	113.1	112.6	112.1	111.6	110.8	109.9
102.5°	146.9	147.0	147.2	147.3	147.0	146.5	146.0	145.5	145.0	143.8	142.6
105°	180.0	179.7	179.4	179.2	179.2	179.2	179.2	179.2	179.2	177.7	176.1
107.5°	216.0	216.1	216.3	216.4	216.1	215.6	215.1	214.6	214.1	213.4	212.8
110°	252.0	252.3	252.6	252.8	252.5	251.8	251.1	250.5	249.8	249.5	249.1

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	289.3	289.3	289.3	289.3	288.9	288.0	287.2	286.3	285.5	285.5	285.5
115°	323.8	323.9	324.1	324.2	324.1	323.9	323.8	323.6	323.4	323.7	324.1
117.5°	359.4	359.9	360.4	360.6	360.6	360.6	360.6	360.6	360.6	360.9	361.3
120°	396.3	396.6	396.9	397.1	397.2	397.3	397.5	397.6	397.8	398.6	399.5
122.5°	432.2	432.7	433.2	433.5	433.8	434.3	434.8	435.3	435.8	436.1	436.5
125°	468.3	469.0	469.7	470.0	470.3	471.0	471.7	472.3	473.0	473.3	473.7
127.5°	503.9	504.6	505.3	505.6	506.1	507.1	508.2	509.2	510.2	510.5	510.9
130°	539.9	541.0	542.2	542.8	543.1	543.8	544.5	545.2	545.9	546.4	546.9
132.5°	575.7	576.5	577.4	577.8	578.2	579.1	579.9	580.8	581.6	581.9	582.3
135°	612.6	612.9	613.2	613.4	613.7	614.4	615.1	615.8	616.5	616.7	616.8
137.5°	646.3	646.8	647.3	647.6	648.0	648.9	649.7	650.6	651.4	650.9	650.4
140°	680.4	681.5	682.7	683.3	683.4	683.6	683.7	683.9	684.1	683.9	683.7
142.5°	713.1	713.9	714.8	715.2	715.3	715.4	715.6	715.7	715.9	715.6	715.2
145°	744.6	745.3	746.0	746.3	746.4	746.6	746.7	746.9	747.1	746.6	746.1
147.5°	774.1	775.2	776.2	776.7	776.7	776.7	776.7	776.7	776.7	776.2	775.7
150°	801.5	802.5	803.5	804.0	804.0	804.0	804.0	804.0	804.0	803.7	803.3
152.5°	827.7	828.5	829.4	829.8	829.6	829.3	829.0	828.6	828.3	828.1	827.9
155°	852.0	853.1	854.3	854.9	854.6	853.9	853.2	852.5	851.8	851.6	851.5
157.5°	873.6	874.6	875.6	876.1	875.8	875.1	874.4	873.8	873.1	872.9	872.7
160°	894.2	894.9	895.6	895.9	895.5	894.6	893.8	892.9	892.1	892.1	892.1
162.5°	911.2	912.3	913.5	914.1	913.7	912.8	912.0	911.1	910.3	910.1	909.9
165°	926.4	927.5	928.7	929.3	928.8	927.8	926.7	925.7	924.7	924.7	924.7
167.5°	939.6	940.7	941.7	942.2	941.7	940.7	939.6	938.6	937.6	937.4	937.3
170°	949.9	951.0	952.2	952.8	952.2	951.0	949.9	948.7	947.5	947.5	947.5
172.5°	957.5	958.6	959.8	960.4	959.9	958.9	957.9	956.9	955.9	955.9	955.9
175°	962.8	963.9	965.1	965.7	965.2	964.2	963.2	962.2	961.2	961.2	961.2
177.5°	965.8	967.0	968.2	968.8	968.3	967.3	966.2	965.2	964.2	964.2	964.2
180°	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9
2.5°	804.2	801.9	801.9	800.4	795.8	787.5	786.7	788.2	783.7	779.1	772.3
5°	843.6	829.2	824.7	820.1	811.0	795.8	789.8	784.4	776.1	766.2	755.6
7.5°	877.0	856.5	850.4	842.1	823.9	802.7	789.0	777.6	766.2	752.6	739.7
10°	918.7	889.1	874.7	862.6	837.6	808.0	787.5	770.8	752.6	735.9	719.2
12.5°	965.8	918.0	913.4	883.8	855.0	811.0	786.0	761.7	737.4	716.9	699.5
15°	1005.2	952.9	933.9	914.2	858.8	804.2	779.9	752.6	724.5	702.5	676.7
17.5°	1030.2	987.0	946.8	920.2	862.6	814.0	767.0	735.9	706.3	676.0	654.7
20°	1060.6	997.6	962.7	927.1	870.2	806.4	759.4	720.7	684.3	657.0	631.2
22.5°	1090.9	1006.0	977.1	938.5	871.7	798.9	745.8	707.1	665.3	638.0	610.0
25°	1087.9	1018.1	970.3	937.7	856.5	792.0	729.8	684.3	645.6	610.7	582.6
27.5°	1090.2	1004.5	955.9	918.0	845.9	782.2	713.1	665.3	625.1	588.7	559.1
30°	1090.9	984.0	941.5	896.0	826.2	758.7	694.2	645.6	603.1	563.7	537.1
32.5°	1088.7	967.3	914.2	873.2	795.1	735.9	672.2	620.6	577.3	540.9	515.9
35°	1083.4	947.6	886.1	834.5	763.2	703.3	651.7	598.6	552.3	518.9	490.1
37.5°	1068.9	926.3	856.5	805.7	726.0	665.3	619.8	575.8	531.1	491.6	467.3
40°	1058.3	897.5	826.9	771.5	685.8	626.6	588.7	547.0	503.0	467.3	443.8
42.5°	1034.0	870.2	796.6	730.6	646.4	585.7	550.0	516.6	478.7	443.8	422.6
45°	994.6	840.6	759.4	692.6	603.1	545.5	512.8	485.5	452.2	418.8	397.5
47.5°	939.2	798.1	720.0	653.2	560.6	502.2	469.6	449.1	422.6	394.5	376.3
50°	879.3	751.8	679.8	613.7	519.7	462.8	430.9	411.9	394.5	368.7	351.3
52.5°	801.1	702.5	633.5	570.5	475.7	421.1	393.0	379.3	361.1	342.9	327.7
55°	725.3	638.8	581.9	522.0	432.4	381.6	354.3	339.9	329.3	314.1	301.9
57.5°	637.3	579.6	527.3	472.6	392.2	345.9	320.2	302.7	295.9	289.0	277.7
60°	556.1	512.1	469.6	424.1	350.5	308.8	283.7	270.1	263.3	258.7	251.1
62.5°	481.7	447.6	411.2	374.8	308.0	270.1	251.1	237.5	231.4	230.6	223.8
65°	410.4	386.2	356.6	320.9	268.6	235.2	217.0	208.6	201.8	201.8	196.5
67.5°	339.1	322.4	298.9	273.9	232.9	201.8	185.1	177.5	173.7	173.7	169.9
70°	282.2	270.8	249.6	227.6	191.9	168.4	155.5	148.7	146.4	147.2	144.1
72.5°	229.1	217.0	199.5	183.6	157.0	139.6	130.5	122.9	119.1	119.9	119.1
75°	177.5	171.5	156.3	144.1	122.9	110.8	102.4	98.6	95.6	96.3	94.8
77.5°	133.5	124.4	116.1	107.7	94.8	85.0	78.1	74.3	72.1	72.1	72.1
80°	91.0	89.5	82.7	78.1	67.5	59.9	54.6	53.9	51.6	51.6	51.6
82.5°	59.2	55.4	51.6	48.6	42.5	37.9	35.7	34.1	33.4	32.6	34.1
85°	32.6	30.3	28.8	25.8	23.5	21.2	19.0	18.2	17.4	18.2	17.4
87.5°	12.9	10.6	10.6	9.9	9.1	8.3	8.3	6.8	6.8	6.1	6.1
90°	11.7	9.5	8.4	7.6	5.9	4.2	2.5	0.8	2.5	4.2	5.9
92.5°	28.8	27.8	27.3	26.8	25.8	24.8	23.8	22.8	23.8	24.8	25.8
95°	52.1	50.8	50.1	49.5	48.3	47.2	46.0	44.8	46.0	47.2	48.3
97.5°	78.9	77.9	77.4	77.0	76.1	75.3	74.4	73.6	74.4	75.3	76.1
100°	109.1	108.2	107.8	107.3	106.3	105.3	104.3	103.3	104.3	105.3	106.3
102.5°	141.5	140.3	139.7	139.4	138.9	138.4	137.9	137.4	137.9	138.4	138.9
105°	174.6	173.1	172.3	172.1	171.8	171.5	171.1	170.8	171.1	171.5	171.8
107.5°	212.1	211.4	211.1	211.0	210.8	210.7	210.5	210.3	210.5	210.7	210.8
110°	248.8	248.5	248.3	248.1	247.8	247.4	247.1	246.7	247.1	247.4	247.8

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	285.5	285.5	285.5	285.4	285.2	285.1	284.9	284.7	284.9	285.1	285.2
115°	324.4	324.7	324.9	324.7	324.2	323.7	323.2	322.7	323.2	323.7	324.2
117.5°	361.6	361.9	362.1	362.0	361.9	361.7	361.6	361.4	361.6	361.7	361.9
120°	400.3	401.2	401.6	401.1	400.1	399.1	398.1	397.1	398.1	399.1	400.1
122.5°	436.8	437.1	437.3	437.0	436.3	435.6	435.0	434.3	435.0	435.6	436.3
125°	474.0	474.3	474.5	474.2	473.7	473.2	472.7	472.2	472.7	473.2	473.7
127.5°	511.2	511.5	511.7	511.2	510.2	509.2	508.2	507.2	508.2	509.2	510.2
130°	547.4	547.9	548.2	547.5	546.2	544.8	543.5	542.1	543.5	544.8	546.2
132.5°	582.6	582.9	583.1	582.4	581.1	579.7	578.4	577.0	578.4	579.7	581.1
135°	617.0	617.1	617.2	616.7	615.7	614.7	613.7	612.7	613.7	614.7	615.7
137.5°	649.9	649.4	649.1	648.7	647.8	647.0	646.1	645.3	646.1	647.0	647.8
140°	683.6	683.4	683.3	682.9	682.0	681.2	680.3	679.5	680.3	681.2	682.0
142.5°	714.9	714.6	714.4	714.0	713.1	712.3	711.4	710.6	711.4	712.3	713.1
145°	745.6	745.1	744.8	744.6	744.3	744.0	743.6	743.3	743.6	744.0	744.3
147.5°	775.2	774.7	774.4	774.1	773.4	772.7	772.1	771.4	772.1	772.7	773.4
150°	803.0	802.7	802.5	802.3	802.0	801.7	801.3	801.0	801.3	801.7	802.0
152.5°	827.8	827.6	827.5	827.3	826.8	826.3	825.8	825.3	825.8	826.3	826.8
155°	851.3	851.2	851.1	851.1	851.1	851.1	851.1	851.1	851.1	851.1	851.1
157.5°	872.6	872.4	872.3	872.4	872.6	872.7	872.9	873.1	872.9	872.7	872.6
160°	892.1	892.1	892.1	892.3	892.6	892.9	893.3	893.6	893.3	892.9	892.6
162.5°	909.8	909.6	909.5	909.8	910.3	910.8	911.3	911.8	911.3	910.8	910.3
165°	924.7	924.7	924.7	925.0	925.5	926.0	926.5	927.0	926.5	926.0	925.5
167.5°	937.1	937.0	936.9	937.2	937.9	938.6	939.2	939.9	939.2	938.6	937.9
170°	947.5	947.5	947.5	947.8	948.5	949.2	949.8	950.5	949.8	949.2	948.5
172.5°	955.9	955.9	955.9	956.2	956.9	957.6	958.2	958.9	958.2	957.6	956.9
175°	961.2	961.2	961.2	961.5	962.2	962.9	963.5	964.2	963.5	962.9	962.2
177.5°	964.2	964.2	964.2	964.5	965.2	965.9	966.5	967.2	966.5	965.9	965.2
180°	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9
2.5°	770.8	770.0	771.5	767.0	759.4	755.6	745.0	742.7	742.0	742.7	743.5
5°	749.5	748.8	746.5	738.9	729.8	723.0	710.1	709.3	704.8	700.2	702.5
7.5°	729.1	726.0	721.5	711.6	699.5	691.9	681.3	673.7	667.6	663.8	660.8
10°	708.6	704.0	699.5	686.6	671.4	660.0	647.1	641.1	634.2	631.2	628.2
12.5°	682.0	677.5	669.1	654.0	644.9	630.4	617.5	611.5	607.7	601.6	597.8
15°	660.8	651.7	647.1	631.2	612.2	610.7	587.2	585.7	578.1	578.1	572.0
17.5°	636.5	629.7	621.3	605.4	591.7	578.1	566.0	561.4	554.6	553.1	550.0
20°	613.0	603.9	600.9	584.9	570.5	553.8	540.9	536.4	533.3	530.3	532.6
22.5°	588.7	581.1	573.5	559.1	548.5	531.8	524.2	519.7	515.1	513.6	514.4
25°	565.2	558.4	550.8	536.4	525.0	511.3	504.5	502.2	500.0	500.0	499.2
27.5°	542.4	535.6	528.8	515.9	504.5	494.6	489.3	487.1	484.8	486.3	487.8
30°	518.9	512.8	506.8	495.4	486.3	477.2	474.2	472.6	471.9	475.7	475.7
32.5°	497.7	492.4	487.8	477.2	468.1	460.5	458.2	459.0	459.7	462.0	463.5
35°	475.7	471.9	467.3	458.2	450.6	443.8	444.6	444.6	446.1	449.9	452.9
37.5°	455.9	450.6	446.8	439.3	433.2	427.1	429.4	431.7	433.2	437.7	439.3
40°	432.4	430.2	427.1	419.5	414.2	413.5	414.2	415.7	418.8	421.1	423.3
42.5°	413.5	410.4	406.6	400.6	396.0	396.8	397.5	399.1	400.6	404.4	406.6
45°	392.2	389.9	386.9	381.6	377.8	378.6	379.3	379.3	380.8	385.4	386.9
47.5°	368.7	369.5	365.7	360.4	358.1	358.1	358.1	359.6	363.4	364.9	365.7
50°	345.9	344.4	343.7	338.4	336.8	336.1	336.8	337.6	342.9	342.2	344.4
52.5°	321.7	321.7	320.9	317.9	315.6	315.6	314.1	317.9	319.4	320.9	323.2
55°	298.1	295.9	295.1	293.6	290.6	289.8	291.3	295.9	297.4	298.9	301.2
57.5°	272.4	272.4	270.8	268.6	268.6	268.6	268.6	271.6	273.9	275.4	279.9
60°	248.8	245.8	243.5	243.5	243.5	242.8	247.3	247.3	251.9	252.6	254.1
62.5°	220.8	219.2	217.7	218.5	217.7	219.2	220.8	223.8	224.6	226.8	229.1
65°	194.2	194.2	192.7	197.2	194.2	194.2	198.0	198.0	199.5	201.8	204.8
67.5°	168.4	169.2	167.7	167.7	169.2	169.9	170.7	173.7	174.5	177.5	181.3
70°	141.9	143.4	144.1	142.6	144.1	145.7	147.2	147.9	151.0	152.5	154.8
72.5°	118.3	119.9	117.6	118.3	119.1	120.6	121.4	122.9	124.4	129.0	130.5
75°	94.8	94.1	93.3	96.3	94.8	97.9	98.6	98.6	100.1	103.9	105.5
77.5°	72.8	72.8	73.6	72.1	74.3	73.6	74.3	76.6	78.9	78.9	85.0
80°	50.8	52.3	52.3	52.3	53.1	53.9	52.3	56.1	56.9	56.9	59.2
82.5°	32.6	33.4	32.6	34.1	34.1	35.7	34.9	35.7	37.2	38.7	39.4
85°	17.4	17.4	19.0	19.0	18.2	19.0	18.2	19.0	20.5	20.5	21.2
87.5°	6.1	6.1	6.1	6.1	6.8	6.1	6.8	6.8	6.1	6.1	8.3
90°	7.6	8.4	9.5	11.7	13.8	16.0	18.2	18.9	19.6	20.3	21.0
92.5°	26.8	27.3	27.8	28.8	29.9	30.9	31.9	32.4	32.9	33.4	33.9
95°	49.5	50.1	50.8	52.1	53.5	54.8	56.2	56.9	57.5	58.2	58.9
97.5°	77.0	77.4	77.9	78.9	80.0	81.0	82.0	82.8	83.7	84.5	85.4
100°	107.3	107.8	108.2	109.1	109.9	110.8	111.6	112.1	112.6	113.1	113.6
102.5°	139.4	139.7	140.3	141.5	142.6	143.8	145.0	145.5	146.0	146.5	147.0
105°	172.1	172.3	173.1	174.6	176.1	177.7	179.2	179.2	179.2	179.2	179.2
107.5°	211.0	211.1	211.4	212.1	212.8	213.4	214.1	214.6	215.1	215.6	216.1
110°	248.1	248.3	248.5	248.8	249.1	249.5	249.8	250.5	251.1	251.8	252.5

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	285.4	285.5	285.5	285.5	285.5	285.5	285.5	286.3	287.2	288.0	288.9
115°	324.7	324.9	324.7	324.4	324.1	323.7	323.4	323.6	323.8	323.9	324.1
117.5°	362.0	362.1	361.9	361.6	361.3	360.9	360.6	360.6	360.6	360.6	360.6
120°	401.1	401.6	401.2	400.3	399.5	398.6	397.8	397.6	397.5	397.3	397.2
122.5°	437.0	437.3	437.1	436.8	436.5	436.1	435.8	435.3	434.8	434.3	433.8
125°	474.2	474.5	474.3	474.0	473.7	473.3	473.0	472.3	471.7	471.0	470.3
127.5°	511.2	511.7	511.5	511.2	510.9	510.5	510.2	509.2	508.2	507.1	506.1
130°	547.5	548.2	547.9	547.4	546.9	546.4	545.9	545.2	544.5	543.8	543.1
132.5°	582.4	583.1	582.9	582.6	582.3	581.9	581.6	580.8	579.9	579.1	578.2
135°	616.7	617.2	617.1	617.0	616.8	616.7	616.5	615.8	615.1	614.4	613.7
137.5°	648.7	649.1	649.4	649.9	650.4	650.9	651.4	650.6	649.7	648.9	648.0
140°	682.9	683.3	683.4	683.6	683.7	683.9	684.1	683.9	683.7	683.6	683.4
142.5°	714.0	714.4	714.6	714.9	715.2	715.6	715.9	715.7	715.6	715.4	715.3
145°	744.6	744.8	745.1	745.6	746.1	746.6	747.1	746.9	746.7	746.6	746.4
147.5°	774.1	774.4	774.7	775.2	775.7	776.2	776.7	776.7	776.7	776.7	776.7
150°	802.3	802.5	802.7	803.0	803.3	803.7	804.0	804.0	804.0	804.0	804.0
152.5°	827.3	827.5	827.6	827.8	827.9	828.1	828.3	828.6	829.0	829.3	829.6
155°	851.1	851.1	851.2	851.3	851.5	851.6	851.8	852.5	853.2	853.9	854.6
157.5°	872.4	872.3	872.4	872.6	872.7	872.9	873.1	873.8	874.4	875.1	875.8
160°	892.3	892.1	892.1	892.1	892.1	892.1	892.1	892.9	893.8	894.6	895.5
162.5°	909.8	909.5	909.6	909.8	909.9	910.1	910.3	911.1	912.0	912.8	913.7
165°	925.0	924.7	924.7	924.7	924.7	924.7	924.7	925.7	926.7	927.8	928.8
167.5°	937.2	936.9	937.0	937.1	937.3	937.4	937.6	938.6	939.6	940.7	941.7
170°	947.8	947.5	947.5	947.5	947.5	947.5	947.5	948.7	949.9	951.0	952.2
172.5°	956.2	955.9	955.9	955.9	955.9	955.9	955.9	956.9	957.9	958.9	959.9
175°	961.5	961.2	961.2	961.2	961.2	961.2	961.2	962.2	963.2	964.2	965.2
177.5°	964.5	964.2	964.2	964.2	964.2	964.2	964.2	965.2	966.2	967.3	968.3
180°	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9
2.5°	742.7	743.5	740.4	738.2	744.2	740.4	740.4	741.2	739.7	742.0	741.2
5°	701.0	701.8	696.4	698.0	694.9	694.2	693.4	698.0	697.2	696.4	698.0
7.5°	660.0	660.0	657.7	656.2	656.2	654.0	657.0	656.2	657.7	657.7	660.0
10°	625.9	627.4	623.6	619.8	619.1	619.8	619.8	620.6	621.3	626.6	625.9
12.5°	597.8	595.5	594.8	592.5	588.7	587.2	585.7	594.0	591.7	591.7	591.7
15°	566.7	572.0	571.3	564.4	562.9	566.0	564.4	564.4	572.0	571.3	570.5
17.5°	550.0	548.5	547.0	543.2	544.0	543.2	544.0	544.0	548.5	548.5	548.5
20°	531.1	528.0	528.0	526.5	526.5	524.2	527.3	528.0	531.1	531.1	531.8
22.5°	514.4	512.1	512.1	511.3	512.8	509.8	512.8	513.6	513.6	515.9	515.9
25°	500.0	498.4	498.4	500.0	500.0	500.0	500.0	503.0	500.7	501.5	500.7
27.5°	487.1	487.8	488.6	489.3	488.6	489.3	490.1	491.6	492.4	491.6	490.1
30°	474.9	477.2	477.9	477.9	479.5	480.2	481.0	481.0	481.7	479.5	481.0
32.5°	465.8	465.8	467.3	468.1	469.6	470.4	470.4	471.9	471.1	468.8	469.6
35°	452.9	452.9	455.9	457.5	459.7	459.0	459.7	459.7	460.5	459.0	456.7
37.5°	440.0	441.5	441.5	444.6	445.3	446.1	445.3	446.8	446.1	444.6	443.8
40°	424.8	424.1	424.8	427.1	427.9	427.9	427.9	429.4	429.4	429.4	428.6
42.5°	405.9	408.2	407.4	409.7	408.9	408.9	410.4	411.9	412.7	410.4	411.2
45°	387.7	387.7	389.2	389.2	389.9	389.9	393.0	391.5	393.0	391.5	392.2
47.5°	367.9	368.7	368.7	369.5	371.0	372.5	371.0	371.7	371.7	372.5	371.0
50°	345.9	345.9	347.5	349.7	352.8	351.3	350.5	353.5	351.3	351.3	349.7
52.5°	323.2	325.5	326.2	328.5	330.8	331.5	332.3	330.8	331.5	329.3	330.0
55°	301.2	301.9	305.0	307.3	309.5	309.5	308.8	309.5	310.3	307.3	307.3
57.5°	279.2	281.5	284.5	284.5	287.5	287.5	286.8	286.8	287.5	285.3	284.5
60°	255.7	257.9	261.7	261.7	266.3	267.0	265.5	264.0	264.0	261.7	262.5
62.5°	230.6	232.9	235.2	239.0	242.0	240.5	243.5	240.5	241.3	236.7	236.7
65°	208.6	209.4	213.2	217.0	217.0	218.5	217.0	217.7	215.5	215.5	212.4
67.5°	182.8	182.8	186.6	190.4	194.2	194.2	194.2	191.9	191.9	189.7	189.7
70°	160.1	159.3	163.1	165.4	167.7	168.4	166.9	166.1	164.6	162.4	161.6
72.5°	132.0	133.5	137.3	138.8	142.6	141.9	145.7	141.1	141.1	137.3	136.6
75°	107.0	108.5	112.3	114.6	116.8	116.8	119.1	116.8	113.8	112.3	111.5
77.5°	85.0	84.2	87.2	91.0	91.8	91.0	92.6	91.8	88.8	88.8	87.2
80°	60.7	63.0	66.0	65.2	68.3	67.5	67.5	66.0	66.0	63.7	65.2
82.5°	40.2	42.5	43.2	42.5	43.2	44.8	45.5	44.8	44.8	43.2	44.0
85°	21.2	21.2	22.8	23.5	22.8	22.8	23.5	25.8	24.3	22.8	24.3
87.5°	6.8	6.1	6.1	6.8	6.1	6.1	6.8	6.8	7.6	7.6	7.6
90°	21.3	21.5	21.8	22.1	22.5	22.8	22.5	22.1	21.8	21.5	21.3
92.5°	34.2	34.0	33.7	33.3	33.0	32.6	33.0	33.3	33.7	34.0	34.2
95°	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2
97.5°	85.8	85.7	85.5	85.4	85.2	85.0	85.2	85.4	85.5	85.7	85.8
100°	113.9	114.1	114.4	114.7	115.1	115.4	115.1	114.7	114.4	114.1	113.9
102.5°	147.3	147.2	147.0	146.9	146.7	146.5	146.7	146.9	147.0	147.2	147.3
105°	179.2	179.4	179.7	180.0	180.4	180.7	180.4	180.0	179.7	179.4	179.2
107.5°	216.4	216.3	216.1	216.0	215.8	215.6	215.8	216.0	216.1	216.3	216.4
110°	252.8	252.6	252.3	252.0	251.6	251.3	251.6	252.0	252.3	252.6	252.8

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	289.3	289.3	289.3	289.3	289.3	289.3	289.3	289.3	289.3	289.3	289.3
115°	324.2	324.1	323.9	323.8	323.6	323.4	323.6	323.8	323.9	324.1	324.2
117.5°	360.6	360.4	359.9	359.4	358.9	358.4	358.9	359.4	359.9	360.4	360.6
120°	397.1	396.9	396.6	396.3	395.9	395.6	395.9	396.3	396.6	396.9	397.1
122.5°	433.5	433.2	432.7	432.2	431.7	431.2	431.7	432.2	432.7	433.2	433.5
125°	470.0	469.7	469.0	468.3	467.6	466.9	467.6	468.3	469.0	469.7	470.0
127.5°	505.6	505.3	504.6	503.9	503.3	502.6	503.3	503.9	504.6	505.3	505.6
130°	542.8	542.2	541.0	539.9	538.7	537.5	538.7	539.9	541.0	542.2	542.8
132.5°	577.8	577.4	576.5	575.7	574.8	574.0	574.8	575.7	576.5	577.4	577.8
135°	613.4	613.2	612.9	612.6	612.2	611.9	612.2	612.6	612.9	613.2	613.4
137.5°	647.6	647.3	646.8	646.3	645.8	645.3	645.8	646.3	646.8	647.3	647.6
140°	683.3	682.7	681.5	680.4	679.2	678.0	679.2	680.4	681.5	682.7	683.3
142.5°	715.2	714.8	713.9	713.1	712.2	711.4	712.2	713.1	713.9	714.8	715.2
145°	746.3	746.0	745.3	744.6	744.0	743.3	744.0	744.6	745.3	746.0	746.3
147.5°	776.7	776.2	775.2	774.1	773.1	772.1	773.1	774.1	775.2	776.2	776.7
150°	804.0	803.5	802.5	801.5	800.5	799.5	800.5	801.5	802.5	803.5	804.0
152.5°	829.8	829.4	828.5	827.7	826.8	826.0	826.8	827.7	828.5	829.4	829.8
155°	854.9	854.3	853.1	852.0	850.8	849.6	850.8	852.0	853.1	854.3	854.9
157.5°	876.1	875.6	874.6	873.6	872.6	871.6	872.6	873.6	874.6	875.6	876.1
160°	895.9	895.6	894.9	894.2	893.5	892.8	893.5	894.2	894.9	895.6	895.9
162.5°	914.1	913.5	912.3	911.2	910.0	908.8	910.0	911.2	912.3	913.5	914.1
165°	929.3	928.7	927.5	926.4	925.2	924.0	925.2	926.4	927.5	928.7	929.3
167.5°	942.2	941.7	940.7	939.6	938.6	937.6	938.6	939.6	940.7	941.7	942.2
170°	952.8	952.2	951.0	949.9	948.7	947.5	948.7	949.9	951.0	952.2	952.8
172.5°	960.4	959.8	958.6	957.5	956.3	955.1	956.3	957.5	958.6	959.8	960.4
175°	965.7	965.1	963.9	962.8	961.6	960.4	961.6	962.8	963.9	965.1	965.7
177.5°	968.8	968.2	967.0	965.8	964.6	963.4	964.6	965.8	967.0	968.2	968.8
180°	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9	782.9
2.5°	743.5	745.0	745.8	742.7	740.4	744.2	749.5	753.3	756.4	760.2	762.4
5°	699.5	704.8	704.8	706.3	708.6	712.4	722.2	729.1	735.1	739.7	743.5
7.5°	662.3	666.1	668.4	672.2	676.0	681.3	692.6	702.5	711.6	716.9	723.0
10°	628.9	632.0	635.7	638.0	644.9	652.4	666.9	675.2	685.8	694.2	701.8
12.5°	597.1	607.7	610.0	609.2	615.3	623.6	638.0	650.9	662.3	670.6	679.0
15°	574.3	578.1	582.6	581.9	594.8	597.1	609.2	624.4	639.5	644.9	652.4
17.5°	549.3	555.3	559.9	562.2	566.0	574.3	585.7	597.1	616.8	617.5	637.3
20°	529.5	535.6	538.6	541.7	544.0	553.8	563.7	576.6	592.5	600.9	611.5
22.5°	516.6	519.7	522.0	524.2	527.3	532.6	544.7	559.1	569.7	578.9	585.7
25°	501.5	504.5	507.5	509.1	511.3	514.4	523.5	534.8	550.0	556.1	562.9
27.5°	490.8	490.8	492.4	492.4	495.4	498.4	505.3	515.9	528.0	535.6	544.7
30°	479.5	478.7	479.5	478.7	477.9	482.5	488.6	497.7	506.0	515.1	521.2
32.5°	468.1	467.3	467.3	468.1	465.1	467.3	470.4	478.7	487.8	492.4	499.2
35°	455.9	454.4	454.4	454.4	452.9	451.4	454.4	462.0	468.1	474.2	479.5
37.5°	443.8	441.5	441.5	440.0	438.5	436.2	436.2	442.3	450.6	452.9	459.7
40°	427.1	427.1	425.6	424.8	423.3	421.8	419.5	424.8	432.4	434.7	440.0
42.5°	410.4	408.2	407.4	407.4	407.4	405.1	403.6	407.4	411.9	415.7	418.8
45°	391.5	389.9	390.7	389.9	388.4	387.7	386.9	388.4	393.7	395.3	399.1
47.5°	371.0	370.2	370.2	369.5	368.7	369.5	366.4	370.2	371.7	373.3	376.3
50°	349.7	349.0	348.2	347.5	347.5	348.2	347.5	347.5	350.5	352.0	355.0
52.5°	328.5	326.2	326.2	325.5	325.5	323.9	325.5	326.2	327.7	329.3	330.8
55°	305.7	305.7	303.5	303.5	301.9	301.9	302.7	301.9	305.0	306.5	306.5
57.5°	283.7	280.7	281.5	279.9	278.4	277.7	277.7	279.2	280.7	280.7	282.2
60°	260.2	257.2	256.4	253.4	254.9	252.6	253.4	253.4	256.4	254.9	256.4
62.5°	236.7	232.9	230.6	229.1	229.1	229.9	228.4	227.6	229.1	230.6	233.7
65°	211.7	209.4	207.1	204.8	204.8	204.1	205.6	203.3	202.6	203.3	204.8
67.5°	185.9	183.6	181.3	179.0	179.8	177.5	176.0	178.3	176.8	177.5	179.0
70°	160.8	159.3	154.8	153.2	152.5	153.2	152.5	151.0	153.2	152.5	153.2
72.5°	135.8	134.3	132.0	128.2	128.2	127.5	126.7	126.7	125.9	125.9	125.9
75°	111.5	108.5	106.2	105.5	103.9	103.2	102.4	100.9	101.7	102.4	100.9
77.5°	86.5	82.7	81.9	81.9	79.7	79.7	80.4	79.7	78.9	78.9	78.9
80°	63.7	60.7	60.7	59.2	57.7	57.7	57.7	57.7	56.9	56.1	56.9
82.5°	41.0	40.2	39.4	39.4	41.0	37.9	39.4	38.7	37.9	37.9	37.2
85°	22.8	23.5	22.8	23.5	22.0	22.8	22.8	22.8	22.0	22.8	21.2
87.5°	8.3	8.3	8.3	9.1	9.1	9.1	9.1	9.1	9.9	9.1	9.1
90°	21.0	20.3	19.6	18.9	18.2	16.0	13.8	11.7	9.5	8.4	7.6
92.5°	33.9	33.4	32.9	32.4	31.9	30.9	29.9	28.8	27.8	27.3	26.8
95°	58.9	58.2	57.5	56.9	56.2	54.8	53.5	52.1	50.8	50.1	49.5
97.5°	85.4	84.5	83.7	82.8	82.0	81.0	80.0	78.9	77.9	77.4	77.0
100°	113.6	113.1	112.6	112.1	111.6	110.8	109.9	109.1	108.2	107.8	107.3
102.5°	147.0	146.5	146.0	145.5	145.0	143.8	142.6	141.5	140.3	139.7	139.4
105°	179.2	179.2	179.2	179.2	179.2	177.7	176.1	174.6	173.1	172.3	172.1
107.5°	216.1	215.6	215.1	214.6	214.1	213.4	212.8	212.1	211.4	211.1	211.0
110°	252.5	251.8	251.1	250.5	249.8	249.5	249.1	248.8	248.5	248.3	248.1

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	288.9	288.0	287.2	286.3	285.5	285.5	285.5	285.5	285.5	285.5	285.4
115°	324.1	323.9	323.8	323.6	323.4	323.7	324.1	324.4	324.7	324.9	324.7
117.5°	360.6	360.6	360.6	360.6	360.6	360.9	361.3	361.6	361.9	362.1	362.0
120°	397.2	397.3	397.5	397.6	397.8	398.6	399.5	400.3	401.2	401.6	401.1
122.5°	433.8	434.3	434.8	435.3	435.8	436.1	436.5	436.8	437.1	437.3	437.0
125°	470.3	471.0	471.7	472.3	473.0	473.3	473.7	474.0	474.3	474.5	474.2
127.5°	506.1	507.1	508.2	509.2	510.2	510.5	510.9	511.2	511.5	511.7	511.2
130°	543.1	543.8	544.5	545.2	545.9	546.4	546.9	547.4	547.9	548.2	547.5
132.5°	578.2	579.1	579.9	580.8	581.6	581.9	582.3	582.6	582.9	583.1	582.4
135°	613.7	614.4	615.1	615.8	616.5	616.7	616.8	617.0	617.1	617.2	616.7
137.5°	648.0	648.9	649.7	650.6	651.4	650.9	650.4	649.9	649.4	649.1	648.7
140°	683.4	683.6	683.7	683.9	684.1	683.9	683.7	683.6	683.4	683.3	682.9
142.5°	715.3	715.4	715.6	715.7	715.9	715.6	715.2	714.9	714.6	714.4	714.0
145°	746.4	746.6	746.7	746.9	747.1	746.6	746.1	745.6	745.1	744.8	744.6
147.5°	776.7	776.7	776.7	776.7	776.7	776.2	775.7	775.2	774.7	774.4	774.1
150°	804.0	804.0	804.0	804.0	804.0	803.7	803.3	803.0	802.7	802.5	802.3
152.5°	829.6	829.3	829.0	828.6	828.3	828.1	827.9	827.8	827.6	827.5	827.3
155°	854.6	853.9	853.2	852.5	851.8	851.6	851.5	851.3	851.2	851.1	851.1
157.5°	875.8	875.1	874.4	873.8	873.1	872.9	872.7	872.6	872.4	872.3	872.4
160°	895.5	894.6	893.8	892.9	892.1	892.1	892.1	892.1	892.1	892.1	892.3
162.5°	913.7	912.8	912.0	911.1	910.3	910.1	909.9	909.8	909.6	909.5	909.8
165°	928.8	927.8	926.7	925.7	924.7	924.7	924.7	924.7	924.7	924.7	925.0
167.5°	941.7	940.7	939.6	938.6	937.6	937.4	937.3	937.1	937.0	936.9	937.2
170°	952.2	951.0	949.9	948.7	947.5	947.5	947.5	947.5	947.5	947.5	947.8
172.5°	959.9	958.9	957.9	956.9	955.9	955.9	955.9	955.9	955.9	955.9	956.2
175°	965.2	964.2	963.2	962.2	961.2	961.2	961.2	961.2	961.2	961.2	961.5
177.5°	968.3	967.3	966.2	965.2	964.2	964.2	964.2	964.2	964.2	964.2	964.5
180°	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5	966.5

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	782.9	782.9	782.9	782.9
2.5°	766.2	768.5	776.1	785.2
5°	751.1	757.1	767.8	782.2
7.5°	734.4	743.5	758.7	776.9
10°	715.4	728.3	747.3	770.0
12.5°	694.9	711.6	735.9	759.4
15°	682.0	698.7	720.7	746.5
17.5°	657.0	676.7	699.5	735.9
20°	631.2	653.2	682.8	719.2
22.5°	611.5	635.0	663.1	701.8
25°	588.0	612.2	642.6	682.8
27.5°	562.9	587.2	621.3	663.8
30°	544.0	567.5	600.1	645.6
32.5°	521.2	544.0	578.1	625.9
35°	495.4	521.2	553.8	602.4
37.5°	475.7	499.2	533.3	579.6
40°	454.4	474.9	508.3	553.8
42.5°	431.7	454.4	483.3	528.8
45°	410.4	427.1	456.7	500.0
47.5°	387.7	406.6	429.4	462.8
50°	363.4	379.3	404.4	427.1
52.5°	339.9	352.8	374.0	391.5
55°	314.8	327.7	343.7	354.3
57.5°	291.3	300.4	311.0	317.9
60°	262.5	271.6	278.4	285.3
62.5°	236.7	243.5	247.3	251.1
65°	210.1	213.9	216.2	219.2
67.5°	181.3	185.1	185.9	190.4
70°	154.8	155.5	157.0	159.3
72.5°	129.7	131.2	130.5	132.0
75°	103.9	105.5	103.9	105.5
77.5°	78.9	80.4	80.4	82.7
80°	56.9	57.7	58.4	58.4
82.5°	37.2	39.4	37.9	38.7
85°	21.2	22.0	22.0	22.8
87.5°	9.9	10.6	9.9	11.4
90°	5.9	4.2	2.5	0.8
92.5°	25.8	24.8	23.8	22.8
95°	48.3	47.2	46.0	44.8
97.5°	76.1	75.3	74.4	73.6
100°	106.3	105.3	104.3	103.3
102.5°	138.9	138.4	137.9	137.4
105°	171.8	171.5	171.1	170.8
107.5°	210.8	210.7	210.5	210.3
110°	247.8	247.4	247.1	246.7

TEST NUMBER: P1011878

CATALOG NUMBER: S123DIP-B560D805UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	285.2	285.1	284.9	284.7
115°	324.2	323.7	323.2	322.7
117.5°	361.9	361.7	361.6	361.4
120°	400.1	399.1	398.1	397.1
122.5°	436.3	435.6	435.0	434.3
125°	473.7	473.2	472.7	472.2
127.5°	510.2	509.2	508.2	507.2
130°	546.2	544.8	543.5	542.1
132.5°	581.1	579.7	578.4	577.0
135°	615.7	614.7	613.7	612.7
137.5°	647.8	647.0	646.1	645.3
140°	682.0	681.2	680.3	679.5
142.5°	713.1	712.3	711.4	710.6
145°	744.3	744.0	743.6	743.3
147.5°	773.4	772.7	772.1	771.4
150°	802.0	801.7	801.3	801.0
152.5°	826.8	826.3	825.8	825.3
155°	851.1	851.1	851.1	851.1
157.5°	872.6	872.7	872.9	873.1
160°	892.6	892.9	893.3	893.6
162.5°	910.3	910.8	911.3	911.8
165°	925.5	926.0	926.5	927.0
167.5°	937.9	938.6	939.2	939.9
170°	948.5	949.2	949.8	950.5
172.5°	956.9	957.6	958.2	958.9
175°	962.2	962.9	963.5	964.2
177.5°	965.2	965.9	966.5	967.2
180°	966.5	966.5	966.5	966.5

(END OF REPORT)