

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1011951

Luminaire Tested: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1011951
REPORT IS A COMBINATION OF REPORTS P990305 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-B775D1195UB30-4F0-XX-W2A-A4
Description: Define 3 Direct/Indirect Pendant with 3000K BioUP LEDs {m-DER=0.589} {m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7597.0 lumens
Efficiency: N/A
Efficacy: 107.2 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.37 / 1.5
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 70.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

Luminous Intensity Polar Plot

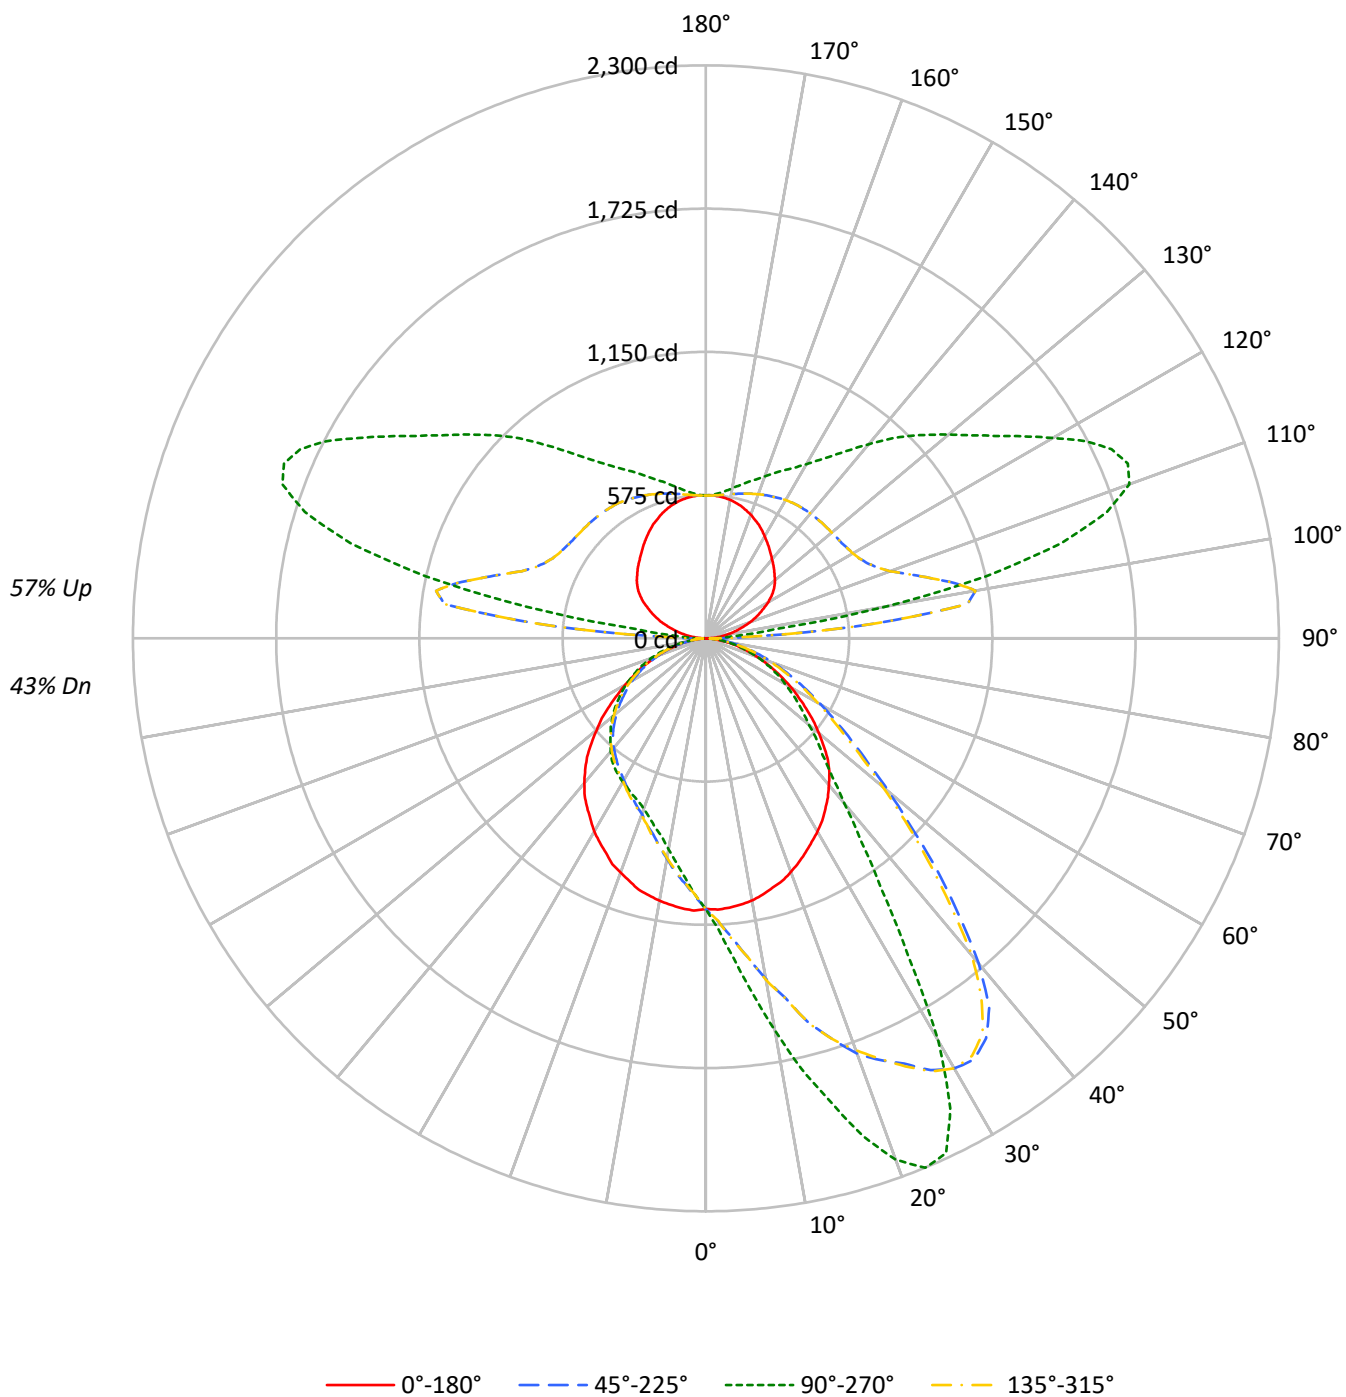

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	96	96	96	96	80	80	80	64	64	64	50	50	50
1	97	92	89	85	88	85	81	78	70	68	66	57	55	54	44	43	43
2	88	81	75	70	80	74	69	65	62	58	55	50	48	45	39	38	36
3	80	71	64	58	73	65	59	54	55	50	46	44	41	39	35	33	31
4	74	63	55	50	67	58	51	46	49	44	40	40	36	33	31	29	27
5	68	56	48	42	62	52	45	40	43	38	34	36	32	29	28	26	23
6	62	50	43	37	57	47	40	34	39	34	30	32	28	25	26	23	21
7	58	46	38	32	53	42	35	30	35	30	26	29	25	22	24	21	18
8	53	41	34	28	49	38	31	27	32	27	23	27	23	20	22	19	17
9	50	38	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15
10	46	34	27	23	42	32	26	21	27	22	19	23	19	16	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	11694	11694	11694	11694
5°	11702	13475	11736	10057
10°	11627	16305	11639	8781
15°	11467	19337	11560	7904
20°	11329	22263	11353	7273
25°	11123	22824	11148	6945
30°	10977	18858	10977	6729
35°	10795	12611	10727	6538
40°	10577	9103	10446	6246
45°	10304	7211	10007	5883
50°	9638	6125	9295	5527
55°	8907	5382	8545	5130
60°	8167	4686	7734	4713
65°	7354	4013	6998	4157
70°	6511	3330	6075	3504
75°	5565	2511	5208	2704
80°	4403	1676	4055	1777
85°	3035	769	2430	700

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 18860 cd/sqm

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.8	1.4
10°-20°	343.2	4.5
20°-30°	577.4	7.6
30°-40°	652.6	8.6
40°-50°	584.5	7.7
50°-60°	471.8	6.2
60°-70°	328.8	4.3
70°-80°	172.6	2.3
80°-90°	44.5	0.6
90°-100°	311.3	4.1
100°-110°	911.3	12.0
110°-120°	889.9	11.7
120°-130°	708.7	9.3
130°-140°	559.2	7.4
140°-150°	417.1	5.5
150°-160°	290.9	3.8
160°-170°	170.9	2.2
170°-180°	55.6	0.7
0°-30°	1027.5	13.5
0°-40°	1680.0	22.1
0°-60°	2736.3	36.0
0°-90°	3282.2	43.2
90°-120°	2112.5	27.8
90°-150°	3797.6	50.0
90°-180°	4315.0	56.8
0°-180°	7597.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1086	1086	1086	1086	1086	
5°	1085	1291	1088	963	1085	103
15°	1036	1921	1044	785	1036	293
25°	948	2280	950	694	948	437
35°	836	1228	831	637	836	523
45°	694	663	674	541	694	531
55°	492	451	472	430	492	440
65°	304	293	290	303	304	303
75°	146	150	137	162	146	157
85°	32	35	25	32	32	36
90°	2	34	2	34	2	5
95°	40	135	40	135	40	42
105°	135	1477	135	1477	135	143
115°	238	1796	238	1796	238	236
125°	331	1417	331	1417	331	294
135°	388	1148	388	1148	388	300
145°	442	898	442	898	442	277
155°	503	744	503	744	503	231
165°	549	649	549	649	549	155
175°	572	584	572	584	572	54
180°	574	574	574	574	574	

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4
2.5°	1089.6	1098.0	1102.2	1108.5	1114.8	1124.3	1127.5	1132.7	1130.6	1134.8	1137.0
5°	1085.4	1100.1	1112.7	1128.5	1143.3	1153.8	1164.3	1181.2	1193.8	1195.9	1205.4
7.5°	1078.0	1099.1	1121.2	1143.3	1171.7	1188.5	1207.5	1230.6	1249.6	1280.1	1291.7
10°	1068.5	1098.0	1129.6	1160.1	1199.1	1225.4	1248.5	1287.5	1326.4	1358.0	1387.5
12.5°	1053.8	1090.6	1131.7	1177.0	1227.5	1258.0	1289.6	1341.2	1400.1	1448.6	1480.1
15°	1035.9	1082.2	1134.8	1183.3	1239.1	1295.9	1329.6	1387.5	1471.7	1517.0	1598.1
17.5°	1021.2	1068.5	1121.2	1197.0	1272.8	1329.6	1353.8	1460.1	1518.0	1593.8	1685.4
20°	998.0	1058.0	1125.4	1201.2	1299.1	1333.8	1383.3	1490.7	1562.3	1661.2	1773.9
22.5°	973.8	1038.0	1119.1	1198.0	1307.5	1344.3	1411.7	1497.0	1610.7	1708.6	1832.8
25°	947.5	1016.9	1099.1	1192.7	1300.1	1353.8	1417.0	1522.3	1645.4	1768.6	1883.3
27.5°	921.1	996.9	1082.2	1175.9	1280.1	1343.3	1406.5	1515.9	1673.8	1807.5	1953.9
30°	895.9	971.7	1056.9	1152.7	1262.2	1323.3	1383.3	1520.2	1696.0	1846.5	1993.9
32.5°	868.5	946.4	1035.9	1115.9	1226.4	1291.7	1359.1	1520.2	1709.6	1869.7	2004.4
35°	835.9	915.9	992.7	1072.7	1182.2	1254.9	1330.7	1509.6	1722.3	1877.0	1960.2
37.5°	804.3	874.8	941.1	1019.0	1133.8	1211.7	1299.1	1497.0	1716.0	1845.4	1868.6
40°	768.5	839.0	892.7	965.4	1086.4	1177.0	1265.4	1480.1	1688.6	1770.7	1703.3
42.5°	733.8	789.6	835.9	906.4	1038.0	1126.4	1222.2	1449.6	1634.9	1651.7	1500.1
45°	693.8	733.8	774.8	854.8	985.4	1075.9	1182.2	1405.4	1548.6	1500.1	1308.6
47.5°	642.2	678.0	723.2	796.9	929.6	1023.3	1124.3	1348.6	1423.3	1322.2	1112.7
50°	592.7	623.2	665.3	736.9	870.6	962.2	1069.6	1259.1	1295.9	1137.0	959.0
52.5°	543.2	566.4	607.4	679.0	812.7	901.1	999.0	1167.5	1146.4	975.9	818.0
55°	491.6	511.6	550.6	621.1	745.3	829.6	923.2	1054.8	1000.1	838.0	711.6
57.5°	441.1	462.2	502.2	561.1	678.0	760.1	834.8	938.0	855.9	726.4	614.8
60°	395.8	413.7	444.3	502.2	608.5	674.8	743.2	813.8	745.3	620.1	534.8
62.5°	348.5	365.3	393.7	446.4	537.9	596.9	651.6	709.5	633.7	542.2	466.4
65°	304.2	317.9	344.2	392.7	467.4	515.8	560.1	600.1	539.0	454.8	397.9
67.5°	264.2	275.8	297.9	341.1	404.3	439.0	474.8	508.5	456.9	389.5	341.1
70°	221.1	230.5	250.6	282.1	332.7	368.5	394.8	420.0	373.7	320.0	287.4
72.5°	183.2	192.7	205.3	237.9	272.7	294.8	323.2	336.9	310.6	266.3	233.7
75°	146.3	153.7	165.3	186.3	219.0	233.7	251.6	262.1	237.9	208.4	188.4
77.5°	114.7	117.9	126.3	141.1	163.2	180.0	193.7	200.0	183.2	164.2	147.4
80°	81.1	85.3	91.6	104.2	121.1	126.3	134.8	142.1	131.6	114.7	104.2
82.5°	53.7	59.0	62.1	67.4	77.9	84.2	86.3	92.6	83.2	76.8	72.6
85°	31.6	33.7	34.7	37.9	43.2	46.3	49.5	50.5	48.4	47.4	43.2
87.5°	15.8	15.8	15.8	17.9	18.9	21.1	22.1	22.1	22.1	21.1	20.0
90°	2.3	4.6	7.0	10.5	12.8	14.0	15.1	18.6	22.1	25.5	29.0
92.5°	17.4	25.5	37.2	47.6	59.2	69.6	80.1	117.3	178.8	239.2	216.0
95°	39.5	43.0	55.7	75.5	105.7	128.4	151.0	249.7	422.7	613.1	688.6
97.5°	62.7	63.9	74.3	91.7	121.9	146.9	171.9	269.4	470.3	790.8	1059.0
100°	85.9	87.1	95.2	111.5	139.3	162.0	184.6	265.9	437.8	743.2	1099.6
102.5°	110.3	112.6	119.6	134.7	159.1	179.4	199.7	270.6	409.9	673.5	1024.2
105°	134.7	138.2	145.1	159.1	181.1	199.1	217.1	279.8	399.4	618.9	933.6
107.5°	160.2	163.7	170.7	184.6	205.5	222.4	239.2	294.9	397.1	579.4	853.5
110°	188.1	191.6	197.4	210.2	229.9	246.2	262.4	314.7	402.9	558.5	787.3

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	213.7	217.1	222.9	235.7	255.5	271.2	286.8	334.4	414.5	546.9	743.2
115°	238.0	242.7	249.7	261.3	281.0	296.7	312.4	356.5	427.3	545.8	714.1
117.5°	262.4	268.2	274.0	284.5	306.5	321.0	335.6	379.7	443.6	546.9	694.4
120°	288.0	291.5	297.3	308.9	330.9	345.4	360.0	401.8	462.1	551.6	681.6
122.5°	310.0	313.5	319.3	332.1	353.0	368.6	384.3	425.0	479.6	559.7	673.5
125°	330.9	333.3	340.2	353.0	375.1	390.8	406.4	447.1	498.1	567.8	666.5
127.5°	347.2	350.7	358.8	371.6	396.0	411.6	427.3	466.8	513.2	577.1	663.0
130°	362.3	365.8	376.2	390.2	414.5	430.2	445.9	484.2	528.3	586.4	659.5
132.5°	373.9	378.5	390.2	407.6	432.0	447.0	462.1	499.3	542.3	593.4	658.4
135°	387.8	392.5	405.2	422.7	447.1	462.8	478.4	514.4	553.9	600.3	657.2
137.5°	400.6	405.2	418.0	436.6	461.0	475.5	490.0	524.9	563.2	605.0	654.9
140°	413.4	419.2	430.8	449.4	472.6	487.1	501.6	535.3	570.1	609.6	653.7
142.5°	427.3	432.0	444.7	461.0	484.2	497.6	510.9	543.4	577.1	613.1	651.4
145°	442.4	445.9	456.3	473.8	493.5	506.8	520.2	550.4	581.7	614.3	649.1
147.5°	457.5	459.8	470.3	485.4	505.1	516.7	528.3	556.2	585.2	614.3	645.6
150°	472.6	473.8	483.0	498.1	514.4	524.8	535.3	562.0	586.4	614.3	641.0
152.5°	487.7	487.7	497.0	509.8	523.7	533.6	543.4	565.5	588.7	610.8	635.2
155°	502.8	502.8	509.8	521.4	534.1	542.2	550.4	570.1	588.7	608.5	628.2
157.5°	514.4	515.6	521.4	531.8	543.4	549.8	556.2	572.5	589.9	605.0	622.4
160°	528.3	528.3	533.0	542.3	550.4	556.2	562.0	575.9	589.9	602.6	615.4
162.5°	538.8	538.8	542.3	549.2	556.2	560.8	565.5	577.1	588.7	598.0	608.5
165°	549.2	548.1	550.4	556.2	560.8	564.9	569.0	578.3	586.4	593.4	601.5
167.5°	557.4	556.2	557.4	562.0	565.5	568.4	571.3	578.3	585.2	588.7	594.5
170°	564.3	562.0	563.2	566.7	569.0	570.2	571.3	577.1	581.7	584.1	587.6
172.5°	569.0	567.8	567.8	570.1	571.3	571.9	572.5	577.1	580.6	580.6	581.7
175°	572.5	571.3	570.1	572.5	572.5	573.0	573.6	575.9	578.3	577.1	577.1
177.5°	574.8	573.6	572.5	573.6	573.6	573.6	573.6	574.8	577.1	574.8	573.6
180°	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4
2.5°	1144.3	1146.4	1153.8	1159.1	1169.6	1168.5	1168.5	1167.5	1164.3	1169.6	1172.7
5°	1224.3	1242.2	1244.3	1267.5	1268.5	1278.0	1284.3	1279.1	1291.7	1290.7	1281.2
7.5°	1323.3	1347.5	1359.1	1381.2	1406.5	1400.1	1424.4	1428.6	1426.5	1437.0	1444.4
10°	1431.7	1473.8	1503.3	1544.4	1554.9	1561.2	1577.0	1590.7	1618.1	1597.0	1610.7
12.5°	1555.9	1586.5	1625.4	1690.7	1723.3	1744.4	1751.8	1761.2	1780.2	1768.6	1769.6
15°	1660.2	1701.2	1767.5	1848.6	1858.1	1884.4	1878.1	1934.9	1962.3	1921.2	1944.4
17.5°	1768.6	1823.3	1902.3	1972.8	2012.8	2030.7	2047.6	2102.3	2100.2	2093.9	2099.2
20°	1838.1	1927.6	2025.5	2119.2	2130.7	2144.4	2189.7	2212.9	2208.6	2226.5	2238.1
22.5°	1936.0	2030.7	2134.9	2197.1	2223.4	2239.2	2275.0	2289.7	2296.0	2300.2	2292.9
25°	2018.1	2119.2	2196.0	2250.7	2266.5	2275.0	2286.5	2290.8	2287.6	2280.2	2286.5
27.5°	2073.9	2155.0	2207.6	2232.9	2224.4	2210.7	2188.6	2173.9	2141.3	2125.5	2144.4
30°	2097.0	2132.8	2148.6	2106.5	2064.4	2030.7	1988.6	1910.7	1849.7	1867.6	1843.3
32.5°	2060.2	2037.0	1961.2	1852.8	1820.2	1765.4	1646.5	1554.9	1558.0	1509.6	1529.6
35°	1951.8	1846.5	1703.3	1539.1	1495.9	1466.5	1335.9	1315.9	1273.8	1228.5	1241.2
37.5°	1760.2	1606.5	1432.8	1311.7	1247.5	1183.3	1109.6	1065.4	1040.1	1021.2	1035.9
40°	1526.5	1339.1	1195.9	1087.5	1032.7	991.7	941.1	896.9	868.5	865.3	870.6
42.5°	1297.0	1139.1	1007.5	904.3	886.4	838.0	805.3	770.6	762.2	748.5	755.9
45°	1098.0	969.6	861.1	776.9	755.9	743.2	703.2	681.1	671.6	663.2	675.9
47.5°	953.8	819.0	740.1	689.5	668.5	647.4	625.3	610.6	603.2	604.3	603.2
50°	814.8	715.9	646.4	607.4	594.8	580.1	562.2	552.7	549.5	540.1	547.4
52.5°	701.1	629.5	581.1	544.3	534.8	524.3	509.5	504.3	496.9	494.8	494.8
55°	609.5	553.7	514.8	490.6	479.0	470.6	462.2	455.8	450.6	450.6	450.6
57.5°	537.9	489.5	461.1	440.0	435.8	427.4	417.9	417.9	410.6	409.5	412.7
60°	476.9	433.7	411.6	393.7	387.4	385.3	375.8	375.8	373.7	368.5	372.7
62.5°	414.8	383.2	364.2	350.6	344.2	344.2	336.9	331.6	331.6	332.7	330.6
65°	357.9	334.8	317.9	307.4	304.2	300.0	299.0	294.8	291.6	292.7	291.6
67.5°	307.4	289.5	277.9	269.5	264.2	262.1	259.0	259.0	256.9	257.9	252.7
70°	262.1	244.2	234.8	226.3	224.2	224.2	220.0	221.1	219.0	222.1	220.0
72.5°	215.8	202.1	194.8	191.6	189.5	188.4	186.3	184.2	183.2	185.3	184.2
75°	174.8	163.2	157.9	155.8	153.7	153.7	152.6	151.6	150.5	150.5	150.5
77.5°	135.8	128.4	122.1	124.2	121.1	122.1	119.0	119.0	120.0	119.0	119.0
80°	100.0	94.7	94.7	92.6	88.4	90.5	90.5	87.4	86.3	88.4	85.3
82.5°	66.3	65.3	63.2	62.1	60.0	61.1	60.0	59.0	57.9	60.0	57.9
85°	39.0	39.0	37.9	35.8	37.9	36.8	35.8	35.8	34.7	34.7	34.7
87.5°	20.0	17.9	17.9	16.8	17.9	15.8	16.8	15.8	14.7	15.8	14.7
90°	27.9	29.0	30.2	31.4	32.6	33.7	32.5	33.7	34.8	33.7	34.8
92.5°	161.4	115.0	89.4	77.8	73.8	69.7	67.3	62.7	63.9	61.5	63.9
95°	558.5	418.0	283.3	221.8	200.9	180.0	157.9	147.5	139.3	134.7	139.3
97.5°	1095.0	960.3	724.6	571.3	505.1	438.9	361.1	317.0	289.1	276.4	289.1
100°	1328.4	1369.0	1275.0	1139.1	1056.6	974.2	856.9	772.2	726.9	728.1	726.9
102.5°	1340.0	1504.9	1524.6	1459.6	1414.9	1370.2	1285.4	1222.7	1186.7	1153.0	1186.7
105°	1266.8	1509.5	1625.6	1647.7	1632.6	1617.5	1564.1	1520.0	1482.8	1477.0	1482.8
107.5°	1162.3	1439.9	1622.2	1712.7	1728.4	1744.1	1737.1	1716.2	1701.1	1688.3	1701.1
110°	1064.8	1330.7	1544.4	1690.7	1731.4	1772.0	1804.5	1813.8	1811.4	1809.1	1811.4

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	980.0	1222.7	1442.2	1610.5	1665.7	1720.9	1787.0	1820.7	1832.3	1833.5	1832.3
115°	915.0	1129.8	1331.9	1502.6	1565.8	1629.1	1716.2	1767.3	1790.5	1796.3	1790.5
117.5°	872.0	1057.8	1236.6	1393.4	1459.0	1524.6	1615.2	1672.1	1706.9	1715.1	1706.9
120°	839.5	1003.3	1160.0	1299.4	1358.0	1416.6	1508.4	1573.4	1601.3	1608.2	1601.3
122.5°	812.8	960.3	1098.5	1225.0	1278.4	1331.9	1410.8	1467.7	1499.1	1508.4	1499.1
125°	790.8	923.1	1049.7	1161.2	1207.6	1254.1	1328.4	1379.5	1408.5	1416.6	1408.5
127.5°	769.9	889.5	1004.4	1106.6	1149.6	1192.5	1259.9	1304.0	1330.7	1337.7	1330.7
130°	753.6	858.1	962.6	1056.7	1096.2	1135.6	1197.2	1239.0	1263.4	1272.6	1263.4
132.5°	738.5	829.1	923.1	1009.1	1046.2	1083.4	1140.3	1182.1	1203.0	1208.8	1203.0
135°	725.7	803.5	886.0	961.5	994.6	1027.6	1084.5	1119.4	1140.3	1148.4	1140.3
137.5°	714.1	779.1	848.8	916.2	945.8	975.4	1024.2	1060.2	1077.6	1084.5	1077.6
140°	703.7	758.2	817.5	873.2	898.2	923.1	967.3	999.8	1018.3	1017.2	1018.3
142.5°	694.4	738.5	787.3	833.7	854.6	875.5	911.5	939.4	955.6	954.5	955.6
145°	686.3	723.4	761.7	798.9	815.8	832.6	861.6	886.0	895.3	897.6	895.3
147.5°	678.1	710.6	742.0	773.3	785.5	797.7	820.9	838.4	847.7	848.8	847.7
150°	670.0	696.7	723.4	747.8	758.8	769.9	787.3	800.0	807.0	807.0	807.0
152.5°	660.7	683.9	706.0	726.9	735.6	744.3	757.1	768.7	772.2	772.2	772.2
155°	651.4	671.2	689.7	707.2	714.2	721.1	731.5	740.8	743.2	744.3	743.2
157.5°	641.0	657.2	673.5	687.4	693.2	699.0	708.3	715.3	717.6	717.6	717.6
160°	630.5	645.6	658.4	670.0	674.0	678.1	686.3	693.2	693.2	692.1	693.2
162.5°	620.1	631.7	642.1	652.6	656.0	659.5	664.2	670.0	670.0	668.8	670.0
165°	610.8	620.1	627.0	635.2	638.1	641.0	645.6	650.3	649.1	649.1	649.1
167.5°	601.5	609.6	615.4	620.1	622.4	624.7	627.0	630.5	629.4	629.4	629.4
170°	593.4	599.2	602.6	607.3	608.4	609.6	610.8	613.1	611.9	611.9	611.9
172.5°	585.2	589.9	592.2	595.7	596.2	596.8	596.8	599.2	596.8	595.7	596.8
175°	579.4	581.7	582.9	585.2	585.2	585.2	585.2	586.4	585.2	584.1	585.2
177.5°	574.8	575.9	577.1	578.3	578.3	578.3	577.1	578.3	575.9	575.9	575.9
180°	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4
2.5°	1164.3	1167.5	1159.1	1157.0	1157.0	1161.2	1158.0	1129.6	1134.8	1128.5	1126.4
5°	1292.8	1286.4	1278.0	1273.8	1268.5	1253.8	1252.8	1220.1	1213.8	1192.7	1183.3
7.5°	1433.8	1428.6	1403.3	1400.1	1398.0	1384.3	1349.6	1314.9	1289.6	1265.4	1242.2
10°	1594.9	1579.1	1567.5	1544.4	1532.8	1513.8	1468.6	1435.9	1392.8	1355.9	1307.5
12.5°	1788.6	1770.7	1731.8	1714.9	1700.2	1647.5	1602.3	1565.4	1481.2	1455.9	1395.9
15°	1930.7	1892.8	1888.6	1851.8	1849.7	1791.8	1705.4	1665.4	1600.2	1507.5	1445.4
17.5°	2084.4	2050.7	2024.4	1980.2	1973.9	1919.1	1856.0	1758.1	1686.5	1598.1	1519.1
20°	2197.1	2179.2	2133.9	2116.0	2079.2	2032.8	1967.6	1846.5	1759.1	1670.7	1573.8
22.5°	2286.5	2268.6	2232.9	2208.6	2187.6	2127.6	2049.7	1946.5	1826.5	1710.7	1610.7
25°	2285.5	2280.2	2265.5	2253.9	2238.1	2193.9	2128.6	2029.7	1896.0	1768.6	1629.6
27.5°	2156.0	2170.7	2196.0	2208.6	2205.5	2199.2	2162.3	2079.2	1959.1	1807.5	1651.7
30°	1886.5	1940.2	1987.6	2050.7	2069.7	2116.0	2137.1	2089.7	1993.9	1852.8	1680.2
32.5°	1564.4	1642.3	1745.4	1780.2	1840.2	1929.7	2029.7	2047.6	1987.6	1879.1	1698.1
35°	1283.3	1347.5	1427.5	1482.3	1535.9	1681.2	1807.5	1917.0	1937.0	1865.4	1693.9
37.5°	1062.2	1107.5	1178.0	1224.3	1273.8	1398.0	1574.9	1717.0	1817.0	1819.1	1682.3
40°	902.2	922.2	983.3	1016.9	1064.3	1171.7	1329.6	1514.9	1661.2	1728.6	1651.7
42.5°	764.3	790.6	841.1	866.4	896.9	990.6	1094.8	1270.7	1451.7	1595.9	1594.9
45°	682.2	701.1	724.3	745.3	780.1	835.9	954.8	1086.4	1260.1	1423.3	1487.5
47.5°	609.5	627.4	650.6	656.9	680.1	732.7	805.3	920.1	1082.2	1244.3	1365.4
50°	548.5	563.2	579.0	590.6	601.1	644.3	699.0	795.9	925.4	1082.2	1232.8
52.5°	501.1	511.6	525.3	531.6	541.1	572.7	614.8	686.4	792.7	935.9	1082.2
55°	456.9	464.3	472.7	483.2	487.4	510.6	543.2	604.3	683.2	811.7	950.6
57.5°	415.8	419.0	424.3	430.6	435.8	455.8	484.3	525.3	594.8	693.8	825.3
60°	369.5	377.9	381.1	387.4	390.6	406.4	428.5	463.2	516.9	602.2	701.1
62.5°	330.6	335.8	341.1	344.2	351.6	356.9	374.8	406.4	450.6	513.7	603.2
65°	295.8	297.9	301.1	304.2	306.3	312.7	329.5	350.6	384.2	440.0	509.5
67.5°	255.8	257.9	262.1	263.2	265.3	273.7	283.2	301.1	329.5	371.6	428.5
70°	216.9	220.0	222.1	224.2	227.4	230.5	241.1	255.8	277.9	307.4	351.6
72.5°	183.2	186.3	186.3	188.4	187.4	191.6	202.1	212.7	227.4	251.6	290.6
75°	149.5	149.5	151.6	152.6	153.7	157.9	162.1	170.5	182.1	201.1	225.3
77.5°	117.9	116.9	119.0	119.0	119.0	122.1	126.3	130.5	137.9	151.6	170.5
80°	86.3	86.3	88.4	89.5	87.4	88.4	90.5	94.7	100.0	109.5	120.0
82.5°	56.8	61.1	60.0	61.1	60.0	62.1	63.2	64.2	66.3	70.5	77.9
85°	34.7	34.7	34.7	35.8	34.7	35.8	35.8	35.8	36.8	39.0	42.1
87.5°	14.7	14.7	14.7	15.8	14.7	14.7	15.8	14.7	15.8	15.8	16.8
90°	33.7	32.5	33.7	32.6	31.4	30.2	29.0	27.9	29.0	25.5	22.1
92.5°	62.7	67.3	69.7	73.8	77.8	89.4	115.0	161.4	216.0	239.2	178.8
95°	147.5	157.9	180.0	200.9	221.8	283.3	418.0	558.5	688.6	613.1	422.7
97.5°	317.0	361.1	438.9	505.1	571.3	724.6	960.3	1095.0	1059.0	790.8	470.3
100°	772.2	856.9	974.2	1056.6	1139.1	1275.0	1369.0	1328.4	1099.6	743.2	437.8
102.5°	1222.7	1285.4	1370.2	1414.9	1459.6	1524.6	1504.9	1340.0	1024.2	673.5	409.9
105°	1520.0	1564.1	1617.5	1632.6	1647.7	1625.6	1509.5	1266.8	933.6	618.9	399.4
107.5°	1716.2	1737.1	1744.1	1728.4	1712.7	1622.2	1439.9	1162.3	853.5	579.4	397.1
110°	1813.8	1804.5	1772.0	1731.4	1690.7	1544.4	1330.7	1064.8	787.3	558.5	402.9

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	1820.7	1787.0	1720.9	1665.7	1610.5	1442.2	1222.7	980.0	743.2	546.9	414.5
115°	1767.3	1716.2	1629.1	1565.8	1502.6	1331.9	1129.8	915.0	714.1	545.8	427.3
117.5°	1672.1	1615.2	1524.6	1459.0	1393.4	1236.6	1057.8	872.0	694.4	546.9	443.6
120°	1573.4	1508.4	1416.6	1358.0	1299.4	1160.0	1003.3	839.5	681.6	551.6	462.1
122.5°	1467.7	1410.8	1331.9	1278.4	1225.0	1098.5	960.3	812.8	673.5	559.7	479.6
125°	1379.5	1328.4	1254.1	1207.6	1161.2	1049.7	923.1	790.8	666.5	567.8	498.1
127.5°	1304.0	1259.9	1192.5	1149.6	1106.6	1004.4	889.5	769.9	663.0	577.1	513.2
130°	1239.0	1197.2	1135.6	1096.2	1056.7	962.6	858.1	753.6	659.5	586.4	528.3
132.5°	1182.1	1140.3	1083.4	1046.2	1009.1	923.1	829.1	738.5	658.4	593.4	542.3
135°	1119.4	1084.5	1027.6	994.6	961.5	886.0	803.5	725.7	657.2	600.3	553.9
137.5°	1060.2	1024.2	975.4	945.8	916.2	848.8	779.1	714.1	654.9	605.0	563.2
140°	999.8	967.3	923.1	898.2	873.2	817.5	758.2	703.7	653.7	609.6	570.1
142.5°	939.4	911.5	875.5	854.6	833.7	787.3	738.5	694.4	651.4	613.1	577.1
145°	886.0	861.6	832.6	815.8	798.9	761.7	723.4	686.3	649.1	614.3	581.7
147.5°	838.4	820.9	797.7	785.5	773.3	742.0	710.6	678.1	645.6	614.3	585.2
150°	800.0	787.3	769.9	758.8	747.8	723.4	696.7	670.0	641.0	614.3	586.4
152.5°	768.7	757.1	744.3	735.6	726.9	706.0	683.9	660.7	635.2	610.8	588.7
155°	740.8	731.5	721.1	714.2	707.2	689.7	671.2	651.4	628.2	608.5	588.7
157.5°	715.3	708.3	699.0	693.2	687.4	673.5	657.2	641.0	622.4	605.0	589.9
160°	693.2	686.3	678.1	674.0	670.0	658.4	645.6	630.5	615.4	602.6	589.9
162.5°	670.0	664.2	659.5	656.0	652.6	642.1	631.7	620.1	608.5	598.0	588.7
165°	650.3	645.6	641.0	638.1	635.2	627.0	620.1	610.8	601.5	593.4	586.4
167.5°	630.5	627.0	624.7	622.4	620.1	615.4	609.6	601.5	594.5	588.7	585.2
170°	613.1	610.8	609.6	608.4	607.3	602.6	599.2	593.4	587.6	584.1	581.7
172.5°	599.2	596.8	596.8	596.2	595.7	592.2	589.9	585.2	581.7	580.6	580.6
175°	586.4	585.2	585.2	585.2	585.2	582.9	581.7	579.4	577.1	577.1	578.3
177.5°	578.3	577.1	578.3	578.3	578.3	577.1	575.9	574.8	573.6	574.8	577.1
180°	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4
2.5°	1115.9	1112.7	1112.7	1110.6	1104.3	1092.7	1091.7	1093.8	1087.5	1081.2	1071.7
5°	1170.6	1150.6	1144.3	1138.0	1125.4	1104.3	1095.9	1088.5	1076.9	1063.3	1048.5
7.5°	1217.0	1188.5	1180.1	1168.5	1143.3	1113.8	1094.8	1079.1	1063.3	1044.3	1026.4
10°	1274.9	1233.8	1213.8	1197.0	1162.2	1121.2	1092.7	1069.6	1044.3	1021.2	998.0
12.5°	1340.1	1273.8	1267.5	1226.4	1186.4	1125.4	1090.6	1056.9	1023.3	994.8	970.6
15°	1394.9	1322.2	1295.9	1268.5	1191.7	1115.9	1082.2	1044.3	1005.4	974.8	939.0
17.5°	1429.6	1369.6	1313.8	1277.0	1197.0	1129.6	1064.3	1021.2	980.1	938.0	908.5
20°	1471.7	1384.3	1335.9	1286.4	1207.5	1119.1	1053.8	1000.1	949.6	911.7	875.9
22.5°	1513.8	1395.9	1355.9	1302.2	1209.6	1108.5	1034.8	981.1	923.2	885.4	846.4
25°	1509.6	1412.8	1346.4	1301.2	1188.5	1099.1	1012.7	949.6	895.9	847.5	808.5
27.5°	1512.8	1393.8	1326.4	1273.8	1173.8	1085.4	989.6	923.2	867.5	816.9	775.9
30°	1513.8	1365.4	1306.4	1243.3	1146.4	1052.7	963.3	895.9	836.9	782.2	745.3
32.5°	1510.7	1342.2	1268.5	1211.7	1103.3	1021.2	932.7	861.1	801.1	750.6	715.9
35°	1503.3	1314.9	1229.6	1158.0	1059.1	975.9	904.3	830.6	766.4	720.1	680.1
37.5°	1483.3	1285.4	1188.5	1118.0	1007.5	923.2	860.1	799.0	736.9	682.2	648.5
40°	1468.6	1245.4	1147.5	1070.6	951.7	869.6	816.9	759.0	698.0	648.5	615.9
42.5°	1434.9	1207.5	1105.4	1013.8	896.9	812.7	763.2	716.9	664.3	615.9	586.4
45°	1380.1	1166.4	1053.8	961.1	836.9	756.9	711.6	673.8	627.4	581.1	551.6
47.5°	1303.3	1107.5	999.0	906.4	778.0	696.9	651.6	623.2	586.4	547.4	522.2
50°	1220.1	1043.3	943.3	851.7	721.1	642.2	598.0	571.6	547.4	511.6	487.4
52.5°	1111.7	974.8	879.0	791.7	660.1	584.3	545.3	526.4	501.1	475.8	454.8
55°	1006.4	886.4	807.4	724.3	600.1	529.5	491.6	471.6	456.9	435.8	419.0
57.5°	884.3	804.3	731.7	655.9	544.3	480.0	444.3	420.0	410.6	401.1	385.3
60°	771.7	710.6	651.6	588.5	486.4	428.5	393.7	374.8	365.3	359.0	348.5
62.5°	668.5	621.1	570.6	520.1	427.4	374.8	348.5	329.5	321.1	320.0	310.6
65°	569.5	535.8	494.8	445.3	372.7	326.3	301.1	289.5	280.0	280.0	272.7
67.5°	470.6	447.4	414.8	380.0	323.2	280.0	256.9	246.3	241.1	241.1	235.8
70°	391.6	375.8	346.4	315.8	266.3	233.7	215.8	206.3	203.2	204.2	200.0
72.5°	317.9	301.1	276.9	254.8	217.9	193.7	181.1	170.5	165.3	166.3	165.3
75°	246.3	237.9	216.9	200.0	170.5	153.7	142.1	136.9	132.6	133.7	131.6
77.5°	185.3	172.6	161.1	149.5	131.6	117.9	108.4	103.2	100.0	100.0	100.0
80°	126.3	124.2	114.7	108.4	93.7	83.2	75.8	74.7	71.6	71.6	71.6
82.5°	82.1	76.8	71.6	67.4	59.0	52.6	49.5	47.4	46.3	45.3	47.4
85°	45.3	42.1	40.0	35.8	32.6	29.5	26.3	25.3	24.2	25.3	24.2
87.5°	17.9	14.7	14.7	13.7	12.6	11.6	11.6	9.5	9.5	8.4	8.4
90°	18.6	15.1	14.0	12.8	10.5	7.0	4.6	2.3	4.6	7.0	10.5
92.5°	117.3	80.1	69.6	59.2	47.6	37.2	25.5	17.4	25.5	37.2	47.6
95°	249.7	151.0	128.4	105.7	75.5	55.7	43.0	39.5	43.0	55.7	75.5
97.5°	269.4	171.9	146.9	121.9	91.7	74.3	63.9	62.7	63.9	74.3	91.7
100°	265.9	184.6	162.0	139.3	111.5	95.2	87.1	85.9	87.1	95.2	111.5
102.5°	270.6	199.7	179.4	159.1	134.7	119.6	112.6	110.3	112.6	119.6	134.7
105°	279.8	217.1	199.1	181.1	159.1	145.1	138.2	134.7	138.2	145.1	159.1
107.5°	294.9	239.2	222.4	205.5	184.6	170.7	163.7	160.2	163.7	170.7	184.6
110°	314.7	262.4	246.2	229.9	210.2	197.4	191.6	188.1	191.6	197.4	210.2

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	334.4	286.8	271.2	255.5	235.7	222.9	217.1	213.7	217.1	222.9	235.7
115°	356.5	312.4	296.7	281.0	261.3	249.7	242.7	238.0	242.7	249.7	261.3
117.5°	379.7	335.6	321.0	306.5	284.5	274.0	268.2	262.4	268.2	274.0	284.5
120°	401.8	360.0	345.4	330.9	308.9	297.3	291.5	288.0	291.5	297.3	308.9
122.5°	425.0	384.3	368.6	353.0	332.1	319.3	313.5	310.0	313.5	319.3	332.1
125°	447.1	406.4	390.8	375.1	353.0	340.2	333.3	330.9	333.3	340.2	353.0
127.5°	466.8	427.3	411.6	396.0	371.6	358.8	350.7	347.2	350.7	358.8	371.6
130°	484.2	445.9	430.2	414.5	390.2	376.2	365.8	362.3	365.8	376.2	390.2
132.5°	499.3	462.1	447.0	432.0	407.6	390.2	378.5	373.9	378.5	390.2	407.6
135°	514.4	478.4	462.8	447.1	422.7	405.2	392.5	387.8	392.5	405.2	422.7
137.5°	524.9	490.0	475.5	461.0	436.6	418.0	405.2	400.6	405.2	418.0	436.6
140°	535.3	501.6	487.1	472.6	449.4	430.8	419.2	413.4	419.2	430.8	449.4
142.5°	543.4	510.9	497.6	484.2	461.0	444.7	432.0	427.3	432.0	444.7	461.0
145°	550.4	520.2	506.8	493.5	473.8	456.3	445.9	442.4	445.9	456.3	473.8
147.5°	556.2	528.3	516.7	505.1	485.4	470.3	459.8	457.5	459.8	470.3	485.4
150°	562.0	535.3	524.8	514.4	498.1	483.0	473.8	472.6	473.8	483.0	498.1
152.5°	565.5	543.4	533.6	523.7	509.8	497.0	487.7	487.7	487.7	497.0	509.8
155°	570.1	550.4	542.2	534.1	521.4	509.8	502.8	502.8	502.8	509.8	521.4
157.5°	572.5	556.2	549.8	543.4	531.8	521.4	515.6	514.4	515.6	521.4	531.8
160°	575.9	562.0	556.2	550.4	542.3	533.0	528.3	528.3	528.3	533.0	542.3
162.5°	577.1	565.5	560.8	556.2	549.2	542.3	538.8	538.8	538.8	542.3	549.2
165°	578.3	569.0	564.9	560.8	556.2	550.4	548.1	549.2	548.1	550.4	556.2
167.5°	578.3	571.3	568.4	565.5	562.0	557.4	556.2	557.4	556.2	557.4	562.0
170°	577.1	571.3	570.2	569.0	566.7	563.2	562.0	564.3	562.0	563.2	566.7
172.5°	577.1	572.5	571.9	571.3	570.1	567.8	567.8	569.0	567.8	567.8	570.1
175°	575.9	573.6	573.0	572.5	572.5	570.1	571.3	572.5	571.3	570.1	572.5
177.5°	574.8	573.6	573.6	573.6	573.6	572.5	573.6	574.8	573.6	572.5	573.6
180°	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4
2.5°	1069.6	1068.5	1070.6	1064.3	1053.8	1048.5	1033.8	1030.6	1029.6	1030.6	1031.7
5°	1040.1	1039.1	1035.9	1025.4	1012.7	1003.3	985.4	984.3	978.0	971.7	974.8
7.5°	1011.7	1007.5	1001.2	987.5	970.6	960.1	945.4	934.8	926.4	921.1	916.9
10°	983.3	976.9	970.6	952.7	931.7	915.9	898.0	889.6	880.1	875.9	871.7
12.5°	946.4	940.1	928.5	907.5	894.8	874.8	856.9	848.5	843.2	834.8	829.6
15°	916.9	904.3	898.0	875.9	849.6	847.5	814.8	812.7	802.2	802.2	793.8
17.5°	883.2	873.8	862.2	840.1	821.1	802.2	785.3	779.0	769.5	767.4	763.2
20°	850.6	838.0	833.8	811.7	791.7	768.5	750.6	744.3	740.1	735.9	739.0
22.5°	816.9	806.4	795.9	775.9	761.1	738.0	727.4	721.1	714.8	712.7	713.8
25°	784.3	774.8	764.3	744.3	728.5	709.5	700.1	696.9	693.8	693.8	692.7
27.5°	752.7	743.2	733.8	715.9	700.1	686.4	679.0	675.9	672.7	674.8	676.9
30°	720.1	711.6	703.2	687.4	674.8	662.2	658.0	655.9	654.8	660.1	660.1
32.5°	690.6	683.2	676.9	662.2	649.5	639.0	635.9	636.9	638.0	641.1	643.2
35°	660.1	654.8	648.5	635.9	625.3	615.9	616.9	616.9	619.0	624.3	628.5
37.5°	632.7	625.3	620.1	609.5	601.1	592.7	595.8	599.0	601.1	607.4	609.5
40°	600.1	596.9	592.7	582.2	574.8	573.7	574.8	576.9	581.1	584.3	587.4
42.5°	573.7	569.5	564.3	555.8	549.5	550.6	551.6	553.7	555.8	561.1	564.3
45°	544.3	541.1	536.9	529.5	524.3	525.3	526.4	526.4	528.5	534.8	536.9
47.5°	511.6	512.7	507.4	500.0	496.9	496.9	496.9	499.0	504.3	506.4	507.4
50°	480.0	477.9	476.9	469.5	467.4	466.4	467.4	468.5	475.8	474.8	477.9
52.5°	446.4	446.4	445.3	441.1	437.9	437.9	435.8	441.1	443.2	445.3	448.5
55°	413.7	410.6	409.5	407.4	403.2	402.1	404.3	410.6	412.7	414.8	417.9
57.5°	377.9	377.9	375.8	372.7	372.7	372.7	372.7	376.9	380.0	382.1	388.5
60°	345.3	341.1	337.9	337.9	337.9	336.9	343.2	343.2	349.5	350.6	352.7
62.5°	306.3	304.2	302.1	303.2	302.1	304.2	306.3	310.6	311.6	314.8	317.9
65°	269.5	269.5	267.4	273.7	269.5	269.5	274.8	274.8	276.9	280.0	284.2
67.5°	233.7	234.8	232.7	232.7	234.8	235.8	236.9	241.1	242.1	246.3	251.6
70°	196.9	199.0	200.0	197.9	200.0	202.1	204.2	205.3	209.5	211.6	214.8
72.5°	164.2	166.3	163.2	164.2	165.3	167.4	168.4	170.5	172.6	179.0	181.1
75°	131.6	130.5	129.5	133.7	131.6	135.8	136.9	136.9	139.0	144.2	146.3
77.5°	101.1	101.1	102.1	100.0	103.2	102.1	103.2	106.3	109.5	109.5	117.9
80°	70.5	72.6	72.6	72.6	73.7	74.7	72.6	77.9	79.0	79.0	82.1
82.5°	45.3	46.3	45.3	47.4	47.4	49.5	48.4	49.5	51.6	53.7	54.7
85°	24.2	24.2	26.3	26.3	25.3	26.3	25.3	26.3	28.4	28.4	29.5
87.5°	8.4	8.4	8.4	8.4	9.5	8.4	9.5	9.5	8.4	8.4	11.6
90°	12.8	14.0	15.1	18.6	22.1	25.5	29.0	27.9	29.0	30.2	31.4
92.5°	59.2	69.6	80.1	117.3	178.8	239.2	216.0	161.4	115.0	89.4	77.8
95°	105.7	128.4	151.0	249.7	422.7	613.1	688.6	558.5	418.0	283.3	221.8
97.5°	121.9	146.9	171.9	269.4	470.3	790.8	1059.0	1095.0	960.3	724.6	571.3
100°	139.3	162.0	184.6	265.9	437.8	743.2	1099.6	1328.4	1369.0	1275.0	1139.1
102.5°	159.1	179.4	199.7	270.6	409.9	673.5	1024.2	1340.0	1504.9	1524.6	1459.6
105°	181.1	199.1	217.1	279.8	399.4	618.9	933.6	1266.8	1509.5	1625.6	1647.7
107.5°	205.5	222.4	239.2	294.9	397.1	579.4	853.5	1162.3	1439.9	1622.2	1712.7
110°	229.9	246.2	262.4	314.7	402.9	558.5	787.3	1064.8	1330.7	1544.4	1690.7

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	255.5	271.2	286.8	334.4	414.5	546.9	743.2	980.0	1222.7	1442.2	1610.5
115°	281.0	296.7	312.4	356.5	427.3	545.8	714.1	915.0	1129.8	1331.9	1502.6
117.5°	306.5	321.0	335.6	379.7	443.6	546.9	694.4	872.0	1057.8	1236.6	1393.4
120°	330.9	345.4	360.0	401.8	462.1	551.6	681.6	839.5	1003.3	1160.0	1299.4
122.5°	353.0	368.6	384.3	425.0	479.6	559.7	673.5	812.8	960.3	1098.5	1225.0
125°	375.1	390.8	406.4	447.1	498.1	567.8	666.5	790.8	923.1	1049.7	1161.2
127.5°	396.0	411.6	427.3	466.8	513.2	577.1	663.0	769.9	889.5	1004.4	1106.6
130°	414.5	430.2	445.9	484.2	528.3	586.4	659.5	753.6	858.1	962.6	1056.7
132.5°	432.0	447.0	462.1	499.3	542.3	593.4	658.4	738.5	829.1	923.1	1009.1
135°	447.1	462.8	478.4	514.4	553.9	600.3	657.2	725.7	803.5	886.0	961.5
137.5°	461.0	475.5	490.0	524.9	563.2	605.0	654.9	714.1	779.1	848.8	916.2
140°	472.6	487.1	501.6	535.3	570.1	609.6	653.7	703.7	758.2	817.5	873.2
142.5°	484.2	497.6	510.9	543.4	577.1	613.1	651.4	694.4	738.5	787.3	833.7
145°	493.5	506.8	520.2	550.4	581.7	614.3	649.1	686.3	723.4	761.7	798.9
147.5°	505.1	516.7	528.3	556.2	585.2	614.3	645.6	678.1	710.6	742.0	773.3
150°	514.4	524.8	535.3	562.0	586.4	614.3	641.0	670.0	696.7	723.4	747.8
152.5°	523.7	533.6	543.4	565.5	588.7	610.8	635.2	660.7	683.9	706.0	726.9
155°	534.1	542.2	550.4	570.1	588.7	608.5	628.2	651.4	671.2	689.7	707.2
157.5°	543.4	549.8	556.2	572.5	589.9	605.0	622.4	641.0	657.2	673.5	687.4
160°	550.4	556.2	562.0	575.9	589.9	602.6	615.4	630.5	645.6	658.4	670.0
162.5°	556.2	560.8	565.5	577.1	588.7	598.0	608.5	620.1	631.7	642.1	652.6
165°	560.8	564.9	569.0	578.3	586.4	593.4	601.5	610.8	620.1	627.0	635.2
167.5°	565.5	568.4	571.3	578.3	585.2	588.7	594.5	601.5	609.6	615.4	620.1
170°	569.0	570.2	571.3	577.1	581.7	584.1	587.6	593.4	599.2	602.6	607.3
172.5°	571.3	571.9	572.5	577.1	580.6	580.6	581.7	585.2	589.9	592.2	595.7
175°	572.5	573.0	573.6	575.9	578.3	577.1	577.1	579.4	581.7	582.9	585.2
177.5°	573.6	573.6	573.6	574.8	577.1	574.8	573.6	574.8	575.9	577.1	578.3
180°	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4
2.5°	1030.6	1031.7	1027.5	1024.3	1032.7	1027.5	1027.5	1028.5	1026.4	1029.6	1028.5
5°	972.7	973.8	966.4	968.5	964.3	963.3	962.2	968.5	967.5	966.4	968.5
7.5°	915.9	915.9	912.7	910.6	910.6	907.5	911.7	910.6	912.7	912.7	915.9
10°	868.5	870.6	865.3	860.1	859.0	860.1	860.1	861.1	862.2	869.6	868.5
12.5°	829.6	826.4	825.3	822.2	816.9	814.8	812.7	824.3	821.1	821.1	821.1
15°	786.4	793.8	792.7	783.2	781.1	785.3	783.2	783.2	793.8	792.7	791.7
17.5°	763.2	761.1	759.0	753.8	754.8	753.8	754.8	754.8	761.1	761.1	761.1
20°	736.9	732.7	732.7	730.6	730.6	727.4	731.7	732.7	736.9	736.9	738.0
22.5°	713.8	710.6	710.6	709.5	711.6	707.4	711.6	712.7	712.7	715.9	715.9
25°	693.8	691.6	691.6	693.8	693.8	693.8	693.8	698.0	694.8	695.9	694.8
27.5°	675.9	676.9	678.0	679.0	678.0	679.0	680.1	682.2	683.2	682.2	680.1
30°	659.0	662.2	663.2	663.2	665.3	666.4	667.4	667.4	668.5	665.3	667.4
32.5°	646.4	646.4	648.5	649.5	651.6	652.7	652.7	654.8	653.7	650.6	651.6
35°	628.5	628.5	632.7	634.8	638.0	636.9	638.0	638.0	639.0	636.9	633.7
37.5°	610.6	612.7	612.7	616.9	618.0	619.0	618.0	620.1	619.0	616.9	615.9
40°	589.5	588.5	589.5	592.7	593.7	593.7	593.7	595.8	595.8	595.8	594.8
42.5°	563.2	566.4	565.3	568.5	567.4	567.4	569.5	571.6	572.7	569.5	570.6
45°	537.9	537.9	540.1	540.1	541.1	541.1	545.3	543.2	545.3	543.2	544.3
47.5°	510.6	511.6	511.6	512.7	514.8	516.9	514.8	515.8	515.8	516.9	514.8
50°	480.0	480.0	482.2	485.3	489.5	487.4	486.4	490.6	487.4	487.4	485.3
52.5°	448.5	451.6	452.7	455.8	459.0	460.0	461.1	459.0	460.0	456.9	457.9
55°	417.9	419.0	423.2	426.4	429.5	429.5	428.5	429.5	430.6	426.4	426.4
57.5°	387.4	390.6	394.8	394.8	399.0	399.0	397.9	397.9	399.0	395.8	394.8
60°	354.8	357.9	363.2	363.2	369.5	370.6	368.5	366.4	366.4	363.2	364.2
62.5°	320.0	323.2	326.3	331.6	335.8	333.7	337.9	333.7	334.8	328.5	328.5
65°	289.5	290.6	295.8	301.1	301.1	303.2	301.1	302.1	299.0	299.0	294.8
67.5°	253.7	253.7	259.0	264.2	269.5	269.5	269.5	266.3	266.3	263.2	263.2
70°	222.1	221.1	226.3	229.5	232.7	233.7	231.6	230.5	228.4	225.3	224.2
72.5°	183.2	185.3	190.5	192.7	197.9	196.9	202.1	195.8	195.8	190.5	189.5
75°	148.4	150.5	155.8	159.0	162.1	162.1	165.3	162.1	157.9	155.8	154.8
77.5°	117.9	116.9	121.1	126.3	127.4	126.3	128.4	127.4	123.2	123.2	121.1
80°	84.2	87.4	91.6	90.5	94.7	93.7	93.7	91.6	91.6	88.4	90.5
82.5°	55.8	59.0	60.0	59.0	60.0	62.1	63.2	62.1	62.1	60.0	61.1
85°	29.5	29.5	31.6	32.6	31.6	31.6	32.6	35.8	33.7	31.6	33.7
87.5°	9.5	8.4	8.4	9.5	8.4	8.4	9.5	9.5	10.5	10.5	10.5
90°	32.6	33.7	32.5	33.7	34.8	33.7	34.8	33.7	32.5	33.7	32.6
92.5°	73.8	69.7	67.3	62.7	63.9	61.5	63.9	62.7	67.3	69.7	73.8
95°	200.9	180.0	157.9	147.5	139.3	134.7	139.3	147.5	157.9	180.0	200.9
97.5°	505.1	438.9	361.1	317.0	289.1	276.4	289.1	317.0	361.1	438.9	505.1
100°	1056.6	974.2	856.9	772.2	726.9	728.1	726.9	772.2	856.9	974.2	1056.6
102.5°	1414.9	1370.2	1285.4	1222.7	1186.7	1153.0	1186.7	1222.7	1285.4	1370.2	1414.9
105°	1632.6	1617.5	1564.1	1520.0	1482.8	1477.0	1482.8	1520.0	1564.1	1617.5	1632.6
107.5°	1728.4	1744.1	1737.1	1716.2	1701.1	1688.3	1701.1	1716.2	1737.1	1744.1	1728.4
110°	1731.4	1772.0	1804.5	1813.8	1811.4	1809.1	1811.4	1813.8	1804.5	1772.0	1731.4

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	1665.7	1720.9	1787.0	1820.7	1832.3	1833.5	1832.3	1820.7	1787.0	1720.9	1665.7
115°	1565.8	1629.1	1716.2	1767.3	1790.5	1796.3	1790.5	1767.3	1716.2	1629.1	1565.8
117.5°	1459.0	1524.6	1615.2	1672.1	1706.9	1715.1	1706.9	1672.1	1615.2	1524.6	1459.0
120°	1358.0	1416.6	1508.4	1573.4	1601.3	1608.2	1601.3	1573.4	1508.4	1416.6	1358.0
122.5°	1278.4	1331.9	1410.8	1467.7	1499.1	1508.4	1499.1	1467.7	1410.8	1331.9	1278.4
125°	1207.6	1254.1	1328.4	1379.5	1408.5	1416.6	1408.5	1379.5	1328.4	1254.1	1207.6
127.5°	1149.6	1192.5	1259.9	1304.0	1330.7	1337.7	1330.7	1304.0	1259.9	1192.5	1149.6
130°	1096.2	1135.6	1197.2	1239.0	1263.4	1272.6	1263.4	1239.0	1197.2	1135.6	1096.2
132.5°	1046.2	1083.4	1140.3	1182.1	1203.0	1208.8	1203.0	1182.1	1140.3	1083.4	1046.2
135°	994.6	1027.6	1084.5	1119.4	1140.3	1148.4	1140.3	1119.4	1084.5	1027.6	994.6
137.5°	945.8	975.4	1024.2	1060.2	1077.6	1084.5	1077.6	1060.2	1024.2	975.4	945.8
140°	898.2	923.1	967.3	999.8	1018.3	1017.2	1018.3	999.8	967.3	923.1	898.2
142.5°	854.6	875.5	911.5	939.4	955.6	954.5	955.6	939.4	911.5	875.5	854.6
145°	815.8	832.6	861.6	886.0	895.3	897.6	895.3	886.0	861.6	832.6	815.8
147.5°	785.5	797.7	820.9	838.4	847.7	848.8	847.7	838.4	820.9	797.7	785.5
150°	758.8	769.9	787.3	800.0	807.0	807.0	807.0	800.0	787.3	769.9	758.8
152.5°	735.6	744.3	757.1	768.7	772.2	772.2	772.2	768.7	757.1	744.3	735.6
155°	714.2	721.1	731.5	740.8	743.2	744.3	743.2	740.8	731.5	721.1	714.2
157.5°	693.2	699.0	708.3	715.3	717.6	717.6	717.6	715.3	708.3	699.0	693.2
160°	674.0	678.1	686.3	693.2	693.2	692.1	693.2	693.2	686.3	678.1	674.0
162.5°	656.0	659.5	664.2	670.0	670.0	668.8	670.0	670.0	664.2	659.5	656.0
165°	638.1	641.0	645.6	650.3	649.1	649.1	649.1	650.3	645.6	641.0	638.1
167.5°	622.4	624.7	627.0	630.5	629.4	629.4	629.4	630.5	627.0	624.7	622.4
170°	608.4	609.6	610.8	613.1	611.9	611.9	611.9	613.1	610.8	609.6	608.4
172.5°	596.2	596.8	596.8	599.2	596.8	595.7	596.8	599.2	596.8	596.8	596.2
175°	585.2	585.2	585.2	586.4	585.2	584.1	585.2	586.4	585.2	585.2	585.2
177.5°	578.3	578.3	577.1	578.3	575.9	575.9	575.9	578.3	577.1	578.3	578.3
180°	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4	1086.4
2.5°	1031.7	1033.8	1034.8	1030.6	1027.5	1032.7	1040.1	1045.4	1049.6	1054.8	1058.0
5°	970.6	978.0	978.0	980.1	983.3	988.5	1002.2	1011.7	1020.1	1026.4	1031.7
7.5°	919.0	924.3	927.5	932.7	938.0	945.4	961.1	974.8	987.5	994.8	1003.3
10°	872.7	876.9	882.2	885.4	894.8	905.4	925.4	936.9	951.7	963.3	973.8
12.5°	828.5	843.2	846.4	845.3	853.8	865.3	885.4	903.2	919.0	930.6	942.2
15°	796.9	802.2	808.5	807.4	825.3	828.5	845.3	866.4	887.5	894.8	905.4
17.5°	762.2	770.6	776.9	780.1	785.3	796.9	812.7	828.5	855.9	856.9	884.3
20°	734.8	743.2	747.4	751.7	754.8	768.5	782.2	800.1	822.2	833.8	848.5
22.5°	716.9	721.1	724.3	727.4	731.7	739.0	755.9	775.9	790.6	803.2	812.7
25°	695.9	700.1	704.3	706.4	709.5	713.8	726.4	742.2	763.2	771.7	781.1
27.5°	681.1	681.1	683.2	683.2	687.4	691.6	701.1	715.9	732.7	743.2	755.9
30°	665.3	664.3	665.3	664.3	663.2	669.5	678.0	690.6	702.2	714.8	723.2
32.5°	649.5	648.5	648.5	649.5	645.3	648.5	652.7	664.3	676.9	683.2	692.7
35°	632.7	630.6	630.6	630.6	628.5	626.4	630.6	641.1	649.5	658.0	665.3
37.5°	615.9	612.7	612.7	610.6	608.5	605.3	605.3	613.7	625.3	628.5	638.0
40°	592.7	592.7	590.6	589.5	587.4	585.3	582.2	589.5	600.1	603.2	610.6
42.5°	569.5	566.4	565.3	565.3	565.3	562.2	560.1	565.3	571.6	576.9	581.1
45°	543.2	541.1	542.2	541.1	539.0	537.9	536.9	539.0	546.4	548.5	553.7
47.5°	514.8	513.7	513.7	512.7	511.6	512.7	508.5	513.7	515.8	517.9	522.2
50°	485.3	484.3	483.2	482.2	482.2	483.2	482.2	482.2	486.4	488.5	492.7
52.5°	455.8	452.7	452.7	451.6	451.6	449.5	451.6	452.7	454.8	456.9	459.0
55°	424.3	424.3	421.1	421.1	419.0	419.0	420.0	419.0	423.2	425.3	425.3
57.5°	393.7	389.5	390.6	388.5	386.4	385.3	385.3	387.4	389.5	389.5	391.6
60°	361.1	356.9	355.8	351.6	353.7	350.6	351.6	351.6	355.8	353.7	355.8
62.5°	328.5	323.2	320.0	317.9	317.9	319.0	316.9	315.8	317.9	320.0	324.2
65°	293.7	290.6	287.4	284.2	284.2	283.2	285.3	282.1	281.1	282.1	284.2
67.5°	257.9	254.8	251.6	248.4	249.5	246.3	244.2	247.4	245.3	246.3	248.4
70°	223.2	221.1	214.8	212.7	211.6	212.7	211.6	209.5	212.7	211.6	212.7
72.5°	188.4	186.3	183.2	177.9	177.9	176.9	175.8	175.8	174.8	174.8	174.8
75°	154.8	150.5	147.4	146.3	144.2	143.2	142.1	140.0	141.1	142.1	140.0
77.5°	120.0	114.7	113.7	113.7	110.5	110.5	111.6	110.5	109.5	109.5	109.5
80°	88.4	84.2	84.2	82.1	80.0	80.0	80.0	80.0	79.0	77.9	79.0
82.5°	56.8	55.8	54.7	54.7	56.8	52.6	54.7	53.7	52.6	52.6	51.6
85°	31.6	32.6	31.6	32.6	30.5	31.6	31.6	31.6	30.5	31.6	29.5
87.5°	11.6	11.6	11.6	12.6	12.6	12.6	12.6	12.6	13.7	12.6	12.6
90°	31.4	30.2	29.0	27.9	29.0	25.5	22.1	18.6	15.1	14.0	12.8
92.5°	77.8	89.4	115.0	161.4	216.0	239.2	178.8	117.3	80.1	69.6	59.2
95°	221.8	283.3	418.0	558.5	688.6	613.1	422.7	249.7	151.0	128.4	105.7
97.5°	571.3	724.6	960.3	1095.0	1059.0	790.8	470.3	269.4	171.9	146.9	121.9
100°	1139.1	1275.0	1369.0	1328.4	1099.6	743.2	437.8	265.9	184.6	162.0	139.3
102.5°	1459.6	1524.6	1504.9	1340.0	1024.2	673.5	409.9	270.6	199.7	179.4	159.1
105°	1647.7	1625.6	1509.5	1266.8	933.6	618.9	399.4	279.8	217.1	199.1	181.1
107.5°	1712.7	1622.2	1439.9	1162.3	853.5	579.4	397.1	294.9	239.2	222.4	205.5
110°	1690.7	1544.4	1330.7	1064.8	787.3	558.5	402.9	314.7	262.4	246.2	229.9

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	1610.5	1442.2	1222.7	980.0	743.2	546.9	414.5	334.4	286.8	271.2	255.5
115°	1502.6	1331.9	1129.8	915.0	714.1	545.8	427.3	356.5	312.4	296.7	281.0
117.5°	1393.4	1236.6	1057.8	872.0	694.4	546.9	443.6	379.7	335.6	321.0	306.5
120°	1299.4	1160.0	1003.3	839.5	681.6	551.6	462.1	401.8	360.0	345.4	330.9
122.5°	1225.0	1098.5	960.3	812.8	673.5	559.7	479.6	425.0	384.3	368.6	353.0
125°	1161.2	1049.7	923.1	790.8	666.5	567.8	498.1	447.1	406.4	390.8	375.1
127.5°	1106.6	1004.4	889.5	769.9	663.0	577.1	513.2	466.8	427.3	411.6	396.0
130°	1056.7	962.6	858.1	753.6	659.5	586.4	528.3	484.2	445.9	430.2	414.5
132.5°	1009.1	923.1	829.1	738.5	658.4	593.4	542.3	499.3	462.1	447.0	432.0
135°	961.5	886.0	803.5	725.7	657.2	600.3	553.9	514.4	478.4	462.8	447.1
137.5°	916.2	848.8	779.1	714.1	654.9	605.0	563.2	524.9	490.0	475.5	461.0
140°	873.2	817.5	758.2	703.7	653.7	609.6	570.1	535.3	501.6	487.1	472.6
142.5°	833.7	787.3	738.5	694.4	651.4	613.1	577.1	543.4	510.9	497.6	484.2
145°	798.9	761.7	723.4	686.3	649.1	614.3	581.7	550.4	520.2	506.8	493.5
147.5°	773.3	742.0	710.6	678.1	645.6	614.3	585.2	556.2	528.3	516.7	505.1
150°	747.8	723.4	696.7	670.0	641.0	614.3	586.4	562.0	535.3	524.8	514.4
152.5°	726.9	706.0	683.9	660.7	635.2	610.8	588.7	565.5	543.4	533.6	523.7
155°	707.2	689.7	671.2	651.4	628.2	608.5	588.7	570.1	550.4	542.2	534.1
157.5°	687.4	673.5	657.2	641.0	622.4	605.0	589.9	572.5	556.2	549.8	543.4
160°	670.0	658.4	645.6	630.5	615.4	602.6	589.9	575.9	562.0	556.2	550.4
162.5°	652.6	642.1	631.7	620.1	608.5	598.0	588.7	577.1	565.5	560.8	556.2
165°	635.2	627.0	620.1	610.8	601.5	593.4	586.4	578.3	569.0	564.9	560.8
167.5°	620.1	615.4	609.6	601.5	594.5	588.7	585.2	578.3	571.3	568.4	565.5
170°	607.3	602.6	599.2	593.4	587.6	584.1	581.7	577.1	571.3	570.2	569.0
172.5°	595.7	592.2	589.9	585.2	581.7	580.6	580.6	577.1	572.5	571.9	571.3
175°	585.2	582.9	581.7	579.4	577.1	577.1	578.3	575.9	573.6	573.0	572.5
177.5°	578.3	577.1	575.9	574.8	573.6	574.8	577.1	574.8	573.6	573.6	573.6
180°	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6	573.6

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1086.4	1086.4	1086.4	1086.4
2.5°	1063.3	1066.4	1076.9	1089.6
5°	1042.2	1050.6	1065.4	1085.4
7.5°	1019.0	1031.7	1052.7	1078.0
10°	992.7	1010.6	1036.9	1068.5
12.5°	964.3	987.5	1021.2	1053.8
15°	946.4	969.6	1000.1	1035.9
17.5°	911.7	939.0	970.6	1021.2
20°	875.9	906.4	947.5	998.0
22.5°	848.5	881.1	920.1	973.8
25°	815.9	849.6	891.7	947.5
27.5°	781.1	814.8	862.2	921.1
30°	754.8	787.4	832.7	895.9
32.5°	723.2	754.8	802.2	868.5
35°	687.4	723.2	768.5	835.9
37.5°	660.1	692.7	740.1	804.3
40°	630.6	659.0	705.3	768.5
42.5°	599.0	630.6	670.6	733.8
45°	569.5	592.7	633.7	693.8
47.5°	537.9	564.3	595.8	642.2
50°	504.3	526.4	561.1	592.7
52.5°	471.6	489.5	519.0	543.2
55°	436.9	454.8	476.9	491.6
57.5°	404.3	416.9	431.6	441.1
60°	364.2	376.9	386.4	395.8
62.5°	328.5	337.9	343.2	348.5
65°	291.6	296.9	300.0	304.2
67.5°	251.6	256.9	257.9	264.2
70°	214.8	215.8	217.9	221.1
72.5°	180.0	182.1	181.1	183.2
75°	144.2	146.3	144.2	146.3
77.5°	109.5	111.6	111.6	114.7
80°	79.0	80.0	81.1	81.1
82.5°	51.6	54.7	52.6	53.7
85°	29.5	30.5	30.5	31.6
87.5°	13.7	14.7	13.7	15.8
90°	10.5	7.0	4.6	2.3
92.5°	47.6	37.2	25.5	17.4
95°	75.5	55.7	43.0	39.5
97.5°	91.7	74.3	63.9	62.7
100°	111.5	95.2	87.1	85.9
102.5°	134.7	119.6	112.6	110.3
105°	159.1	145.1	138.2	134.7
107.5°	184.6	170.7	163.7	160.2
110°	210.2	197.4	191.6	188.1

TEST NUMBER: P1011951

CATALOG NUMBER: S123DIP-B775D1195UB30-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	235.7	222.9	217.1	213.7
115°	261.3	249.7	242.7	238.0
117.5°	284.5	274.0	268.2	262.4
120°	308.9	297.3	291.5	288.0
122.5°	332.1	319.3	313.5	310.0
125°	353.0	340.2	333.3	330.9
127.5°	371.6	358.8	350.7	347.2
130°	390.2	376.2	365.8	362.3
132.5°	407.6	390.2	378.5	373.9
135°	422.7	405.2	392.5	387.8
137.5°	436.6	418.0	405.2	400.6
140°	449.4	430.8	419.2	413.4
142.5°	461.0	444.7	432.0	427.3
145°	473.8	456.3	445.9	442.4
147.5°	485.4	470.3	459.8	457.5
150°	498.1	483.0	473.8	472.6
152.5°	509.8	497.0	487.7	487.7
155°	521.4	509.8	502.8	502.8
157.5°	531.8	521.4	515.6	514.4
160°	542.3	533.0	528.3	528.3
162.5°	549.2	542.3	538.8	538.8
165°	556.2	550.4	548.1	549.2
167.5°	562.0	557.4	556.2	557.4
170°	566.7	563.2	562.0	564.3
172.5°	570.1	567.8	567.8	569.0
175°	572.5	570.1	571.3	572.5
177.5°	573.6	572.5	573.6	574.8
180°	573.6	573.6	573.6	573.6

(END OF REPORT)