

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1012056

Luminaire Tested: S123DIP-B775D585UB40-4F0-XX-W2A-A4

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1012056
REPORT IS A COMBINATION OF REPORTS P990443 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-B775D585UB40-4F0-XX-W2A-A4
Description: Define 3 Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865} {m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5373.0 lumens
Efficiency: N/A
Efficacy: 104.7 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.37 / 1.5
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 51.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

Luminous Intensity Polar Plot

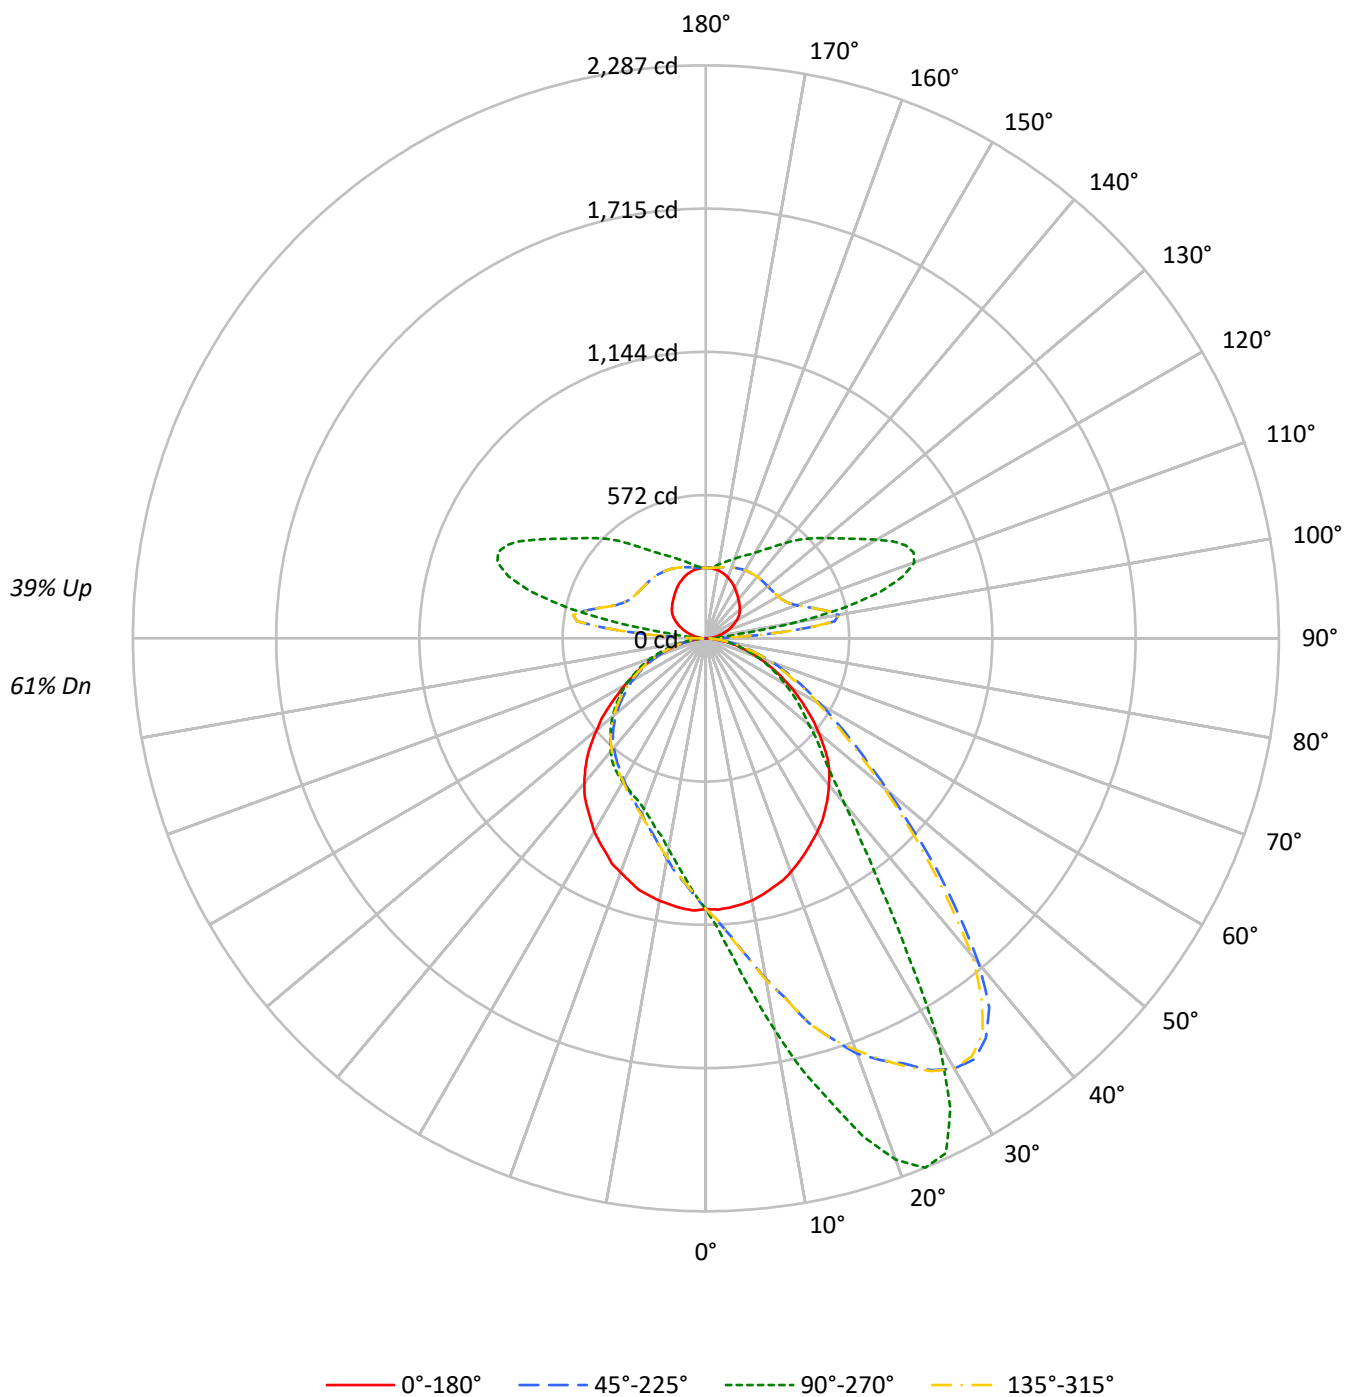

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	101	96	92	89	94	90	87	84	79	76	74	68	67	65	59	58	56
2	92	84	78	73	86	79	74	69	69	65	62	61	57	55	52	50	48
3	84	75	67	61	78	70	64	58	62	57	52	54	50	47	46	44	41
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	38	36
5	71	59	51	45	66	56	48	43	49	43	39	43	39	35	38	34	31
6	65	53	45	39	61	50	43	37	44	39	34	39	34	31	34	31	28
7	60	48	40	34	56	45	38	33	40	34	30	36	31	27	31	27	25
8	56	44	36	31	52	41	34	29	37	31	27	33	28	24	29	25	22
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	27	23	20
10	49	37	29	25	46	35	28	24	31	26	22	28	23	20	25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	11626	11626	11626	11626
5°	11634	13396	11668	9998
10°	11560	16210	11572	8730
15°	11400	19225	11493	7859
20°	11263	22134	11287	7231
25°	11059	22692	11084	6904
30°	10913	18748	10913	6689
35°	10732	12538	10665	6500
40°	10515	9051	10385	6210
45°	10243	7170	9947	5850
50°	9583	6088	9241	5495
55°	8857	5351	8496	5100
60°	8120	4658	7688	4685
65°	7313	3989	6957	4132
70°	6473	3311	6040	3485
75°	5535	2497	5177	2689
80°	4376	1667	4034	1768
85°	3016	765	2411	696

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 18751 cd/sqm

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.2	2.0
10°-20°	341.2	6.4
20°-30°	574.1	10.7
30°-40°	648.8	12.1
40°-50°	581.1	10.8
50°-60°	469.1	8.7
60°-70°	326.9	6.1
70°-80°	171.6	3.2
80°-90°	42.7	0.8
90°-100°	152.3	2.8
100°-110°	445.9	8.3
110°-120°	435.5	8.1
120°-130°	346.8	6.5
130°-140°	273.6	5.1
140°-150°	204.1	3.8
150°-160°	142.3	2.6
160°-170°	83.6	1.6
170°-180°	27.2	0.5
0°-30°	1021.5	19.0
0°-40°	1670.3	31.1
0°-60°	2720.4	50.6
0°-90°	3261.6	60.7
90°-120°	1033.7	19.2
90°-150°	1858.3	34.6
90°-180°	2111.0	39.3
0°-180°	5373.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1080	1080	1080	1080	1080	
5°	1079	1283	1082	958	1079	102
15°	1030	1910	1038	781	1030	291
25°	942	2267	944	690	942	435
35°	831	1221	826	633	831	520
45°	690	659	670	538	690	528
55°	489	448	469	427	489	438
65°	302	291	288	301	302	301
75°	146	150	136	161	146	156
85°	31	34	25	31	31	36
90°	1	16	1	16	1	4
95°	19	66	19	66	19	20
105°	66	723	66	723	66	70
115°	116	879	116	879	116	115
125°	162	693	162	693	162	144
135°	190	562	190	562	190	147
145°	216	439	216	439	216	136
155°	246	364	246	364	246	113
165°	269	318	269	318	269	76
175°	280	286	280	286	280	27
180°	281	281	281	281	281	

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1
2.5°	1083.3	1091.6	1095.8	1102.1	1108.4	1117.8	1120.9	1126.2	1124.1	1128.3	1130.4
5°	1079.1	1093.7	1106.3	1122.0	1136.6	1147.1	1157.6	1174.3	1186.9	1189.0	1198.4
7.5°	1071.8	1092.7	1114.7	1136.6	1164.9	1181.7	1200.5	1223.5	1242.4	1272.7	1284.2
10°	1062.3	1091.6	1123.0	1153.4	1192.1	1218.3	1241.3	1280.0	1318.8	1350.2	1379.5
12.5°	1047.7	1084.3	1125.1	1170.1	1220.4	1250.7	1282.1	1333.4	1392.0	1440.2	1471.6
15°	1029.9	1075.9	1128.3	1176.4	1231.9	1288.4	1321.9	1379.5	1463.2	1508.2	1588.8
17.5°	1015.2	1062.3	1114.7	1190.0	1265.4	1321.9	1346.0	1451.7	1509.2	1584.6	1675.7
20°	992.2	1051.9	1118.9	1194.2	1291.5	1326.1	1375.3	1482.0	1553.2	1651.6	1763.6
22.5°	968.1	1032.0	1112.6	1191.1	1299.9	1336.6	1403.5	1488.3	1601.4	1698.7	1822.2
25°	942.0	1011.1	1092.7	1185.8	1292.6	1346.0	1408.8	1513.4	1635.9	1758.3	1872.4
27.5°	915.8	991.2	1075.9	1169.1	1272.7	1335.5	1398.3	1507.2	1664.2	1797.1	1942.6
30°	890.7	966.0	1050.8	1146.1	1254.9	1315.6	1375.3	1511.3	1686.1	1835.8	1982.3
32.5°	863.5	940.9	1029.9	1109.4	1219.3	1284.2	1351.2	1511.3	1699.7	1858.8	1992.8
35°	831.0	910.6	987.0	1066.5	1175.4	1247.6	1322.9	1500.9	1712.3	1866.2	1948.8
37.5°	799.6	869.8	935.7	1013.1	1127.2	1204.7	1291.5	1488.3	1706.0	1834.8	1857.8
40°	764.0	834.2	887.5	959.8	1080.1	1170.1	1258.1	1471.6	1678.8	1760.4	1693.5
42.5°	729.5	785.0	831.0	901.2	1032.0	1119.9	1215.1	1441.2	1625.4	1642.2	1491.5
45°	689.7	729.5	770.3	849.9	979.7	1069.7	1175.4	1397.3	1539.6	1491.5	1301.0
47.5°	638.4	674.0	719.0	792.3	924.2	1017.3	1117.8	1340.7	1415.1	1314.6	1106.3
50°	589.3	619.6	661.5	732.6	865.6	956.6	1063.4	1251.8	1288.4	1130.4	953.5
52.5°	540.1	563.1	603.9	675.1	808.0	895.9	993.3	1160.7	1139.8	970.2	813.2
55°	488.8	508.7	547.4	617.5	741.0	824.7	917.9	1048.7	994.3	833.1	707.5
57.5°	438.5	459.5	499.2	557.9	674.0	755.7	830.0	932.6	850.9	722.2	611.2
60°	393.5	411.3	441.7	499.2	605.0	670.9	738.9	809.0	741.0	616.5	531.7
62.5°	346.4	363.2	391.4	443.8	534.8	593.4	647.9	705.4	630.1	539.0	463.7
65°	302.5	316.1	342.2	390.4	464.7	512.9	556.8	596.6	535.9	452.1	395.6
67.5°	262.7	274.2	296.2	339.1	401.9	436.4	472.0	505.5	454.2	387.3	339.1
70°	219.8	229.2	249.1	280.5	330.7	366.3	392.5	417.6	371.6	318.2	285.7
72.5°	182.1	191.5	204.1	236.5	271.1	293.1	321.3	334.9	308.8	264.8	232.4
75°	145.5	152.8	164.3	185.3	217.7	232.4	250.1	260.6	236.5	207.2	187.3
77.5°	114.1	117.2	125.6	140.2	162.2	179.0	192.6	198.9	182.1	163.3	146.5
80°	80.6	84.8	91.1	103.6	120.4	125.6	134.0	141.3	130.8	114.1	103.6
82.5°	53.4	58.6	61.8	67.0	77.5	83.7	85.8	92.1	82.7	76.4	72.2
85°	31.4	33.5	34.5	37.7	42.9	46.1	49.2	50.2	48.1	47.1	42.9
87.5°	15.7	15.7	15.7	17.8	18.8	20.9	22.0	22.0	22.0	20.9	19.9
90°	1.1	2.3	3.4	5.1	6.3	6.8	7.4	9.1	10.8	12.5	14.2
92.5°	8.5	12.5	18.2	23.3	29.0	34.1	39.2	57.4	87.5	117.1	105.7
95°	19.3	21.0	27.3	36.9	51.7	62.8	73.9	122.2	206.8	300.0	337.0
97.5°	30.7	31.3	36.4	44.9	59.7	71.9	84.1	131.8	230.1	387.0	518.2
100°	42.0	42.6	46.6	54.5	68.2	79.2	90.3	130.1	214.2	363.7	538.1
102.5°	54.0	55.1	58.5	65.9	77.8	87.8	97.7	132.4	200.6	329.6	501.2
105°	65.9	67.6	71.0	77.8	88.6	97.4	106.3	136.9	195.5	302.9	456.8
107.5°	78.4	80.1	83.5	90.3	100.6	108.8	117.1	144.3	194.3	283.5	417.6
110°	92.1	93.8	96.6	102.8	112.5	120.4	128.4	154.0	197.2	273.3	385.3

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	104.6	106.3	109.1	115.3	125.0	132.6	140.3	163.6	202.9	267.6	363.7
115°	116.5	118.8	122.2	127.8	137.5	145.2	152.9	174.4	209.1	267.1	349.5
117.5°	128.4	131.3	134.1	139.2	150.0	157.1	164.2	185.8	217.1	267.6	339.8
120°	140.9	142.6	145.5	151.1	161.9	169.0	176.1	196.6	226.2	269.9	333.5
122.5°	151.7	153.4	156.3	162.5	172.7	180.4	188.1	208.0	234.7	273.9	329.6
125°	161.9	163.1	166.5	172.7	183.5	191.2	198.9	218.8	243.8	277.9	326.2
127.5°	169.9	171.6	175.6	181.8	193.8	201.4	209.1	228.4	251.2	282.4	324.5
130°	177.3	179.0	184.1	190.9	202.9	210.6	218.2	236.9	258.5	286.9	322.7
132.5°	183.0	185.2	190.9	199.4	211.4	218.8	226.2	244.3	265.4	290.4	322.2
135°	189.8	192.1	198.3	206.8	218.8	226.4	234.1	251.7	271.0	293.8	321.6
137.5°	196.0	198.3	204.6	213.6	225.6	232.7	239.8	256.8	275.6	296.0	320.5
140°	202.3	205.1	210.8	219.9	231.3	238.4	245.5	261.9	279.0	298.3	319.9
142.5°	209.1	211.4	217.6	225.6	236.9	243.4	250.0	265.9	282.4	300.0	318.8
145°	216.5	218.2	223.3	231.8	241.5	248.0	254.6	269.3	284.7	300.6	317.6
147.5°	223.9	225.0	230.1	237.5	247.2	252.8	258.5	272.2	286.4	300.6	315.9
150°	231.3	231.8	236.4	243.8	251.7	256.8	261.9	275.0	286.9	300.6	313.7
152.5°	238.7	238.7	243.2	249.4	256.3	261.1	265.9	276.7	288.1	298.9	310.8
155°	246.0	246.0	249.4	255.1	261.4	265.4	269.3	279.0	288.1	297.7	307.4
157.5°	251.7	252.3	255.1	260.2	265.9	269.0	272.2	280.1	288.7	296.0	304.6
160°	258.5	258.5	260.8	265.4	269.3	272.2	275.0	281.8	288.7	294.9	301.2
162.5°	263.7	263.7	265.4	268.8	272.2	274.4	276.7	282.4	288.1	292.6	297.7
165°	268.8	268.2	269.3	272.2	274.4	276.4	278.4	283.0	286.9	290.4	294.3
167.5°	272.7	272.2	272.7	275.0	276.7	278.2	279.6	283.0	286.4	288.1	290.9
170°	276.2	275.0	275.6	277.3	278.4	279.0	279.6	282.4	284.7	285.8	287.5
172.5°	278.4	277.9	277.9	279.0	279.6	279.8	280.1	282.4	284.1	284.1	284.7
175°	280.1	279.6	279.0	280.1	280.1	280.4	280.7	281.8	283.0	282.4	282.4
177.5°	281.3	280.7	280.1	280.7	280.7	280.7	280.7	281.3	282.4	281.3	280.7
180°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1
2.5°	1137.7	1139.8	1147.1	1152.3	1162.8	1161.8	1161.8	1160.7	1157.6	1162.8	1166.0
5°	1217.2	1235.0	1237.1	1260.1	1261.2	1270.6	1276.9	1271.7	1284.2	1283.2	1273.8
7.5°	1315.6	1339.7	1351.2	1373.2	1398.3	1392.0	1416.1	1420.3	1418.2	1428.7	1436.0
10°	1423.4	1465.3	1494.6	1535.4	1545.9	1552.2	1567.9	1581.5	1608.7	1587.7	1601.4
12.5°	1546.9	1577.3	1616.0	1680.9	1713.3	1734.3	1741.6	1751.0	1769.9	1758.3	1759.4
15°	1650.5	1691.4	1757.3	1837.9	1847.3	1873.5	1867.2	1923.7	1950.9	1910.1	1933.1
17.5°	1758.3	1812.8	1891.3	1961.4	2001.2	2019.0	2035.7	2090.1	2088.0	2081.8	2087.0
20°	1827.4	1916.4	2013.7	2106.9	2118.4	2132.0	2177.0	2200.0	2195.8	2213.6	2225.1
22.5°	1924.8	2019.0	2122.6	2184.3	2210.5	2226.2	2261.8	2276.4	2282.7	2286.9	2279.6
25°	2006.4	2106.9	2183.3	2237.7	2253.4	2261.8	2273.3	2277.5	2274.3	2267.0	2273.3
27.5°	2061.9	2142.5	2194.8	2219.9	2211.5	2197.9	2176.0	2161.3	2128.9	2113.2	2132.0
30°	2084.9	2120.5	2136.2	2094.3	2052.5	2019.0	1977.1	1899.6	1838.9	1856.7	1832.7
32.5°	2048.3	2025.2	1949.9	1842.1	1809.6	1755.2	1636.9	1545.9	1549.0	1500.9	1520.8
35°	1940.5	1835.8	1693.5	1530.2	1487.3	1458.0	1328.2	1308.3	1266.4	1221.4	1234.0
37.5°	1750.0	1597.2	1424.5	1304.1	1240.3	1176.4	1103.2	1059.2	1034.1	1015.2	1029.9
40°	1517.6	1331.3	1189.0	1081.2	1026.7	985.9	935.7	891.7	863.5	860.3	865.6
42.5°	1289.5	1132.5	1001.6	899.1	881.3	833.1	800.7	766.1	757.8	744.2	751.5
45°	1091.6	964.0	856.1	772.4	751.5	738.9	699.2	677.2	667.8	659.4	671.9
47.5°	948.3	814.3	735.8	685.5	664.6	643.7	621.7	607.0	599.7	600.8	599.7
50°	810.1	711.7	642.6	603.9	591.3	576.7	558.9	549.5	546.3	536.9	544.3
52.5°	697.1	625.9	577.7	541.1	531.7	521.2	506.6	501.3	494.0	491.9	491.9
55°	606.0	550.5	511.8	487.7	476.2	467.8	459.5	453.2	448.0	448.0	448.0
57.5°	534.8	486.7	458.4	437.5	433.3	424.9	415.5	415.5	408.2	407.1	410.3
60°	474.1	431.2	409.2	391.4	385.2	383.1	373.6	373.6	371.6	366.3	370.5
62.5°	412.4	381.0	362.1	348.5	342.2	342.2	334.9	329.7	329.7	330.7	328.6
65°	355.9	332.8	316.1	305.6	302.5	298.3	297.2	293.1	289.9	291.0	289.9
67.5°	305.6	287.8	276.3	267.9	262.7	260.6	257.5	257.5	255.4	256.4	251.2
70°	260.6	242.8	233.4	225.0	222.9	222.9	218.7	219.8	217.7	220.8	218.7
72.5°	214.6	201.0	193.6	190.5	188.4	187.3	185.3	183.2	182.1	184.2	183.2
75°	173.7	162.2	157.0	154.9	152.8	152.8	151.8	150.7	149.7	149.7	149.7
77.5°	135.0	127.7	121.4	123.5	120.4	121.4	118.3	118.3	119.3	118.3	118.3
80°	99.4	94.2	94.2	92.1	87.9	90.0	90.0	86.9	85.8	87.9	84.8
82.5°	65.9	64.9	62.8	61.8	59.7	60.7	59.7	58.6	57.6	59.7	57.6
85°	38.7	38.7	37.7	35.6	37.7	36.6	35.6	35.6	34.5	34.5	34.5
87.5°	19.9	17.8	17.8	16.7	17.8	15.7	16.7	15.7	14.7	15.7	14.7
90°	13.6	14.2	14.8	15.3	15.9	16.5	15.9	16.5	17.0	16.5	17.0
92.5°	79.0	56.3	43.8	38.1	36.1	34.1	33.0	30.7	31.3	30.1	31.3
95°	273.3	204.6	138.6	108.5	98.3	88.1	77.3	72.2	68.2	65.9	68.2
97.5°	535.8	469.9	354.6	279.6	247.2	214.8	176.7	155.1	141.5	135.2	141.5
100°	650.0	669.9	623.9	557.4	517.0	476.7	419.3	377.9	355.7	356.3	355.7
102.5°	655.7	736.4	746.1	714.2	692.4	670.5	629.0	598.3	580.7	564.2	580.7
105°	619.9	738.7	795.5	806.3	798.9	791.5	765.4	743.8	725.6	722.8	725.6
107.5°	568.8	704.6	793.8	838.1	845.8	853.5	850.1	839.8	832.4	826.2	832.4
110°	521.1	651.2	755.7	827.3	847.2	867.1	883.0	887.6	886.4	885.3	886.4

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	479.6	598.3	705.7	788.1	815.1	842.1	874.5	891.0	896.6	897.2	896.6
115°	447.8	552.9	651.7	735.3	766.2	797.2	839.8	864.8	876.2	879.0	876.2
117.5°	426.7	517.6	605.2	681.9	714.0	746.1	790.4	818.2	835.3	839.3	835.3
120°	410.8	490.9	567.6	635.8	664.5	693.2	738.1	769.9	783.6	787.0	783.6
122.5°	397.8	469.9	537.5	599.5	625.6	651.7	690.4	718.2	733.6	738.1	733.6
125°	387.0	451.7	513.7	568.2	591.0	613.7	650.0	675.0	689.2	693.2	689.2
127.5°	376.7	435.3	491.5	541.5	562.6	583.6	616.5	638.1	651.2	654.6	651.2
130°	368.8	419.9	471.1	517.1	536.4	555.7	585.8	606.3	618.2	622.8	618.2
132.5°	361.4	405.7	451.7	493.8	512.0	530.1	558.0	578.4	588.7	591.5	588.7
135°	355.1	393.2	433.5	470.5	486.7	502.9	530.7	547.8	558.0	562.0	558.0
137.5°	349.5	381.3	415.4	448.3	462.8	477.3	501.2	518.8	527.3	530.7	527.3
140°	344.3	371.0	400.0	427.3	439.5	451.7	473.3	489.2	498.3	497.8	498.3
142.5°	339.8	361.4	385.3	408.0	418.2	428.4	446.0	459.7	467.6	467.1	467.6
145°	335.8	354.0	372.7	390.9	399.2	407.4	421.6	433.5	438.1	439.2	438.1
147.5°	331.8	347.7	363.1	378.4	384.4	390.4	401.7	410.3	414.8	415.4	414.8
150°	327.9	340.9	354.0	365.9	371.3	376.7	385.3	391.5	394.9	394.9	394.9
152.5°	323.3	334.7	345.5	355.7	360.0	364.2	370.5	376.2	377.9	377.9	377.9
155°	318.8	328.4	337.5	346.0	349.4	352.9	358.0	362.5	363.7	364.2	363.7
157.5°	313.7	321.6	329.6	336.4	339.2	342.1	346.6	350.0	351.2	351.2	351.2
160°	308.5	315.9	322.2	327.9	329.8	331.8	335.8	339.2	339.2	338.7	339.2
162.5°	303.4	309.1	314.2	319.3	321.0	322.7	325.0	327.9	327.9	327.3	327.9
165°	298.9	303.4	306.8	310.8	312.2	313.7	315.9	318.2	317.6	317.6	317.6
167.5°	294.3	298.3	301.2	303.4	304.5	305.7	306.8	308.5	308.0	308.0	308.0
170°	290.4	293.2	294.9	297.2	297.8	298.3	298.9	300.0	299.5	299.5	299.5
172.5°	286.4	288.7	289.8	291.5	291.8	292.1	292.1	293.2	292.1	291.5	292.1
175°	283.5	284.7	285.2	286.4	286.4	286.4	286.4	286.9	286.4	285.8	286.4
177.5°	281.3	281.8	282.4	283.0	283.0	283.0	282.4	283.0	281.8	281.8	281.8
180°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1
2.5°	1157.6	1160.7	1152.3	1150.3	1150.3	1154.4	1151.3	1123.0	1128.3	1122.0	1119.9
5°	1285.3	1279.0	1270.6	1266.4	1261.2	1246.5	1245.5	1213.1	1206.8	1185.8	1176.4
7.5°	1425.5	1420.3	1395.2	1392.0	1389.9	1376.3	1341.8	1307.2	1282.1	1258.1	1235.0
10°	1585.7	1570.0	1558.4	1535.4	1523.9	1505.1	1460.1	1427.6	1384.7	1348.1	1299.9
12.5°	1778.2	1760.4	1721.7	1705.0	1690.3	1638.0	1593.0	1556.3	1472.6	1447.5	1387.8
15°	1919.5	1881.9	1877.7	1841.0	1838.9	1781.4	1695.5	1655.8	1590.9	1498.8	1437.0
17.5°	2072.3	2038.8	2012.7	1968.7	1962.4	1908.0	1845.2	1747.9	1676.7	1588.8	1510.3
20°	2184.3	2166.5	2121.5	2103.7	2067.1	2021.1	1956.2	1835.8	1748.9	1661.0	1564.7
22.5°	2273.3	2255.5	2219.9	2195.8	2174.9	2115.3	2037.8	1935.2	1815.9	1700.8	1601.4
25°	2272.2	2267.0	2252.4	2240.8	2225.1	2181.2	2116.3	2017.9	1885.0	1758.3	1620.2
27.5°	2143.5	2158.2	2183.3	2195.8	2192.7	2186.4	2149.8	2067.1	1947.8	1797.1	1642.2
30°	1875.6	1928.9	1976.0	2038.8	2057.7	2103.7	2124.7	2077.6	1982.3	1842.1	1670.4
32.5°	1555.3	1632.8	1735.3	1769.9	1829.5	1918.5	2017.9	2035.7	1976.0	1868.2	1688.2
35°	1275.8	1339.7	1419.2	1473.7	1527.0	1671.5	1797.1	1905.9	1925.8	1854.6	1684.0
37.5°	1056.1	1101.1	1171.2	1217.2	1266.4	1389.9	1565.8	1707.1	1806.5	1808.6	1672.5
40°	897.0	916.9	977.6	1011.1	1058.1	1164.9	1321.9	1506.1	1651.6	1718.6	1642.2
42.5°	759.9	786.0	836.3	861.4	891.7	984.9	1088.5	1263.3	1443.3	1586.7	1585.7
45°	678.2	697.1	720.1	741.0	775.6	831.0	949.3	1080.1	1252.8	1415.1	1478.9
47.5°	606.0	623.8	646.8	653.1	676.1	728.5	800.7	914.8	1075.9	1237.1	1357.5
50°	545.3	560.0	575.6	587.2	597.6	640.5	695.0	791.3	920.0	1075.9	1225.6
52.5°	498.2	508.7	522.3	528.6	538.0	569.4	611.2	682.4	788.1	930.5	1075.9
55°	454.2	461.6	469.9	480.4	484.6	507.6	540.1	600.8	679.3	807.0	945.1
57.5°	413.4	416.6	421.8	428.1	433.3	453.2	481.5	522.3	591.3	689.7	820.6
60°	367.4	375.7	378.9	385.2	388.3	404.0	426.0	460.5	513.9	598.7	697.1
62.5°	328.6	333.9	339.1	342.2	349.6	354.8	372.6	404.0	448.0	510.8	599.7
65°	294.1	296.2	299.3	302.5	304.6	310.9	327.6	348.5	382.0	437.5	506.6
67.5°	254.3	256.4	260.6	261.7	263.8	272.1	281.5	299.3	327.6	369.5	426.0
70°	215.6	218.7	220.8	222.9	226.1	229.2	239.7	254.3	276.3	305.6	349.6
72.5°	182.1	185.3	185.3	187.3	186.3	190.5	201.0	211.4	226.1	250.1	288.9
75°	148.6	148.6	150.7	151.8	152.8	157.0	161.2	169.6	181.1	199.9	224.0
77.5°	117.2	116.2	118.3	118.3	118.3	121.4	125.6	129.8	137.1	150.7	169.6
80°	85.8	85.8	87.9	89.0	86.9	87.9	90.0	94.2	99.4	108.9	119.3
82.5°	56.5	60.7	59.7	60.7	59.7	61.8	62.8	63.8	65.9	70.1	77.5
85°	34.5	34.5	34.5	35.6	34.5	35.6	35.6	35.6	36.6	38.7	41.9
87.5°	14.7	14.7	14.7	15.7	14.7	14.7	15.7	14.7	15.7	15.7	16.7
90°	16.5	15.9	16.5	15.9	15.3	14.8	14.2	13.6	14.2	12.5	10.8
92.5°	30.7	33.0	34.1	36.1	38.1	43.8	56.3	79.0	105.7	117.1	87.5
95°	72.2	77.3	88.1	98.3	108.5	138.6	204.6	273.3	337.0	300.0	206.8
97.5°	155.1	176.7	214.8	247.2	279.6	354.6	469.9	535.8	518.2	387.0	230.1
100°	377.9	419.3	476.7	517.0	557.4	623.9	669.9	650.0	538.1	363.7	214.2
102.5°	598.3	629.0	670.5	692.4	714.2	746.1	736.4	655.7	501.2	329.6	200.6
105°	743.8	765.4	791.5	798.9	806.3	795.5	738.7	619.9	456.8	302.9	195.5
107.5°	839.8	850.1	853.5	845.8	838.1	793.8	704.6	568.8	417.6	283.5	194.3
110°	887.6	883.0	867.1	847.2	827.3	755.7	651.2	521.1	385.3	273.3	197.2

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	891.0	874.5	842.1	815.1	788.1	705.7	598.3	479.6	363.7	267.6	202.9
115°	864.8	839.8	797.2	766.2	735.3	651.7	552.9	447.8	349.5	267.1	209.1
117.5°	818.2	790.4	746.1	714.0	681.9	605.2	517.6	426.7	339.8	267.6	217.1
120°	769.9	738.1	693.2	664.5	635.8	567.6	490.9	410.8	333.5	269.9	226.2
122.5°	718.2	690.4	651.7	625.6	599.5	537.5	469.9	397.8	329.6	273.9	234.7
125°	675.0	650.0	613.7	591.0	568.2	513.7	451.7	387.0	326.2	277.9	243.8
127.5°	638.1	616.5	583.6	562.6	541.5	491.5	435.3	376.7	324.5	282.4	251.2
130°	606.3	585.8	555.7	536.4	517.1	471.1	419.9	368.8	322.7	286.9	258.5
132.5°	578.4	558.0	530.1	512.0	493.8	451.7	405.7	361.4	322.2	290.4	265.4
135°	547.8	530.7	502.9	486.7	470.5	433.5	393.2	355.1	321.6	293.8	271.0
137.5°	518.8	501.2	477.3	462.8	448.3	415.4	381.3	349.5	320.5	296.0	275.6
140°	489.2	473.3	451.7	439.5	427.3	400.0	371.0	344.3	319.9	298.3	279.0
142.5°	459.7	446.0	428.4	418.2	408.0	385.3	361.4	339.8	318.8	300.0	282.4
145°	433.5	421.6	407.4	399.2	390.9	372.7	354.0	335.8	317.6	300.6	284.7
147.5°	410.3	401.7	390.4	384.4	378.4	363.1	347.7	331.8	315.9	300.6	286.4
150°	391.5	385.3	376.7	371.3	365.9	354.0	340.9	327.9	313.7	300.6	286.9
152.5°	376.2	370.5	364.2	360.0	355.7	345.5	334.7	323.3	310.8	298.9	288.1
155°	362.5	358.0	352.9	349.4	346.0	337.5	328.4	318.8	307.4	297.7	288.1
157.5°	350.0	346.6	342.1	339.2	336.4	329.6	321.6	313.7	304.6	296.0	288.7
160°	339.2	335.8	331.8	329.8	327.9	322.2	315.9	308.5	301.2	294.9	288.7
162.5°	327.9	325.0	322.7	321.0	319.3	314.2	309.1	303.4	297.7	292.6	288.1
165°	318.2	315.9	313.7	312.2	310.8	306.8	303.4	298.9	294.3	290.4	286.9
167.5°	308.5	306.8	305.7	304.5	303.4	301.2	298.3	294.3	290.9	288.1	286.4
170°	300.0	298.9	298.3	297.8	297.2	294.9	293.2	290.4	287.5	285.8	284.7
172.5°	293.2	292.1	292.1	291.8	291.5	289.8	288.7	286.4	284.7	284.1	284.1
175°	286.9	286.4	286.4	286.4	286.4	285.2	284.7	283.5	282.4	282.4	283.0
177.5°	283.0	282.4	283.0	283.0	283.0	282.4	281.8	281.3	280.7	281.3	282.4
180°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1
2.5°	1109.4	1106.3	1106.3	1104.2	1097.9	1086.4	1085.4	1087.5	1081.2	1074.9	1065.5
5°	1163.9	1144.0	1137.7	1131.4	1118.9	1097.9	1089.5	1082.2	1070.7	1057.1	1042.4
7.5°	1209.9	1181.7	1173.3	1161.8	1136.6	1107.3	1088.5	1072.8	1057.1	1038.3	1020.5
10°	1267.5	1226.7	1206.8	1190.0	1155.5	1114.7	1086.4	1063.4	1038.3	1015.2	992.2
12.5°	1332.4	1266.4	1260.1	1219.3	1179.6	1118.9	1084.3	1050.8	1017.3	989.1	965.0
15°	1386.8	1314.6	1288.4	1261.2	1184.8	1109.4	1075.9	1038.3	999.5	969.2	933.6
17.5°	1421.3	1361.7	1306.2	1269.6	1190.0	1123.0	1058.1	1015.2	974.4	932.6	903.2
20°	1463.2	1376.3	1328.2	1279.0	1200.5	1112.6	1047.7	994.3	944.1	906.4	870.8
22.5°	1505.1	1387.8	1348.1	1294.7	1202.6	1102.1	1028.8	975.5	917.9	880.2	841.5
25°	1500.9	1404.6	1338.6	1293.6	1181.7	1092.7	1006.9	944.1	890.7	842.5	803.8
27.5°	1504.0	1385.7	1318.8	1266.4	1167.0	1079.1	983.8	917.9	862.4	812.2	771.4
30°	1505.1	1357.5	1298.9	1236.1	1139.8	1046.6	957.7	890.7	832.1	777.7	741.0
32.5°	1501.9	1334.5	1261.2	1204.7	1096.9	1015.2	927.3	856.1	796.5	746.3	711.7
35°	1494.6	1307.2	1222.5	1151.3	1052.9	970.2	899.1	825.8	762.0	715.9	676.1
37.5°	1474.7	1277.9	1181.7	1111.5	1001.6	917.9	855.1	794.4	732.6	678.2	644.7
40°	1460.1	1238.2	1140.8	1064.4	946.2	864.5	812.2	754.6	693.9	644.7	612.3
42.5°	1426.6	1200.5	1099.0	1007.9	891.7	808.0	758.8	712.8	660.4	612.3	583.0
45°	1372.1	1159.7	1047.7	955.6	832.1	752.5	707.5	669.8	623.8	577.7	548.4
47.5°	1295.7	1101.1	993.3	901.2	773.5	692.9	647.9	619.6	583.0	544.3	519.1
50°	1213.1	1037.2	937.8	846.7	716.9	638.4	594.5	568.3	544.3	508.7	484.6
52.5°	1105.2	969.2	873.9	787.1	656.2	580.9	542.2	523.3	498.2	473.1	452.1
55°	1000.6	881.3	802.8	720.1	596.6	526.5	488.8	468.9	454.2	433.3	416.6
57.5°	879.2	799.6	727.4	652.1	541.1	477.3	441.7	417.6	408.2	398.8	383.1
60°	767.2	706.5	647.9	585.1	483.5	426.0	391.4	372.6	363.2	356.9	346.4
62.5°	664.6	617.5	567.3	517.0	424.9	372.6	346.4	327.6	319.2	318.2	308.8
65°	566.2	532.7	491.9	442.7	370.5	324.5	299.3	287.8	278.4	278.4	271.1
67.5°	467.8	444.8	412.4	377.8	321.3	278.4	255.4	244.9	239.7	239.7	234.4
70°	389.3	373.6	344.3	314.0	264.8	232.4	214.6	205.1	202.0	203.0	198.9
72.5°	316.1	299.3	275.3	253.3	216.7	192.6	180.0	169.6	164.3	165.4	164.3
75°	244.9	236.5	215.6	198.9	169.6	152.8	141.3	136.1	131.9	132.9	130.8
77.5°	184.2	171.6	160.1	148.6	130.8	117.2	107.8	102.6	99.4	99.4	99.4
80°	125.6	123.5	114.1	107.8	93.2	82.7	75.4	74.3	71.2	71.2	71.2
82.5°	81.6	76.4	71.2	67.0	58.6	52.3	49.2	47.1	46.1	45.0	47.1
85°	45.0	41.9	39.8	35.6	32.4	29.3	26.2	25.1	24.1	25.1	24.1
87.5°	17.8	14.7	14.7	13.6	12.6	11.5	11.5	9.4	9.4	8.4	8.4
90°	9.1	7.4	6.8	6.3	5.1	3.4	2.3	1.1	2.3	3.4	5.1
92.5°	57.4	39.2	34.1	29.0	23.3	18.2	12.5	8.5	12.5	18.2	23.3
95°	122.2	73.9	62.8	51.7	36.9	27.3	21.0	19.3	21.0	27.3	36.9
97.5°	131.8	84.1	71.9	59.7	44.9	36.4	31.3	30.7	31.3	36.4	44.9
100°	130.1	90.3	79.2	68.2	54.5	46.6	42.6	42.0	42.6	46.6	54.5
102.5°	132.4	97.7	87.8	77.8	65.9	58.5	55.1	54.0	55.1	58.5	65.9
105°	136.9	106.3	97.4	88.6	77.8	71.0	67.6	65.9	67.6	71.0	77.8
107.5°	144.3	117.1	108.8	100.6	90.3	83.5	80.1	78.4	80.1	83.5	90.3
110°	154.0	128.4	120.4	112.5	102.8	96.6	93.8	92.1	93.8	96.6	102.8

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	163.6	140.3	132.6	125.0	115.3	109.1	106.3	104.6	106.3	109.1	115.3
115°	174.4	152.9	145.2	137.5	127.8	122.2	118.8	116.5	118.8	122.2	127.8
117.5°	185.8	164.2	157.1	150.0	139.2	134.1	131.3	128.4	131.3	134.1	139.2
120°	196.6	176.1	169.0	161.9	151.1	145.5	142.6	140.9	142.6	145.5	151.1
122.5°	208.0	188.1	180.4	172.7	162.5	156.3	153.4	151.7	153.4	156.3	162.5
125°	218.8	198.9	191.2	183.5	172.7	166.5	163.1	161.9	163.1	166.5	172.7
127.5°	228.4	209.1	201.4	193.8	181.8	175.6	171.6	169.9	171.6	175.6	181.8
130°	236.9	218.2	210.6	202.9	190.9	184.1	179.0	177.3	179.0	184.1	190.9
132.5°	244.3	226.2	218.8	211.4	199.4	190.9	185.2	183.0	185.2	190.9	199.4
135°	251.7	234.1	226.4	218.8	206.8	198.3	192.1	189.8	192.1	198.3	206.8
137.5°	256.8	239.8	232.7	225.6	213.6	204.6	198.3	196.0	198.3	204.6	213.6
140°	261.9	245.5	238.4	231.3	219.9	210.8	205.1	202.3	205.1	210.8	219.9
142.5°	265.9	250.0	243.4	236.9	225.6	217.6	211.4	209.1	211.4	217.6	225.6
145°	269.3	254.6	248.0	241.5	231.8	223.3	218.2	216.5	218.2	223.3	231.8
147.5°	272.2	258.5	252.8	247.2	237.5	230.1	225.0	223.9	225.0	230.1	237.5
150°	275.0	261.9	256.8	251.7	243.8	236.4	231.8	231.3	231.8	236.4	243.8
152.5°	276.7	265.9	261.1	256.3	249.4	243.2	238.7	238.7	238.7	243.2	249.4
155°	279.0	269.3	265.4	261.4	255.1	249.4	246.0	246.0	246.0	249.4	255.1
157.5°	280.1	272.2	269.0	265.9	260.2	255.1	252.3	251.7	252.3	255.1	260.2
160°	281.8	275.0	272.2	269.3	265.4	260.8	258.5	258.5	258.5	260.8	265.4
162.5°	282.4	276.7	274.4	272.2	268.8	265.4	263.7	263.7	263.7	265.4	268.8
165°	283.0	278.4	276.4	274.4	272.2	269.3	268.2	268.8	268.2	269.3	272.2
167.5°	283.0	279.6	278.2	276.7	275.0	272.7	272.2	272.7	272.2	272.7	275.0
170°	282.4	279.6	279.0	278.4	277.3	275.6	275.0	276.2	275.0	275.6	277.3
172.5°	282.4	280.1	279.8	279.6	279.0	277.9	277.9	278.4	277.9	277.9	279.0
175°	281.8	280.7	280.4	280.1	280.1	279.0	279.6	280.1	279.6	279.0	280.1
177.5°	281.3	280.7	280.7	280.7	280.7	280.1	280.7	281.3	280.7	280.1	280.7
180°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1
2.5°	1063.4	1062.3	1064.4	1058.1	1047.7	1042.4	1027.8	1024.7	1023.6	1024.7	1025.7
5°	1034.1	1033.0	1029.9	1019.4	1006.9	997.4	979.7	978.6	972.3	966.0	969.2
7.5°	1005.8	1001.6	995.4	981.7	965.0	954.5	939.9	929.4	921.0	915.8	911.6
10°	977.6	971.3	965.0	947.2	926.3	910.6	892.8	884.4	875.0	870.8	866.6
12.5°	940.9	934.6	923.1	902.2	889.6	869.8	852.0	843.6	838.4	830.0	824.7
15°	911.6	899.1	892.8	870.8	844.6	842.5	810.1	808.0	797.5	797.5	789.2
17.5°	878.1	868.7	857.2	835.2	816.4	797.5	780.8	774.5	765.1	763.0	758.8
20°	845.7	833.1	828.9	807.0	787.1	764.0	746.3	740.0	735.8	731.6	734.7
22.5°	812.2	801.7	791.3	771.4	756.7	733.7	723.2	716.9	710.7	708.6	709.6
25°	779.7	770.3	759.9	740.0	724.3	705.4	696.0	692.9	689.7	689.7	688.7
27.5°	748.3	738.9	729.5	711.7	696.0	682.4	675.1	671.9	668.8	670.9	673.0
30°	715.9	707.5	699.2	683.5	670.9	658.3	654.1	652.1	651.0	656.2	656.2
32.5°	686.6	679.3	673.0	658.3	645.8	635.3	632.2	633.2	634.3	637.4	639.5
35°	656.2	651.0	644.7	632.2	621.7	612.3	613.3	613.3	615.4	620.7	624.8
37.5°	629.0	621.7	616.5	606.0	597.6	589.3	592.4	595.5	597.6	603.9	606.0
40°	596.6	593.4	589.3	578.8	571.5	570.4	571.5	573.6	577.7	580.9	584.0
42.5°	570.4	566.2	561.0	552.6	546.3	547.4	548.4	550.5	552.6	557.9	561.0
45°	541.1	538.0	533.8	526.5	521.2	522.3	523.3	523.3	525.4	531.7	533.8
47.5°	508.7	509.7	504.5	497.2	494.0	494.0	494.0	496.1	501.3	503.4	504.5
50°	477.3	475.2	474.1	466.8	464.7	463.7	464.7	465.8	473.1	472.0	475.2
52.5°	443.8	443.8	442.7	438.5	435.4	435.4	433.3	438.5	440.6	442.7	445.9
55°	411.3	408.2	407.1	405.0	400.9	399.8	401.9	408.2	410.3	412.4	415.5
57.5°	375.7	375.7	373.6	370.5	370.5	370.5	370.5	374.7	377.8	379.9	386.2
60°	343.3	339.1	336.0	336.0	336.0	334.9	341.2	341.2	347.5	348.5	350.6
62.5°	304.6	302.5	300.4	301.4	300.4	302.5	304.6	308.8	309.8	312.9	316.1
65°	267.9	267.9	265.8	272.1	267.9	267.9	273.2	273.2	275.3	278.4	282.6
67.5°	232.4	233.4	231.3	231.3	233.4	234.4	235.5	239.7	240.7	244.9	250.1
70°	195.7	197.8	198.9	196.8	198.9	201.0	203.0	204.1	208.3	210.4	213.5
72.5°	163.3	165.4	162.2	163.3	164.3	166.4	167.5	169.6	171.6	177.9	180.0
75°	130.8	129.8	128.7	132.9	130.8	135.0	136.1	136.1	138.2	143.4	145.5
77.5°	100.5	100.5	101.5	99.4	102.6	101.5	102.6	105.7	108.9	108.9	117.2
80°	70.1	72.2	72.2	72.2	73.3	74.3	72.2	77.5	78.5	78.5	81.6
82.5°	45.0	46.1	45.0	47.1	47.1	49.2	48.1	49.2	51.3	53.4	54.4
85°	24.1	24.1	26.2	26.2	25.1	26.2	25.1	26.2	28.3	28.3	29.3
87.5°	8.4	8.4	8.4	8.4	9.4	8.4	9.4	9.4	8.4	8.4	11.5
90°	6.3	6.8	7.4	9.1	10.8	12.5	14.2	13.6	14.2	14.8	15.3
92.5°	29.0	34.1	39.2	57.4	87.5	117.1	105.7	79.0	56.3	43.8	38.1
95°	51.7	62.8	73.9	122.2	206.8	300.0	337.0	273.3	204.6	138.6	108.5
97.5°	59.7	71.9	84.1	131.8	230.1	387.0	518.2	535.8	469.9	354.6	279.6
100°	68.2	79.2	90.3	130.1	214.2	363.7	538.1	650.0	669.9	623.9	557.4
102.5°	77.8	87.8	97.7	132.4	200.6	329.6	501.2	655.7	736.4	746.1	714.2
105°	88.6	97.4	106.3	136.9	195.5	302.9	456.8	619.9	738.7	795.5	806.3
107.5°	100.6	108.8	117.1	144.3	194.3	283.5	417.6	568.8	704.6	793.8	838.1
110°	112.5	120.4	128.4	154.0	197.2	273.3	385.3	521.1	651.2	755.7	827.3

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	125.0	132.6	140.3	163.6	202.9	267.6	363.7	479.6	598.3	705.7	788.1
115°	137.5	145.2	152.9	174.4	209.1	267.1	349.5	447.8	552.9	651.7	735.3
117.5°	150.0	157.1	164.2	185.8	217.1	267.6	339.8	426.7	517.6	605.2	681.9
120°	161.9	169.0	176.1	196.6	226.2	269.9	333.5	410.8	490.9	567.6	635.8
122.5°	172.7	180.4	188.1	208.0	234.7	273.9	329.6	397.8	469.9	537.5	599.5
125°	183.5	191.2	198.9	218.8	243.8	277.9	326.2	387.0	451.7	513.7	568.2
127.5°	193.8	201.4	209.1	228.4	251.2	282.4	324.5	376.7	435.3	491.5	541.5
130°	202.9	210.6	218.2	236.9	258.5	286.9	322.7	368.8	419.9	471.1	517.1
132.5°	211.4	218.8	226.2	244.3	265.4	290.4	322.2	361.4	405.7	451.7	493.8
135°	218.8	226.4	234.1	251.7	271.0	293.8	321.6	355.1	393.2	433.5	470.5
137.5°	225.6	232.7	239.8	256.8	275.6	296.0	320.5	349.5	381.3	415.4	448.3
140°	231.3	238.4	245.5	261.9	279.0	298.3	319.9	344.3	371.0	400.0	427.3
142.5°	236.9	243.4	250.0	265.9	282.4	300.0	318.8	339.8	361.4	385.3	408.0
145°	241.5	248.0	254.6	269.3	284.7	300.6	317.6	335.8	354.0	372.7	390.9
147.5°	247.2	252.8	258.5	272.2	286.4	300.6	315.9	331.8	347.7	363.1	378.4
150°	251.7	256.8	261.9	275.0	286.9	300.6	313.7	327.9	340.9	354.0	365.9
152.5°	256.3	261.1	265.9	276.7	288.1	298.9	310.8	323.3	334.7	345.5	355.7
155°	261.4	265.4	269.3	279.0	288.1	297.7	307.4	318.8	328.4	337.5	346.0
157.5°	265.9	269.0	272.2	280.1	288.7	296.0	304.6	313.7	321.6	329.6	336.4
160°	269.3	272.2	275.0	281.8	288.7	294.9	301.2	308.5	315.9	322.2	327.9
162.5°	272.2	274.4	276.7	282.4	288.1	292.6	297.7	303.4	309.1	314.2	319.3
165°	274.4	276.4	278.4	283.0	286.9	290.4	294.3	298.9	303.4	306.8	310.8
167.5°	276.7	278.2	279.6	283.0	286.4	288.1	290.9	294.3	298.3	301.2	303.4
170°	278.4	279.0	279.6	282.4	284.7	285.8	287.5	290.4	293.2	294.9	297.2
172.5°	279.6	279.8	280.1	282.4	284.1	284.1	284.7	286.4	288.7	289.8	291.5
175°	280.1	280.4	280.7	281.8	283.0	282.4	282.4	283.5	284.7	285.2	286.4
177.5°	280.7	280.7	280.7	281.3	282.4	281.3	280.7	281.3	281.8	282.4	283.0
180°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1
2.5°	1024.7	1025.7	1021.5	1018.4	1026.7	1021.5	1021.5	1022.6	1020.5	1023.6	1022.6
5°	967.1	968.1	960.8	962.9	958.7	957.7	956.6	962.9	961.9	960.8	962.9
7.5°	910.6	910.6	907.4	905.3	905.3	902.2	906.4	905.3	907.4	907.4	910.6
10°	863.5	865.6	860.3	855.1	854.1	855.1	855.1	856.1	857.2	864.5	863.5
12.5°	824.7	821.6	820.6	817.4	812.2	810.1	808.0	819.5	816.4	816.4	816.4
15°	781.8	789.2	788.1	778.7	776.6	780.8	778.7	778.7	789.2	788.1	787.1
17.5°	758.8	756.7	754.6	749.4	750.4	749.4	750.4	750.4	756.7	756.7	756.7
20°	732.6	728.5	728.5	726.4	726.4	723.2	727.4	728.5	732.6	732.6	733.7
22.5°	709.6	706.5	706.5	705.4	707.5	703.3	707.5	708.6	708.6	711.7	711.7
25°	689.7	687.6	687.6	689.7	689.7	689.7	689.7	693.9	690.8	691.8	690.8
27.5°	671.9	673.0	674.0	675.1	674.0	675.1	676.1	678.2	679.3	678.2	676.1
30°	655.2	658.3	659.4	659.4	661.5	662.5	663.6	663.6	664.6	661.5	663.6
32.5°	642.6	642.6	644.7	645.8	647.9	648.9	648.9	651.0	650.0	646.8	647.9
35°	624.8	624.8	629.0	631.1	634.3	633.2	634.3	634.3	635.3	633.2	630.1
37.5°	607.0	609.1	609.1	613.3	614.4	615.4	614.4	616.5	615.4	613.3	612.3
40°	586.1	585.1	586.1	589.3	590.3	590.3	590.3	592.4	592.4	592.4	591.3
42.5°	560.0	563.1	562.0	565.2	564.1	564.1	566.2	568.3	569.4	566.2	567.3
45°	534.8	534.8	536.9	536.9	538.0	538.0	542.2	540.1	542.2	540.1	541.1
47.5°	507.6	508.7	508.7	509.7	511.8	513.9	511.8	512.9	512.9	513.9	511.8
50°	477.3	477.3	479.4	482.5	486.7	484.6	483.5	487.7	484.6	484.6	482.5
52.5°	445.9	449.0	450.1	453.2	456.3	457.4	458.4	456.3	457.4	454.2	455.3
55°	415.5	416.6	420.7	423.9	427.0	427.0	426.0	427.0	428.1	423.9	423.9
57.5°	385.2	388.3	392.5	392.5	396.7	396.7	395.6	395.6	396.7	393.5	392.5
60°	352.7	355.9	361.1	361.1	367.4	368.4	366.3	364.2	364.2	361.1	362.1
62.5°	318.2	321.3	324.5	329.7	333.9	331.8	336.0	331.8	332.8	326.6	326.6
65°	287.8	288.9	294.1	299.3	299.3	301.4	299.3	300.4	297.2	297.2	293.1
67.5°	252.2	252.2	257.5	262.7	267.9	267.9	267.9	264.8	264.8	261.7	261.7
70°	220.8	219.8	225.0	228.2	231.3	232.4	230.3	229.2	227.1	224.0	222.9
72.5°	182.1	184.2	189.4	191.5	196.8	195.7	201.0	194.7	194.7	189.4	188.4
75°	147.6	149.7	154.9	158.0	161.2	161.2	164.3	161.2	157.0	154.9	153.9
77.5°	117.2	116.2	120.4	125.6	126.6	125.6	127.7	126.6	122.5	122.5	120.4
80°	83.7	86.9	91.1	90.0	94.2	93.2	93.2	91.1	91.1	87.9	90.0
82.5°	55.5	58.6	59.7	58.6	59.7	61.8	62.8	61.8	61.8	59.7	60.7
85°	29.3	29.3	31.4	32.4	31.4	31.4	32.4	35.6	33.5	31.4	33.5
87.5°	9.4	8.4	8.4	9.4	8.4	8.4	9.4	9.4	10.5	10.5	10.5
90°	15.9	16.5	15.9	16.5	17.0	16.5	17.0	16.5	15.9	16.5	15.9
92.5°	36.1	34.1	33.0	30.7	31.3	30.1	31.3	30.7	33.0	34.1	36.1
95°	98.3	88.1	77.3	72.2	68.2	65.9	68.2	72.2	77.3	88.1	98.3
97.5°	247.2	214.8	176.7	155.1	141.5	135.2	141.5	155.1	176.7	214.8	247.2
100°	517.0	476.7	419.3	377.9	355.7	356.3	355.7	377.9	419.3	476.7	517.0
102.5°	692.4	670.5	629.0	598.3	580.7	564.2	580.7	598.3	629.0	670.5	692.4
105°	798.9	791.5	765.4	743.8	725.6	722.8	725.6	743.8	765.4	791.5	798.9
107.5°	845.8	853.5	850.1	839.8	832.4	826.2	832.4	839.8	850.1	853.5	845.8
110°	847.2	867.1	883.0	887.6	886.4	885.3	886.4	887.6	883.0	867.1	847.2

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	815.1	842.1	874.5	891.0	896.6	897.2	896.6	891.0	874.5	842.1	815.1
115°	766.2	797.2	839.8	864.8	876.2	879.0	876.2	864.8	839.8	797.2	766.2
117.5°	714.0	746.1	790.4	818.2	835.3	839.3	835.3	818.2	790.4	746.1	714.0
120°	664.5	693.2	738.1	769.9	783.6	787.0	783.6	769.9	738.1	693.2	664.5
122.5°	625.6	651.7	690.4	718.2	733.6	738.1	733.6	718.2	690.4	651.7	625.6
125°	591.0	613.7	650.0	675.0	689.2	693.2	689.2	675.0	650.0	613.7	591.0
127.5°	562.6	583.6	616.5	638.1	651.2	654.6	651.2	638.1	616.5	583.6	562.6
130°	536.4	555.7	585.8	606.3	618.2	622.8	618.2	606.3	585.8	555.7	536.4
132.5°	512.0	530.1	558.0	578.4	588.7	591.5	588.7	578.4	558.0	530.1	512.0
135°	486.7	502.9	530.7	547.8	558.0	562.0	558.0	547.8	530.7	502.9	486.7
137.5°	462.8	477.3	501.2	518.8	527.3	530.7	527.3	518.8	501.2	477.3	462.8
140°	439.5	451.7	473.3	489.2	498.3	497.8	498.3	489.2	473.3	451.7	439.5
142.5°	418.2	428.4	446.0	459.7	467.6	467.1	467.6	459.7	446.0	428.4	418.2
145°	399.2	407.4	421.6	433.5	438.1	439.2	438.1	433.5	421.6	407.4	399.2
147.5°	384.4	390.4	401.7	410.3	414.8	415.4	414.8	410.3	401.7	390.4	384.4
150°	371.3	376.7	385.3	391.5	394.9	394.9	394.9	391.5	385.3	376.7	371.3
152.5°	360.0	364.2	370.5	376.2	377.9	377.9	377.9	376.2	370.5	364.2	360.0
155°	349.4	352.9	358.0	362.5	363.7	364.2	363.7	362.5	358.0	352.9	349.4
157.5°	339.2	342.1	346.6	350.0	351.2	351.2	351.2	350.0	346.6	342.1	339.2
160°	329.8	331.8	335.8	339.2	339.2	338.7	339.2	339.2	335.8	331.8	329.8
162.5°	321.0	322.7	325.0	327.9	327.9	327.3	327.9	327.9	325.0	322.7	321.0
165°	312.2	313.7	315.9	318.2	317.6	317.6	317.6	318.2	315.9	313.7	312.2
167.5°	304.5	305.7	306.8	308.5	308.0	308.0	308.0	308.5	306.8	305.7	304.5
170°	297.8	298.3	298.9	300.0	299.5	299.5	299.5	300.0	298.9	298.3	297.8
172.5°	291.8	292.1	292.1	293.2	292.1	291.5	292.1	293.2	292.1	292.1	291.8
175°	286.4	286.4	286.4	286.9	286.4	285.8	286.4	286.9	286.4	286.4	286.4
177.5°	283.0	283.0	282.4	283.0	281.8	281.8	281.8	283.0	282.4	283.0	283.0
180°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1	1080.1
2.5°	1025.7	1027.8	1028.8	1024.7	1021.5	1026.7	1034.1	1039.3	1043.5	1048.7	1051.9
5°	965.0	972.3	972.3	974.4	977.6	982.8	996.4	1005.8	1014.2	1020.5	1025.7
7.5°	913.7	918.9	922.1	927.3	932.6	939.9	955.6	969.2	981.7	989.1	997.4
10°	867.7	871.8	877.1	880.2	889.6	900.1	920.0	931.5	946.2	957.7	968.1
12.5°	823.7	838.4	841.5	840.4	848.8	860.3	880.2	898.0	913.7	925.2	936.7
15°	792.3	797.5	803.8	802.8	820.6	823.7	840.4	861.4	882.3	889.6	900.1
17.5°	757.8	766.1	772.4	775.6	780.8	792.3	808.0	823.7	850.9	852.0	879.2
20°	730.6	738.9	743.1	747.3	750.4	764.0	777.7	795.4	817.4	828.9	843.6
22.5°	712.8	716.9	720.1	723.2	727.4	734.7	751.5	771.4	786.0	798.6	808.0
25°	691.8	696.0	700.2	702.3	705.4	709.6	722.2	737.9	758.8	767.2	776.6
27.5°	677.2	677.2	679.3	679.3	683.5	687.6	697.1	711.7	728.5	738.9	751.5
30°	661.5	660.4	661.5	660.4	659.4	665.7	674.0	686.6	698.1	710.7	719.0
32.5°	645.8	644.7	644.7	645.8	641.6	644.7	648.9	660.4	673.0	679.3	688.7
35°	629.0	626.9	626.9	626.9	624.8	622.7	626.9	637.4	645.8	654.1	661.5
37.5°	612.3	609.1	609.1	607.0	605.0	601.8	601.8	610.2	621.7	624.8	634.3
40°	589.3	589.3	587.2	586.1	584.0	581.9	578.8	586.1	596.6	599.7	607.0
42.5°	566.2	563.1	562.0	562.0	562.0	558.9	556.8	562.0	568.3	573.6	577.7
45°	540.1	538.0	539.0	538.0	535.9	534.8	533.8	535.9	543.2	545.3	550.5
47.5°	511.8	510.8	510.8	509.7	508.7	509.7	505.5	510.8	512.9	514.9	519.1
50°	482.5	481.5	480.4	479.4	479.4	480.4	479.4	479.4	483.5	485.6	489.8
52.5°	453.2	450.1	450.1	449.0	449.0	446.9	449.0	450.1	452.1	454.2	456.3
55°	421.8	421.8	418.7	418.7	416.6	416.6	417.6	416.6	420.7	422.8	422.8
57.5°	391.4	387.3	388.3	386.2	384.1	383.1	383.1	385.2	387.3	387.3	389.3
60°	359.0	354.8	353.8	349.6	351.7	348.5	349.6	349.6	353.8	351.7	353.8
62.5°	326.6	321.3	318.2	316.1	316.1	317.1	315.0	314.0	316.1	318.2	322.4
65°	292.0	288.9	285.7	282.6	282.6	281.5	283.6	280.5	279.5	280.5	282.6
67.5°	256.4	253.3	250.1	247.0	248.1	244.9	242.8	246.0	243.9	244.9	247.0
70°	221.9	219.8	213.5	211.4	210.4	211.4	210.4	208.3	211.4	210.4	211.4
72.5°	187.3	185.3	182.1	176.9	176.9	175.8	174.8	174.8	173.7	173.7	173.7
75°	153.9	149.7	146.5	145.5	143.4	142.3	141.3	139.2	140.2	141.3	139.2
77.5°	119.3	114.1	113.0	113.0	109.9	109.9	110.9	109.9	108.9	108.9	108.9
80°	87.9	83.7	83.7	81.6	79.5	79.5	79.5	79.5	78.5	77.5	78.5
82.5°	56.5	55.5	54.4	54.4	56.5	52.3	54.4	53.4	52.3	52.3	51.3
85°	31.4	32.4	31.4	32.4	30.4	31.4	31.4	31.4	30.4	31.4	29.3
87.5°	11.5	11.5	11.5	12.6	12.6	12.6	12.6	12.6	13.6	12.6	12.6
90°	15.3	14.8	14.2	13.6	14.2	12.5	10.8	9.1	7.4	6.8	6.3
92.5°	38.1	43.8	56.3	79.0	105.7	117.1	87.5	57.4	39.2	34.1	29.0
95°	108.5	138.6	204.6	273.3	337.0	300.0	206.8	122.2	73.9	62.8	51.7
97.5°	279.6	354.6	469.9	535.8	518.2	387.0	230.1	131.8	84.1	71.9	59.7
100°	557.4	623.9	669.9	650.0	538.1	363.7	214.2	130.1	90.3	79.2	68.2
102.5°	714.2	746.1	736.4	655.7	501.2	329.6	200.6	132.4	97.7	87.8	77.8
105°	806.3	795.5	738.7	619.9	456.8	302.9	195.5	136.9	106.3	97.4	88.6
107.5°	838.1	793.8	704.6	568.8	417.6	283.5	194.3	144.3	117.1	108.8	100.6
110°	827.3	755.7	651.2	521.1	385.3	273.3	197.2	154.0	128.4	120.4	112.5

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	788.1	705.7	598.3	479.6	363.7	267.6	202.9	163.6	140.3	132.6	125.0
115°	735.3	651.7	552.9	447.8	349.5	267.1	209.1	174.4	152.9	145.2	137.5
117.5°	681.9	605.2	517.6	426.7	339.8	267.6	217.1	185.8	164.2	157.1	150.0
120°	635.8	567.6	490.9	410.8	333.5	269.9	226.2	196.6	176.1	169.0	161.9
122.5°	599.5	537.5	469.9	397.8	329.6	273.9	234.7	208.0	188.1	180.4	172.7
125°	568.2	513.7	451.7	387.0	326.2	277.9	243.8	218.8	198.9	191.2	183.5
127.5°	541.5	491.5	435.3	376.7	324.5	282.4	251.2	228.4	209.1	201.4	193.8
130°	517.1	471.1	419.9	368.8	322.7	286.9	258.5	236.9	218.2	210.6	202.9
132.5°	493.8	451.7	405.7	361.4	322.2	290.4	265.4	244.3	226.2	218.8	211.4
135°	470.5	433.5	393.2	355.1	321.6	293.8	271.0	251.7	234.1	226.4	218.8
137.5°	448.3	415.4	381.3	349.5	320.5	296.0	275.6	256.8	239.8	232.7	225.6
140°	427.3	400.0	371.0	344.3	319.9	298.3	279.0	261.9	245.5	238.4	231.3
142.5°	408.0	385.3	361.4	339.8	318.8	300.0	282.4	265.9	250.0	243.4	236.9
145°	390.9	372.7	354.0	335.8	317.6	300.6	284.7	269.3	254.6	248.0	241.5
147.5°	378.4	363.1	347.7	331.8	315.9	300.6	286.4	272.2	258.5	252.8	247.2
150°	365.9	354.0	340.9	327.9	313.7	300.6	286.9	275.0	261.9	256.8	251.7
152.5°	355.7	345.5	334.7	323.3	310.8	298.9	288.1	276.7	265.9	261.1	256.3
155°	346.0	337.5	328.4	318.8	307.4	297.7	288.1	279.0	269.3	265.4	261.4
157.5°	336.4	329.6	321.6	313.7	304.6	296.0	288.7	280.1	272.2	269.0	265.9
160°	327.9	322.2	315.9	308.5	301.2	294.9	288.7	281.8	275.0	272.2	269.3
162.5°	319.3	314.2	309.1	303.4	297.7	292.6	288.1	282.4	276.7	274.4	272.2
165°	310.8	306.8	303.4	298.9	294.3	290.4	286.9	283.0	278.4	276.4	274.4
167.5°	303.4	301.2	298.3	294.3	290.9	288.1	286.4	283.0	279.6	278.2	276.7
170°	297.2	294.9	293.2	290.4	287.5	285.8	284.7	282.4	279.6	279.0	278.4
172.5°	291.5	289.8	288.7	286.4	284.7	284.1	284.1	282.4	280.1	279.8	279.6
175°	286.4	285.2	284.7	283.5	282.4	282.4	283.0	281.8	280.7	280.4	280.1
177.5°	283.0	282.4	281.8	281.3	280.7	281.3	282.4	281.3	280.7	280.7	280.7
180°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7

TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1080.1	1080.1	1080.1	1080.1
2.5°	1057.1	1060.2	1070.7	1083.3
5°	1036.2	1044.5	1059.2	1079.1
7.5°	1013.1	1025.7	1046.6	1071.8
10°	987.0	1004.8	1030.9	1062.3
12.5°	958.7	981.7	1015.2	1047.7
15°	940.9	964.0	994.3	1029.9
17.5°	906.4	933.6	965.0	1015.2
20°	870.8	901.2	942.0	992.2
22.5°	843.6	876.0	914.8	968.1
25°	811.1	844.6	886.5	942.0
27.5°	776.6	810.1	857.2	915.8
30°	750.4	782.9	827.9	890.7
32.5°	719.0	750.4	797.5	863.5
35°	683.5	719.0	764.0	831.0
37.5°	656.2	688.7	735.8	799.6
40°	626.9	655.2	701.2	764.0
42.5°	595.5	626.9	666.7	729.5
45°	566.2	589.3	630.1	689.7
47.5°	534.8	561.0	592.4	638.4
50°	501.3	523.3	557.9	589.3
52.5°	468.9	486.7	516.0	540.1
55°	434.4	452.1	474.1	488.8
57.5°	401.9	414.5	429.1	438.5
60°	362.1	374.7	384.1	393.5
62.5°	326.6	336.0	341.2	346.4
65°	289.9	295.2	298.3	302.5
67.5°	250.1	255.4	256.4	262.7
70°	213.5	214.6	216.7	219.8
72.5°	179.0	181.1	180.0	182.1
75°	143.4	145.5	143.4	145.5
77.5°	108.9	110.9	110.9	114.1
80°	78.5	79.5	80.6	80.6
82.5°	51.3	54.4	52.3	53.4
85°	29.3	30.4	30.4	31.4
87.5°	13.6	14.7	13.6	15.7
90°	5.1	3.4	2.3	1.1
92.5°	23.3	18.2	12.5	8.5
95°	36.9	27.3	21.0	19.3
97.5°	44.9	36.4	31.3	30.7
100°	54.5	46.6	42.6	42.0
102.5°	65.9	58.5	55.1	54.0
105°	77.8	71.0	67.6	65.9
107.5°	90.3	83.5	80.1	78.4
110°	102.8	96.6	93.8	92.1



TEST NUMBER: P1012056

CATALOG NUMBER: S123DIP-B775D585UB40-4F0-XX-W2A-A4

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	115.3	109.1	106.3	104.6
115°	127.8	122.2	118.8	116.5
117.5°	139.2	134.1	131.3	128.4
120°	151.1	145.5	142.6	140.9
122.5°	162.5	156.3	153.4	151.7
125°	172.7	166.5	163.1	161.9
127.5°	181.8	175.6	171.6	169.9
130°	190.9	184.1	179.0	177.3
132.5°	199.4	190.9	185.2	183.0
135°	206.8	198.3	192.1	189.8
137.5°	213.6	204.6	198.3	196.0
140°	219.9	210.8	205.1	202.3
142.5°	225.6	217.6	211.4	209.1
145°	231.8	223.3	218.2	216.5
147.5°	237.5	230.1	225.0	223.9
150°	243.8	236.4	231.8	231.3
152.5°	249.4	243.2	238.7	238.7
155°	255.1	249.4	246.0	246.0
157.5°	260.2	255.1	252.3	251.7
160°	265.4	260.8	258.5	258.5
162.5°	268.8	265.4	263.7	263.7
165°	272.2	269.3	268.2	268.8
167.5°	275.0	272.7	272.2	272.7
170°	277.3	275.6	275.0	276.2
172.5°	279.0	277.9	277.9	278.4
175°	280.1	279.0	279.6	280.1
177.5°	280.7	280.1	280.7	281.3
180°	280.7	280.7	280.7	280.7

(END OF REPORT)