

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1012717

Luminaire Tested: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1012717
REPORT IS A COMBINATION OF REPORTS P993548 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1
Description: Define 3 Regressed Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865}
{m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6513.0 lumens
Efficiency: N/A
Efficacy: 101.1 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.2 / 1.34
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 64.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

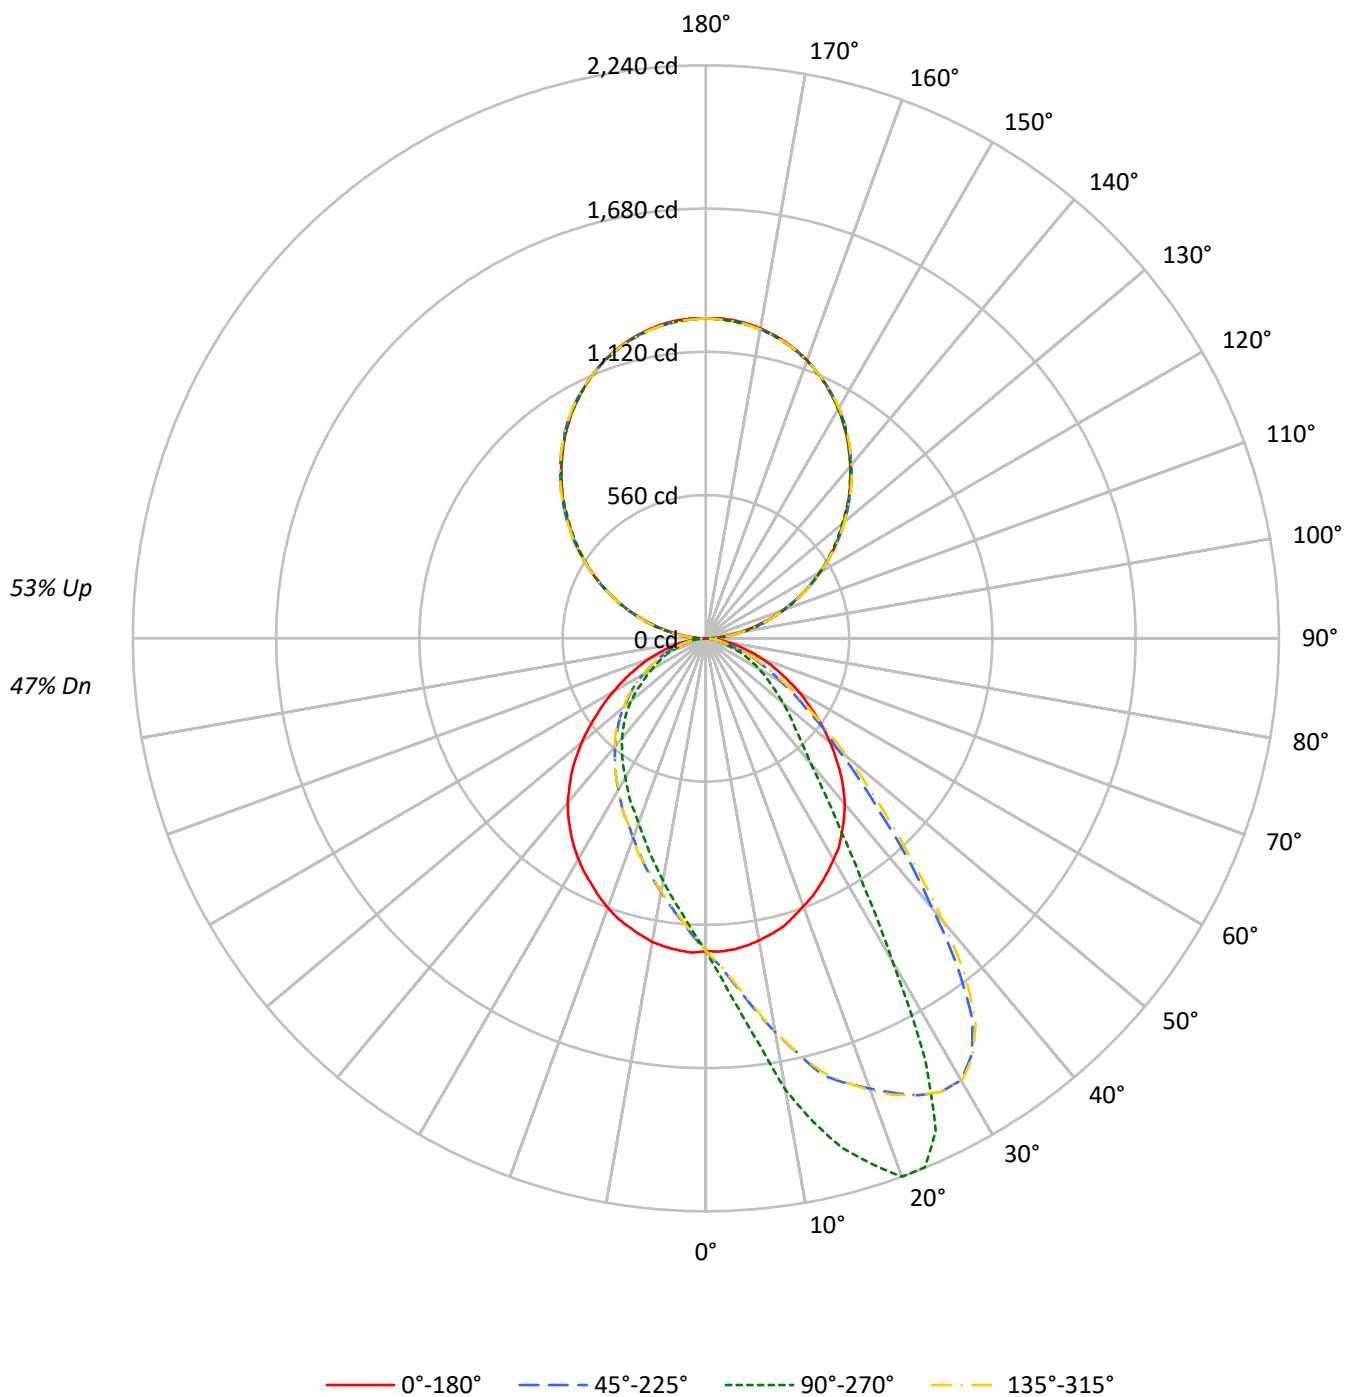

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53
1	98	94	90	87	90	86	83	80	72	70	68	60	58	57	48	47	46
2	89	82	76	72	82	76	71	67	64	60	57	53	50	48	43	41	40
3	82	73	66	60	75	67	61	56	57	52	49	47	44	41	38	36	34
4	75	65	57	51	69	60	53	48	51	46	42	42	39	36	35	32	30
5	69	58	50	44	63	54	47	42	46	41	36	38	34	31	31	29	26
6	64	52	44	39	59	48	41	36	41	36	32	35	31	28	29	26	24
7	59	47	39	34	54	44	37	32	38	32	28	32	28	25	26	23	21
8	55	43	35	30	50	40	33	29	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	37	30	26	32	26	23	27	23	20	22	19	17
10	48	36	29	24	44	34	27	23	29	24	21	25	21	18	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13159	13159	13159	13159
5°	13168	15155	13203	11244
10°	13052	18294	13110	9821
15°	12918	20763	12918	8659
20°	12653	22396	12724	7681
25°	12459	21277	12435	7009
30°	12234	14742	12208	6351
35°	11962	9466	11908	5855
40°	11624	6684	11566	5362
45°	11036	5349	11021	4882
50°	10314	4475	10280	4321
55°	9502	3688	9426	3663
60°	8704	3048	8617	3114
65°	7767	2439	7818	2640
70°	6903	1694	7088	2134
75°	5854	1258	6090	1642
80°	4658	834	5054	1231
85°	3314	395	3621	765

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 30°

Vertical Angle: 45°

Luminance: 17567 cd/sqm

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.1	1.8
10°-20°	375.8	5.8
20°-30°	591.9	9.1
30°-40°	615.5	9.4
40°-50°	526.5	8.1
50°-60°	401.4	6.2
60°-70°	257.2	3.9
70°-80°	123.2	1.9
80°-90°	35.0	0.5
90°-100°	80.5	1.2
100°-110°	243.7	3.7
110°-120°	415.0	6.4
120°-130°	545.9	8.4
130°-140°	613.6	9.4
140°-150°	603.2	9.3
150°-160°	507.9	7.8
160°-170°	338.1	5.2
170°-180°	118.4	1.8
0°-30°	1087.7	16.7
0°-40°	1703.2	26.2
0°-60°	2631.2	40.4
0°-90°	3046.6	46.8
90°-120°	739.2	11.4
90°-150°	2502.0	38.4
90°-180°	3466.0	53.2
0°-180°	6513.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1222	1222	1222	1222	1222	
5°	1221	1452	1225	1077	1221	116
15°	1167	2063	1167	860	1167	328
25°	1061	2126	1059	700	1061	489
35°	926	922	922	570	926	580
45°	743	492	742	449	743	572
55°	524	309	520	307	524	470
65°	321	178	323	193	321	321
75°	154	75	160	98	154	166
85°	34	18	38	34	34	39
90°	1	30	1	30	1	6
95°	58	77	58	77	58	64
105°	221	234	221	234	221	237
115°	418	419	418	419	418	413
125°	611	604	611	604	611	545
135°	793	792	793	792	793	611
145°	962	962	962	962	962	601
155°	1102	1100	1102	1100	1102	507
165°	1200	1196	1200	1196	1200	338
175°	1248	1243	1248	1243	1248	119
180°	1251	1251	1251	1251	1251	

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5
2.5°	1225.6	1234.0	1240.3	1244.4	1254.9	1261.2	1266.4	1275.8	1275.8	1277.9	1282.1
5°	1221.4	1239.2	1251.8	1268.5	1290.5	1301.0	1315.6	1328.2	1346.0	1355.4	1364.8
7.5°	1212.0	1237.1	1263.3	1288.4	1320.8	1341.8	1356.4	1388.9	1411.9	1440.2	1462.1
10°	1199.4	1234.0	1267.5	1306.2	1350.2	1381.6	1403.5	1446.4	1490.4	1530.2	1563.7
12.5°	1183.7	1225.6	1273.7	1320.8	1382.6	1414.0	1449.6	1503.0	1565.8	1616.0	1661.0
15°	1167.0	1215.1	1269.6	1327.1	1404.6	1448.5	1499.8	1564.7	1634.8	1707.1	1768.8
17.5°	1140.8	1201.5	1262.2	1346.0	1437.0	1463.2	1507.1	1596.1	1683.0	1747.9	1823.2
20°	1114.7	1182.7	1259.1	1334.5	1432.8	1493.5	1534.4	1628.6	1721.7	1800.2	1872.4
22.5°	1090.6	1161.8	1241.3	1336.5	1428.6	1489.4	1540.6	1639.0	1746.8	1834.7	1923.7
25°	1061.3	1138.7	1226.6	1316.7	1428.6	1474.7	1531.2	1645.3	1759.4	1860.9	1970.8
27.5°	1029.9	1108.4	1195.3	1287.4	1389.9	1458.0	1513.4	1635.9	1775.1	1883.9	1997.0
30°	998.5	1079.1	1162.8	1245.5	1360.6	1425.5	1489.4	1624.4	1783.5	1908.0	1994.9
32.5°	968.1	1036.2	1118.8	1199.4	1313.5	1384.7	1456.9	1612.9	1786.6	1891.3	1933.1
35°	926.3	997.4	1064.4	1150.2	1265.4	1335.5	1420.3	1611.8	1773.0	1837.9	1816.9
37.5°	887.5	947.2	1011.0	1087.4	1205.7	1296.8	1384.7	1584.6	1728.0	1732.2	1613.9
40°	844.6	893.8	947.2	1027.8	1155.5	1245.5	1340.7	1542.7	1646.3	1584.6	1376.3
42.5°	795.4	839.4	881.3	959.8	1099.0	1199.4	1302.0	1490.4	1528.1	1385.7	1169.1
45°	743.1	778.7	817.4	900.1	1039.3	1138.7	1241.3	1409.8	1371.1	1170.1	963.9
47.5°	688.7	719.0	756.7	832.1	975.5	1077.0	1174.3	1294.7	1196.3	980.7	808.0
50°	634.3	658.3	695.0	772.4	910.6	1002.7	1092.7	1171.2	1033.0	841.5	667.7
52.5°	580.9	599.7	637.4	703.3	837.3	925.2	990.1	1020.5	880.2	695.0	579.8
55°	524.4	545.3	570.4	637.4	770.3	835.2	878.1	877.1	732.6	589.3	479.4
57.5°	469.9	488.8	510.8	577.7	685.5	729.5	766.1	748.3	611.2	482.5	411.3
60°	421.8	432.3	456.3	512.8	594.5	632.2	653.1	622.7	499.2	407.1	340.2
62.5°	369.5	379.9	399.8	453.2	503.4	523.3	541.1	502.4	412.4	331.8	291.0
65°	321.3	334.9	347.5	390.4	417.6	441.7	439.6	407.1	322.4	270.0	236.5
67.5°	279.4	284.7	295.1	321.3	333.9	351.7	352.7	316.1	259.6	219.8	199.9
70°	234.4	239.7	247.0	259.6	267.9	272.1	270.0	237.6	195.7	171.6	153.9
72.5°	195.7	194.7	199.9	199.9	208.3	207.2	201.0	175.8	148.6	128.7	118.3
75°	153.9	154.9	155.9	153.9	150.7	146.5	141.3	122.5	104.7	95.2	85.8
77.5°	120.4	118.3	119.3	112.0	107.8	103.6	96.3	86.9	72.2	70.1	65.9
80°	85.8	84.8	83.7	80.6	71.2	67.0	61.8	56.5	53.4	51.3	50.2
82.5°	57.6	57.6	55.5	49.2	44.0	40.8	39.8	37.7	34.5	34.5	33.5
85°	34.5	33.5	31.4	25.1	22.0	22.0	22.0	22.0	19.9	19.9	18.8
87.5°	13.6	12.6	9.4	9.4	8.4	8.4	8.4	7.3	7.3	6.3	6.3
90°	1.0	3.2	5.4	7.5	9.7	10.8	12.2	15.1	17.9	20.8	23.6
92.5°	29.5	30.8	32.1	33.4	34.7	35.4	36.1	37.4	38.7	40.0	41.3
95°	58.0	59.5	61.1	62.6	64.1	64.9	65.8	67.5	69.2	71.0	72.7
97.5°	95.3	96.4	97.5	98.6	99.7	100.2	100.9	102.2	103.5	104.8	106.1
100°	133.7	135.0	136.3	137.6	138.9	139.5	140.1	141.2	142.3	143.4	144.5
102.5°	177.9	178.5	179.2	179.8	180.5	180.8	181.6	183.1	184.6	186.2	187.7
105°	221.1	221.5	222.0	222.4	222.9	223.1	224.1	226.0	228.0	229.9	231.9
107.5°	272.2	272.4	272.6	272.9	273.1	273.2	273.6	274.5	275.4	276.2	277.1
110°	319.4	319.8	320.3	320.7	321.2	321.4	321.6	322.0	322.5	322.9	323.3

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	368.5	368.7	368.9	369.2	369.4	369.5	369.5	369.5	369.5	369.5	369.5
115°	417.7	418.3	419.0	419.6	420.3	420.6	420.4	419.9	419.5	419.0	418.6
117.5°	467.8	468.0	468.2	468.5	468.7	468.8	468.6	468.1	467.7	467.2	466.8
120°	514.0	515.3	516.6	517.9	519.2	519.9	519.4	518.3	517.2	516.1	515.0
122.5°	562.1	563.0	563.9	564.8	565.7	566.1	565.9	565.4	565.0	564.5	564.1
125°	611.3	611.9	612.6	613.2	613.9	614.2	614.0	613.5	613.1	612.6	612.2
127.5°	656.5	657.8	659.1	660.4	661.7	662.4	662.2	661.7	661.3	660.8	660.4
130°	701.7	703.4	705.2	706.9	708.6	709.5	709.2	708.5	707.9	707.2	706.6
132.5°	746.9	748.6	750.4	752.1	753.8	754.7	754.5	754.1	753.6	753.2	752.8
135°	793.1	794.4	795.7	797.0	798.3	799.0	798.9	798.7	798.4	798.2	798.0
137.5°	835.3	836.4	837.5	838.6	839.7	840.2	840.5	841.2	841.9	842.5	843.2
140°	879.5	880.6	881.7	882.8	883.9	884.5	884.6	884.8	885.0	885.2	885.4
142.5°	919.8	920.9	922.0	923.1	924.2	924.8	925.0	925.4	925.9	926.3	926.7
145°	962.1	962.5	963.0	963.4	963.9	964.1	964.4	965.1	965.7	966.4	967.0
147.5°	998.5	999.4	1000.2	1001.1	1002.0	1002.4	1002.7	1003.4	1004.0	1004.7	1005.3
150°	1036.8	1037.2	1037.7	1038.1	1038.6	1038.8	1039.0	1039.4	1039.9	1040.3	1040.7
152.5°	1068.2	1068.9	1069.5	1070.2	1070.9	1071.2	1071.3	1071.5	1071.8	1072.0	1072.2
155°	1101.6	1101.6	1101.6	1101.6	1101.6	1101.6	1101.7	1101.9	1102.2	1102.4	1102.6
157.5°	1130.1	1129.9	1129.7	1129.5	1129.3	1129.2	1129.3	1129.5	1129.7	1129.9	1130.1
160°	1156.7	1156.3	1155.8	1155.4	1154.9	1154.7	1154.7	1154.7	1154.7	1154.7	1154.7
162.5°	1180.3	1179.6	1179.0	1178.3	1177.6	1177.3	1177.4	1177.6	1177.9	1178.1	1178.3
165°	1199.9	1199.3	1198.6	1198.0	1197.3	1197.0	1197.0	1197.0	1197.0	1197.0	1197.0
167.5°	1216.6	1215.7	1214.9	1214.0	1213.1	1212.7	1212.8	1213.0	1213.3	1213.5	1213.7
170°	1230.4	1229.5	1228.7	1227.8	1226.9	1226.5	1226.5	1226.5	1226.5	1226.5	1226.5
172.5°	1241.2	1240.3	1239.5	1238.6	1237.7	1237.3	1237.3	1237.3	1237.3	1237.3	1237.3
175°	1248.1	1247.2	1246.3	1245.4	1244.5	1244.1	1244.1	1244.1	1244.1	1244.1	1244.1
177.5°	1252.0	1251.1	1250.3	1249.4	1248.5	1248.1	1248.1	1248.1	1248.1	1248.1	1248.1
180°	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5
2.5°	1290.5	1290.5	1299.9	1309.3	1304.1	1307.2	1318.8	1314.6	1322.9	1321.9	1325.0
5°	1387.8	1399.3	1408.8	1428.6	1431.8	1428.6	1448.5	1453.8	1463.2	1451.7	1456.9
7.5°	1497.7	1521.8	1544.8	1574.1	1583.5	1585.6	1596.1	1610.8	1623.3	1600.3	1611.8
10°	1604.5	1641.1	1688.2	1714.4	1737.4	1745.8	1754.2	1763.6	1778.2	1791.8	1781.4
12.5°	1719.6	1773.0	1818.0	1865.1	1893.4	1890.2	1914.3	1920.6	1932.1	1935.2	1939.4
15°	1813.8	1889.2	1917.4	1987.5	1993.8	2014.8	2042.0	2066.0	2069.2	2062.9	2062.9
17.5°	1903.8	1968.7	2018.9	2075.5	2087.0	2104.8	2139.3	2150.8	2155.0	2154.0	2154.0
20°	1977.1	2020.0	2104.8	2151.9	2170.7	2193.7	2217.8	2232.5	2235.6	2239.8	2233.5
22.5°	2025.2	2090.1	2159.2	2197.9	2213.6	2222.0	2237.7	2241.9	2236.6	2237.7	2238.7
25°	2062.9	2126.8	2168.6	2179.1	2178.0	2167.6	2156.1	2136.2	2134.1	2125.7	2109.0
27.5°	2073.4	2097.4	2092.2	2049.3	2006.4	2002.2	1933.1	1895.4	1852.5	1858.8	1834.7
30°	2016.9	1985.5	1911.1	1802.3	1757.3	1684.0	1606.6	1526.0	1494.6	1460.0	1523.9
32.5°	1878.7	1766.7	1634.8	1493.5	1418.2	1353.3	1270.6	1212.0	1178.5	1150.2	1204.7
35°	1670.4	1495.6	1320.8	1186.9	1125.1	1066.5	989.1	959.8	917.9	922.1	927.3
37.5°	1402.5	1209.9	1078.0	946.2	905.3	881.3	824.7	779.7	765.1	760.9	760.9
40°	1151.3	993.3	876.0	772.4	741.0	721.1	676.1	655.2	639.5	635.3	640.5
42.5°	952.4	817.4	726.4	657.3	635.3	610.2	591.3	565.2	562.0	554.7	564.1
45°	799.6	682.4	614.4	564.1	545.3	535.9	514.9	499.2	493.0	491.9	499.2
47.5°	678.2	587.2	527.5	496.1	481.4	472.0	454.2	448.0	441.7	443.8	440.6
50°	569.4	501.3	462.6	434.4	424.9	415.5	404.0	397.7	394.6	394.6	393.5
52.5°	488.8	432.3	407.1	381.0	376.8	371.6	359.0	354.8	349.6	348.5	352.7
55°	418.7	379.9	354.8	339.1	334.9	324.5	319.2	314.0	310.8	308.8	309.8
57.5°	357.9	328.6	311.9	298.3	291.0	286.8	277.4	276.3	274.2	274.2	273.2
60°	307.7	286.8	266.9	258.5	253.3	248.1	247.0	240.7	237.6	239.7	238.6
62.5°	260.6	243.9	232.4	222.9	219.8	215.6	212.5	210.4	207.2	208.3	208.3
65°	217.7	204.1	195.7	187.3	186.3	182.1	181.1	179.0	179.0	177.9	180.0
67.5°	179.0	169.6	162.2	157.0	153.9	154.9	150.7	147.6	147.6	146.5	149.7
70°	142.3	137.1	129.8	123.5	119.3	119.3	114.1	113.0	113.0	113.0	112.0
72.5°	109.9	100.5	97.3	95.2	95.2	95.2	93.1	93.1	92.1	93.1	92.1
75°	81.6	80.6	78.5	77.5	77.5	76.4	75.4	75.4	75.4	75.4	75.4
77.5°	63.8	63.8	61.8	60.7	60.7	60.7	59.7	59.7	58.6	58.6	58.6
80°	47.1	47.1	45.0	45.0	45.0	44.0	44.0	44.0	45.0	44.0	44.0
82.5°	32.4	32.4	31.4	32.4	31.4	30.4	30.4	30.4	29.3	30.4	30.4
85°	18.8	18.8	17.8	16.7	17.8	17.8	16.7	17.8	16.7	17.8	16.7
87.5°	7.3	6.3	6.3	6.3	5.2	6.3	5.2	5.2	6.3	5.2	6.3
90°	24.5	25.3	26.2	27.1	27.5	27.7	28.2	28.6	29.1	29.5	29.1
92.5°	41.9	42.6	43.2	43.9	44.2	44.0	43.6	43.1	42.7	42.3	42.7
95°	73.6	74.5	75.4	76.3	76.7	76.7	76.7	76.7	76.7	76.7	76.7
97.5°	107.2	108.3	109.4	110.5	111.0	110.9	110.7	110.5	110.3	110.1	110.3
100°	145.1	145.8	146.4	147.1	147.4	147.6	148.1	148.5	149.0	149.4	149.0
102.5°	188.4	189.0	189.7	190.4	190.7	190.6	190.4	190.1	189.9	189.7	189.9
105°	231.9	231.9	231.9	231.9	231.9	232.1	232.6	233.0	233.5	233.9	233.5
107.5°	277.8	278.4	279.1	279.8	280.1	280.0	279.8	279.5	279.3	279.1	279.3
110°	324.2	325.1	326.0	326.9	327.3	327.1	326.6	326.2	325.7	325.3	325.7

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	370.6	371.7	372.8	373.9	374.4	374.4	374.4	374.4	374.4	374.4	374.4
115°	418.8	419.0	419.3	419.5	419.6	419.5	419.3	419.0	418.8	418.6	418.8
117.5°	466.8	466.8	466.8	466.8	466.8	466.5	465.8	465.2	464.5	463.9	464.5
120°	514.8	514.6	514.3	514.1	514.0	513.8	513.3	512.9	512.4	512.0	512.4
122.5°	563.4	562.8	562.1	561.4	561.1	560.8	560.1	559.5	558.8	558.2	558.8
125°	611.3	610.5	609.6	608.7	608.3	607.9	607.0	606.1	605.3	604.4	605.3
127.5°	659.1	657.8	656.5	655.2	654.5	654.1	653.2	652.3	651.5	650.6	651.5
130°	705.7	704.9	704.0	703.1	702.7	701.9	700.4	698.9	697.3	695.8	697.3
132.5°	751.7	750.6	749.5	748.4	747.9	747.3	746.2	745.1	744.0	742.9	744.0
135°	797.1	796.3	795.4	794.5	794.1	793.9	793.4	793.0	792.5	792.1	792.5
137.5°	842.1	841.0	839.9	838.8	838.3	838.0	837.3	836.6	836.0	835.3	836.0
140°	885.2	885.0	884.8	884.6	884.5	883.7	882.2	880.7	879.1	877.6	879.1
142.5°	926.5	926.3	926.0	925.8	925.7	925.2	924.1	923.0	921.9	920.8	921.9
145°	966.8	966.6	966.3	966.1	966.0	965.6	964.7	963.8	963.0	962.1	963.0
147.5°	1005.3	1005.3	1005.3	1005.3	1005.3	1004.6	1003.3	1002.0	1000.7	999.4	1000.7
150°	1040.7	1040.7	1040.7	1040.7	1040.7	1040.0	1038.7	1037.4	1036.1	1034.8	1036.1
152.5°	1072.6	1073.0	1073.5	1073.9	1074.1	1073.6	1072.5	1071.4	1070.3	1069.2	1070.3
155°	1103.5	1104.4	1105.3	1106.2	1106.6	1105.8	1104.3	1102.8	1101.2	1099.7	1101.2
157.5°	1131.0	1131.9	1132.8	1133.7	1134.1	1133.4	1132.1	1130.8	1129.5	1128.2	1129.5
160°	1155.8	1156.9	1158.0	1159.1	1159.6	1159.2	1158.3	1157.4	1156.6	1155.7	1156.6
162.5°	1179.4	1180.5	1181.6	1182.7	1183.2	1182.4	1180.9	1179.4	1177.8	1176.3	1177.8
165°	1198.3	1199.6	1200.9	1202.2	1202.9	1202.1	1200.6	1199.1	1197.5	1196.0	1197.5
167.5°	1215.0	1216.3	1217.6	1218.9	1219.6	1218.9	1217.6	1216.3	1215.0	1213.7	1215.0
170°	1228.0	1229.5	1231.0	1232.5	1233.3	1232.5	1231.0	1229.5	1228.0	1226.5	1228.0
172.5°	1238.6	1239.9	1241.2	1242.5	1243.2	1242.4	1240.9	1239.4	1237.8	1236.3	1237.8
175°	1245.4	1246.7	1248.0	1249.3	1250.0	1249.2	1247.7	1246.2	1244.7	1243.2	1244.7
177.5°	1249.4	1250.7	1252.0	1253.3	1254.0	1253.2	1251.7	1250.2	1248.6	1247.1	1248.6
180°	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5
2.5°	1319.8	1313.5	1309.3	1306.2	1303.1	1312.5	1299.9	1286.3	1276.9	1270.6	1268.5
5°	1458.0	1444.3	1432.8	1423.4	1425.5	1425.5	1403.5	1379.5	1358.5	1347.0	1334.5
7.5°	1618.1	1603.4	1580.4	1575.2	1571.0	1544.8	1522.8	1478.9	1452.7	1426.6	1403.5
10°	1777.2	1758.3	1736.4	1729.0	1718.6	1686.1	1652.6	1596.1	1563.7	1515.5	1485.2
12.5°	1925.8	1902.8	1880.8	1875.6	1859.9	1831.6	1774.0	1715.4	1660.0	1608.7	1555.3
15°	2050.3	2044.1	2010.6	1989.6	1955.1	1916.4	1903.8	1824.3	1754.2	1700.8	1604.5
17.5°	2155.0	2125.7	2094.3	2080.7	2067.1	2022.1	1977.1	1895.4	1820.1	1741.6	1679.8
20°	2238.7	2206.3	2184.3	2164.4	2158.1	2106.9	2035.7	1963.5	1880.8	1792.9	1712.3
22.5°	2242.9	2238.7	2224.1	2212.6	2200.0	2166.5	2110.0	2020.0	1932.1	1835.8	1730.1
25°	2156.1	2149.8	2191.6	2181.2	2189.5	2177.0	2146.6	2071.3	1968.7	1855.7	1748.9
27.5°	1894.4	1958.2	2024.2	2047.2	2062.9	2107.9	2122.6	2080.7	1998.0	1877.7	1758.3
30°	1538.5	1623.3	1730.1	1787.6	1831.6	1915.3	2024.2	2037.8	1999.1	1902.8	1756.2
32.5°	1207.8	1285.3	1371.1	1439.1	1497.7	1669.4	1815.9	1921.6	1940.5	1890.2	1761.5
35°	973.4	1006.9	1088.5	1153.4	1232.9	1379.5	1552.2	1722.8	1837.9	1844.2	1745.8
37.5°	802.8	820.6	891.7	928.4	975.5	1104.2	1265.4	1488.3	1667.3	1752.1	1701.8
40°	664.6	705.4	746.2	767.2	800.7	889.6	1044.5	1219.3	1441.2	1598.2	1633.8
42.5°	576.7	594.5	620.7	650.0	670.9	748.3	852.0	1012.1	1212.0	1430.7	1529.1
45°	508.7	514.9	542.2	561.0	583.0	637.4	710.7	844.6	1020.5	1236.1	1403.5
47.5°	452.1	464.7	479.4	490.9	505.5	547.4	610.2	707.5	862.4	1055.0	1235.0
50°	401.9	409.2	428.1	433.3	443.8	473.1	521.2	595.5	723.2	877.1	1063.4
52.5°	354.8	368.4	375.7	383.1	392.5	416.6	448.0	508.7	605.0	749.4	907.4
55°	318.2	322.4	332.8	339.1	346.4	363.2	390.4	435.4	510.8	625.9	775.6
57.5°	282.6	282.6	293.1	298.3	305.6	318.2	342.2	376.8	431.2	517.0	654.1
60°	244.9	246.0	254.3	260.6	262.7	275.3	295.1	322.4	364.2	427.0	539.0
62.5°	211.4	216.7	220.8	222.9	230.3	237.6	254.3	273.2	302.5	357.9	437.5
65°	183.2	184.2	187.3	189.4	192.6	201.0	213.5	226.1	251.2	292.0	356.9
67.5°	150.7	154.9	159.1	159.1	162.2	166.4	179.0	189.4	208.3	232.4	276.3
70°	113.0	115.1	121.4	124.5	128.7	136.1	142.3	148.6	163.3	181.1	214.6
72.5°	94.2	94.2	96.3	97.3	97.3	102.6	112.0	118.3	125.6	138.2	161.2
75°	75.4	75.4	78.5	77.5	79.5	81.6	82.7	86.9	91.1	100.5	114.1
77.5°	59.7	60.7	60.7	61.8	61.8	62.8	63.8	65.9	68.0	73.3	79.5
80°	44.0	45.0	45.0	46.1	46.1	47.1	48.1	49.2	51.3	53.4	56.5
82.5°	30.4	31.4	31.4	32.4	31.4	32.4	33.5	33.5	34.5	36.6	37.7
85°	17.8	17.8	18.8	17.8	17.8	17.8	18.8	18.8	19.9	23.0	23.0
87.5°	5.2	6.3	5.2	6.3	6.3	6.3	6.3	7.3	7.3	8.4	9.4
90°	28.6	28.2	27.7	27.5	27.1	26.2	25.3	24.5	23.6	20.8	17.9
92.5°	43.1	43.6	44.0	44.2	43.9	43.2	42.6	41.9	41.3	40.0	38.7
95°	76.7	76.7	76.7	76.7	76.3	75.4	74.5	73.6	72.7	71.0	69.2
97.5°	110.5	110.7	110.9	111.0	110.5	109.4	108.3	107.2	106.1	104.8	103.5
100°	148.5	148.1	147.6	147.4	147.1	146.4	145.8	145.1	144.5	143.4	142.3
102.5°	190.1	190.4	190.6	190.7	190.4	189.7	189.0	188.4	187.7	186.2	184.6
105°	233.0	232.6	232.1	231.9	231.9	231.9	231.9	231.9	231.9	229.9	228.0
107.5°	279.5	279.8	280.0	280.1	279.8	279.1	278.4	277.8	277.1	276.2	275.4
110°	326.2	326.6	327.1	327.3	326.9	326.0	325.1	324.2	323.3	322.9	322.5

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	374.4	374.4	374.4	374.4	373.9	372.8	371.7	370.6	369.5	369.5	369.5
115°	419.0	419.3	419.5	419.6	419.5	419.3	419.0	418.8	418.6	419.0	419.5
117.5°	465.2	465.8	466.5	466.8	466.8	466.8	466.8	466.8	466.8	467.2	467.7
120°	512.9	513.3	513.8	514.0	514.1	514.3	514.6	514.8	515.0	516.1	517.2
122.5°	559.5	560.1	560.8	561.1	561.4	562.1	562.8	563.4	564.1	564.5	565.0
125°	606.1	607.0	607.9	608.3	608.7	609.6	610.5	611.3	612.2	612.6	613.1
127.5°	652.3	653.2	654.1	654.5	655.2	656.5	657.8	659.1	660.4	660.8	661.3
130°	698.9	700.4	701.9	702.7	703.1	704.0	704.9	705.7	706.6	707.2	707.9
132.5°	745.1	746.2	747.3	747.9	748.4	749.5	750.6	751.7	752.8	753.2	753.6
135°	793.0	793.4	793.9	794.1	794.5	795.4	796.3	797.1	798.0	798.2	798.4
137.5°	836.6	837.3	838.0	838.3	838.8	839.9	841.0	842.1	843.2	842.5	841.9
140°	880.7	882.2	883.7	884.5	884.6	884.8	885.0	885.2	885.4	885.2	885.0
142.5°	923.0	924.1	925.2	925.7	925.8	926.0	926.3	926.5	926.7	926.3	925.9
145°	963.8	964.7	965.6	966.0	966.1	966.3	966.6	966.8	967.0	966.4	965.7
147.5°	1002.0	1003.3	1004.6	1005.3	1005.3	1005.3	1005.3	1005.3	1005.3	1004.7	1004.0
150°	1037.4	1038.7	1040.0	1040.7	1040.7	1040.7	1040.7	1040.7	1040.7	1040.3	1039.9
152.5°	1071.4	1072.5	1073.6	1074.1	1073.9	1073.5	1073.0	1072.6	1072.2	1072.0	1071.8
155°	1102.8	1104.3	1105.8	1106.6	1106.2	1105.3	1104.4	1103.5	1102.6	1102.4	1102.2
157.5°	1130.8	1132.1	1133.4	1134.1	1133.7	1132.8	1131.9	1131.0	1130.1	1129.9	1129.7
160°	1157.4	1158.3	1159.2	1159.6	1159.1	1158.0	1156.9	1155.8	1154.7	1154.7	1154.7
162.5°	1179.4	1180.9	1182.4	1183.2	1182.7	1181.6	1180.5	1179.4	1178.3	1178.1	1177.9
165°	1199.1	1200.6	1202.1	1202.9	1202.2	1200.9	1199.6	1198.3	1197.0	1197.0	1197.0
167.5°	1216.3	1217.6	1218.9	1219.6	1218.9	1217.6	1216.3	1215.0	1213.7	1213.5	1213.3
170°	1229.5	1231.0	1232.5	1233.3	1232.5	1231.0	1229.5	1228.0	1226.5	1226.5	1226.5
172.5°	1239.4	1240.9	1242.4	1243.2	1242.5	1241.2	1239.9	1238.6	1237.3	1237.3	1237.3
175°	1246.2	1247.7	1249.2	1250.0	1249.3	1248.0	1246.7	1245.4	1244.1	1244.1	1244.1
177.5°	1250.2	1251.7	1253.2	1254.0	1253.3	1252.0	1250.7	1249.4	1248.1	1248.1	1248.1
180°	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5
2.5°	1265.4	1260.1	1254.9	1254.9	1243.4	1232.9	1227.7	1229.8	1223.5	1215.1	1206.8
5°	1320.8	1299.9	1295.7	1284.2	1268.5	1246.5	1235.0	1224.6	1212.0	1195.3	1179.6
7.5°	1372.1	1344.9	1330.3	1318.8	1288.4	1258.0	1232.9	1216.2	1194.2	1169.1	1150.2
10°	1439.1	1388.9	1373.2	1347.0	1304.1	1261.2	1231.9	1204.7	1174.3	1145.0	1119.9
12.5°	1492.5	1434.9	1405.6	1379.5	1324.0	1269.6	1220.4	1186.9	1150.2	1117.8	1085.4
15°	1553.2	1488.3	1437.0	1405.6	1335.5	1269.6	1214.1	1167.0	1126.2	1086.4	1058.1
17.5°	1582.5	1500.9	1477.8	1432.8	1331.3	1265.4	1197.3	1147.1	1097.9	1051.9	1018.4
20°	1628.6	1533.3	1475.7	1445.4	1355.4	1258.0	1178.5	1120.9	1069.7	1020.5	984.9
22.5°	1631.7	1528.1	1490.4	1432.8	1321.9	1236.1	1161.8	1091.6	1032.0	985.9	949.3
25°	1624.4	1518.7	1466.3	1420.3	1328.2	1223.5	1128.3	1059.2	1000.6	947.2	904.3
27.5°	1621.2	1491.4	1442.3	1396.2	1292.6	1186.9	1108.4	1029.9	962.9	915.8	871.8
30°	1617.0	1462.1	1402.5	1349.1	1253.9	1158.6	1064.4	996.4	932.5	872.9	828.9
32.5°	1589.8	1422.4	1361.7	1305.1	1202.6	1107.3	1033.0	960.8	891.7	836.3	796.5
35°	1581.5	1385.7	1306.2	1245.5	1145.0	1060.2	981.7	922.1	857.2	801.7	754.6
37.5°	1557.4	1348.1	1262.2	1184.8	1080.1	999.5	942.0	882.3	819.5	759.9	722.2
40°	1515.5	1304.1	1206.8	1127.2	1019.4	937.8	884.4	840.4	778.7	725.3	679.3
42.5°	1453.8	1259.1	1154.4	1070.7	951.4	875.0	831.0	789.2	736.8	681.4	643.7
45°	1382.6	1199.4	1102.1	1009.0	887.5	813.2	767.2	742.1	693.9	646.8	602.9
47.5°	1285.3	1137.7	1041.4	945.1	821.6	749.4	712.8	687.6	654.1	602.9	567.3
50°	1162.8	1058.1	967.1	881.3	756.7	687.6	651.0	632.2	603.9	567.3	532.7
52.5°	1026.7	966.0	890.7	811.1	690.8	625.9	592.4	577.7	556.8	522.3	493.0
55°	889.6	863.5	812.2	733.7	621.7	568.3	539.0	520.2	504.5	479.4	454.2
57.5°	767.2	754.6	719.0	658.3	564.1	508.7	483.5	471.0	458.4	439.6	414.5
60°	640.5	654.1	617.5	587.2	501.3	453.2	431.2	417.6	411.3	394.6	378.9
62.5°	530.6	543.2	522.3	499.2	438.5	395.6	382.0	369.5	365.3	350.6	334.9
65°	431.2	446.9	431.2	418.7	382.0	346.4	329.7	323.4	319.2	309.8	297.2
67.5°	343.3	359.0	351.7	336.0	324.5	295.1	285.7	279.4	277.4	270.0	259.6
70°	258.5	280.5	282.6	273.2	262.7	249.1	242.8	240.7	235.5	229.2	222.9
72.5°	186.3	211.4	212.5	212.5	206.2	206.2	199.9	196.8	196.8	190.5	183.2
75°	137.1	153.9	155.9	158.0	161.2	164.3	160.1	160.1	159.1	152.8	149.7
77.5°	91.1	105.7	110.9	118.3	122.5	122.5	124.5	126.6	124.5	121.4	119.3
80°	58.6	69.1	75.4	79.5	85.8	89.0	92.1	93.1	91.1	90.0	86.9
82.5°	38.7	41.9	45.0	50.2	57.6	62.8	62.8	61.8	63.8	62.8	61.8
85°	22.0	24.1	25.1	26.2	30.4	35.6	36.6	37.7	39.8	37.7	35.6
87.5°	8.4	9.4	9.4	9.4	11.5	12.6	15.7	19.9	18.8	16.7	16.7
90°	15.1	12.2	10.8	9.7	7.5	5.4	3.2	1.0	3.2	5.4	7.5
92.5°	37.4	36.1	35.4	34.7	33.4	32.1	30.8	29.5	30.8	32.1	33.4
95°	67.5	65.8	64.9	64.1	62.6	61.1	59.5	58.0	59.5	61.1	62.6
97.5°	102.2	100.9	100.2	99.7	98.6	97.5	96.4	95.3	96.4	97.5	98.6
100°	141.2	140.1	139.5	138.9	137.6	136.3	135.0	133.7	135.0	136.3	137.6
102.5°	183.1	181.6	180.8	180.5	179.8	179.2	178.5	177.9	178.5	179.2	179.8
105°	226.0	224.1	223.1	222.9	222.4	222.0	221.5	221.1	221.5	222.0	222.4
107.5°	274.5	273.6	273.2	273.1	272.9	272.6	272.4	272.2	272.4	272.6	272.9
110°	322.0	321.6	321.4	321.2	320.7	320.3	319.8	319.4	319.8	320.3	320.7

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	369.5	369.5	369.5	369.4	369.2	368.9	368.7	368.5	368.7	368.9	369.2
115°	419.9	420.4	420.6	420.3	419.6	419.0	418.3	417.7	418.3	419.0	419.6
117.5°	468.1	468.6	468.8	468.7	468.5	468.2	468.0	467.8	468.0	468.2	468.5
120°	518.3	519.4	519.9	519.2	517.9	516.6	515.3	514.0	515.3	516.6	517.9
122.5°	565.4	565.9	566.1	565.7	564.8	563.9	563.0	562.1	563.0	563.9	564.8
125°	613.5	614.0	614.2	613.9	613.2	612.6	611.9	611.3	611.9	612.6	613.2
127.5°	661.7	662.2	662.4	661.7	660.4	659.1	657.8	656.5	657.8	659.1	660.4
130°	708.5	709.2	709.5	708.6	706.9	705.2	703.4	701.7	703.4	705.2	706.9
132.5°	754.1	754.5	754.7	753.8	752.1	750.4	748.6	746.9	748.6	750.4	752.1
135°	798.7	798.9	799.0	798.3	797.0	795.7	794.4	793.1	794.4	795.7	797.0
137.5°	841.2	840.5	840.2	839.7	838.6	837.5	836.4	835.3	836.4	837.5	838.6
140°	884.8	884.6	884.5	883.9	882.8	881.7	880.6	879.5	880.6	881.7	882.8
142.5°	925.4	925.0	924.8	924.2	923.1	922.0	920.9	919.8	920.9	922.0	923.1
145°	965.1	964.4	964.1	963.9	963.4	963.0	962.5	962.1	962.5	963.0	963.4
147.5°	1003.4	1002.7	1002.4	1002.0	1001.1	1000.2	999.4	998.5	999.4	1000.2	1001.1
150°	1039.4	1039.0	1038.8	1038.6	1038.1	1037.7	1037.2	1036.8	1037.2	1037.7	1038.1
152.5°	1071.5	1071.3	1071.2	1070.9	1070.2	1069.5	1068.9	1068.2	1068.9	1069.5	1070.2
155°	1101.9	1101.7	1101.6	1101.6	1101.6	1101.6	1101.6	1101.6	1101.6	1101.6	1101.6
157.5°	1129.5	1129.3	1129.2	1129.3	1129.5	1129.7	1129.9	1130.1	1129.9	1129.7	1129.5
160°	1154.7	1154.7	1154.7	1154.9	1155.4	1155.8	1156.3	1156.7	1156.3	1155.8	1155.4
162.5°	1177.6	1177.4	1177.3	1177.6	1178.3	1179.0	1179.6	1180.3	1179.6	1179.0	1178.3
165°	1197.0	1197.0	1197.0	1197.3	1198.0	1198.6	1199.3	1199.9	1199.3	1198.6	1198.0
167.5°	1213.0	1212.8	1212.7	1213.1	1214.0	1214.9	1215.7	1216.6	1215.7	1214.9	1214.0
170°	1226.5	1226.5	1226.5	1226.9	1227.8	1228.7	1229.5	1230.4	1229.5	1228.7	1227.8
172.5°	1237.3	1237.3	1237.3	1237.7	1238.6	1239.5	1240.3	1241.2	1240.3	1239.5	1238.6
175°	1244.1	1244.1	1244.1	1244.5	1245.4	1246.3	1247.2	1248.1	1247.2	1246.3	1245.4
177.5°	1248.1	1248.1	1248.1	1248.5	1249.4	1250.3	1251.1	1252.0	1251.1	1250.3	1249.4
180°	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5
2.5°	1206.8	1201.5	1199.4	1194.2	1181.6	1173.3	1163.9	1157.6	1158.6	1153.4	1156.5
5°	1169.1	1168.0	1160.7	1150.2	1132.5	1123.0	1106.3	1097.9	1093.7	1094.8	1088.5
7.5°	1137.7	1128.3	1123.0	1106.3	1089.5	1069.7	1056.0	1048.7	1042.4	1036.2	1032.0
10°	1102.1	1093.7	1085.4	1067.6	1044.5	1025.7	1006.9	999.5	990.1	985.9	982.8
12.5°	1064.4	1059.2	1048.7	1027.8	1001.6	983.8	961.9	957.7	945.1	936.7	934.6
15°	1029.9	1026.7	1007.9	983.8	957.7	939.9	921.0	908.5	887.5	891.7	884.4
17.5°	993.3	979.6	968.1	935.7	923.1	895.9	873.9	867.7	853.0	843.6	834.2
20°	952.4	944.1	929.4	908.5	878.1	846.7	830.0	819.5	811.1	796.5	792.3
22.5°	913.7	903.2	890.7	863.5	837.3	811.1	788.1	778.7	768.2	757.8	751.5
25°	883.4	867.7	854.0	820.6	794.4	772.4	757.8	742.1	727.4	721.1	719.0
27.5°	836.3	826.8	813.2	781.8	757.8	733.7	720.1	709.6	693.9	686.6	680.3
30°	805.9	787.1	771.4	746.2	722.2	696.0	683.4	670.9	661.5	652.0	644.7
32.5°	765.1	750.4	737.9	712.8	688.7	664.6	651.0	632.2	626.9	619.6	611.2
35°	725.3	715.9	702.3	675.1	648.9	632.2	617.5	599.7	593.4	588.2	580.9
37.5°	687.6	674.0	664.6	638.4	615.4	595.5	584.0	569.4	565.2	558.9	553.7
40°	655.2	641.6	632.2	606.0	581.9	561.0	553.7	539.0	532.7	525.4	522.3
42.5°	618.6	607.0	594.5	575.6	550.5	529.6	514.9	506.6	498.2	495.1	488.8
45°	579.8	569.4	559.9	539.0	512.8	498.2	485.6	474.1	467.8	462.6	458.4
47.5°	546.3	536.9	524.4	501.3	480.4	466.8	454.2	442.7	436.4	430.2	424.9
50°	507.6	502.4	488.8	466.8	446.9	431.2	419.7	409.2	405.0	397.7	389.3
52.5°	473.1	463.7	452.1	434.4	416.6	397.7	382.0	375.7	368.4	364.2	356.9
55°	432.3	426.0	413.4	397.7	378.9	363.2	351.7	343.3	333.9	329.7	320.3
57.5°	397.7	386.2	379.9	360.0	342.2	326.5	318.2	309.8	299.3	293.1	288.9
60°	360.0	349.6	340.2	323.4	310.8	294.1	281.5	274.2	266.9	258.5	254.3
62.5°	323.4	315.0	303.5	289.9	274.2	260.6	251.2	240.7	236.5	228.2	225.0
65°	283.6	277.4	267.9	252.2	239.7	228.2	218.7	210.4	206.2	203.0	201.0
67.5°	248.1	239.7	233.4	219.8	206.2	196.8	191.5	186.3	181.1	177.9	174.8
70°	211.4	205.1	198.9	186.3	176.9	168.5	164.3	160.1	157.0	153.9	150.7
72.5°	173.7	170.6	164.3	155.9	148.6	142.3	139.2	134.0	130.8	125.6	123.5
75°	143.4	138.2	135.0	127.7	121.4	116.2	112.0	105.7	101.5	99.4	98.4
77.5°	113.0	110.9	106.8	100.5	97.3	92.1	85.8	83.7	81.6	81.6	80.6
80°	84.8	81.6	78.5	73.3	70.1	65.9	65.9	65.9	64.9	65.9	64.9
82.5°	57.6	55.5	53.4	50.2	49.2	49.2	50.2	50.2	50.2	50.2	50.2
85°	33.5	33.5	33.5	34.5	33.5	33.5	34.5	35.6	34.5	34.5	33.5
87.5°	15.7	15.7	16.7	16.7	17.8	17.8	17.8	17.8	17.8	17.8	18.8
90°	9.7	10.8	12.2	15.1	17.9	20.8	23.6	24.5	25.3	26.2	27.1
92.5°	34.7	35.4	36.1	37.4	38.7	40.0	41.3	41.9	42.6	43.2	43.9
95°	64.1	64.9	65.8	67.5	69.2	71.0	72.7	73.6	74.5	75.4	76.3
97.5°	99.7	100.2	100.9	102.2	103.5	104.8	106.1	107.2	108.3	109.4	110.5
100°	138.9	139.5	140.1	141.2	142.3	143.4	144.5	145.1	145.8	146.4	147.1
102.5°	180.5	180.8	181.6	183.1	184.6	186.2	187.7	188.4	189.0	189.7	190.4
105°	222.9	223.1	224.1	226.0	228.0	229.9	231.9	231.9	231.9	231.9	231.9
107.5°	273.1	273.2	273.6	274.5	275.4	276.2	277.1	277.8	278.4	279.1	279.8
110°	321.2	321.4	321.6	322.0	322.5	322.9	323.3	324.2	325.1	326.0	326.9

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	369.4	369.5	369.5	369.5	369.5	369.5	369.5	370.6	371.7	372.8	373.9
115°	420.3	420.6	420.4	419.9	419.5	419.0	418.6	418.8	419.0	419.3	419.5
117.5°	468.7	468.8	468.6	468.1	467.7	467.2	466.8	466.8	466.8	466.8	466.8
120°	519.2	519.9	519.4	518.3	517.2	516.1	515.0	514.8	514.6	514.3	514.1
122.5°	565.7	566.1	565.9	565.4	565.0	564.5	564.1	563.4	562.8	562.1	561.4
125°	613.9	614.2	614.0	613.5	613.1	612.6	612.2	611.3	610.5	609.6	608.7
127.5°	661.7	662.4	662.2	661.7	661.3	660.8	660.4	659.1	657.8	656.5	655.2
130°	708.6	709.5	709.2	708.5	707.9	707.2	706.6	705.7	704.9	704.0	703.1
132.5°	753.8	754.7	754.5	754.1	753.6	753.2	752.8	751.7	750.6	749.5	748.4
135°	798.3	799.0	798.9	798.7	798.4	798.2	798.0	797.1	796.3	795.4	794.5
137.5°	839.7	840.2	840.5	841.2	841.9	842.5	843.2	842.1	841.0	839.9	838.8
140°	883.9	884.5	884.6	884.8	885.0	885.2	885.4	885.2	885.0	884.8	884.6
142.5°	924.2	924.8	925.0	925.4	925.9	926.3	926.7	926.5	926.3	926.0	925.8
145°	963.9	964.1	964.4	965.1	965.7	966.4	967.0	966.8	966.6	966.3	966.1
147.5°	1002.0	1002.4	1002.7	1003.4	1004.0	1004.7	1005.3	1005.3	1005.3	1005.3	1005.3
150°	1038.6	1038.8	1039.0	1039.4	1039.9	1040.3	1040.7	1040.7	1040.7	1040.7	1040.7
152.5°	1070.9	1071.2	1071.3	1071.5	1071.8	1072.0	1072.2	1072.6	1073.0	1073.5	1073.9
155°	1101.6	1101.6	1101.7	1101.9	1102.2	1102.4	1102.6	1103.5	1104.4	1105.3	1106.2
157.5°	1129.3	1129.2	1129.3	1129.5	1129.7	1129.9	1130.1	1131.0	1131.9	1132.8	1133.7
160°	1154.9	1154.7	1154.7	1154.7	1154.7	1154.7	1154.7	1155.8	1156.9	1158.0	1159.1
162.5°	1177.6	1177.3	1177.4	1177.6	1177.9	1178.1	1178.3	1179.4	1180.5	1181.6	1182.7
165°	1197.3	1197.0	1197.0	1197.0	1197.0	1197.0	1197.0	1198.3	1199.6	1200.9	1202.2
167.5°	1213.1	1212.7	1212.8	1213.0	1213.3	1213.5	1213.7	1215.0	1216.3	1217.6	1218.9
170°	1226.9	1226.5	1226.5	1226.5	1226.5	1226.5	1226.5	1228.0	1229.5	1231.0	1232.5
172.5°	1237.7	1237.3	1237.3	1237.3	1237.3	1237.3	1237.3	1238.6	1239.9	1241.2	1242.5
175°	1244.5	1244.1	1244.1	1244.1	1244.1	1244.1	1244.1	1245.4	1246.7	1248.0	1249.3
177.5°	1248.5	1248.1	1248.1	1248.1	1248.1	1248.1	1248.1	1249.4	1250.7	1252.0	1253.3
180°	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5
2.5°	1155.5	1156.5	1153.4	1147.1	1146.1	1148.2	1154.4	1152.3	1147.1	1156.5	1148.2
5°	1091.6	1086.4	1084.3	1086.4	1080.1	1077.0	1083.3	1080.1	1083.3	1084.3	1087.4
7.5°	1029.9	1030.9	1024.6	1025.7	1017.3	1019.4	1019.4	1019.4	1022.6	1024.6	1028.8
10°	976.5	978.6	971.3	972.3	966.0	961.9	965.0	971.3	971.3	971.3	973.4
12.5°	933.6	924.2	918.9	917.9	910.6	908.5	914.8	916.8	922.1	922.1	925.2
15°	880.2	878.1	873.9	873.9	856.1	860.3	862.4	869.7	880.2	871.8	873.9
17.5°	832.1	826.8	821.6	819.5	817.4	811.1	819.5	818.5	824.7	825.8	828.9
20°	789.2	785.0	774.5	775.6	777.6	768.2	773.5	773.5	779.7	786.0	793.3
22.5°	747.3	743.1	737.9	740.0	733.7	731.6	731.6	736.8	744.2	749.4	748.3
25°	714.8	707.5	704.4	701.2	698.1	700.2	697.1	702.3	707.5	710.7	707.5
27.5°	678.2	675.1	668.8	665.7	660.4	662.5	664.6	668.8	671.9	671.9	675.1
30°	642.6	638.4	636.4	633.2	633.2	629.0	630.1	634.3	637.4	640.5	644.7
32.5°	608.1	605.0	601.8	601.8	599.7	598.7	597.6	603.9	603.9	610.2	610.2
35°	579.8	574.6	574.6	569.4	571.5	570.4	568.3	572.5	573.6	577.7	576.7
37.5°	548.4	548.4	546.3	541.1	536.9	538.0	543.2	543.2	546.3	545.3	548.4
40°	517.0	514.9	514.9	511.8	510.8	509.7	510.8	511.8	517.0	516.0	517.0
42.5°	485.6	486.7	481.4	481.4	481.4	478.3	479.4	480.4	482.5	484.6	487.7
45°	455.3	453.2	452.1	450.1	448.0	449.0	448.0	452.1	451.1	453.2	456.3
47.5°	422.8	419.7	418.7	414.5	414.5	416.6	415.5	418.7	419.7	422.8	420.7
50°	391.4	387.3	384.1	385.2	378.9	381.0	381.0	384.1	387.3	388.3	390.4
52.5°	354.8	353.8	352.7	347.5	346.4	345.4	346.4	347.5	351.7	354.8	355.9
55°	319.2	318.2	311.9	309.8	306.7	306.7	308.8	309.8	317.1	318.2	322.4
57.5°	286.8	283.6	276.3	275.3	275.3	275.3	272.1	276.3	278.4	283.6	283.6
60°	251.2	251.2	244.9	244.9	246.0	244.9	244.9	246.0	246.0	250.1	252.2
62.5°	222.9	221.9	221.9	219.8	218.7	219.8	218.7	218.7	219.8	222.9	226.1
65°	197.8	196.8	195.7	194.7	192.6	192.6	193.6	195.7	195.7	197.8	198.9
67.5°	173.7	173.7	171.6	171.6	170.6	169.6	170.6	169.6	173.7	173.7	174.8
70°	149.7	148.6	145.5	144.4	141.3	142.3	142.3	145.5	146.5	148.6	150.7
72.5°	120.4	120.4	118.3	116.2	117.2	115.1	115.1	116.2	116.2	119.3	120.4
75°	99.4	97.3	96.3	97.3	96.3	98.4	96.3	96.3	98.4	98.4	98.4
77.5°	81.6	81.6	80.6	80.6	81.6	80.6	81.6	81.6	81.6	80.6	81.6
80°	67.0	65.9	65.9	65.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
82.5°	50.2	50.2	49.2	50.2	50.2	49.2	50.2	49.2	49.2	50.2	50.2
85°	33.5	35.6	33.5	33.5	34.5	34.5	35.6	34.5	35.6	33.5	34.5
87.5°	17.8	18.8	18.8	17.8	17.8	18.8	18.8	18.8	19.9	17.8	18.8
90°	27.5	27.7	28.2	28.6	29.1	29.5	29.1	28.6	28.2	27.7	27.5
92.5°	44.2	44.0	43.6	43.1	42.7	42.3	42.7	43.1	43.6	44.0	44.2
95°	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7
97.5°	111.0	110.9	110.7	110.5	110.3	110.1	110.3	110.5	110.7	110.9	111.0
100°	147.4	147.6	148.1	148.5	149.0	149.4	149.0	148.5	148.1	147.6	147.4
102.5°	190.7	190.6	190.4	190.1	189.9	189.7	189.9	190.1	190.4	190.6	190.7
105°	231.9	232.1	232.6	233.0	233.5	233.9	233.5	233.0	232.6	232.1	231.9
107.5°	280.1	280.0	279.8	279.5	279.3	279.1	279.3	279.5	279.8	280.0	280.1
110°	327.3	327.1	326.6	326.2	325.7	325.3	325.7	326.2	326.6	327.1	327.3

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	374.4	374.4	374.4	374.4	374.4	374.4	374.4	374.4	374.4	374.4	374.4
115°	419.6	419.5	419.3	419.0	418.8	418.6	418.8	419.0	419.3	419.5	419.6
117.5°	466.8	466.5	465.8	465.2	464.5	463.9	464.5	465.2	465.8	466.5	466.8
120°	514.0	513.8	513.3	512.9	512.4	512.0	512.4	512.9	513.3	513.8	514.0
122.5°	561.1	560.8	560.1	559.5	558.8	558.2	558.8	559.5	560.1	560.8	561.1
125°	608.3	607.9	607.0	606.1	605.3	604.4	605.3	606.1	607.0	607.9	608.3
127.5°	654.5	654.1	653.2	652.3	651.5	650.6	651.5	652.3	653.2	654.1	654.5
130°	702.7	701.9	700.4	698.9	697.3	695.8	697.3	698.9	700.4	701.9	702.7
132.5°	747.9	747.3	746.2	745.1	744.0	742.9	744.0	745.1	746.2	747.3	747.9
135°	794.1	793.9	793.4	793.0	792.5	792.1	792.5	793.0	793.4	793.9	794.1
137.5°	838.3	838.0	837.3	836.6	836.0	835.3	836.0	836.6	837.3	838.0	838.3
140°	884.5	883.7	882.2	880.7	879.1	877.6	879.1	880.7	882.2	883.7	884.5
142.5°	925.7	925.2	924.1	923.0	921.9	920.8	921.9	923.0	924.1	925.2	925.7
145°	966.0	965.6	964.7	963.8	963.0	962.1	963.0	963.8	964.7	965.6	966.0
147.5°	1005.3	1004.6	1003.3	1002.0	1000.7	999.4	1000.7	1002.0	1003.3	1004.6	1005.3
150°	1040.7	1040.0	1038.7	1037.4	1036.1	1034.8	1036.1	1037.4	1038.7	1040.0	1040.7
152.5°	1074.1	1073.6	1072.5	1071.4	1070.3	1069.2	1070.3	1071.4	1072.5	1073.6	1074.1
155°	1106.6	1105.8	1104.3	1102.8	1101.2	1099.7	1101.2	1102.8	1104.3	1105.8	1106.6
157.5°	1134.1	1133.4	1132.1	1130.8	1129.5	1128.2	1129.5	1130.8	1132.1	1133.4	1134.1
160°	1159.6	1159.2	1158.3	1157.4	1156.6	1155.7	1156.6	1157.4	1158.3	1159.2	1159.6
162.5°	1183.2	1182.4	1180.9	1179.4	1177.8	1176.3	1177.8	1179.4	1180.9	1182.4	1183.2
165°	1202.9	1202.1	1200.6	1199.1	1197.5	1196.0	1197.5	1199.1	1200.6	1202.1	1202.9
167.5°	1219.6	1218.9	1217.6	1216.3	1215.0	1213.7	1215.0	1216.3	1217.6	1218.9	1219.6
170°	1233.3	1232.5	1231.0	1229.5	1228.0	1226.5	1228.0	1229.5	1231.0	1232.5	1233.3
172.5°	1243.2	1242.4	1240.9	1239.4	1237.8	1236.3	1237.8	1239.4	1240.9	1242.4	1243.2
175°	1250.0	1249.2	1247.7	1246.2	1244.7	1243.2	1244.7	1246.2	1247.7	1249.2	1250.0
177.5°	1254.0	1253.2	1251.7	1250.2	1248.6	1247.1	1248.6	1250.2	1251.7	1253.2	1254.0
180°	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5	1222.5
2.5°	1156.5	1160.7	1156.5	1148.2	1156.5	1161.8	1167.0	1175.4	1179.6	1179.6	1185.8
5°	1090.6	1099.0	1095.8	1093.7	1102.1	1107.3	1115.7	1126.2	1137.7	1145.0	1153.4
7.5°	1032.0	1037.2	1042.4	1042.4	1050.8	1062.3	1074.9	1087.4	1102.1	1112.6	1118.8
10°	980.7	984.9	988.0	992.2	1004.8	1017.3	1034.1	1049.8	1062.3	1073.8	1084.3
12.5°	931.5	937.8	945.1	948.2	957.7	973.4	989.1	1007.9	1027.8	1039.3	1049.8
15°	884.4	887.5	895.9	905.3	913.7	930.5	950.3	970.2	987.0	1004.8	1014.2
17.5°	836.3	837.3	859.3	854.0	881.3	897.0	907.4	926.3	953.5	968.1	982.8
20°	789.2	799.6	809.0	814.3	828.9	846.7	877.1	891.7	913.7	927.3	939.9
22.5°	752.5	768.2	768.2	780.8	788.1	804.9	826.8	855.1	879.2	888.6	906.4
25°	720.1	727.4	740.0	744.2	757.8	772.4	787.1	817.4	843.6	856.1	868.7
27.5°	678.2	687.6	704.4	704.4	722.2	737.9	755.7	775.6	801.7	819.5	833.1
30°	645.8	655.2	662.5	674.0	681.4	696.0	727.4	742.1	765.1	780.8	797.5
32.5°	615.4	622.7	629.0	641.6	650.0	666.7	683.4	709.6	729.5	744.2	761.9
35°	581.9	589.3	597.6	607.0	619.6	635.3	651.0	673.0	692.9	706.5	721.1
37.5°	550.5	555.8	568.3	574.6	585.1	599.7	619.6	642.6	660.4	670.9	685.5
40°	520.2	524.4	533.8	545.3	552.6	564.1	585.1	605.0	626.9	639.5	651.0
42.5°	487.7	493.0	501.3	512.8	524.4	536.9	548.4	571.5	591.3	601.8	614.4
45°	459.5	462.6	468.9	480.4	491.9	501.3	519.1	540.1	558.9	567.3	580.9
47.5°	426.0	429.1	438.5	443.8	456.3	468.9	486.7	507.6	524.4	532.7	545.3
50°	391.4	394.6	400.9	412.4	420.7	434.4	450.1	467.8	488.8	500.3	507.6
52.5°	357.9	364.2	369.5	378.9	389.3	403.0	417.6	434.4	452.1	463.7	472.0
55°	324.5	329.7	336.0	341.2	353.8	366.3	383.1	398.8	414.5	424.9	434.4
57.5°	286.8	294.1	300.4	310.8	320.3	330.7	349.6	362.1	381.0	388.3	396.7
60°	254.3	261.7	266.9	275.3	283.6	297.2	309.8	325.5	341.2	350.6	361.1
62.5°	227.1	230.3	233.4	241.8	250.1	262.7	275.3	291.0	307.7	312.9	321.3
65°	199.9	203.0	208.3	215.6	221.9	229.2	242.8	255.4	271.1	279.4	282.6
67.5°	176.9	180.0	181.1	186.3	191.5	199.9	207.2	219.8	234.4	239.7	246.0
70°	150.7	155.9	157.0	161.2	163.3	168.5	176.9	186.3	197.8	207.2	212.5
72.5°	120.4	127.7	129.8	136.1	139.2	144.4	150.7	158.0	165.4	169.6	173.7
75°	98.4	100.5	101.5	106.8	112.0	119.3	122.5	126.6	132.9	138.2	142.3
77.5°	81.6	82.7	83.7	83.7	84.8	89.0	95.2	100.5	104.7	106.8	109.9
80°	65.9	64.9	64.9	65.9	65.9	65.9	68.0	75.4	77.5	82.7	81.6
82.5°	51.3	49.2	50.2	49.2	49.2	49.2	49.2	50.2	50.2	53.4	55.5
85°	33.5	34.5	33.5	33.5	32.4	33.5	32.4	32.4	31.4	31.4	30.4
87.5°	17.8	18.8	17.8	17.8	16.7	17.8	16.7	16.7	15.7	15.7	13.6
90°	27.1	26.2	25.3	24.5	23.6	20.8	17.9	15.1	12.2	10.8	9.7
92.5°	43.9	43.2	42.6	41.9	41.3	40.0	38.7	37.4	36.1	35.4	34.7
95°	76.3	75.4	74.5	73.6	72.7	71.0	69.2	67.5	65.8	64.9	64.1
97.5°	110.5	109.4	108.3	107.2	106.1	104.8	103.5	102.2	100.9	100.2	99.7
100°	147.1	146.4	145.8	145.1	144.5	143.4	142.3	141.2	140.1	139.5	138.9
102.5°	190.4	189.7	189.0	188.4	187.7	186.2	184.6	183.1	181.6	180.8	180.5
105°	231.9	231.9	231.9	231.9	231.9	229.9	228.0	226.0	224.1	223.1	222.9
107.5°	279.8	279.1	278.4	277.8	277.1	276.2	275.4	274.5	273.6	273.2	273.1
110°	326.9	326.0	325.1	324.2	323.3	322.9	322.5	322.0	321.6	321.4	321.2

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	373.9	372.8	371.7	370.6	369.5	369.5	369.5	369.5	369.5	369.5	369.4
115°	419.5	419.3	419.0	418.8	418.6	419.0	419.5	419.9	420.4	420.6	420.3
117.5°	466.8	466.8	466.8	466.8	466.8	467.2	467.7	468.1	468.6	468.8	468.7
120°	514.1	514.3	514.6	514.8	515.0	516.1	517.2	518.3	519.4	519.9	519.2
122.5°	561.4	562.1	562.8	563.4	564.1	564.5	565.0	565.4	565.9	566.1	565.7
125°	608.7	609.6	610.5	611.3	612.2	612.6	613.1	613.5	614.0	614.2	613.9
127.5°	655.2	656.5	657.8	659.1	660.4	660.8	661.3	661.7	662.2	662.4	661.7
130°	703.1	704.0	704.9	705.7	706.6	707.2	707.9	708.5	709.2	709.5	708.6
132.5°	748.4	749.5	750.6	751.7	752.8	753.2	753.6	754.1	754.5	754.7	753.8
135°	794.5	795.4	796.3	797.1	798.0	798.2	798.4	798.7	798.9	799.0	798.3
137.5°	838.8	839.9	841.0	842.1	843.2	842.5	841.9	841.2	840.5	840.2	839.7
140°	884.6	884.8	885.0	885.2	885.4	885.2	885.0	884.8	884.6	884.5	883.9
142.5°	925.8	926.0	926.3	926.5	926.7	926.3	925.9	925.4	925.0	924.8	924.2
145°	966.1	966.3	966.6	966.8	967.0	966.4	965.7	965.1	964.4	964.1	963.9
147.5°	1005.3	1005.3	1005.3	1005.3	1005.3	1004.7	1004.0	1003.4	1002.7	1002.4	1002.0
150°	1040.7	1040.7	1040.7	1040.7	1040.7	1040.3	1039.9	1039.4	1039.0	1038.8	1038.6
152.5°	1073.9	1073.5	1073.0	1072.6	1072.2	1072.0	1071.8	1071.5	1071.3	1071.2	1070.9
155°	1106.2	1105.3	1104.4	1103.5	1102.6	1102.4	1102.2	1101.9	1101.7	1101.6	1101.6
157.5°	1133.7	1132.8	1131.9	1131.0	1130.1	1129.9	1129.7	1129.5	1129.3	1129.2	1129.3
160°	1159.1	1158.0	1156.9	1155.8	1154.7	1154.7	1154.7	1154.7	1154.7	1154.7	1154.9
162.5°	1182.7	1181.6	1180.5	1179.4	1178.3	1178.1	1177.9	1177.6	1177.4	1177.3	1177.6
165°	1202.2	1200.9	1199.6	1198.3	1197.0	1197.0	1197.0	1197.0	1197.0	1197.0	1197.3
167.5°	1218.9	1217.6	1216.3	1215.0	1213.7	1213.5	1213.3	1213.0	1212.8	1212.7	1213.1
170°	1232.5	1231.0	1229.5	1228.0	1226.5	1226.5	1226.5	1226.5	1226.5	1226.5	1226.9
172.5°	1242.5	1241.2	1239.9	1238.6	1237.3	1237.3	1237.3	1237.3	1237.3	1237.3	1237.7
175°	1249.3	1248.0	1246.7	1245.4	1244.1	1244.1	1244.1	1244.1	1244.1	1244.1	1244.5
177.5°	1253.3	1252.0	1250.7	1249.4	1248.1	1248.1	1248.1	1248.1	1248.1	1248.1	1248.5
180°	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0	1251.0

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1222.5	1222.5	1222.5	1222.5
2.5°	1191.1	1198.4	1213.0	1225.6
5°	1165.9	1177.5	1199.4	1221.4
7.5°	1135.6	1153.4	1181.6	1212.0
10°	1106.3	1129.3	1163.9	1199.4
12.5°	1077.0	1101.1	1137.7	1183.7
15°	1042.4	1067.6	1111.5	1167.0
17.5°	1012.1	1045.6	1085.4	1140.8
20°	979.6	1004.8	1056.0	1114.7
22.5°	938.8	980.7	1028.8	1090.6
25°	906.4	943.0	991.2	1061.3
27.5°	866.6	909.5	968.1	1029.9
30°	834.2	869.7	924.2	998.5
32.5°	796.5	838.3	894.9	968.1
35°	763.0	798.6	852.0	926.3
37.5°	723.2	761.9	821.6	887.5
40°	688.7	726.4	782.9	844.6
42.5°	646.8	686.6	743.1	795.4
45°	613.3	650.0	695.0	743.1
47.5°	572.5	611.2	655.2	688.7
50°	535.9	571.5	606.0	634.3
52.5°	496.1	528.5	559.9	580.9
55°	459.5	484.6	509.7	524.4
57.5°	416.6	440.6	461.6	469.9
60°	378.9	398.8	412.4	421.8
62.5°	339.1	353.8	364.2	369.5
65°	300.4	310.8	316.1	321.3
67.5°	260.6	270.0	273.2	279.4
70°	218.7	229.2	231.3	234.4
72.5°	187.3	187.3	191.5	195.7
75°	149.7	151.8	153.9	153.9
77.5°	117.2	117.2	119.3	120.4
80°	85.8	86.9	86.9	85.8
82.5°	58.6	60.7	58.6	57.6
85°	32.4	36.6	34.5	34.5
87.5°	13.6	13.6	15.7	13.6
90°	7.5	5.4	3.2	1.0
92.5°	33.4	32.1	30.8	29.5
95°	62.6	61.1	59.5	58.0
97.5°	98.6	97.5	96.4	95.3
100°	137.6	136.3	135.0	133.7
102.5°	179.8	179.2	178.5	177.9
105°	222.4	222.0	221.5	221.1
107.5°	272.9	272.6	272.4	272.2
110°	320.7	320.3	319.8	319.4

TEST NUMBER: P1012717

CATALOG NUMBER: S123RDIP-B775D1025UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	369.2	368.9	368.7	368.5
115°	419.6	419.0	418.3	417.7
117.5°	468.5	468.2	468.0	467.8
120°	517.9	516.6	515.3	514.0
122.5°	564.8	563.9	563.0	562.1
125°	613.2	612.6	611.9	611.3
127.5°	660.4	659.1	657.8	656.5
130°	706.9	705.2	703.4	701.7
132.5°	752.1	750.4	748.6	746.9
135°	797.0	795.7	794.4	793.1
137.5°	838.6	837.5	836.4	835.3
140°	882.8	881.7	880.6	879.5
142.5°	923.1	922.0	920.9	919.8
145°	963.4	963.0	962.5	962.1
147.5°	1001.1	1000.2	999.4	998.5
150°	1038.1	1037.7	1037.2	1036.8
152.5°	1070.2	1069.5	1068.9	1068.2
155°	1101.6	1101.6	1101.6	1101.6
157.5°	1129.5	1129.7	1129.9	1130.1
160°	1155.4	1155.8	1156.3	1156.7
162.5°	1178.3	1179.0	1179.6	1180.3
165°	1198.0	1198.6	1199.3	1199.9
167.5°	1214.0	1214.9	1215.7	1216.6
170°	1227.8	1228.7	1229.5	1230.4
172.5°	1238.6	1239.5	1240.3	1241.2
175°	1245.4	1246.3	1247.2	1248.1
177.5°	1249.4	1250.3	1251.1	1252.0
180°	1251.0	1251.0	1251.0	1251.0

(END OF REPORT)