

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1007545

Luminaire Tested: S123IP-B365UB2750-4F0-XX-W2A_4000K

Issue Date: 5/5/2025

Test Information

Test Method: LM-79-2019
Report Number: P1007545
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5)
Test Lab: INNOVATION CENTER
Issue Date: 5/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123IP-B365UB2750-4F0-XX-W2A_4000K
Description: Define 3 Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865} {m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1451.0 lumens
Efficiency: N/A
Efficacy: 156.0 lumens/watt
Spacing Criteria (0/90/45): - / - / -
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Indirect

Input Watts (W): 9.3
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1007545

CATALOG NUMBER: S123IP-B365UB2750-4F0-XX-W2A_4000K

Luminous Intensity Polar Plot

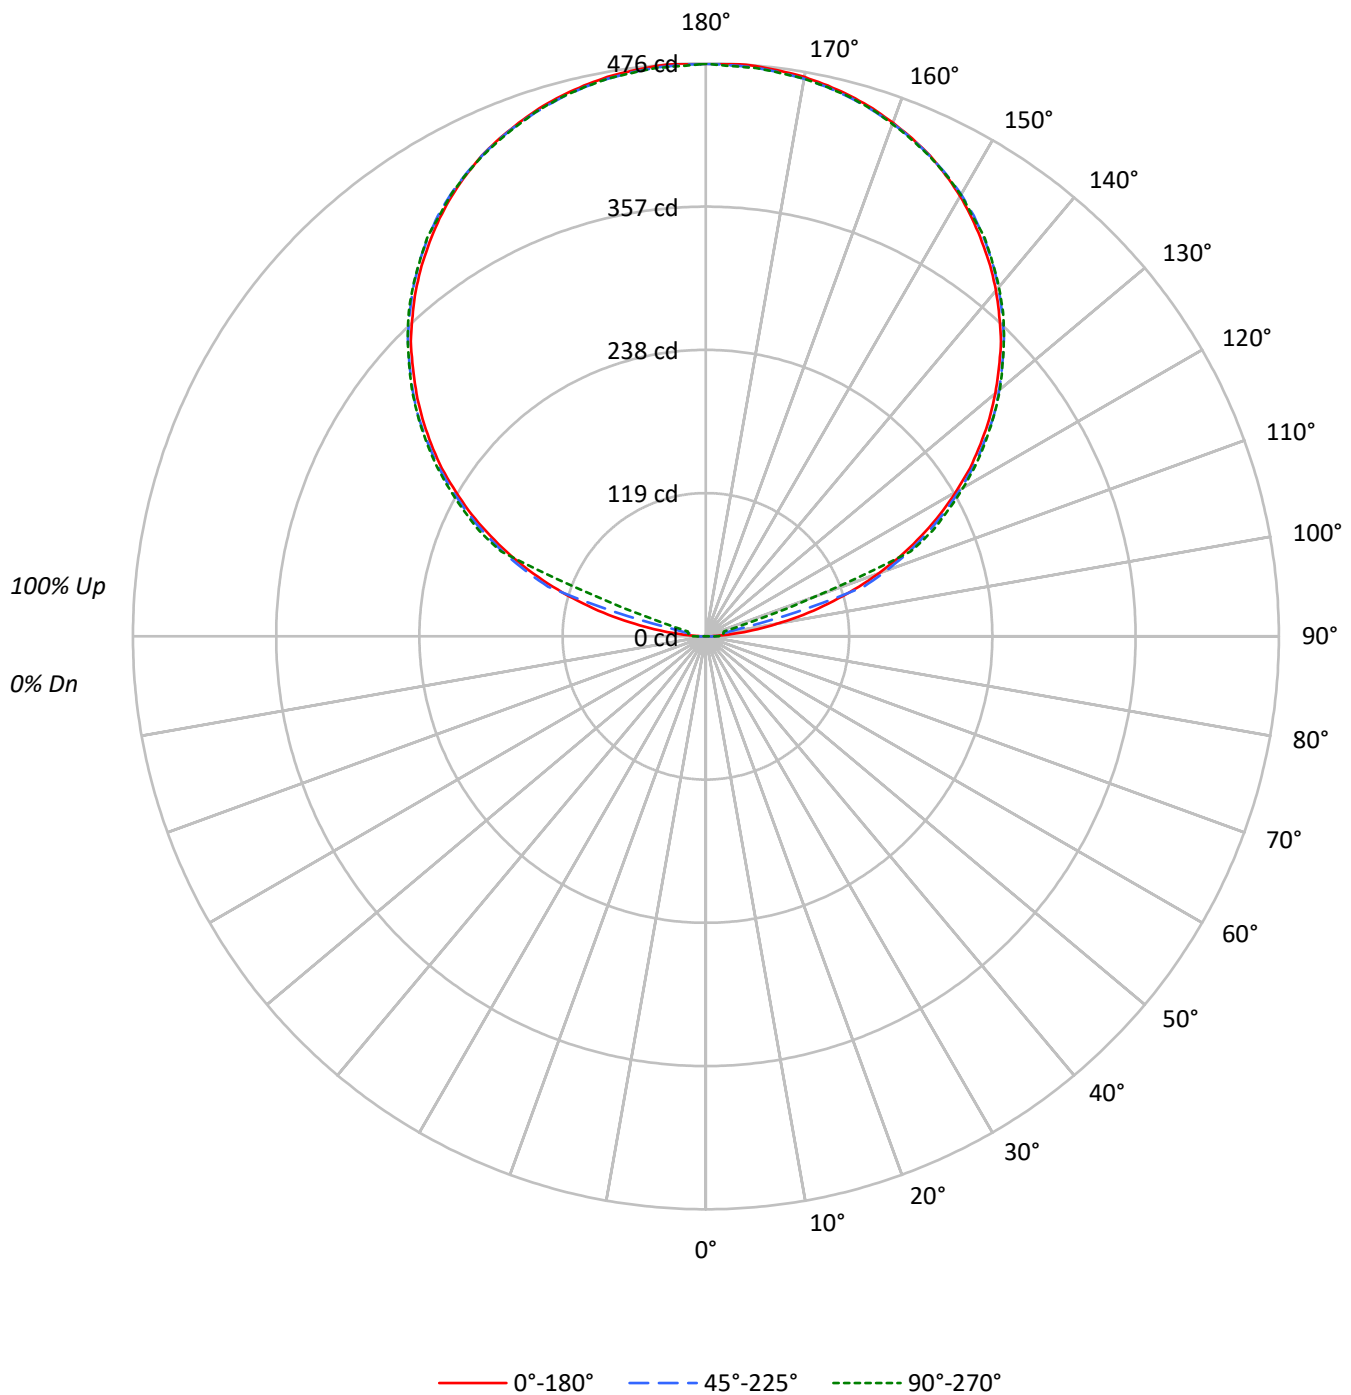



TEST NUMBER: P1007545

CATALOG NUMBER: S123IP-B365UB2750-4F0-XX-W2A_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	0	0	0
5°	0	0	0
10°	0	0	0
15°	0	0	0
20°	0	0	0
25°	0	0	0
30°	0	0	0
35°	0	0	0
40°	0	0	0
45°	0	0	0
50°	0	0	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 0°
Luminance: 0 cd/sqm

TEST NUMBER: P1007545

CATALOG NUMBER: S123IP-B365UB2750-4F0-XX-W2A_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	1.0	0.1
90°-100°	16.8	1.2
100°-110°	81.1	5.6
110°-120°	198.7	13.7
120°-130°	252.3	17.4
130°-140°	269.5	18.6
140°-150°	252.0	17.4
150°-160°	203.3	14.0
160°-170°	131.2	9.0
170°-180°	45.2	3.1
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	1.0	0.1
90°-120°	296.6	20.4
90°-150°	1070.4	73.8
90°-180°	1450.0	99.9
0°-180°	1451.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	0	0	0	0	0	
5°	0	0	0	0	0	0
15°	0	0	0	0	0	0
25°	0	0	0	0	0	0
35°	0	0	0	0	0	0
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	4	8	10	11	1
95°	22	7	11	13	13	26
105°	105	109	77	15	16	112
115°	198	200	203	206	208	195
125°	278	281	283	283	284	249
135°	347	349	350	351	350	267
145°	400	402	403	404	404	250
155°	441	440	440	442	440	203
165°	465	464	463	466	464	131
175°	476	474	474	477	474	45
180°	476	476	476	476	476	

TEST NUMBER: P1007545

CATALOG NUMBER: S123IP-B365UB2750-4F0-XX-W2A_4000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	0.0	0.0	0.0	0.0	0.0
2.5°	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0
7.5°	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0
12.5°	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0
17.5°	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.4	3.9	8.5	9.9	10.6
92.5°	8.1	6.0	9.2	11.7	12.0
95°	21.6	7.1	11.0	13.4	13.4
97.5°	39.2	29.3	11.3	14.1	14.5
100°	59.7	66.8	11.7	14.5	14.8
102.5°	83.0	87.6	26.1	14.5	15.2
105°	105.3	109.2	77.4	14.8	15.5
107.5°	129.0	132.2	137.5	83.0	36.8
110°	152.7	155.5	159.4	147.7	97.2

TEST NUMBER: P1007545

CATALOG NUMBER: S123IP-B365UB2750-4F0-XX-W2A_4000K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	175.3	177.7	181.6	184.8	184.1
115°	197.5	199.7	202.8	206.4	207.8
117.5°	219.4	221.9	223.7	226.5	226.9
120°	239.6	242.8	243.8	246.7	246.7
122.5°	260.1	262.6	264.0	265.7	266.1
125°	278.5	281.3	282.7	283.4	284.1
127.5°	296.8	299.7	301.4	302.5	301.8
130°	313.8	316.6	318.0	319.5	318.7
132.5°	330.1	332.9	333.9	335.4	334.3
135°	346.7	348.8	350.2	351.3	350.2
137.5°	360.8	363.6	364.3	366.1	365.4
140°	374.9	377.1	378.1	379.5	378.8
142.5°	388.0	390.1	391.2	392.2	391.2
145°	400.0	402.5	403.2	403.9	403.9
147.5°	411.7	413.5	414.2	414.9	413.1
150°	422.3	423.3	424.1	424.8	423.7
152.5°	431.8	432.2	432.5	433.9	432.2
155°	440.7	440.0	440.3	442.1	440.0
157.5°	447.7	447.7	447.4	449.5	446.7
160°	454.1	453.7	453.4	455.5	453.0
162.5°	460.1	459.0	458.7	461.2	459.0
165°	464.7	463.6	463.3	466.1	463.6
167.5°	468.6	467.2	467.2	470.0	467.2
170°	471.8	470.3	470.3	473.2	470.3
172.5°	473.9	472.1	472.5	475.3	472.1
175°	475.6	473.9	474.2	476.7	473.9
177.5°	476.4	474.6	474.9	477.8	474.2
180°	475.6	475.6	475.6	475.6	475.6

(END OF REPORT)