

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1013408

Luminaire Tested: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1013408
REPORT IS A COMBINATION OF REPORTS P999667 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K
Description: Define 4 Regressed Direct/Indirect Pendant with 3500K BioUP LEDs {m-DER=0.721}
{m-EER=0.792}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8197.0 lumens
Efficiency: N/A
Efficacy: 115.6 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.27 / 1.38
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 70.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

Luminous Intensity Polar Plot

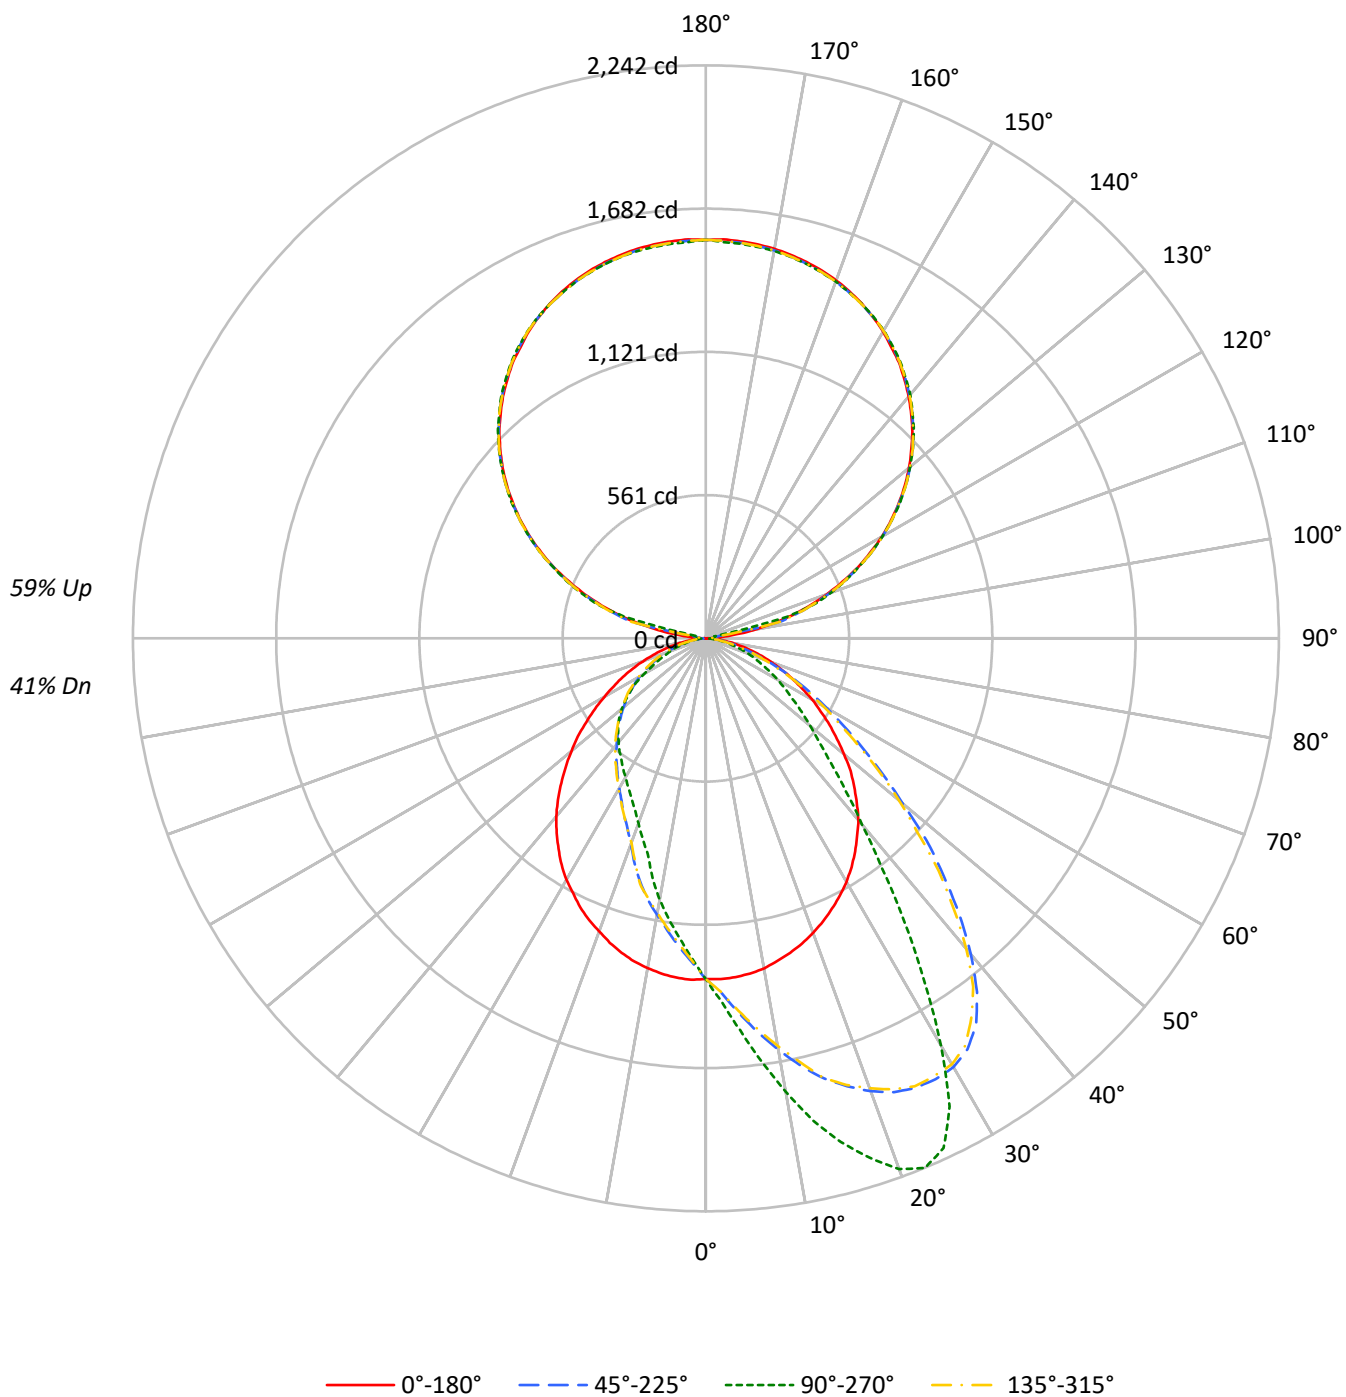

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41
2	88	81	75	70	80	74	69	65	61	58	54	49	47	45	38	37	35
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26
5	68	56	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21
7	58	46	38	33	53	42	35	31	35	30	26	29	25	22	23	20	18
8	54	42	34	29	49	38	32	27	32	27	24	27	23	20	21	19	17
9	50	38	31	26	45	35	29	24	30	25	21	25	21	18	20	17	15
10	47	35	28	23	42	32	26	22	27	22	19	23	19	16	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10867	10867	10867	10867
5°	10868	12280	10885	9386
10°	10810	14156	10801	8163
15°	10681	15932	10681	6834
20°	10547	17274	10491	6018
25°	10383	17348	10335	5436
30°	10207	14751	10128	5034
35°	9961	11130	9834	4736
40°	9685	8066	9495	4502
45°	9231	6131	9002	4296
50°	8692	4955	8453	3994
55°	8108	4103	7842	3591
60°	7521	3469	7185	2986
65°	6785	2826	6569	2374
70°	6108	2291	5823	1928
75°	5354	1652	4983	1413
80°	4417	1095	4018	1038
85°	3202	562	2656	562

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 13605 cd/sqm

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.0	1.6
10°-20°	389.7	4.8
20°-30°	610.5	7.4
30°-40°	677.9	8.3
40°-50°	600.7	7.3
50°-60°	468.1	5.7
60°-70°	306.2	3.7
70°-80°	150.3	1.8
80°-90°	39.8	0.5
90°-100°	51.8	0.6
100°-110°	340.9	4.2
110°-120°	650.9	7.9
120°-130°	826.3	10.1
130°-140°	883.9	10.8
140°-150°	826.5	10.1
150°-160°	666.5	8.1
160°-170°	429.9	5.2
170°-180°	148.2	1.8
0°-30°	1129.2	13.8
0°-40°	1807.1	22.0
0°-60°	2875.9	35.1
0°-90°	3372.2	41.1
90°-120°	1043.5	12.7
90°-150°	3580.2	43.7
90°-180°	4825.0	58.9
0°-180°	8197.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1333	1333	1333	1333	1333	
5°	1331	1540	1333	1177	1331	126
15°	1274	2040	1274	875	1274	359
25°	1167	2200	1162	690	1167	538
35°	1018	1355	1005	577	1018	636
45°	820	693	800	485	820	633
55°	591	414	571	362	591	528
65°	370	242	359	203	370	370
75°	186	112	173	96	186	197
85°	44	27	36	27	44	50
90°	4	35	4	35	4	6
95°	64	34	64	34	64	79
105°	351	332	351	332	351	367
115°	655	660	655	660	655	645
125°	921	928	921	928	921	823
135°	1143	1151	1143	1151	1143	881
145°	1318	1325	1318	1325	1318	823
155°	1445	1444	1445	1444	1445	666
165°	1524	1517	1524	1517	1524	431
175°	1559	1550	1559	1550	1559	148
180°	1559	1559	1559	1559	1559	

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7
2.5°	1334.9	1346.7	1353.1	1358.5	1369.2	1373.5	1382.1	1384.3	1392.9	1391.8	1388.6
5°	1330.6	1351.0	1366.0	1382.1	1401.5	1412.2	1424.0	1441.2	1449.8	1461.6	1469.1
7.5°	1323.1	1351.0	1375.7	1400.4	1431.5	1448.7	1463.8	1490.6	1513.2	1532.5	1554.0
10°	1311.3	1346.7	1383.2	1416.5	1459.5	1479.9	1502.4	1542.2	1573.3	1600.1	1634.5
12.5°	1293.0	1342.4	1383.2	1428.3	1483.1	1511.0	1541.1	1588.3	1624.8	1668.9	1711.8
15°	1273.7	1328.4	1382.1	1441.2	1503.5	1535.7	1565.8	1629.1	1685.0	1735.5	1782.7
17.5°	1252.2	1312.3	1371.4	1436.9	1512.1	1551.8	1587.3	1663.5	1724.7	1790.2	1837.5
20°	1226.4	1291.9	1359.6	1432.6	1517.5	1561.5	1601.2	1688.2	1755.9	1826.7	1885.8
22.5°	1198.5	1269.4	1343.5	1422.9	1511.0	1559.3	1605.5	1698.9	1777.3	1842.8	1922.3
25°	1167.4	1242.5	1318.8	1402.5	1501.3	1554.0	1601.2	1693.6	1777.3	1863.3	1940.6
27.5°	1135.1	1212.5	1291.9	1380.0	1480.9	1532.5	1586.2	1675.3	1773.0	1866.5	1944.9
30°	1099.7	1174.9	1258.6	1342.4	1449.8	1501.3	1556.1	1652.8	1759.1	1852.5	1937.4
32.5°	1061.0	1138.4	1217.8	1304.8	1410.1	1465.9	1516.4	1625.9	1734.4	1826.7	1906.2
35°	1018.1	1091.1	1166.3	1255.4	1359.6	1410.1	1470.2	1584.0	1693.6	1791.3	1842.8
37.5°	971.9	1041.7	1111.5	1199.6	1299.4	1360.7	1419.7	1534.6	1650.6	1716.1	1743.0
40°	928.9	990.2	1051.4	1136.2	1237.2	1300.5	1360.7	1479.9	1581.9	1632.4	1612.0
42.5°	874.2	937.5	992.3	1070.7	1172.7	1231.8	1293.0	1416.5	1499.2	1519.6	1469.1
45°	820.5	873.1	925.7	1002.0	1109.4	1159.8	1225.3	1340.3	1409.0	1390.7	1316.6
47.5°	767.9	810.8	860.2	934.3	1031.0	1091.1	1152.3	1252.2	1300.5	1274.7	1171.6
50°	705.6	748.5	800.1	864.5	957.9	1015.9	1064.3	1156.6	1193.1	1129.8	1005.2
52.5°	646.5	684.1	728.1	788.3	877.4	930.0	982.6	1062.1	1073.9	1000.9	869.9
55°	590.7	620.7	666.9	715.2	796.8	852.7	889.2	956.9	953.6	862.4	749.6
57.5°	532.7	560.6	591.7	642.2	719.5	761.4	801.1	860.2	829.1	751.7	640.1
60°	481.1	497.2	528.4	576.7	642.2	678.7	709.9	742.1	715.2	631.5	545.6
62.5°	424.2	442.5	465.0	503.7	561.7	596.0	618.6	632.5	604.6	540.2	461.8
65°	370.5	386.6	410.2	444.6	488.6	514.4	526.2	535.9	520.9	447.8	385.5
67.5°	322.2	332.9	354.4	376.9	424.2	430.6	446.8	451.0	421.0	365.1	315.7
70°	273.8	284.6	294.3	321.1	342.6	354.4	357.6	357.6	327.5	291.0	250.2
72.5°	228.7	235.2	244.9	263.1	274.9	283.5	287.8	282.4	254.5	224.4	194.4
75°	185.8	189.0	197.6	209.4	219.1	215.9	214.8	208.3	187.9	166.5	149.3
77.5°	142.8	145.0	154.6	157.9	157.9	161.1	156.8	150.3	133.2	117.1	109.5
80°	107.4	110.6	111.7	113.8	111.7	111.7	108.5	97.7	89.1	81.6	76.2
82.5°	74.1	76.2	77.3	74.1	76.2	73.0	67.7	60.1	54.8	53.7	51.5
85°	44.0	45.1	44.0	44.0	40.8	39.7	35.4	34.4	32.2	32.2	31.1
87.5°	21.5	20.4	18.3	16.1	16.1	15.0	16.1	14.0	16.1	15.0	14.0
90°	3.5	6.3	9.2	12.0	14.9	16.3	17.3	19.4	21.5	23.6	25.7
92.5°	17.5	17.0	16.5	16.0	15.5	15.2	16.2	18.3	20.4	22.4	24.5
95°	64.1	55.3	46.5	37.7	28.9	24.5	24.6	24.9	25.2	25.4	25.7
97.5°	122.5	128.2	133.9	139.6	145.3	148.1	134.5	107.3	80.1	52.9	25.7
100°	191.3	195.9	200.6	205.2	209.9	212.2	194.3	158.6	122.8	87.1	51.3
102.5°	268.2	271.3	274.4	277.5	280.6	282.2	283.8	286.9	290.0	293.1	296.2
105°	351.0	352.6	354.1	355.7	357.2	358.0	358.7	360.0	361.3	362.6	363.9
107.5°	426.8	427.6	428.4	429.1	429.9	430.3	431.2	433.0	434.9	436.7	438.5
110°	503.8	504.6	505.4	506.1	506.9	507.3	508.1	509.6	511.2	512.7	514.3

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	578.4	580.0	581.5	583.1	584.6	585.4	585.7	586.2	586.7	587.3	587.8
115°	655.4	656.2	657.0	657.7	658.5	658.9	658.8	658.5	658.2	658.0	657.7
117.5°	724.2	725.2	726.3	727.3	728.4	728.9	729.3	730.1	730.8	731.6	732.4
120°	794.2	795.2	796.3	797.3	798.4	798.9	798.8	798.5	798.2	798.0	797.7
122.5°	859.5	860.0	860.5	861.0	861.5	861.8	862.1	862.6	863.1	863.7	864.2
125°	921.3	922.3	923.4	924.4	925.5	926.0	925.7	925.2	924.7	924.1	923.6
127.5°	980.8	981.0	981.3	981.5	981.8	981.9	982.6	983.9	985.2	986.5	987.8
130°	1037.9	1038.2	1038.4	1038.7	1039.0	1039.1	1039.5	1040.3	1041.0	1041.8	1042.6
132.5°	1090.4	1090.9	1091.4	1091.9	1092.4	1092.7	1093.2	1094.3	1095.3	1096.4	1097.4
135°	1142.9	1142.6	1142.4	1142.1	1141.8	1141.7	1142.2	1143.3	1144.3	1145.4	1146.4
137.5°	1189.5	1189.5	1189.5	1189.5	1189.5	1189.5	1190.2	1191.5	1192.8	1194.1	1195.4
140°	1235.0	1235.5	1236.0	1236.5	1237.0	1237.3	1237.6	1238.1	1238.6	1239.2	1239.7
142.5°	1275.8	1276.8	1277.9	1278.9	1280.0	1280.5	1280.6	1280.9	1281.2	1281.4	1281.7
145°	1317.8	1318.6	1319.4	1320.1	1320.9	1321.3	1321.3	1321.3	1321.3	1321.3	1321.3
147.5°	1350.5	1352.1	1353.6	1355.2	1356.7	1357.5	1357.4	1357.1	1356.8	1356.6	1356.3
150°	1386.6	1387.6	1388.7	1389.7	1390.8	1391.3	1391.2	1390.9	1390.6	1390.4	1390.1
152.5°	1416.9	1417.7	1418.5	1419.2	1420.0	1420.4	1420.1	1419.6	1419.1	1418.6	1418.1
155°	1444.9	1445.2	1445.4	1445.7	1446.0	1446.1	1445.7	1444.9	1444.2	1443.4	1442.6
157.5°	1469.4	1469.4	1469.4	1469.4	1469.4	1469.4	1468.9	1467.9	1466.8	1465.8	1464.8
160°	1490.4	1489.6	1488.8	1488.1	1487.3	1486.9	1486.8	1486.5	1486.2	1486.0	1485.7
162.5°	1509.1	1508.1	1507.0	1506.0	1504.9	1504.4	1504.3	1504.0	1503.7	1503.5	1503.2
165°	1524.2	1522.9	1521.6	1520.3	1519.0	1518.4	1518.4	1518.4	1518.4	1518.4	1518.4
167.5°	1537.1	1535.8	1534.5	1533.2	1531.9	1531.2	1531.1	1530.8	1530.6	1530.3	1530.1
170°	1547.6	1546.0	1544.5	1542.9	1541.4	1540.6	1540.7	1541.0	1541.2	1541.5	1541.7
172.5°	1554.6	1553.0	1551.5	1549.9	1548.4	1547.6	1547.7	1548.0	1548.2	1548.5	1548.7
175°	1559.2	1557.6	1556.1	1554.5	1553.0	1552.2	1552.3	1552.6	1552.9	1553.1	1553.4
177.5°	1562.7	1560.9	1559.1	1557.3	1555.5	1554.6	1554.9	1555.4	1555.9	1556.4	1556.9
180°	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7
2.5°	1397.2	1409.0	1410.1	1420.8	1417.6	1412.2	1421.9	1415.4	1428.3	1424.0	1429.4
5°	1478.8	1494.9	1508.9	1517.5	1532.5	1529.3	1545.4	1540.0	1551.8	1540.0	1555.0
7.5°	1574.4	1601.2	1615.2	1637.7	1644.2	1645.2	1664.6	1668.9	1676.4	1668.9	1677.5
10°	1667.8	1700.0	1732.2	1750.5	1762.3	1778.4	1795.6	1803.1	1808.5	1801.0	1806.3
12.5°	1752.6	1803.1	1838.6	1875.1	1883.7	1897.6	1915.9	1913.7	1935.2	1930.9	1940.6
15°	1831.0	1886.9	1929.8	1958.8	1982.5	1994.3	2028.6	2030.8	2029.7	2040.4	2034.0
17.5°	1900.8	1948.1	2009.3	2046.9	2075.9	2075.9	2095.2	2135.0	2131.7	2130.7	2137.1
20°	1957.8	2011.5	2068.4	2131.7	2155.4	2159.7	2186.5	2206.9	2210.1	2210.1	2210.1
22.5°	2000.7	2064.1	2125.3	2170.4	2188.7	2203.7	2227.3	2240.2	2244.5	2242.3	2244.5
25°	2022.2	2082.3	2144.6	2185.4	2196.2	2204.8	2206.9	2214.4	2213.4	2200.5	2208.0
27.5°	2026.5	2084.5	2125.3	2136.0	2130.7	2125.3	2090.9	2094.1	2084.5	2065.1	2072.7
30°	2007.2	2038.3	2037.2	2003.9	1994.3	1971.7	1940.6	1894.4	1856.8	1840.7	1846.1
32.5°	1937.4	1937.4	1898.7	1823.5	1790.2	1749.4	1693.6	1651.7	1602.3	1591.6	1612.0
35°	1840.7	1785.9	1715.1	1616.3	1565.8	1535.7	1439.1	1409.0	1367.1	1355.3	1365.0
37.5°	1690.4	1599.1	1496.0	1403.6	1360.7	1307.0	1222.1	1179.2	1149.1	1128.7	1138.4
40°	1521.7	1411.1	1303.7	1189.9	1142.7	1098.6	1035.3	996.6	948.3	950.4	953.6
42.5°	1360.7	1230.7	1110.4	1005.2	960.1	923.6	879.5	832.3	815.1	809.7	804.4
45°	1189.9	1051.4	938.6	860.2	819.4	785.0	744.2	717.4	697.0	692.7	698.0
47.5°	1028.8	911.8	804.4	731.3	698.0	680.9	648.6	623.9	611.1	600.3	606.8
50°	882.8	773.2	687.3	626.1	602.5	590.7	560.6	547.7	534.8	531.6	530.5
52.5°	762.5	669.1	595.0	545.6	527.3	520.9	498.3	480.0	469.3	472.5	474.7
55°	652.9	573.5	515.5	475.7	460.7	453.2	437.1	424.2	416.7	413.5	415.6
57.5°	556.3	487.6	445.7	413.5	401.6	398.4	381.2	376.9	371.6	368.4	368.4
60°	468.2	419.9	381.2	363.0	350.1	346.9	334.0	328.6	327.5	324.3	322.2
62.5°	394.1	354.4	327.5	308.2	302.8	301.8	293.2	286.7	283.5	281.4	281.4
65°	329.7	300.7	278.1	264.2	259.9	257.7	248.1	245.9	243.8	241.6	240.6
67.5°	274.9	249.1	233.0	223.4	218.0	219.1	213.7	209.4	209.4	208.3	207.3
70°	222.3	206.2	192.2	186.9	184.7	182.6	180.4	177.2	176.1	176.1	176.1
72.5°	175.0	164.3	156.8	153.6	151.4	149.3	147.1	147.1	147.1	146.1	146.1
75°	134.2	129.9	124.6	121.4	121.4	123.5	120.3	117.1	113.8	111.7	112.8
77.5°	100.9	98.8	95.6	90.2	91.3	89.1	89.1	87.0	88.1	88.1	85.9
80°	74.1	70.9	69.8	66.6	67.7	66.6	65.5	65.5	63.4	63.4	63.4
82.5°	51.5	48.3	48.3	47.3	46.2	46.2	45.1	45.1	46.2	44.0	44.0
85°	31.1	30.1	30.1	27.9	27.9	27.9	27.9	29.0	27.9	26.8	26.8
87.5°	14.0	15.0	14.0	12.9	12.9	12.9	11.8	11.8	10.7	11.8	11.8
90°	27.3	28.8	30.4	31.9	32.7	33.0	33.5	34.0	34.5	35.0	34.5
92.5°	26.1	27.6	29.2	30.7	31.5	31.5	31.5	31.5	31.5	31.5	31.5
95°	27.3	28.8	30.4	31.9	32.7	32.8	33.1	33.3	33.6	33.8	33.6
97.5°	27.0	28.3	29.6	30.9	31.5	31.6	31.9	32.2	32.4	32.7	32.4
100°	46.9	42.5	38.1	33.7	31.5	31.6	31.9	32.2	32.4	32.7	32.4
102.5°	237.9	179.6	121.3	63.0	33.8	33.8	33.8	33.8	33.8	33.8	33.8
105°	366.2	368.6	370.9	373.2	374.4	369.7	360.4	351.1	341.7	332.4	341.7
107.5°	439.8	441.1	442.4	443.7	444.3	444.8	445.9	446.9	448.0	449.0	448.0
110°	514.8	515.3	515.8	516.3	516.6	517.0	517.8	518.5	519.3	520.1	519.3

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	587.5	587.3	587.0	586.7	586.6	587.1	588.2	589.2	590.3	591.3	590.3
115°	658.2	658.8	659.3	659.8	660.1	660.1	660.1	660.1	660.1	660.1	660.1
117.5°	732.1	731.9	731.6	731.3	731.2	731.2	731.2	731.2	731.2	731.2	731.2
120°	798.2	798.7	799.2	799.7	800.0	799.7	799.2	798.7	798.2	797.7	798.2
122.5°	864.4	864.7	864.9	865.2	865.3	865.0	864.5	864.0	863.5	863.0	863.5
125°	924.4	925.2	925.9	926.7	927.1	927.2	927.5	927.8	928.0	928.3	928.0
127.5°	987.5	987.3	987.0	986.7	986.6	986.5	986.2	985.9	985.7	985.4	985.7
130°	1042.9	1043.1	1043.4	1043.7	1043.8	1043.8	1043.8	1043.8	1043.8	1043.8	1043.8
132.5°	1097.7	1097.9	1098.2	1098.5	1098.6	1098.5	1098.2	1097.9	1097.7	1097.4	1097.7
135°	1146.9	1147.4	1147.9	1148.4	1148.7	1149.0	1149.5	1150.0	1150.5	1151.0	1150.5
137.5°	1195.9	1196.4	1196.9	1197.4	1197.7	1197.6	1197.3	1197.0	1196.8	1196.5	1196.8
140°	1240.5	1241.3	1242.0	1242.8	1243.2	1243.3	1243.6	1243.8	1244.1	1244.3	1244.1
142.5°	1282.2	1282.7	1283.2	1283.7	1284.0	1284.0	1284.0	1284.0	1284.0	1284.0	1284.0
145°	1321.6	1321.8	1322.1	1322.4	1322.5	1322.8	1323.3	1323.8	1324.3	1324.8	1324.3
147.5°	1356.6	1356.8	1357.1	1357.4	1357.5	1357.6	1357.9	1358.1	1358.4	1358.6	1358.4
150°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.2	1390.5	1390.8	1391.0	1391.3	1391.0
152.5°	1418.6	1419.1	1419.6	1420.1	1420.4	1420.3	1420.0	1419.8	1419.5	1419.3	1419.5
155°	1443.6	1444.7	1445.7	1446.8	1447.3	1446.9	1446.1	1445.4	1444.6	1443.8	1444.6
157.5°	1466.1	1467.4	1468.7	1470.0	1470.6	1470.0	1468.7	1467.4	1466.1	1464.8	1466.1
160°	1487.3	1488.8	1490.4	1491.9	1492.7	1491.9	1490.4	1488.8	1487.3	1485.7	1487.3
162.5°	1504.8	1506.3	1507.9	1509.4	1510.2	1509.3	1507.5	1505.7	1503.9	1502.1	1503.9
165°	1520.5	1522.5	1524.6	1526.7	1527.7	1526.5	1524.2	1521.9	1519.5	1517.2	1519.5
167.5°	1532.4	1534.8	1537.1	1539.4	1540.6	1539.3	1536.7	1534.1	1531.5	1528.9	1531.5
170°	1543.8	1545.9	1548.0	1550.1	1551.1	1549.8	1547.2	1544.6	1542.0	1539.4	1542.0
172.5°	1550.8	1552.9	1555.0	1557.1	1558.1	1556.7	1553.8	1550.9	1548.1	1545.2	1548.1
175°	1555.7	1558.1	1560.4	1562.7	1563.9	1562.3	1559.2	1556.1	1553.0	1549.9	1553.0
177.5°	1559.0	1561.0	1563.1	1565.2	1566.2	1564.6	1561.5	1558.4	1555.3	1552.2	1555.3
180°	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7
2.5°	1432.6	1425.1	1424.0	1424.0	1412.2	1418.6	1405.8	1391.8	1385.4	1385.4	1373.5
5°	1551.8	1544.3	1536.8	1525.0	1525.0	1518.5	1498.1	1477.7	1462.7	1449.8	1435.8
7.5°	1674.2	1666.7	1645.2	1633.4	1639.9	1627.0	1600.1	1565.8	1540.0	1519.6	1490.6
10°	1807.4	1787.0	1776.3	1769.8	1747.3	1733.3	1702.2	1651.7	1619.5	1592.6	1555.0
12.5°	1915.9	1922.3	1881.5	1884.7	1862.2	1842.8	1794.5	1746.2	1697.9	1660.3	1604.4
15°	2032.9	2013.6	1988.9	1969.6	1962.1	1938.4	1897.6	1833.2	1780.6	1721.5	1658.1
17.5°	2125.3	2110.3	2086.6	2068.4	2052.3	1995.3	1961.0	1904.1	1832.1	1774.1	1696.8
20°	2203.7	2189.7	2156.4	2144.6	2115.6	2074.8	2025.4	1937.4	1872.9	1809.6	1734.4
22.5°	2237.0	2223.0	2194.0	2179.0	2160.7	2121.0	2073.7	1990.0	1910.5	1831.0	1751.6
25°	2209.1	2209.1	2195.1	2189.7	2173.6	2138.2	2089.9	2019.0	1934.1	1848.2	1753.7
27.5°	2073.7	2100.6	2110.3	2115.6	2115.6	2116.7	2083.4	2014.7	1932.0	1848.2	1749.4
30°	1878.3	1923.4	1963.1	1974.9	1995.3	2017.9	2031.9	1998.6	1924.5	1836.4	1737.6
32.5°	1632.4	1690.4	1764.5	1782.7	1810.6	1878.3	1915.9	1929.8	1889.0	1811.7	1706.5
35°	1387.5	1460.5	1505.6	1561.5	1587.3	1687.1	1770.9	1821.4	1811.7	1765.5	1669.9
37.5°	1173.8	1215.7	1270.4	1329.5	1381.1	1476.6	1580.8	1678.5	1718.3	1695.7	1623.8
40°	968.7	1018.1	1083.6	1131.9	1167.4	1262.9	1391.8	1498.1	1585.1	1599.1	1555.0
42.5°	823.7	873.1	912.8	965.5	993.4	1085.7	1199.6	1332.7	1435.8	1490.6	1471.3
45°	712.0	742.1	774.3	804.4	838.7	920.4	1025.6	1171.6	1287.6	1365.0	1372.5
47.5°	614.3	641.1	669.1	697.0	716.3	779.7	876.3	995.5	1122.2	1228.6	1270.4
50°	545.6	558.4	578.8	595.0	617.5	672.3	749.6	852.7	986.9	1101.8	1156.6
52.5°	477.9	494.0	510.1	524.1	539.1	577.8	648.6	737.8	853.8	971.9	1039.6
55°	421.0	433.9	448.9	458.6	467.2	501.5	555.2	623.9	723.8	835.5	919.3
57.5°	374.8	380.2	393.1	398.4	408.1	436.0	474.7	535.9	616.4	724.9	793.6
60°	324.3	335.1	344.7	349.0	356.5	375.9	402.7	459.6	529.4	608.9	687.3
62.5°	283.5	287.8	295.3	300.7	306.1	326.5	349.0	392.0	444.6	511.2	583.1
65°	245.9	248.1	252.4	259.9	263.1	278.1	291.0	322.2	371.6	422.1	494.0
67.5°	207.3	209.4	214.8	219.1	222.3	232.0	245.9	268.5	295.3	351.2	390.9
70°	177.2	177.2	180.4	182.6	185.8	190.1	197.6	214.8	239.5	274.9	311.4
72.5°	148.2	148.2	148.2	151.4	151.4	154.6	158.9	170.8	187.9	215.9	239.5
75°	114.9	116.0	118.1	118.1	119.2	123.5	126.7	129.9	138.5	156.8	178.3
77.5°	87.0	89.1	90.2	88.1	90.2	90.2	94.5	98.8	103.1	108.5	124.6
80°	64.4	65.5	63.4	64.4	64.4	66.6	68.7	67.7	69.8	76.2	80.5
82.5°	43.0	44.0	44.0	44.0	44.0	47.3	47.3	46.2	47.3	48.3	49.4
85°	26.8	25.8	25.8	26.8	25.8	25.8	26.8	27.9	26.8	27.9	29.0
87.5°	11.8	11.8	11.8	11.8	10.7	10.7	11.8	10.7	11.8	10.7	9.7
90°	34.0	33.5	33.0	32.7	31.9	30.4	28.8	27.3	25.7	23.6	21.5
92.5°	31.5	31.5	31.5	31.5	30.7	29.2	27.6	26.1	24.5	22.4	20.4
95°	33.3	33.1	32.8	32.7	31.9	30.4	28.8	27.3	25.7	25.4	25.2
97.5°	32.2	31.9	31.6	31.5	30.9	29.6	28.3	27.0	25.7	52.9	80.1
100°	32.2	31.9	31.6	31.5	33.7	38.1	42.5	46.9	51.3	87.1	122.8
102.5°	33.8	33.8	33.8	33.8	63.0	121.3	179.6	237.9	296.2	293.1	290.0
105°	351.1	360.4	369.7	374.4	373.2	370.9	368.6	366.2	363.9	362.6	361.3
107.5°	446.9	445.9	444.8	444.3	443.7	442.4	441.1	439.8	438.5	436.7	434.9
110°	518.5	517.8	517.0	516.6	516.3	515.8	515.3	514.8	514.3	512.7	511.2

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	589.2	588.2	587.1	586.6	586.7	587.0	587.3	587.5	587.8	587.3	586.7
115°	660.1	660.1	660.1	660.1	659.8	659.3	658.8	658.2	657.7	658.0	658.2
117.5°	731.2	731.2	731.2	731.2	731.3	731.6	731.9	732.1	732.4	731.6	730.8
120°	798.7	799.2	799.7	800.0	799.7	799.2	798.7	798.2	797.7	798.0	798.2
122.5°	864.0	864.5	865.0	865.3	865.2	864.9	864.7	864.4	864.2	863.7	863.1
125°	927.8	927.5	927.2	927.1	926.7	925.9	925.2	924.4	923.6	924.1	924.7
127.5°	985.9	986.2	986.5	986.6	986.7	987.0	987.3	987.5	987.8	986.5	985.2
130°	1043.8	1043.8	1043.8	1043.8	1043.7	1043.4	1043.1	1042.9	1042.6	1041.8	1041.0
132.5°	1097.9	1098.2	1098.5	1098.6	1098.5	1098.2	1097.9	1097.7	1097.4	1096.4	1095.3
135°	1150.0	1149.5	1149.0	1148.7	1148.4	1147.9	1147.4	1146.9	1146.4	1145.4	1144.3
137.5°	1197.0	1197.3	1197.6	1197.7	1197.4	1196.9	1196.4	1195.9	1195.4	1194.1	1192.8
140°	1243.8	1243.6	1243.3	1243.2	1242.8	1242.0	1241.3	1240.5	1239.7	1239.2	1238.6
142.5°	1284.0	1284.0	1284.0	1284.0	1283.7	1283.2	1282.7	1282.2	1281.7	1281.4	1281.2
145°	1323.8	1323.3	1322.8	1322.5	1322.4	1322.1	1321.8	1321.6	1321.3	1321.3	1321.3
147.5°	1358.1	1357.9	1357.6	1357.5	1357.4	1357.1	1356.8	1356.6	1356.3	1356.6	1356.8
150°	1390.8	1390.5	1390.2	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.4	1390.6
152.5°	1419.8	1420.0	1420.3	1420.4	1420.1	1419.6	1419.1	1418.6	1418.1	1418.6	1419.1
155°	1445.4	1446.1	1446.9	1447.3	1446.8	1445.7	1444.7	1443.6	1442.6	1443.4	1444.2
157.5°	1467.4	1468.7	1470.0	1470.6	1470.0	1468.7	1467.4	1466.1	1464.8	1465.8	1466.8
160°	1488.8	1490.4	1491.9	1492.7	1491.9	1490.4	1488.8	1487.3	1485.7	1486.0	1486.2
162.5°	1505.7	1507.5	1509.3	1510.2	1509.4	1507.9	1506.3	1504.8	1503.2	1503.5	1503.7
165°	1521.9	1524.2	1526.5	1527.7	1526.7	1524.6	1522.5	1520.5	1518.4	1518.4	1518.4
167.5°	1534.1	1536.7	1539.3	1540.6	1539.4	1537.1	1534.8	1532.4	1530.1	1530.3	1530.6
170°	1544.6	1547.2	1549.8	1551.1	1550.1	1548.0	1545.9	1543.8	1541.7	1541.5	1541.2
172.5°	1550.9	1553.8	1556.7	1558.1	1557.1	1555.0	1552.9	1550.8	1548.7	1548.5	1548.2
175°	1556.1	1559.2	1562.3	1563.9	1562.7	1560.4	1558.1	1555.7	1553.4	1553.1	1552.9
177.5°	1558.4	1561.5	1564.6	1566.2	1565.2	1563.1	1561.0	1559.0	1556.9	1556.4	1555.9
180°	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7
2.5°	1367.1	1361.7	1358.5	1357.4	1347.8	1342.4	1339.2	1337.0	1333.8	1325.2	1317.7
5°	1418.6	1403.6	1396.1	1387.5	1372.5	1355.3	1341.3	1332.7	1322.0	1304.8	1288.7
7.5°	1467.0	1444.4	1429.4	1417.6	1391.8	1363.9	1341.3	1323.1	1302.7	1279.0	1256.5
10°	1517.5	1480.9	1461.6	1443.3	1405.8	1369.2	1337.0	1310.2	1281.2	1250.0	1225.3
12.5°	1557.2	1508.9	1487.4	1461.6	1415.4	1372.5	1331.7	1295.1	1257.6	1224.3	1188.8
15°	1603.4	1543.2	1518.5	1485.2	1421.9	1366.0	1313.4	1273.7	1235.0	1185.6	1148.0
17.5°	1630.2	1560.4	1525.0	1496.0	1427.2	1359.6	1298.4	1249.0	1203.9	1154.5	1114.7
20°	1657.1	1577.6	1537.9	1497.0	1415.4	1343.5	1279.0	1220.0	1172.7	1119.0	1078.2
22.5°	1665.7	1573.3	1531.4	1493.8	1407.9	1327.4	1253.3	1193.1	1138.4	1084.7	1038.5
25°	1665.7	1572.2	1522.8	1474.5	1384.3	1301.6	1227.5	1162.0	1100.8	1047.1	1000.9
27.5°	1648.5	1550.7	1499.2	1455.2	1361.7	1272.6	1196.3	1124.4	1065.3	1011.6	959.0
30°	1627.0	1519.6	1468.0	1415.4	1325.2	1240.4	1157.7	1091.1	1028.8	967.6	920.4
32.5°	1600.1	1486.3	1429.4	1375.7	1280.1	1192.1	1115.8	1050.3	991.2	927.9	875.2
35°	1561.5	1436.9	1373.5	1326.3	1233.9	1142.7	1069.6	1005.2	948.3	882.8	825.8
37.5°	1512.1	1391.8	1327.4	1269.4	1173.8	1090.0	1021.3	959.0	903.2	843.0	779.7
40°	1454.1	1328.4	1272.6	1211.4	1110.4	1031.0	966.5	910.7	854.8	797.9	736.7
42.5°	1388.6	1264.0	1201.7	1142.7	1046.0	967.6	907.5	857.0	805.4	752.8	687.3
45°	1310.2	1193.1	1133.0	1077.1	983.7	903.2	848.4	800.1	756.0	702.3	644.4
47.5°	1222.1	1120.1	1058.9	998.7	907.5	837.7	784.0	743.2	705.6	651.9	599.2
50°	1136.2	1035.3	985.9	924.6	840.9	775.4	720.6	686.2	657.2	604.6	557.4
52.5°	1027.7	951.5	904.2	851.6	771.1	704.5	661.5	631.5	597.1	556.3	514.4
55°	932.2	861.3	823.7	774.3	694.8	635.8	599.2	571.3	544.5	508.0	474.7
57.5°	823.7	779.7	742.1	699.1	620.7	570.3	538.0	514.4	489.7	459.6	432.8
60°	709.9	689.5	652.9	618.6	552.0	508.0	481.1	459.6	436.0	411.3	388.8
62.5°	608.9	597.1	575.6	548.8	486.5	448.9	422.1	405.9	388.8	366.2	344.7
65°	513.3	508.0	487.6	468.2	425.3	392.0	368.4	358.7	339.4	322.2	302.8
67.5°	428.5	422.1	410.2	401.6	365.1	334.0	322.2	309.3	293.2	280.3	264.2
70°	342.6	341.5	334.0	323.3	303.9	281.4	269.6	261.0	244.9	235.2	223.4
72.5°	266.3	271.7	265.3	261.0	248.1	232.0	221.2	215.9	203.0	195.5	186.9
75°	198.7	203.0	206.2	198.7	195.5	187.9	178.3	172.9	166.5	155.7	152.5
77.5°	135.3	145.0	145.0	147.1	148.2	143.9	136.4	132.1	124.6	122.4	118.1
80°	89.1	97.7	98.8	100.9	104.2	104.2	98.8	97.7	90.2	89.1	85.9
82.5°	51.5	59.1	63.4	66.6	65.5	69.8	65.5	64.4	60.1	60.1	58.0
85°	27.9	29.0	31.1	33.3	35.4	37.6	37.6	36.5	35.4	34.4	32.2
87.5°	10.7	10.7	11.8	10.7	11.8	14.0	15.0	15.0	14.0	12.9	10.7
90°	19.4	17.3	16.3	14.9	12.0	9.2	6.3	3.5	6.3	9.2	12.0
92.5°	18.3	16.2	15.2	15.5	16.0	16.5	17.0	17.5	17.0	16.5	16.0
95°	24.9	24.6	24.5	28.9	37.7	46.5	55.3	64.1	55.3	46.5	37.7
97.5°	107.3	134.5	148.1	145.3	139.6	133.9	128.2	122.5	128.2	133.9	139.6
100°	158.6	194.3	212.2	209.9	205.2	200.6	195.9	191.3	195.9	200.6	205.2
102.5°	286.9	283.8	282.2	280.6	277.5	274.4	271.3	268.2	271.3	274.4	277.5
105°	360.0	358.7	358.0	357.2	355.7	354.1	352.6	351.0	352.6	354.1	355.7
107.5°	433.0	431.2	430.3	429.9	429.1	428.4	427.6	426.8	427.6	428.4	429.1
110°	509.6	508.1	507.3	506.9	506.1	505.4	504.6	503.8	504.6	505.4	506.1

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	586.2	585.7	585.4	584.6	583.1	581.5	580.0	578.4	580.0	581.5	583.1
115°	658.5	658.8	658.9	658.5	657.7	657.0	656.2	655.4	656.2	657.0	657.7
117.5°	730.1	729.3	728.9	728.4	727.3	726.3	725.2	724.2	725.2	726.3	727.3
120°	798.5	798.8	798.9	798.4	797.3	796.3	795.2	794.2	795.2	796.3	797.3
122.5°	862.6	862.1	861.8	861.5	861.0	860.5	860.0	859.5	860.0	860.5	861.0
125°	925.2	925.7	926.0	925.5	924.4	923.4	922.3	921.3	922.3	923.4	924.4
127.5°	983.9	982.6	981.9	981.8	981.5	981.3	981.0	980.8	981.0	981.3	981.5
130°	1040.3	1039.5	1039.1	1039.0	1038.7	1038.4	1038.2	1037.9	1038.2	1038.4	1038.7
132.5°	1094.3	1093.2	1092.7	1092.4	1091.9	1091.4	1090.9	1090.4	1090.9	1091.4	1091.9
135°	1143.3	1142.2	1141.7	1141.8	1142.1	1142.4	1142.6	1142.9	1142.6	1142.4	1142.1
137.5°	1191.5	1190.2	1189.5	1189.5	1189.5	1189.5	1189.5	1189.5	1189.5	1189.5	1189.5
140°	1238.1	1237.6	1237.3	1237.0	1236.5	1236.0	1235.5	1235.0	1235.5	1236.0	1236.5
142.5°	1280.9	1280.6	1280.5	1280.0	1278.9	1277.9	1276.8	1275.8	1276.8	1277.9	1278.9
145°	1321.3	1321.3	1321.3	1320.9	1320.1	1319.4	1318.6	1317.8	1318.6	1319.4	1320.1
147.5°	1357.1	1357.4	1357.5	1356.7	1355.2	1353.6	1352.1	1350.5	1352.1	1353.6	1355.2
150°	1390.9	1391.2	1391.3	1390.8	1389.7	1388.7	1387.6	1386.6	1387.6	1388.7	1389.7
152.5°	1419.6	1420.1	1420.4	1420.0	1419.2	1418.5	1417.7	1416.9	1417.7	1418.5	1419.2
155°	1444.9	1445.7	1446.1	1446.0	1445.7	1445.4	1445.2	1444.9	1445.2	1445.4	1445.7
157.5°	1467.9	1468.9	1469.4	1469.4	1469.4	1469.4	1469.4	1469.4	1469.4	1469.4	1469.4
160°	1486.5	1486.8	1486.9	1487.3	1488.1	1488.8	1489.6	1490.4	1489.6	1488.8	1488.1
162.5°	1504.0	1504.3	1504.4	1504.9	1506.0	1507.0	1508.1	1509.1	1508.1	1507.0	1506.0
165°	1518.4	1518.4	1518.4	1519.0	1520.3	1521.6	1522.9	1524.2	1522.9	1521.6	1520.3
167.5°	1530.8	1531.1	1531.2	1531.9	1533.2	1534.5	1535.8	1537.1	1535.8	1534.5	1533.2
170°	1541.0	1540.7	1540.6	1541.4	1542.9	1544.5	1546.0	1547.6	1546.0	1544.5	1542.9
172.5°	1548.0	1547.7	1547.6	1548.4	1549.9	1551.5	1553.0	1554.6	1553.0	1551.5	1549.9
175°	1552.6	1552.3	1552.2	1553.0	1554.5	1556.1	1557.6	1559.2	1557.6	1556.1	1554.5
177.5°	1555.4	1554.9	1554.6	1555.5	1557.3	1559.1	1560.9	1562.7	1560.9	1559.1	1557.3
180°	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7
2.5°	1311.3	1309.1	1307.0	1298.4	1290.9	1278.0	1267.2	1262.9	1261.9	1262.9	1259.7
5°	1273.7	1272.6	1265.1	1250.0	1236.1	1221.0	1210.3	1199.6	1193.1	1193.1	1185.6
7.5°	1238.2	1230.7	1224.3	1204.9	1188.8	1168.4	1152.3	1142.7	1137.3	1125.5	1125.5
10°	1200.6	1189.9	1181.3	1163.1	1139.4	1119.0	1098.6	1086.8	1077.1	1068.6	1065.3
12.5°	1163.1	1154.5	1138.4	1119.0	1095.4	1069.6	1048.1	1039.6	1017.0	998.7	999.8
15°	1127.6	1108.3	1100.8	1072.8	1044.9	1020.2	989.1	964.4	946.1	934.3	919.3
17.5°	1087.9	1068.6	1054.6	1031.0	994.5	955.8	925.7	892.4	874.2	853.8	844.1
20°	1043.9	1027.7	1017.0	979.4	935.4	889.2	855.9	835.5	815.1	800.1	791.5
22.5°	1006.3	985.9	973.0	922.5	874.2	828.0	802.2	785.0	767.9	755.0	750.7
25°	957.9	946.1	915.0	870.9	811.9	780.7	758.2	735.6	726.0	717.4	707.7
27.5°	918.2	889.2	867.7	809.7	773.2	737.8	715.2	698.0	686.2	677.6	670.1
30°	868.8	842.0	811.9	763.6	730.3	697.0	676.6	662.6	649.7	644.4	637.9
32.5°	817.3	792.6	763.6	724.9	684.1	658.3	642.2	627.2	618.6	613.2	605.7
35°	771.1	739.9	720.6	684.1	650.8	621.8	606.8	593.9	584.2	582.1	581.0
37.5°	721.7	698.0	679.8	642.2	614.3	589.6	575.6	561.7	556.3	555.2	550.9
40°	678.7	658.3	641.1	605.7	575.6	553.1	542.3	533.7	528.4	528.4	527.3
42.5°	641.1	619.7	602.5	570.3	543.4	523.0	511.2	502.6	500.4	501.5	500.4
45°	599.2	581.0	563.8	530.5	508.0	492.9	480.0	475.7	472.5	473.6	474.7
47.5°	559.5	544.5	527.3	500.4	474.7	458.6	451.0	446.8	446.8	446.8	448.9
50°	524.1	506.9	491.9	463.9	440.3	427.4	421.0	415.6	416.7	417.8	418.8
52.5°	482.2	467.2	456.4	428.5	411.3	395.2	387.7	388.8	387.7	387.7	389.8
55°	445.7	430.6	419.9	394.1	376.9	366.2	359.8	356.5	357.6	355.5	359.8
57.5°	404.9	392.0	384.5	359.8	344.7	335.1	329.7	324.3	326.5	325.4	324.3
60°	369.4	354.4	342.6	325.4	312.5	300.7	297.5	292.1	294.3	292.1	291.0
62.5°	328.6	316.8	308.2	291.0	280.3	270.6	263.1	259.9	258.8	255.6	252.4
65°	287.8	281.4	272.8	255.6	244.9	237.3	233.0	229.8	228.7	220.2	210.5
67.5°	250.2	245.9	237.3	224.4	214.8	207.3	200.8	195.5	189.0	182.6	177.2
70°	214.8	208.3	203.0	191.2	182.6	175.0	168.6	162.2	158.9	152.5	150.3
72.5°	180.4	174.0	168.6	157.9	150.3	142.8	140.7	133.2	129.9	128.9	128.9
75°	145.0	139.6	136.4	126.7	120.3	114.9	111.7	109.5	107.4	105.2	102.0
77.5°	110.6	107.4	105.2	98.8	93.4	90.2	89.1	81.6	79.5	77.3	75.2
80°	80.5	79.5	77.3	72.0	69.8	62.3	62.3	60.1	59.1	59.1	59.1
82.5°	54.8	52.6	51.5	46.2	45.1	44.0	43.0	41.9	43.0	41.9	43.0
85°	29.0	27.9	26.8	26.8	26.8	26.8	26.8	26.8	26.8	25.8	26.8
87.5°	10.7	10.7	10.7	10.7	9.7	10.7	10.7	9.7	10.7	10.7	10.7
90°	14.9	16.3	17.3	19.4	21.5	23.6	25.7	27.3	28.8	30.4	31.9
92.5°	15.5	15.2	16.2	18.3	20.4	22.4	24.5	26.1	27.6	29.2	30.7
95°	28.9	24.5	24.6	24.9	25.2	25.4	25.7	27.3	28.8	30.4	31.9
97.5°	145.3	148.1	134.5	107.3	80.1	52.9	25.7	27.0	28.3	29.6	30.9
100°	209.9	212.2	194.3	158.6	122.8	87.1	51.3	46.9	42.5	38.1	33.7
102.5°	280.6	282.2	283.8	286.9	290.0	293.1	296.2	237.9	179.6	121.3	63.0
105°	357.2	358.0	358.7	360.0	361.3	362.6	363.9	366.2	368.6	370.9	373.2
107.5°	429.9	430.3	431.2	433.0	434.9	436.7	438.5	439.8	441.1	442.4	443.7
110°	506.9	507.3	508.1	509.6	511.2	512.7	514.3	514.8	515.3	515.8	516.3

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	584.6	585.4	585.7	586.2	586.7	587.3	587.8	587.5	587.3	587.0	586.7
115°	658.5	658.9	658.8	658.5	658.2	658.0	657.7	658.2	658.8	659.3	659.8
117.5°	728.4	728.9	729.3	730.1	730.8	731.6	732.4	732.1	731.9	731.6	731.3
120°	798.4	798.9	798.8	798.5	798.2	798.0	797.7	798.2	798.7	799.2	799.7
122.5°	861.5	861.8	862.1	862.6	863.1	863.7	864.2	864.4	864.7	864.9	865.2
125°	925.5	926.0	925.7	925.2	924.7	924.1	923.6	924.4	925.2	925.9	926.7
127.5°	981.8	981.9	982.6	983.9	985.2	986.5	987.8	987.5	987.3	987.0	986.7
130°	1039.0	1039.1	1039.5	1040.3	1041.0	1041.8	1042.6	1042.9	1043.1	1043.4	1043.7
132.5°	1092.4	1092.7	1093.2	1094.3	1095.3	1096.4	1097.4	1097.7	1097.9	1098.2	1098.5
135°	1141.8	1141.7	1142.2	1143.3	1144.3	1145.4	1146.4	1146.9	1147.4	1147.9	1148.4
137.5°	1189.5	1189.5	1190.2	1191.5	1192.8	1194.1	1195.4	1195.9	1196.4	1196.9	1197.4
140°	1237.0	1237.3	1237.6	1238.1	1238.6	1239.2	1239.7	1240.5	1241.3	1242.0	1242.8
142.5°	1280.0	1280.5	1280.6	1280.9	1281.2	1281.4	1281.7	1282.2	1282.7	1283.2	1283.7
145°	1320.9	1321.3	1321.3	1321.3	1321.3	1321.3	1321.3	1321.6	1321.8	1322.1	1322.4
147.5°	1356.7	1357.5	1357.4	1357.1	1356.8	1356.6	1356.3	1356.6	1356.8	1357.1	1357.4
150°	1390.8	1391.3	1391.2	1390.9	1390.6	1390.4	1390.1	1390.1	1390.1	1390.1	1390.1
152.5°	1420.0	1420.4	1420.1	1419.6	1419.1	1418.6	1418.1	1418.6	1419.1	1419.6	1420.1
155°	1446.0	1446.1	1445.7	1444.9	1444.2	1443.4	1442.6	1443.6	1444.7	1445.7	1446.8
157.5°	1469.4	1469.4	1468.9	1467.9	1466.8	1465.8	1464.8	1466.1	1467.4	1468.7	1470.0
160°	1487.3	1486.9	1486.8	1486.5	1486.2	1486.0	1485.7	1487.3	1488.8	1490.4	1491.9
162.5°	1504.9	1504.4	1504.3	1504.0	1503.7	1503.5	1503.2	1504.8	1506.3	1507.9	1509.4
165°	1519.0	1518.4	1518.4	1518.4	1518.4	1518.4	1518.4	1520.5	1522.5	1524.6	1526.7
167.5°	1531.9	1531.2	1531.1	1530.8	1530.6	1530.3	1530.1	1532.4	1534.8	1537.1	1539.4
170°	1541.4	1540.6	1540.7	1541.0	1541.2	1541.5	1541.7	1543.8	1545.9	1548.0	1550.1
172.5°	1548.4	1547.6	1547.7	1548.0	1548.2	1548.5	1548.7	1550.8	1552.9	1555.0	1557.1
175°	1553.0	1552.2	1552.3	1552.6	1552.9	1553.1	1553.4	1555.7	1558.1	1560.4	1562.7
177.5°	1555.5	1554.6	1554.9	1555.4	1555.9	1556.4	1556.9	1559.0	1561.0	1563.1	1565.2
180°	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7
2.5°	1259.7	1264.0	1258.6	1261.9	1254.3	1253.3	1254.3	1254.3	1255.4	1256.5	1257.6
5°	1188.8	1187.8	1181.3	1177.0	1173.8	1177.0	1179.2	1181.3	1179.2	1181.3	1182.4
7.5°	1122.2	1119.0	1115.8	1108.3	1110.4	1108.3	1114.7	1111.5	1111.5	1116.9	1121.2
10°	1063.2	1056.7	1054.6	1046.0	1039.6	1038.5	1046.0	1049.2	1052.4	1054.6	1063.2
12.5°	986.9	977.3	969.8	973.0	954.7	962.2	964.4	960.1	973.0	988.0	979.4
15°	905.3	906.4	891.4	886.0	870.9	875.2	876.3	887.1	897.8	896.7	909.6
17.5°	845.2	838.7	825.8	824.8	818.3	821.5	820.5	829.1	825.8	831.2	842.0
20°	789.3	785.0	774.3	770.0	772.1	770.0	771.1	772.1	775.4	787.2	785.0
22.5°	745.3	739.9	739.9	734.6	728.1	726.0	731.3	734.6	738.9	741.0	746.4
25°	706.6	702.3	697.0	693.8	688.4	689.5	692.7	697.0	700.2	704.5	708.8
27.5°	666.9	666.9	661.5	660.5	658.3	657.2	661.5	663.7	663.7	666.9	671.2
30°	635.8	635.8	630.4	629.3	628.2	628.2	631.5	632.5	633.6	636.8	639.0
32.5°	605.7	604.6	602.5	603.5	602.5	603.5	603.5	604.6	606.8	607.8	612.1
35°	577.8	578.8	576.7	576.7	575.6	576.7	578.8	579.9	581.0	583.1	583.1
37.5°	550.9	553.1	552.0	555.2	555.2	555.2	555.2	557.4	557.4	557.4	556.3
40°	527.3	527.3	526.2	528.4	530.5	530.5	531.6	531.6	532.7	532.7	531.6
42.5°	500.4	502.6	505.8	506.9	509.0	508.0	511.2	510.1	511.2	509.0	506.9
45°	475.7	475.7	480.0	484.3	485.4	485.4	485.4	487.6	485.4	482.2	481.1
47.5°	448.9	451.0	453.2	458.6	459.6	459.6	459.6	459.6	457.5	457.5	457.5
50°	422.1	423.1	424.2	426.3	429.6	428.5	428.5	428.5	432.8	428.5	429.6
52.5°	389.8	390.9	392.0	396.3	395.2	395.2	396.3	396.3	399.5	398.4	396.3
55°	357.6	357.6	359.8	359.8	359.8	361.9	363.0	365.1	364.1	365.1	366.2
57.5°	325.4	323.3	322.2	322.2	325.4	324.3	325.4	325.4	329.7	331.8	332.9
60°	287.8	287.8	286.7	280.3	280.3	279.2	282.4	284.6	286.7	296.4	295.3
62.5°	249.1	244.9	240.6	241.6	235.2	238.4	236.3	238.4	244.9	252.4	253.4
65°	210.5	207.3	203.0	201.9	199.7	203.0	201.9	203.0	206.2	210.5	215.9
67.5°	176.1	175.0	172.9	171.8	171.8	171.8	174.0	174.0	175.0	178.3	181.5
70°	150.3	149.3	150.3	148.2	149.3	148.2	149.3	150.3	151.4	152.5	155.7
72.5°	126.7	126.7	126.7	124.6	126.7	125.6	125.6	126.7	127.8	128.9	131.0
75°	100.9	98.8	96.7	94.5	93.4	95.6	96.7	95.6	98.8	103.1	103.1
77.5°	76.2	75.2	75.2	75.2	76.2	75.2	77.3	76.2	77.3	77.3	79.5
80°	59.1	58.0	59.1	59.1	58.0	60.1	59.1	59.1	60.1	61.2	60.1
82.5°	43.0	44.0	43.0	43.0	43.0	45.1	43.0	43.0	43.0	44.0	44.0
85°	26.8	26.8	26.8	26.8	27.9	26.8	27.9	26.8	29.0	27.9	27.9
87.5°	9.7	10.7	11.8	11.8	11.8	11.8	10.7	11.8	12.9	11.8	12.9
90°	32.7	33.0	33.5	34.0	34.5	35.0	34.5	34.0	33.5	33.0	32.7
92.5°	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5
95°	32.7	32.8	33.1	33.3	33.6	33.8	33.6	33.3	33.1	32.8	32.7
97.5°	31.5	31.6	31.9	32.2	32.4	32.7	32.4	32.2	31.9	31.6	31.5
100°	31.5	31.6	31.9	32.2	32.4	32.7	32.4	32.2	31.9	31.6	31.5
102.5°	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8
105°	374.4	369.7	360.4	351.1	341.7	332.4	341.7	351.1	360.4	369.7	374.4
107.5°	444.3	444.8	445.9	446.9	448.0	449.0	448.0	446.9	445.9	444.8	444.3
110°	516.6	517.0	517.8	518.5	519.3	520.1	519.3	518.5	517.8	517.0	516.6

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	586.6	587.1	588.2	589.2	590.3	591.3	590.3	589.2	588.2	587.1	586.6
115°	660.1	660.1	660.1	660.1	660.1	660.1	660.1	660.1	660.1	660.1	660.1
117.5°	731.2	731.2	731.2	731.2	731.2	731.2	731.2	731.2	731.2	731.2	731.2
120°	800.0	799.7	799.2	798.7	798.2	797.7	798.2	798.7	799.2	799.7	800.0
122.5°	865.3	865.0	864.5	864.0	863.5	863.0	863.5	864.0	864.5	865.0	865.3
125°	927.1	927.2	927.5	927.8	928.0	928.3	928.0	927.8	927.5	927.2	927.1
127.5°	986.6	986.5	986.2	985.9	985.7	985.4	985.7	985.9	986.2	986.5	986.6
130°	1043.8	1043.8	1043.8	1043.8	1043.8	1043.8	1043.8	1043.8	1043.8	1043.8	1043.8
132.5°	1098.6	1098.5	1098.2	1097.9	1097.7	1097.4	1097.7	1097.9	1098.2	1098.5	1098.6
135°	1148.7	1149.0	1149.5	1150.0	1150.5	1151.0	1150.5	1150.0	1149.5	1149.0	1148.7
137.5°	1197.7	1197.6	1197.3	1197.0	1196.8	1196.5	1196.8	1197.0	1197.3	1197.6	1197.7
140°	1243.2	1243.3	1243.6	1243.8	1244.1	1244.3	1244.1	1243.8	1243.6	1243.3	1243.2
142.5°	1284.0	1284.0	1284.0	1284.0	1284.0	1284.0	1284.0	1284.0	1284.0	1284.0	1284.0
145°	1322.5	1322.8	1323.3	1323.8	1324.3	1324.8	1324.3	1323.8	1323.3	1322.8	1322.5
147.5°	1357.5	1357.6	1357.9	1358.1	1358.4	1358.6	1358.4	1358.1	1357.9	1357.6	1357.5
150°	1390.1	1390.2	1390.5	1390.8	1391.0	1391.3	1391.0	1390.8	1390.5	1390.2	1390.1
152.5°	1420.4	1420.3	1420.0	1419.8	1419.5	1419.3	1419.5	1419.8	1420.0	1420.3	1420.4
155°	1447.3	1446.9	1446.1	1445.4	1444.6	1443.8	1444.6	1445.4	1446.1	1446.9	1447.3
157.5°	1470.6	1470.0	1468.7	1467.4	1466.1	1464.8	1466.1	1467.4	1468.7	1470.0	1470.6
160°	1492.7	1491.9	1490.4	1488.8	1487.3	1485.7	1487.3	1488.8	1490.4	1491.9	1492.7
162.5°	1510.2	1509.3	1507.5	1505.7	1503.9	1502.1	1503.9	1505.7	1507.5	1509.3	1510.2
165°	1527.7	1526.5	1524.2	1521.9	1519.5	1517.2	1519.5	1521.9	1524.2	1526.5	1527.7
167.5°	1540.6	1539.3	1536.7	1534.1	1531.5	1528.9	1531.5	1534.1	1536.7	1539.3	1540.6
170°	1551.1	1549.8	1547.2	1544.6	1542.0	1539.4	1542.0	1544.6	1547.2	1549.8	1551.1
172.5°	1558.1	1556.7	1553.8	1550.9	1548.1	1545.2	1548.1	1550.9	1553.8	1556.7	1558.1
175°	1563.9	1562.3	1559.2	1556.1	1553.0	1549.9	1553.0	1556.1	1559.2	1562.3	1563.9
177.5°	1566.2	1564.6	1561.5	1558.4	1555.3	1552.2	1555.3	1558.4	1561.5	1564.6	1566.2
180°	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7	1332.7
2.5°	1261.9	1267.2	1265.1	1257.6	1260.8	1267.2	1273.7	1282.3	1287.6	1291.9	1294.1
5°	1187.8	1197.4	1195.3	1195.3	1199.6	1210.3	1221.0	1239.3	1245.7	1253.3	1264.0
7.5°	1122.2	1129.8	1136.2	1138.4	1144.8	1158.8	1172.7	1193.1	1209.2	1217.8	1224.3
10°	1064.3	1069.6	1079.3	1084.7	1091.1	1108.3	1128.7	1150.2	1166.3	1181.3	1189.9
12.5°	990.2	1011.6	1024.5	1033.1	1041.7	1067.5	1083.6	1107.2	1126.5	1140.5	1153.4
15°	907.5	933.2	940.8	974.0	995.5	1015.9	1040.6	1068.6	1086.8	1102.9	1120.1
17.5°	837.7	855.9	864.5	899.9	918.2	950.4	985.9	1021.3	1049.2	1061.0	1078.2
20°	793.6	803.3	820.5	832.3	851.6	889.2	927.9	970.8	1012.7	1024.5	1041.7
22.5°	748.5	761.4	773.2	789.3	804.4	830.1	868.8	916.1	961.2	982.6	1003.0
25°	707.7	720.6	728.1	745.3	759.3	785.0	811.9	860.2	913.9	932.2	964.4
27.5°	675.5	683.0	695.9	703.4	719.5	743.2	767.9	804.4	857.0	888.1	919.3
30°	643.3	648.6	659.4	670.1	681.9	698.0	726.0	761.4	809.7	836.6	867.7
32.5°	611.1	619.7	626.1	633.6	646.5	665.8	685.2	719.5	758.2	788.3	819.4
35°	584.2	587.4	596.0	604.6	613.2	630.4	650.8	684.1	718.5	742.1	770.0
37.5°	555.2	560.6	567.0	570.3	584.2	595.0	616.4	642.2	683.0	698.0	726.0
40°	532.7	531.6	538.0	543.4	549.8	567.0	579.9	607.8	640.1	663.7	680.9
42.5°	504.7	504.7	506.9	513.3	521.9	532.7	547.7	571.3	604.6	621.8	642.2
45°	482.2	479.0	480.0	484.3	489.7	500.4	515.5	535.9	569.2	583.1	604.6
47.5°	455.3	452.1	452.1	456.4	460.7	468.2	480.0	503.7	530.5	548.8	564.9
50°	425.3	426.3	425.3	428.5	430.6	438.2	451.0	470.4	495.1	510.1	528.4
52.5°	397.4	395.2	394.1	396.3	400.6	405.9	419.9	437.1	460.7	475.7	491.9
55°	363.0	365.1	365.1	365.1	371.6	373.7	384.5	401.6	425.3	437.1	452.1
57.5°	331.8	330.8	332.9	331.8	337.2	344.7	353.3	366.2	389.8	401.6	415.6
60°	297.5	298.6	299.6	299.6	303.9	311.4	321.1	332.9	352.2	364.1	376.9
62.5°	255.6	261.0	266.3	268.5	274.9	280.3	286.7	299.6	316.8	325.4	337.2
65°	215.9	223.4	230.9	236.3	240.6	245.9	254.5	266.3	280.3	288.9	300.7
67.5°	181.5	186.9	196.5	201.9	210.5	216.9	222.3	232.0	249.1	252.4	262.0
70°	156.8	158.9	163.2	167.5	177.2	182.6	189.0	198.7	211.6	219.1	224.4
72.5°	132.1	133.2	135.3	139.6	143.9	150.3	157.9	166.5	178.3	181.5	189.0
75°	105.2	111.7	111.7	114.9	118.1	121.4	127.8	136.4	143.9	149.3	153.6
77.5°	78.4	81.6	83.8	89.1	93.4	96.7	100.9	107.4	111.7	116.0	119.2
80°	61.2	62.3	63.4	63.4	65.5	69.8	74.1	78.4	83.8	85.9	89.1
82.5°	45.1	45.1	45.1	47.3	48.3	49.4	49.4	51.5	56.9	59.1	62.3
85°	29.0	29.0	29.0	29.0	30.1	31.1	32.2	33.3	33.3	33.3	35.4
87.5°	11.8	14.0	12.9	14.0	14.0	14.0	14.0	15.0	15.0	16.1	16.1
90°	31.9	30.4	28.8	27.3	25.7	23.6	21.5	19.4	17.3	16.3	14.9
92.5°	30.7	29.2	27.6	26.1	24.5	22.4	20.4	18.3	16.2	15.2	15.5
95°	31.9	30.4	28.8	27.3	25.7	25.4	25.2	24.9	24.6	24.5	28.9
97.5°	30.9	29.6	28.3	27.0	25.7	52.9	80.1	107.3	134.5	148.1	145.3
100°	33.7	38.1	42.5	46.9	51.3	87.1	122.8	158.6	194.3	212.2	209.9
102.5°	63.0	121.3	179.6	237.9	296.2	293.1	290.0	286.9	283.8	282.2	280.6
105°	373.2	370.9	368.6	366.2	363.9	362.6	361.3	360.0	358.7	358.0	357.2
107.5°	443.7	442.4	441.1	439.8	438.5	436.7	434.9	433.0	431.2	430.3	429.9
110°	516.3	515.8	515.3	514.8	514.3	512.7	511.2	509.6	508.1	507.3	506.9

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	586.7	587.0	587.3	587.5	587.8	587.3	586.7	586.2	585.7	585.4	584.6
115°	659.8	659.3	658.8	658.2	657.7	658.0	658.2	658.5	658.8	658.9	658.5
117.5°	731.3	731.6	731.9	732.1	732.4	731.6	730.8	730.1	729.3	728.9	728.4
120°	799.7	799.2	798.7	798.2	797.7	798.0	798.2	798.5	798.8	798.9	798.4
122.5°	865.2	864.9	864.7	864.4	864.2	863.7	863.1	862.6	862.1	861.8	861.5
125°	926.7	925.9	925.2	924.4	923.6	924.1	924.7	925.2	925.7	926.0	925.5
127.5°	986.7	987.0	987.3	987.5	987.8	986.5	985.2	983.9	982.6	981.9	981.8
130°	1043.7	1043.4	1043.1	1042.9	1042.6	1041.8	1041.0	1040.3	1039.5	1039.1	1039.0
132.5°	1098.5	1098.2	1097.9	1097.7	1097.4	1096.4	1095.3	1094.3	1093.2	1092.7	1092.4
135°	1148.4	1147.9	1147.4	1146.9	1146.4	1145.4	1144.3	1143.3	1142.2	1141.7	1141.8
137.5°	1197.4	1196.9	1196.4	1195.9	1195.4	1194.1	1192.8	1191.5	1190.2	1189.5	1189.5
140°	1242.8	1242.0	1241.3	1240.5	1239.7	1239.2	1238.6	1238.1	1237.6	1237.3	1237.0
142.5°	1283.7	1283.2	1282.7	1282.2	1281.7	1281.4	1281.2	1280.9	1280.6	1280.5	1280.0
145°	1322.4	1322.1	1321.8	1321.6	1321.3	1321.3	1321.3	1321.3	1321.3	1321.3	1320.9
147.5°	1357.4	1357.1	1356.8	1356.6	1356.3	1356.6	1356.8	1357.1	1357.4	1357.5	1356.7
150°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.4	1390.6	1390.9	1391.2	1391.3	1390.8
152.5°	1420.1	1419.6	1419.1	1418.6	1418.1	1418.6	1419.1	1419.6	1420.1	1420.4	1420.0
155°	1446.8	1445.7	1444.7	1443.6	1442.6	1443.4	1444.2	1444.9	1445.7	1446.1	1446.0
157.5°	1470.0	1468.7	1467.4	1466.1	1464.8	1465.8	1466.8	1467.9	1468.9	1469.4	1469.4
160°	1491.9	1490.4	1488.8	1487.3	1485.7	1486.0	1486.2	1486.5	1486.8	1486.9	1487.3
162.5°	1509.4	1507.9	1506.3	1504.8	1503.2	1503.5	1503.7	1504.0	1504.3	1504.4	1504.9
165°	1526.7	1524.6	1522.5	1520.5	1518.4	1518.4	1518.4	1518.4	1518.4	1518.4	1519.0
167.5°	1539.4	1537.1	1534.8	1532.4	1530.1	1530.3	1530.6	1530.8	1531.1	1531.2	1531.9
170°	1550.1	1548.0	1545.9	1543.8	1541.7	1541.5	1541.2	1541.0	1540.7	1540.6	1541.4
172.5°	1557.1	1555.0	1552.9	1550.8	1548.7	1548.5	1548.2	1548.0	1547.7	1547.6	1548.4
175°	1562.7	1560.4	1558.1	1555.7	1553.4	1553.1	1552.9	1552.6	1552.3	1552.2	1553.0
177.5°	1565.2	1563.1	1561.0	1559.0	1556.9	1556.4	1555.9	1555.4	1554.9	1554.6	1555.5
180°	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2	1559.2

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1332.7	1332.7	1332.7	1332.7
2.5°	1302.7	1309.1	1319.8	1334.9
5°	1272.6	1290.9	1308.0	1330.6
7.5°	1245.7	1267.2	1290.9	1323.1
10°	1214.6	1241.5	1271.5	1311.3
12.5°	1178.1	1215.7	1250.0	1293.0
15°	1151.2	1179.2	1223.2	1273.7
17.5°	1113.7	1151.2	1195.3	1252.2
20°	1078.2	1118.0	1167.4	1226.4
22.5°	1040.6	1085.7	1135.1	1198.5
25°	1002.0	1050.3	1099.7	1167.4
27.5°	966.5	1010.6	1066.4	1135.1
30°	923.6	974.0	1027.7	1099.7
32.5°	881.7	934.3	989.1	1061.0
35°	836.6	889.2	949.3	1018.1
37.5°	792.6	850.5	905.3	971.9
40°	744.2	804.4	861.3	928.9
42.5°	697.0	759.3	816.2	874.2
45°	652.9	714.2	765.7	820.5
47.5°	611.1	665.8	718.5	767.9
50°	570.3	616.4	664.8	705.6
52.5°	527.3	571.3	610.0	646.5
55°	488.6	523.0	557.4	590.7
57.5°	442.5	476.8	506.9	532.7
60°	403.8	425.3	454.3	481.1
62.5°	359.8	384.5	407.0	424.2
65°	316.8	338.3	355.5	370.5
67.5°	280.3	293.2	306.1	322.2
70°	236.3	247.0	262.0	273.8
72.5°	198.7	207.3	214.8	228.7
75°	161.1	168.6	172.9	185.8
77.5°	124.6	132.1	135.3	142.8
80°	95.6	96.7	100.9	107.4
82.5°	65.5	67.7	68.7	74.1
85°	37.6	43.0	41.9	44.0
87.5°	16.1	17.2	19.3	21.5
90°	12.0	9.2	6.3	3.5
92.5°	16.0	16.5	17.0	17.5
95°	37.7	46.5	55.3	64.1
97.5°	139.6	133.9	128.2	122.5
100°	205.2	200.6	195.9	191.3
102.5°	277.5	274.4	271.3	268.2
105°	355.7	354.1	352.6	351.0
107.5°	429.1	428.4	427.6	426.8
110°	506.1	505.4	504.6	503.8

TEST NUMBER: P1013408

CATALOG NUMBER: S124RDIP-B795D1205UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	583.1	581.5	580.0	578.4
115°	657.7	657.0	656.2	655.4
117.5°	727.3	726.3	725.2	724.2
120°	797.3	796.3	795.2	794.2
122.5°	861.0	860.5	860.0	859.5
125°	924.4	923.4	922.3	921.3
127.5°	981.5	981.3	981.0	980.8
130°	1038.7	1038.4	1038.2	1037.9
132.5°	1091.9	1091.4	1090.9	1090.4
135°	1142.1	1142.4	1142.6	1142.9
137.5°	1189.5	1189.5	1189.5	1189.5
140°	1236.5	1236.0	1235.5	1235.0
142.5°	1278.9	1277.9	1276.8	1275.8
145°	1320.1	1319.4	1318.6	1317.8
147.5°	1355.2	1353.6	1352.1	1350.5
150°	1389.7	1388.7	1387.6	1386.6
152.5°	1419.2	1418.5	1417.7	1416.9
155°	1445.7	1445.4	1445.2	1444.9
157.5°	1469.4	1469.4	1469.4	1469.4
160°	1488.1	1488.8	1489.6	1490.4
162.5°	1506.0	1507.0	1508.1	1509.1
165°	1520.3	1521.6	1522.9	1524.2
167.5°	1533.2	1534.5	1535.8	1537.1
170°	1542.9	1544.5	1546.0	1547.6
172.5°	1549.9	1551.5	1553.0	1554.6
175°	1554.5	1556.1	1557.6	1559.2
177.5°	1557.3	1559.1	1560.9	1562.7
180°	1559.2	1559.2	1559.2	1559.2

(END OF REPORT)