

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1025966

Luminaire Tested: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1025966
REPORT IS A COMBINATION OF REPORTS P998876 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1
Description: Define 4 Regressed Direct/Indirect Pendant with 3000K BioUP LEDs {m-DER=0.589}
{m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8480.0 lumens
Efficiency: N/A
Efficacy: 103.7 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.27 / 1.38
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 81.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

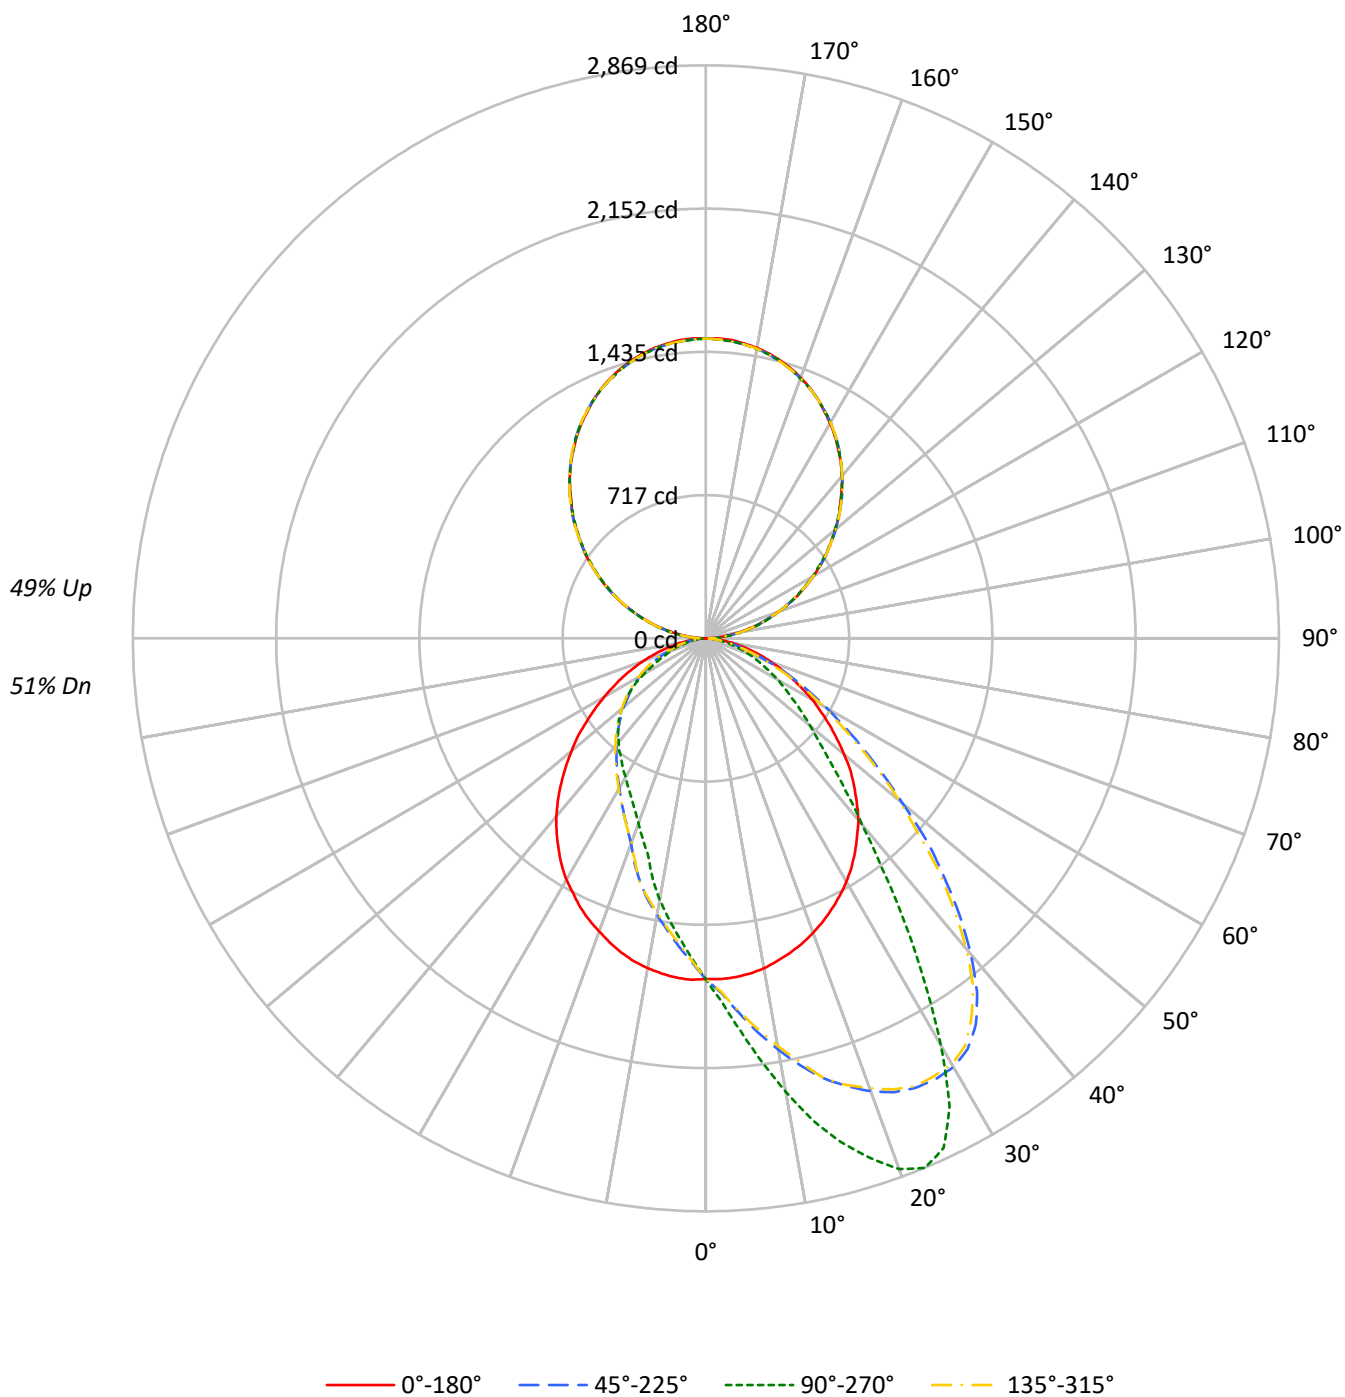

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	57	57	51
1	98	94	91	87	91	87	84	81	74	72	70	62	61	59	51	50	49	49	49	44
2	90	83	77	72	83	77	72	67	66	62	59	55	52	50	45	44	42	42	42	37
3	82	73	66	61	76	68	62	57	58	54	50	49	46	43	41	38	36	36	36	32
4	76	65	57	52	70	61	54	49	52	47	43	44	40	37	37	34	32	32	32	28
5	70	58	50	44	64	54	47	42	47	41	37	40	36	32	33	30	28	28	28	25
6	64	52	44	39	59	49	42	37	42	37	33	36	32	29	30	27	25	25	25	22
7	59	47	40	34	55	44	37	32	38	33	29	33	29	25	28	24	22	22	22	19
8	55	43	35	30	51	40	33	29	35	30	26	30	26	23	25	22	20	20	20	17
9	51	39	32	27	48	37	30	26	32	27	23	28	24	20	24	20	18	18	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	22	19	22	19	16	16	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13907	13907	13907	13907
5°	13906	15714	13929	12010
10°	13833	18114	13821	10445
15°	13667	20387	13667	8745
20°	13495	22104	13425	7701
25°	13286	22198	13224	6955
30°	13062	18876	12960	6442
35°	12745	14242	12584	6060
40°	12394	10322	12150	5762
45°	11812	7845	11519	5497
50°	11122	6340	10817	5110
55°	10375	5250	10036	4595
60°	9623	4439	9195	3821
65°	8682	3616	8406	3037
70°	7817	2933	7449	2467
75°	6850	2113	6374	1808
80°	5651	1401	5145	1330
85°	4097	721	3398	721

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 17409 cd/sqm

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.1	1.9
10°-20°	498.7	5.9
20°-30°	781.1	9.2
30°-40°	867.4	10.2
40°-50°	768.7	9.1
50°-60°	599.0	7.1
60°-70°	391.8	4.6
70°-80°	192.3	2.3
80°-90°	50.0	0.6
90°-100°	97.9	1.2
100°-110°	293.1	3.5
110°-120°	498.0	5.9
120°-130°	656.7	7.7
130°-140°	737.6	8.7
140°-150°	725.0	8.5
150°-160°	609.8	7.2
160°-170°	405.7	4.8
170°-180°	142.1	1.7
0°-30°	1445.0	17.0
0°-40°	2312.4	27.3
0°-60°	3680.1	43.4
0°-90°	4314.2	50.9
90°-120°	889.0	10.5
90°-150°	3008.3	35.5
90°-180°	4166.0	49.1
0°-180°	8480.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1705	1705	1705	1705	1705	
5°	1703	1971	1705	1506	1703	162
15°	1630	2611	1630	1120	1630	460
25°	1494	2816	1487	882	1494	688
35°	1303	1734	1286	738	1303	814
45°	1050	886	1024	621	1050	810
55°	756	529	731	463	756	676
65°	474	309	459	260	474	473
75°	238	143	221	122	238	252
85°	56	34	47	34	56	64
90°	4	35	4	35	4	9
95°	70	92	70	92	70	75
105°	271	283	271	283	271	287
115°	506	502	506	502	506	499
125°	737	732	737	732	737	657
135°	951	952	951	952	951	736
145°	1155	1156	1155	1156	1155	723
155°	1324	1323	1324	1323	1324	609
165°	1441	1438	1441	1438	1441	406
175°	1499	1492	1499	1492	1499	142
180°	1501	1501	1501	1501	1501	

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4
2.5°	1708.1	1723.2	1731.5	1738.4	1752.1	1757.6	1768.6	1771.3	1782.3	1781.0	1776.8
5°	1702.6	1728.7	1748.0	1768.6	1793.3	1807.1	1822.2	1844.2	1855.2	1870.3	1879.9
7.5°	1693.0	1728.7	1760.3	1792.0	1831.8	1853.8	1873.0	1907.4	1936.2	1961.0	1988.5
10°	1677.9	1723.2	1770.0	1812.6	1867.5	1893.6	1922.5	1973.3	2013.2	2047.6	2091.5
12.5°	1654.5	1717.7	1770.0	1827.7	1897.8	1933.5	1972.0	2032.4	2079.2	2135.5	2190.5
15°	1629.8	1699.9	1768.6	1844.2	1923.9	1965.1	2003.6	2084.7	2156.1	2220.7	2281.2
17.5°	1602.3	1679.3	1754.9	1838.7	1934.9	1985.7	2031.1	2128.6	2207.0	2290.8	2351.3
20°	1569.3	1653.2	1739.7	1833.2	1941.7	1998.1	2048.9	2160.2	2246.8	2337.5	2413.1
22.5°	1533.6	1624.3	1719.1	1820.8	1933.5	1995.3	2054.4	2174.0	2274.3	2358.1	2459.8
25°	1493.8	1589.9	1687.5	1794.7	1921.1	1988.5	2048.9	2167.1	2274.3	2384.2	2483.2
27.5°	1452.5	1551.5	1653.2	1765.8	1895.0	1961.0	2029.7	2143.7	2268.8	2388.4	2488.7
30°	1407.2	1503.4	1610.6	1717.7	1855.2	1921.1	1991.2	2114.9	2250.9	2370.5	2479.1
32.5°	1357.7	1456.6	1558.3	1669.7	1804.3	1875.8	1940.4	2080.5	2219.3	2337.5	2439.2
35°	1302.7	1396.2	1492.4	1606.4	1739.7	1804.3	1881.3	2026.9	2167.1	2292.2	2358.1
37.5°	1243.6	1333.0	1422.3	1535.0	1662.8	1741.1	1816.7	1963.7	2112.1	2196.0	2230.3
40°	1188.7	1267.0	1345.3	1453.9	1583.1	1664.2	1741.1	1893.6	2024.2	2088.8	2062.7
42.5°	1118.6	1199.7	1269.8	1370.1	1500.6	1576.2	1654.5	1812.6	1918.4	1944.5	1879.9
45°	1049.9	1117.2	1184.6	1282.1	1419.5	1484.1	1568.0	1715.0	1802.9	1779.6	1684.8
47.5°	982.6	1037.5	1100.7	1195.6	1319.2	1396.2	1474.5	1602.3	1664.2	1631.2	1499.3
50°	902.8	957.8	1023.8	1106.2	1225.8	1300.0	1361.8	1480.0	1526.7	1445.7	1286.2
52.5°	827.3	875.4	931.7	1008.7	1122.7	1190.1	1257.4	1359.1	1374.2	1280.8	1113.1
55°	755.8	794.3	853.4	915.2	1019.7	1091.1	1137.8	1224.4	1220.3	1103.5	959.2
57.5°	681.6	717.3	757.2	821.8	920.7	974.3	1025.2	1100.7	1060.9	961.9	819.0
60°	615.6	636.3	676.1	737.9	821.8	868.5	908.3	949.6	915.2	808.0	698.1
62.5°	542.8	566.2	595.0	644.5	718.7	762.7	791.5	809.4	773.7	691.2	590.9
65°	474.1	494.7	524.9	568.9	625.3	658.2	673.4	685.7	666.5	573.0	493.3
67.5°	412.3	426.0	453.5	482.3	542.8	551.1	571.7	577.2	538.7	467.2	404.0
70°	350.4	364.2	376.5	410.9	438.4	453.5	457.6	457.6	419.1	372.4	320.2
72.5°	292.7	300.9	313.3	336.7	351.8	362.8	368.3	361.4	325.7	287.2	248.7
75°	237.7	241.9	252.9	268.0	280.3	276.2	274.8	266.6	240.5	213.0	191.0
77.5°	182.8	185.5	197.9	202.0	202.0	206.1	200.6	192.4	170.4	149.8	140.2
80°	137.4	141.5	142.9	145.7	142.9	142.9	138.8	125.1	114.1	104.4	97.6
82.5°	94.8	97.6	98.9	94.8	97.6	93.4	86.6	77.0	70.1	68.7	66.0
85°	56.3	57.7	56.3	56.3	52.2	50.8	45.3	44.0	41.2	41.2	39.9
87.5°	27.5	26.1	23.4	20.6	20.6	19.2	20.6	17.9	20.6	19.2	17.9
90°	3.5	6.3	9.2	12.0	14.9	16.3	17.3	19.4	21.4	23.5	25.5
92.5°	30.2	33.6	36.9	40.3	43.6	45.3	45.9	47.2	48.5	49.8	51.1
95°	69.7	72.0	74.3	76.6	78.9	80.1	81.0	82.8	84.6	86.4	88.2
97.5°	111.5	113.6	115.6	117.7	119.8	120.8	121.8	123.9	126.0	128.0	130.1
100°	162.6	163.6	164.6	165.7	166.7	167.2	168.4	170.7	173.0	175.4	177.7
102.5°	216.0	216.2	216.5	216.7	217.0	217.1	218.1	220.2	222.3	224.3	226.4
105°	270.6	270.8	271.1	271.3	271.6	271.7	272.2	273.3	274.3	275.4	276.4
107.5°	327.4	327.7	327.9	328.2	328.5	328.6	328.7	329.0	329.3	329.5	329.8
110°	385.5	386.0	386.5	387.0	387.5	387.8	387.7	387.4	387.2	386.9	386.7

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	445.9	445.9	445.9	445.9	445.9	445.9	445.6	445.1	444.6	444.1	443.6
115°	506.3	506.3	506.3	506.3	506.3	506.3	506.0	505.5	505.0	504.4	503.9
117.5°	563.2	563.2	563.2	563.2	563.2	563.2	563.1	562.8	562.5	562.3	562.0
120°	620.1	621.1	622.1	623.2	624.2	624.7	624.3	623.5	622.8	622.0	621.2
122.5°	679.3	679.5	679.8	680.0	680.3	680.4	680.3	680.0	679.8	679.5	679.3
125°	737.3	737.3	737.3	737.3	737.3	737.3	737.2	736.9	736.7	736.4	736.2
127.5°	789.6	790.4	791.2	791.9	792.7	793.1	792.8	792.3	791.8	791.3	790.8
130°	845.3	846.1	846.9	847.6	848.4	848.8	848.8	848.8	848.8	848.8	848.8
132.5°	902.2	902.7	903.2	903.7	904.2	904.5	904.4	904.1	903.9	903.6	903.4
135°	951.0	952.6	954.1	955.7	957.2	958.0	958.0	958.0	958.0	958.0	958.0
137.5°	1005.6	1006.4	1007.2	1007.9	1008.7	1009.1	1009.4	1009.9	1010.4	1010.9	1011.4
140°	1060.1	1060.6	1061.2	1061.7	1062.2	1062.5	1062.5	1062.5	1062.5	1062.5	1062.5
142.5°	1110.1	1110.6	1111.1	1111.6	1112.1	1112.4	1112.3	1112.0	1111.7	1111.5	1111.2
145°	1155.4	1156.4	1157.4	1158.5	1159.5	1160.0	1160.1	1160.4	1160.7	1160.9	1161.2
147.5°	1201.8	1203.1	1204.4	1205.7	1207.0	1207.6	1207.5	1207.2	1206.9	1206.7	1206.4
150°	1243.6	1244.6	1245.7	1246.7	1247.8	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3
152.5°	1283.1	1283.6	1284.1	1284.6	1285.1	1285.4	1285.5	1285.8	1286.1	1286.3	1286.6
155°	1323.7	1323.7	1323.7	1323.7	1323.7	1323.7	1323.6	1323.3	1323.1	1322.8	1322.6
157.5°	1358.6	1358.1	1357.5	1357.0	1356.5	1356.2	1356.2	1356.2	1356.2	1356.2	1356.2
160°	1388.8	1388.5	1388.3	1388.0	1387.7	1387.6	1387.5	1387.2	1386.9	1386.7	1386.4
162.5°	1416.6	1415.8	1415.0	1414.3	1413.5	1413.1	1413.0	1412.7	1412.5	1412.2	1412.0
165°	1441.0	1440.2	1439.4	1438.7	1437.9	1437.5	1437.2	1436.7	1436.2	1435.7	1435.2
167.5°	1460.7	1459.7	1458.7	1457.6	1456.6	1456.1	1456.1	1456.1	1456.1	1456.1	1456.1
170°	1477.0	1475.7	1474.4	1473.1	1471.8	1471.2	1471.3	1471.6	1471.9	1472.1	1472.4
172.5°	1488.6	1487.6	1486.6	1485.5	1484.5	1484.0	1484.0	1484.0	1484.0	1484.0	1484.0
175°	1499.1	1497.8	1496.5	1495.2	1493.9	1493.3	1493.2	1492.9	1492.6	1492.4	1492.1
177.5°	1503.7	1502.4	1501.1	1499.8	1498.5	1497.9	1497.9	1497.9	1497.9	1497.9	1497.9
180°	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4
2.5°	1787.8	1802.9	1804.3	1818.1	1813.9	1807.1	1819.4	1811.2	1827.7	1822.2	1829.1
5°	1892.3	1912.9	1930.7	1941.7	1961.0	1956.9	1977.5	1970.6	1985.7	1970.6	1989.8
7.5°	2014.6	2048.9	2066.8	2095.7	2103.9	2105.3	2130.0	2135.5	2145.1	2135.5	2146.5
10°	2134.1	2175.4	2216.6	2239.9	2255.1	2275.7	2297.7	2307.3	2314.1	2304.5	2311.4
12.5°	2242.7	2307.3	2352.6	2399.3	2410.3	2428.2	2451.6	2448.8	2476.3	2470.8	2483.2
15°	2343.0	2414.5	2469.4	2506.5	2536.8	2551.9	2595.9	2598.6	2597.2	2611.0	2602.7
17.5°	2432.3	2492.8	2571.1	2619.2	2656.3	2656.3	2681.1	2731.9	2727.8	2726.4	2734.7
20°	2505.2	2573.9	2646.7	2727.8	2758.0	2763.5	2797.9	2824.0	2828.1	2828.1	2828.1
22.5°	2560.1	2641.2	2719.5	2777.3	2800.6	2819.9	2850.1	2866.6	2872.1	2869.3	2872.1
25°	2587.6	2664.6	2744.3	2796.5	2810.2	2821.2	2824.0	2833.6	2832.2	2815.7	2825.4
27.5°	2593.1	2667.3	2719.5	2733.3	2726.4	2719.5	2675.6	2679.7	2667.3	2642.6	2652.2
30°	2568.4	2608.2	2606.9	2564.3	2551.9	2523.0	2483.2	2424.1	2376.0	2355.4	2362.2
32.5°	2479.1	2479.1	2429.6	2333.4	2290.8	2238.6	2167.1	2113.5	2050.3	2036.6	2062.7
35°	2355.4	2285.3	2194.6	2068.2	2003.6	1965.1	1841.4	1802.9	1749.4	1734.2	1746.6
37.5°	2163.0	2046.2	1914.3	1796.1	1741.1	1672.4	1563.8	1508.9	1470.4	1444.3	1456.6
40°	1947.2	1805.7	1668.3	1522.6	1462.1	1405.8	1324.7	1275.3	1213.4	1216.2	1220.3
42.5°	1741.1	1574.8	1420.9	1286.2	1228.5	1181.8	1125.5	1065.0	1043.0	1036.1	1029.3
45°	1522.6	1345.3	1201.0	1100.7	1048.5	1004.5	952.3	918.0	891.9	886.4	893.2
47.5°	1316.5	1166.7	1029.3	935.8	893.2	871.2	830.0	798.4	781.9	768.2	776.4
50°	1129.6	989.4	879.5	801.2	770.9	755.8	717.3	700.8	684.4	680.2	678.9
52.5°	975.7	856.1	761.3	698.1	674.7	666.5	637.6	614.3	600.5	604.6	607.4
55°	835.5	733.8	659.6	608.8	589.5	579.9	559.3	542.8	533.2	529.1	531.8
57.5°	711.8	623.9	570.3	529.1	514.0	509.8	487.8	482.3	475.5	471.3	471.3
60°	599.2	537.3	487.8	464.5	448.0	443.9	427.4	420.5	419.1	415.0	412.3
62.5°	504.3	453.5	419.1	394.4	387.5	386.1	375.2	366.9	362.8	360.0	360.0
65°	421.9	384.8	355.9	338.1	332.6	329.8	317.4	314.7	311.9	309.2	307.8
67.5°	351.8	318.8	298.2	285.8	279.0	280.3	273.5	268.0	268.0	266.6	265.2
70°	284.5	263.8	246.0	239.1	236.4	233.6	230.9	226.7	225.4	225.4	225.4
72.5°	224.0	210.3	200.6	196.5	193.8	191.0	188.3	188.3	188.3	186.9	186.9
75°	171.8	166.3	159.4	155.3	155.3	158.0	153.9	149.8	145.7	142.9	144.3
77.5°	129.2	126.4	122.3	115.4	116.8	114.1	114.1	111.3	112.7	112.7	109.9
80°	94.8	90.7	89.3	85.2	86.6	85.2	83.8	83.8	81.1	81.1	81.1
82.5°	66.0	61.8	61.8	60.5	59.1	59.1	57.7	57.7	59.1	56.3	56.3
85°	39.9	38.5	38.5	35.7	35.7	35.7	35.7	37.1	35.7	34.4	34.4
87.5°	17.9	19.2	17.9	16.5	16.5	16.5	15.1	15.1	13.7	15.1	15.1
90°	27.1	28.6	30.2	31.7	32.5	32.8	33.3	33.8	34.3	34.8	34.3
92.5°	51.9	52.7	53.4	54.2	54.6	54.7	55.0	55.2	55.5	55.7	55.5
95°	89.0	89.8	90.5	91.3	91.7	91.7	91.7	91.7	91.7	91.7	91.7
97.5°	131.1	132.1	133.2	134.2	134.7	134.7	134.7	134.7	134.7	134.7	134.7
100°	178.2	178.7	179.2	179.7	180.0	180.0	180.0	180.0	180.0	180.0	180.0
102.5°	227.2	228.0	228.7	229.5	229.9	230.0	230.3	230.6	230.8	231.1	230.8
105°	277.2	277.9	278.7	279.4	279.8	280.2	281.0	281.7	282.5	283.3	282.5
107.5°	330.8	331.8	332.9	333.9	334.4	334.3	334.0	333.8	333.5	333.3	333.5
110°	386.2	385.6	385.1	384.6	384.3	384.7	385.5	386.2	387.0	387.8	387.0

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6
115°	503.7	503.4	503.2	502.9	502.8	502.7	502.4	502.1	501.9	501.6	501.9
117.5°	561.2	560.4	559.7	558.9	558.5	558.1	557.3	556.6	555.8	555.0	555.8
120°	619.9	618.6	617.3	616.0	615.4	615.7	616.2	616.7	617.2	617.7	617.2
122.5°	678.5	677.7	677.0	676.2	675.8	675.2	673.9	672.6	671.3	670.0	671.3
125°	735.7	735.2	734.7	734.2	733.9	733.6	733.1	732.6	732.0	731.5	732.0
127.5°	790.3	789.7	789.2	788.7	788.4	788.3	788.0	787.8	787.5	787.3	787.5
130°	848.3	847.8	847.3	846.8	846.5	846.0	844.9	843.9	842.8	841.8	842.8
132.5°	902.9	902.4	901.9	901.4	901.1	901.0	900.7	900.4	900.2	899.9	900.2
135°	957.5	956.9	956.4	955.9	955.6	955.2	954.5	953.7	953.0	952.2	953.0
137.5°	1010.6	1009.8	1009.1	1008.3	1007.9	1008.0	1008.3	1008.6	1008.8	1009.1	1008.8
140°	1062.2	1062.0	1061.7	1061.4	1061.3	1061.2	1060.9	1060.6	1060.4	1060.1	1060.4
142.5°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2
145°	1160.9	1160.7	1160.4	1160.1	1160.0	1159.6	1158.8	1158.1	1157.3	1156.5	1157.3
147.5°	1206.2	1205.9	1205.7	1205.4	1205.3	1205.2	1204.9	1204.6	1204.4	1204.1	1204.4
150°	1248.3	1248.3	1248.3	1248.3	1248.3	1248.2	1247.9	1247.6	1247.4	1247.1	1247.4
152.5°	1287.4	1288.2	1288.9	1289.7	1290.1	1289.7	1288.9	1288.2	1287.4	1286.6	1287.4
155°	1323.6	1324.6	1325.7	1326.7	1327.2	1326.7	1325.7	1324.6	1323.6	1322.6	1323.6
157.5°	1357.0	1357.8	1358.5	1359.3	1359.7	1359.3	1358.5	1357.8	1357.0	1356.2	1357.0
160°	1387.2	1388.0	1388.7	1389.5	1389.9	1389.3	1388.0	1386.7	1385.4	1384.1	1385.4
162.5°	1413.5	1415.1	1416.6	1418.1	1418.9	1418.3	1417.0	1415.7	1414.4	1413.1	1414.4
165°	1436.8	1438.3	1439.9	1441.4	1442.2	1441.7	1440.6	1439.6	1438.5	1437.5	1438.5
167.5°	1457.7	1459.2	1460.8	1462.3	1463.1	1462.3	1460.8	1459.2	1457.7	1456.1	1457.7
170°	1473.9	1475.5	1477.0	1478.5	1479.3	1478.4	1476.6	1474.8	1473.0	1471.2	1473.0
172.5°	1485.8	1487.6	1489.4	1491.2	1492.1	1491.2	1489.4	1487.6	1485.8	1484.0	1485.8
175°	1493.9	1495.7	1497.5	1499.3	1500.2	1499.3	1497.5	1495.7	1493.9	1492.1	1493.9
177.5°	1499.7	1501.5	1503.3	1505.1	1506.0	1505.0	1502.9	1500.8	1498.8	1496.7	1498.8
180°	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4
2.5°	1833.2	1823.6	1822.2	1822.2	1807.1	1815.3	1798.8	1781.0	1772.7	1772.7	1757.6
5°	1985.7	1976.1	1966.5	1951.4	1951.4	1943.1	1917.0	1890.9	1871.7	1855.2	1837.3
7.5°	2142.4	2132.8	2105.3	2090.2	2098.4	2081.9	2047.6	2003.6	1970.6	1944.5	1907.4
10°	2312.8	2286.7	2272.9	2264.7	2235.8	2218.0	2178.1	2113.5	2072.3	2037.9	1989.8
12.5°	2451.6	2459.8	2407.6	2411.7	2382.9	2358.1	2296.3	2234.4	2172.6	2124.5	2053.1
15°	2601.4	2576.6	2545.0	2520.3	2510.7	2480.4	2428.2	2345.8	2278.4	2202.8	2121.8
17.5°	2719.5	2700.3	2670.1	2646.7	2626.1	2553.3	2509.3	2436.5	2344.4	2270.2	2171.2
20°	2819.9	2802.0	2759.4	2744.3	2707.2	2655.0	2591.7	2479.1	2396.6	2315.5	2219.3
22.5°	2862.5	2844.6	2807.5	2788.2	2764.9	2714.0	2653.6	2546.4	2444.7	2343.0	2241.3
25°	2826.7	2826.7	2808.9	2802.0	2781.4	2736.0	2674.2	2583.5	2474.9	2365.0	2244.1
27.5°	2653.6	2687.9	2700.3	2707.2	2707.2	2708.5	2665.9	2578.0	2472.2	2365.0	2238.6
30°	2403.5	2461.2	2512.0	2527.2	2553.3	2582.1	2600.0	2557.4	2462.6	2349.9	2223.5
32.5°	2088.8	2163.0	2257.8	2281.2	2316.9	2403.5	2451.6	2469.4	2417.2	2318.3	2183.6
35°	1775.5	1868.9	1926.6	1998.1	2031.1	2158.9	2266.1	2330.6	2318.3	2259.2	2136.9
37.5°	1502.0	1555.6	1625.7	1701.3	1767.2	1889.5	2022.8	2147.9	2198.7	2169.9	2077.8
40°	1239.5	1302.7	1386.6	1448.4	1493.8	1616.1	1781.0	1917.0	2028.3	2046.2	1989.8
42.5°	1054.0	1117.2	1168.1	1235.4	1271.1	1389.3	1535.0	1705.4	1837.3	1907.4	1882.7
45°	911.1	949.6	990.8	1029.3	1073.2	1177.7	1312.4	1499.3	1647.7	1746.6	1756.2
47.5°	786.0	820.4	856.1	891.9	916.6	997.7	1121.3	1273.9	1436.0	1572.1	1625.7
50°	698.1	714.6	740.7	761.3	790.2	860.2	959.2	1091.1	1262.9	1409.9	1480.0
52.5°	611.5	632.1	652.7	670.6	689.8	739.3	830.0	944.1	1092.5	1243.6	1330.2
55°	538.7	555.2	574.4	586.8	597.8	641.8	710.5	798.4	926.2	1069.1	1176.3
57.5°	479.6	486.5	503.0	509.8	522.2	557.9	607.4	685.7	788.8	927.6	1015.5
60°	415.0	428.7	441.1	446.6	456.2	481.0	515.3	588.2	677.5	779.2	879.5
62.5°	362.8	368.3	377.9	384.8	391.6	417.8	446.6	501.6	568.9	654.1	746.2
65°	314.7	317.4	322.9	332.6	336.7	355.9	372.4	412.3	475.5	540.1	632.1
67.5°	265.2	268.0	274.8	280.3	284.5	296.8	314.7	343.5	377.9	449.4	500.2
70°	226.7	226.7	230.9	233.6	237.7	243.2	252.9	274.8	306.4	351.8	398.5
72.5°	189.6	189.6	189.6	193.8	193.8	197.9	203.4	218.5	240.5	276.2	306.4
75°	147.0	148.4	151.2	151.2	152.5	158.0	162.2	166.3	177.3	200.6	228.1
77.5°	111.3	114.1	115.4	112.7	115.4	115.4	120.9	126.4	131.9	138.8	159.4
80°	82.5	83.8	81.1	82.5	82.5	85.2	87.9	86.6	89.3	97.6	103.1
82.5°	55.0	56.3	56.3	56.3	56.3	60.5	60.5	59.1	60.5	61.8	63.2
85°	34.4	33.0	33.0	34.4	33.0	33.0	34.4	35.7	34.4	35.7	37.1
87.5°	15.1	15.1	15.1	15.1	13.7	13.7	15.1	13.7	15.1	13.7	12.4
90°	33.8	33.3	32.8	32.5	31.7	30.2	28.6	27.1	25.5	23.5	21.4
92.5°	55.2	55.0	54.7	54.6	54.2	53.4	52.7	51.9	51.1	49.8	48.5
95°	91.7	91.7	91.7	91.7	91.3	90.5	89.8	89.0	88.2	86.4	84.6
97.5°	134.7	134.7	134.7	134.7	134.2	133.2	132.1	131.1	130.1	128.0	126.0
100°	180.0	180.0	180.0	180.0	179.7	179.2	178.7	178.2	177.7	175.4	173.0
102.5°	230.6	230.3	230.0	229.9	229.5	228.7	228.0	227.2	226.4	224.3	222.3
105°	281.7	281.0	280.2	279.8	279.4	278.7	277.9	277.2	276.4	275.4	274.3
107.5°	333.8	334.0	334.3	334.4	333.9	332.9	331.8	330.8	329.8	329.5	329.3
110°	386.2	385.5	384.7	384.3	384.6	385.1	385.6	386.2	386.7	386.9	387.2

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6	444.1	444.6
115°	502.1	502.4	502.7	502.8	502.9	503.2	503.4	503.7	503.9	504.4	505.0
117.5°	556.6	557.3	558.1	558.5	558.9	559.7	560.4	561.2	562.0	562.3	562.5
120°	616.7	616.2	615.7	615.4	616.0	617.3	618.6	619.9	621.2	622.0	622.8
122.5°	672.6	673.9	675.2	675.8	676.2	677.0	677.7	678.5	679.3	679.5	679.8
125°	732.6	733.1	733.6	733.9	734.2	734.7	735.2	735.7	736.2	736.4	736.7
127.5°	787.8	788.0	788.3	788.4	788.7	789.2	789.7	790.3	790.8	791.3	791.8
130°	843.9	844.9	846.0	846.5	846.8	847.3	847.8	848.3	848.8	848.8	848.8
132.5°	900.4	900.7	901.0	901.1	901.4	901.9	902.4	902.9	903.4	903.6	903.9
135°	953.7	954.5	955.2	955.6	955.9	956.4	956.9	957.5	958.0	958.0	958.0
137.5°	1008.6	1008.3	1008.0	1007.9	1008.3	1009.1	1009.8	1010.6	1011.4	1010.9	1010.4
140°	1060.6	1060.9	1061.2	1061.3	1061.4	1061.7	1062.0	1062.2	1062.5	1062.5	1062.5
142.5°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.5	1111.7
145°	1158.1	1158.8	1159.6	1160.0	1160.1	1160.4	1160.7	1160.9	1161.2	1160.9	1160.7
147.5°	1204.6	1204.9	1205.2	1205.3	1205.4	1205.7	1205.9	1206.2	1206.4	1206.7	1206.9
150°	1247.6	1247.9	1248.2	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3
152.5°	1288.2	1288.9	1289.7	1290.1	1289.7	1288.9	1288.2	1287.4	1286.6	1286.3	1286.1
155°	1324.6	1325.7	1326.7	1327.2	1326.7	1325.7	1324.6	1323.6	1322.6	1322.8	1323.1
157.5°	1357.8	1358.5	1359.3	1359.7	1359.3	1358.5	1357.8	1357.0	1356.2	1356.2	1356.2
160°	1386.7	1388.0	1389.3	1389.9	1389.5	1388.7	1388.0	1387.2	1386.4	1386.7	1386.9
162.5°	1415.7	1417.0	1418.3	1418.9	1418.1	1416.6	1415.1	1413.5	1412.0	1412.2	1412.5
165°	1439.6	1440.6	1441.7	1442.2	1441.4	1439.9	1438.3	1436.8	1435.2	1435.7	1436.2
167.5°	1459.2	1460.8	1462.3	1463.1	1462.3	1460.8	1459.2	1457.7	1456.1	1456.1	1456.1
170°	1474.8	1476.6	1478.4	1479.3	1478.5	1477.0	1475.5	1473.9	1472.4	1472.1	1471.9
172.5°	1487.6	1489.4	1491.2	1492.1	1491.2	1489.4	1487.6	1485.8	1484.0	1484.0	1484.0
175°	1495.7	1497.5	1499.3	1500.2	1499.3	1497.5	1495.7	1493.9	1492.1	1492.4	1492.6
177.5°	1500.8	1502.9	1505.0	1506.0	1505.1	1503.3	1501.5	1499.7	1497.9	1497.9	1497.9
180°	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4
2.5°	1749.4	1742.5	1738.4	1737.0	1724.6	1717.7	1713.6	1710.9	1706.8	1695.8	1686.1
5°	1815.3	1796.1	1786.5	1775.5	1756.2	1734.2	1716.4	1705.4	1691.6	1669.7	1649.0
7.5°	1877.2	1848.3	1829.1	1813.9	1781.0	1745.2	1716.4	1693.0	1666.9	1636.7	1607.8
10°	1941.7	1895.0	1870.3	1846.9	1798.8	1752.1	1710.9	1676.5	1639.4	1599.6	1568.0
12.5°	1992.6	1930.7	1903.3	1870.3	1811.2	1756.2	1704.0	1657.3	1609.2	1566.6	1521.2
15°	2051.7	1974.7	1943.1	1900.5	1819.4	1748.0	1680.6	1629.8	1580.3	1517.1	1469.0
17.5°	2086.0	1996.7	1951.4	1914.3	1826.3	1739.7	1661.4	1598.2	1540.5	1477.3	1426.4
20°	2120.4	2018.7	1967.9	1915.6	1811.2	1719.1	1636.7	1561.1	1500.6	1431.9	1379.7
22.5°	2131.4	2013.2	1959.6	1911.5	1801.6	1698.5	1603.7	1526.7	1456.6	1387.9	1328.8
25°	2131.4	2011.8	1948.6	1886.8	1771.3	1665.5	1570.7	1486.9	1408.6	1339.8	1280.8
27.5°	2109.4	1984.3	1918.4	1862.0	1742.5	1628.4	1530.9	1438.8	1363.2	1294.5	1227.2
30°	2081.9	1944.5	1878.5	1811.2	1695.8	1587.2	1481.4	1396.2	1316.5	1238.2	1177.7
32.5°	2047.6	1901.9	1829.1	1760.3	1638.0	1525.4	1427.8	1344.0	1268.4	1187.3	1120.0
35°	1998.1	1838.7	1757.6	1697.1	1579.0	1462.1	1368.7	1286.2	1213.4	1129.6	1056.8
37.5°	1934.9	1781.0	1698.5	1624.3	1502.0	1394.8	1306.9	1227.2	1155.7	1078.7	997.7
40°	1860.7	1699.9	1628.4	1550.1	1420.9	1319.2	1236.8	1165.3	1093.9	1021.0	942.7
42.5°	1776.8	1617.4	1537.7	1462.1	1338.5	1238.2	1161.2	1096.6	1030.6	963.3	879.5
45°	1676.5	1526.7	1449.8	1378.3	1258.8	1155.7	1085.6	1023.8	967.4	898.7	824.5
47.5°	1563.8	1433.3	1355.0	1278.0	1161.2	1071.9	1003.2	950.9	902.8	834.1	766.8
50°	1453.9	1324.7	1261.5	1183.2	1076.0	992.2	922.1	878.1	841.0	773.7	713.2
52.5°	1315.1	1217.5	1157.1	1089.7	986.7	901.5	846.5	808.0	764.1	711.8	658.2
55°	1192.8	1102.1	1054.0	990.8	889.1	813.5	766.8	731.1	696.7	650.0	607.4
57.5°	1054.0	997.7	949.6	894.6	794.3	729.7	688.5	658.2	626.6	588.2	553.8
60°	908.3	882.2	835.5	791.5	706.3	650.0	615.6	588.2	557.9	526.3	497.5
62.5°	779.2	764.1	736.6	702.2	622.5	574.4	540.1	519.4	497.5	468.6	441.1
65°	656.9	650.0	623.9	599.2	544.2	501.6	471.3	459.0	434.2	412.3	387.5
67.5°	548.3	540.1	524.9	514.0	467.2	427.4	412.3	395.8	375.2	358.7	338.1
70°	438.4	437.0	427.4	413.6	388.9	360.0	344.9	333.9	313.3	300.9	285.8
72.5°	340.8	347.7	339.4	333.9	317.4	296.8	283.1	276.2	259.7	250.1	239.1
75°	254.2	259.7	263.8	254.2	250.1	240.5	228.1	221.2	213.0	199.3	195.1
77.5°	173.1	185.5	185.5	188.3	189.6	184.1	174.5	169.0	159.4	156.7	151.2
80°	114.1	125.1	126.4	129.2	133.3	133.3	126.4	125.1	115.4	114.1	109.9
82.5°	66.0	75.6	81.1	85.2	83.8	89.3	83.8	82.5	77.0	77.0	74.2
85°	35.7	37.1	39.9	42.6	45.3	48.1	48.1	46.7	45.3	44.0	41.2
87.5°	13.7	13.7	15.1	13.7	15.1	17.9	19.2	19.2	17.9	16.5	13.7
90°	19.4	17.3	16.3	14.9	12.0	9.2	6.3	3.5	6.3	9.2	12.0
92.5°	47.2	45.9	45.3	43.6	40.3	36.9	33.6	30.2	33.6	36.9	40.3
95°	82.8	81.0	80.1	78.9	76.6	74.3	72.0	69.7	72.0	74.3	76.6
97.5°	123.9	121.8	120.8	119.8	117.7	115.6	113.6	111.5	113.6	115.6	117.7
100°	170.7	168.4	167.2	166.7	165.7	164.6	163.6	162.6	163.6	164.6	165.7
102.5°	220.2	218.1	217.1	217.0	216.7	216.5	216.2	216.0	216.2	216.5	216.7
105°	273.3	272.2	271.7	271.6	271.3	271.1	270.8	270.6	270.8	271.1	271.3
107.5°	329.0	328.7	328.6	328.5	328.2	327.9	327.7	327.4	327.7	327.9	328.2
110°	387.4	387.7	387.8	387.5	387.0	386.5	386.0	385.5	386.0	386.5	387.0

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	445.1	445.6	445.9	445.9	445.9	445.9	445.9	445.9	445.9	445.9	445.9
115°	505.5	506.0	506.3	506.3	506.3	506.3	506.3	506.3	506.3	506.3	506.3
117.5°	562.8	563.1	563.2	563.2	563.2	563.2	563.2	563.2	563.2	563.2	563.2
120°	623.5	624.3	624.7	624.2	623.2	622.1	621.1	620.1	621.1	622.1	623.2
122.5°	680.0	680.3	680.4	680.3	680.0	679.8	679.5	679.3	679.5	679.8	680.0
125°	736.9	737.2	737.3	737.3	737.3	737.3	737.3	737.3	737.3	737.3	737.3
127.5°	792.3	792.8	793.1	792.7	791.9	791.2	790.4	789.6	790.4	791.2	791.9
130°	848.8	848.8	848.8	848.4	847.6	846.9	846.1	845.3	846.1	846.9	847.6
132.5°	904.1	904.4	904.5	904.2	903.7	903.2	902.7	902.2	902.7	903.2	903.7
135°	958.0	958.0	958.0	957.2	955.7	954.1	952.6	951.0	952.6	954.1	955.7
137.5°	1009.9	1009.4	1009.1	1008.7	1007.9	1007.2	1006.4	1005.6	1006.4	1007.2	1007.9
140°	1062.5	1062.5	1062.5	1062.2	1061.7	1061.2	1060.6	1060.1	1060.6	1061.2	1061.7
142.5°	1112.0	1112.3	1112.4	1112.1	1111.6	1111.1	1110.6	1110.1	1110.6	1111.1	1111.6
145°	1160.4	1160.1	1160.0	1159.5	1158.5	1157.4	1156.4	1155.4	1156.4	1157.4	1158.5
147.5°	1207.2	1207.5	1207.6	1207.0	1205.7	1204.4	1203.1	1201.8	1203.1	1204.4	1205.7
150°	1248.3	1248.3	1248.3	1247.8	1246.7	1245.7	1244.6	1243.6	1244.6	1245.7	1246.7
152.5°	1285.8	1285.5	1285.4	1285.1	1284.6	1284.1	1283.6	1283.1	1283.6	1284.1	1284.6
155°	1323.3	1323.6	1323.7	1323.7	1323.7	1323.7	1323.7	1323.7	1323.7	1323.7	1323.7
157.5°	1356.2	1356.2	1356.2	1356.5	1357.0	1357.5	1358.1	1358.6	1358.1	1357.5	1357.0
160°	1387.2	1387.5	1387.6	1387.7	1388.0	1388.3	1388.5	1388.8	1388.5	1388.3	1388.0
162.5°	1412.7	1413.0	1413.1	1413.5	1414.3	1415.0	1415.8	1416.6	1415.8	1415.0	1414.3
165°	1436.7	1437.2	1437.5	1437.9	1438.7	1439.4	1440.2	1441.0	1440.2	1439.4	1438.7
167.5°	1456.1	1456.1	1456.1	1456.6	1457.6	1458.7	1459.7	1460.7	1459.7	1458.7	1457.6
170°	1471.6	1471.3	1471.2	1471.8	1473.1	1474.4	1475.7	1477.0	1475.7	1474.4	1473.1
172.5°	1484.0	1484.0	1484.0	1484.5	1485.5	1486.6	1487.6	1488.6	1487.6	1486.6	1485.5
175°	1492.9	1493.2	1493.3	1493.9	1495.2	1496.5	1497.8	1499.1	1497.8	1496.5	1495.2
177.5°	1497.9	1497.9	1497.9	1498.5	1499.8	1501.1	1502.4	1503.7	1502.4	1501.1	1499.8
180°	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4
2.5°	1677.9	1675.1	1672.4	1661.4	1651.8	1635.3	1621.6	1616.1	1614.7	1616.1	1611.9
5°	1629.8	1628.4	1618.8	1599.6	1581.7	1562.5	1548.7	1535.0	1526.7	1526.7	1517.1
7.5°	1584.5	1574.8	1566.6	1541.9	1521.2	1495.1	1474.5	1462.1	1455.3	1440.2	1440.2
10°	1536.4	1522.6	1511.6	1488.3	1458.0	1431.9	1405.8	1390.7	1378.3	1367.3	1363.2
12.5°	1488.3	1477.3	1456.6	1431.9	1401.7	1368.7	1341.2	1330.2	1301.4	1278.0	1279.4
15°	1442.9	1418.2	1408.6	1372.8	1337.1	1305.5	1265.6	1234.0	1210.7	1195.6	1176.3
17.5°	1392.1	1367.3	1349.5	1319.2	1272.5	1223.0	1184.6	1142.0	1118.6	1092.5	1080.1
20°	1335.7	1315.1	1301.4	1253.3	1196.9	1137.8	1095.2	1069.1	1043.0	1023.8	1012.8
22.5°	1287.6	1261.5	1245.0	1180.4	1118.6	1059.5	1026.5	1004.5	982.6	966.1	960.6
25°	1225.8	1210.7	1170.8	1114.5	1038.9	999.0	970.2	941.3	929.0	918.0	905.6
27.5°	1174.9	1137.8	1110.4	1036.1	989.4	944.1	915.2	893.2	878.1	867.1	857.5
30°	1111.7	1077.4	1038.9	977.1	934.5	891.9	865.7	847.9	831.4	824.5	816.3
32.5°	1045.8	1014.2	977.1	927.6	875.4	842.4	821.8	802.5	791.5	784.7	775.0
35°	986.7	946.8	922.1	875.4	832.8	795.7	776.4	759.9	747.6	744.8	743.4
37.5°	923.5	893.2	869.9	821.8	786.0	754.4	736.6	718.7	711.8	710.5	705.0
40°	868.5	842.4	820.4	775.0	736.6	707.7	694.0	683.0	676.1	676.1	674.7
42.5°	820.4	792.9	770.9	729.7	695.3	669.2	654.1	643.1	640.4	641.8	640.4
45°	766.8	743.4	721.5	678.9	650.0	630.8	614.3	608.8	604.6	606.0	607.4
47.5°	716.0	696.7	674.7	640.4	607.4	586.8	577.2	571.7	571.7	571.7	574.4
50°	670.6	648.6	629.4	593.7	563.4	546.9	538.7	531.8	533.2	534.6	535.9
52.5°	617.0	597.8	584.0	548.3	526.3	505.7	496.1	497.5	496.1	496.1	498.8
55°	570.3	551.1	537.3	504.3	482.3	468.6	460.4	456.2	457.6	454.9	460.4
57.5°	518.1	501.6	492.0	460.4	441.1	428.7	421.9	415.0	417.8	416.4	415.0
60°	472.7	453.5	438.4	416.4	399.9	384.8	380.7	373.8	376.5	373.8	372.4
62.5°	420.5	405.4	394.4	372.4	358.7	346.3	336.7	332.6	331.2	327.1	322.9
65°	368.3	360.0	349.0	327.1	313.3	303.7	298.2	294.1	292.7	281.7	269.3
67.5°	320.2	314.7	303.7	287.2	274.8	265.2	257.0	250.1	241.9	233.6	226.7
70°	274.8	266.6	259.7	244.6	233.6	224.0	215.7	207.5	203.4	195.1	192.4
72.5°	230.9	222.6	215.7	202.0	192.4	182.8	180.0	170.4	166.3	164.9	164.9
75°	185.5	178.6	174.5	162.2	153.9	147.0	142.9	140.2	137.4	134.7	130.5
77.5°	141.5	137.4	134.7	126.4	119.6	115.4	114.1	104.4	101.7	98.9	96.2
80°	103.1	101.7	98.9	92.1	89.3	79.7	79.7	77.0	75.6	75.6	75.6
82.5°	70.1	67.3	66.0	59.1	57.7	56.3	55.0	53.6	55.0	53.6	55.0
85°	37.1	35.7	34.4	34.4	34.4	34.4	34.4	34.4	34.4	33.0	34.4
87.5°	13.7	13.7	13.7	13.7	12.4	13.7	13.7	12.4	13.7	13.7	13.7
90°	14.9	16.3	17.3	19.4	21.4	23.5	25.5	27.1	28.6	30.2	31.7
92.5°	43.6	45.3	45.9	47.2	48.5	49.8	51.1	51.9	52.7	53.4	54.2
95°	78.9	80.1	81.0	82.8	84.6	86.4	88.2	89.0	89.8	90.5	91.3
97.5°	119.8	120.8	121.8	123.9	126.0	128.0	130.1	131.1	132.1	133.2	134.2
100°	166.7	167.2	168.4	170.7	173.0	175.4	177.7	178.2	178.7	179.2	179.7
102.5°	217.0	217.1	218.1	220.2	222.3	224.3	226.4	227.2	228.0	228.7	229.5
105°	271.6	271.7	272.2	273.3	274.3	275.4	276.4	277.2	277.9	278.7	279.4
107.5°	328.5	328.6	328.7	329.0	329.3	329.5	329.8	330.8	331.8	332.9	333.9
110°	387.5	387.8	387.7	387.4	387.2	386.9	386.7	386.2	385.6	385.1	384.6

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	445.9	445.9	445.6	445.1	444.6	444.1	443.6	443.6	443.6	443.6	443.6
115°	506.3	506.3	506.0	505.5	505.0	504.4	503.9	503.7	503.4	503.2	502.9
117.5°	563.2	563.2	563.1	562.8	562.5	562.3	562.0	561.2	560.4	559.7	558.9
120°	624.2	624.7	624.3	623.5	622.8	622.0	621.2	619.9	618.6	617.3	616.0
122.5°	680.3	680.4	680.3	680.0	679.8	679.5	679.3	678.5	677.7	677.0	676.2
125°	737.3	737.3	737.2	736.9	736.7	736.4	736.2	735.7	735.2	734.7	734.2
127.5°	792.7	793.1	792.8	792.3	791.8	791.3	790.8	790.3	789.7	789.2	788.7
130°	848.4	848.8	848.8	848.8	848.8	848.8	848.8	848.3	847.8	847.3	846.8
132.5°	904.2	904.5	904.4	904.1	903.9	903.6	903.4	902.9	902.4	901.9	901.4
135°	957.2	958.0	958.0	958.0	958.0	958.0	958.0	957.5	956.9	956.4	955.9
137.5°	1008.7	1009.1	1009.4	1009.9	1010.4	1010.9	1011.4	1010.6	1009.8	1009.1	1008.3
140°	1062.2	1062.5	1062.5	1062.5	1062.5	1062.5	1062.5	1062.2	1062.0	1061.7	1061.4
142.5°	1112.1	1112.4	1112.3	1112.0	1111.7	1111.5	1111.2	1111.2	1111.2	1111.2	1111.2
145°	1159.5	1160.0	1160.1	1160.4	1160.7	1160.9	1161.2	1160.9	1160.7	1160.4	1160.1
147.5°	1207.0	1207.6	1207.5	1207.2	1206.9	1206.7	1206.4	1206.2	1205.9	1205.7	1205.4
150°	1247.8	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3
152.5°	1285.1	1285.4	1285.5	1285.8	1286.1	1286.3	1286.6	1287.4	1288.2	1288.9	1289.7
155°	1323.7	1323.7	1323.6	1323.3	1323.1	1322.8	1322.6	1323.6	1324.6	1325.7	1326.7
157.5°	1356.5	1356.2	1356.2	1356.2	1356.2	1356.2	1356.2	1357.0	1357.8	1358.5	1359.3
160°	1387.7	1387.6	1387.5	1387.2	1386.9	1386.7	1386.4	1387.2	1388.0	1388.7	1389.5
162.5°	1413.5	1413.1	1413.0	1412.7	1412.5	1412.2	1412.0	1413.5	1415.1	1416.6	1418.1
165°	1437.9	1437.5	1437.2	1436.7	1436.2	1435.7	1435.2	1436.8	1438.3	1439.9	1441.4
167.5°	1456.6	1456.1	1456.1	1456.1	1456.1	1456.1	1456.1	1457.7	1459.2	1460.8	1462.3
170°	1471.8	1471.2	1471.3	1471.6	1471.9	1472.1	1472.4	1473.9	1475.5	1477.0	1478.5
172.5°	1484.5	1484.0	1484.0	1484.0	1484.0	1484.0	1484.0	1485.8	1487.6	1489.4	1491.2
175°	1493.9	1493.3	1493.2	1492.9	1492.6	1492.4	1492.1	1493.9	1495.7	1497.5	1499.3
177.5°	1498.5	1497.9	1497.9	1497.9	1497.9	1497.9	1497.9	1499.7	1501.5	1503.3	1505.1
180°	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4
2.5°	1611.9	1617.4	1610.6	1614.7	1605.1	1603.7	1605.1	1605.1	1606.4	1607.8	1609.2
5°	1521.2	1519.9	1511.6	1506.1	1502.0	1506.1	1508.9	1511.6	1508.9	1511.6	1513.0
7.5°	1436.0	1431.9	1427.8	1418.2	1420.9	1418.2	1426.4	1422.3	1422.3	1429.2	1434.7
10°	1360.5	1352.2	1349.5	1338.5	1330.2	1328.8	1338.5	1342.6	1346.7	1349.5	1360.5
12.5°	1262.9	1250.5	1240.9	1245.0	1221.7	1231.3	1234.0	1228.5	1245.0	1264.3	1253.3
15°	1158.4	1159.8	1140.6	1133.7	1114.5	1120.0	1121.3	1135.1	1148.8	1147.5	1163.9
17.5°	1081.5	1073.2	1056.8	1055.4	1047.1	1051.3	1049.9	1060.9	1056.8	1063.6	1077.4
20°	1010.0	1004.5	990.8	985.3	988.0	985.3	986.7	988.0	992.2	1007.3	1004.5
22.5°	953.7	946.8	946.8	940.0	931.7	929.0	935.8	940.0	945.4	948.2	955.1
25°	904.2	898.7	891.9	887.7	880.9	882.2	886.4	891.9	896.0	901.5	907.0
27.5°	853.4	853.4	846.5	845.1	842.4	841.0	846.5	849.3	849.3	853.4	858.9
30°	813.5	813.5	806.7	805.3	803.9	803.9	808.0	809.4	810.8	814.9	817.6
32.5°	775.0	773.7	770.9	772.3	770.9	772.3	772.3	773.7	776.4	777.8	783.3
35°	739.3	740.7	737.9	737.9	736.6	737.9	740.7	742.1	743.4	746.2	746.2
37.5°	705.0	707.7	706.3	710.5	710.5	710.5	710.5	713.2	713.2	713.2	711.8
40°	674.7	674.7	673.4	676.1	678.9	678.9	680.2	680.2	681.6	681.6	680.2
42.5°	640.4	643.1	647.2	648.6	651.4	650.0	654.1	652.7	654.1	651.4	648.6
45°	608.8	608.8	614.3	619.8	621.1	621.1	621.1	623.9	621.1	617.0	615.6
47.5°	574.4	577.2	579.9	586.8	588.2	588.2	588.2	588.2	585.4	585.4	585.4
50°	540.1	541.4	542.8	545.6	549.7	548.3	548.3	548.3	553.8	548.3	549.7
52.5°	498.8	500.2	501.6	507.1	505.7	505.7	507.1	507.1	511.2	509.8	507.1
55°	457.6	457.6	460.4	460.4	460.4	463.1	464.5	467.2	465.9	467.2	468.6
57.5°	416.4	413.6	412.3	412.3	416.4	415.0	416.4	416.4	421.9	424.6	426.0
60°	368.3	368.3	366.9	358.7	358.7	357.3	361.4	364.2	366.9	379.3	377.9
62.5°	318.8	313.3	307.8	309.2	300.9	305.1	302.3	305.1	313.3	322.9	324.3
65°	269.3	265.2	259.7	258.3	255.6	259.7	258.3	259.7	263.8	269.3	276.2
67.5°	225.4	224.0	221.2	219.9	219.9	219.9	222.6	222.6	224.0	228.1	232.2
70°	192.4	191.0	192.4	189.6	191.0	189.6	191.0	192.4	193.8	195.1	199.3
72.5°	162.2	162.2	162.2	159.4	162.2	160.8	160.8	162.2	163.5	164.9	167.7
75°	129.2	126.4	123.7	120.9	119.6	122.3	123.7	122.3	126.4	131.9	131.9
77.5°	97.6	96.2	96.2	96.2	97.6	96.2	98.9	97.6	98.9	98.9	101.7
80°	75.6	74.2	75.6	75.6	74.2	77.0	75.6	75.6	77.0	78.3	77.0
82.5°	55.0	56.3	55.0	55.0	55.0	57.7	55.0	55.0	55.0	56.3	56.3
85°	34.4	34.4	34.4	34.4	35.7	34.4	35.7	34.4	37.1	35.7	35.7
87.5°	12.4	13.7	15.1	15.1	15.1	15.1	13.7	15.1	16.5	15.1	16.5
90°	32.5	32.8	33.3	33.8	34.3	34.8	34.3	33.8	33.3	32.8	32.5
92.5°	54.6	54.7	55.0	55.2	55.5	55.7	55.5	55.2	55.0	54.7	54.6
95°	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7
97.5°	134.7	134.7	134.7	134.7	134.7	134.7	134.7	134.7	134.7	134.7	134.7
100°	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0
102.5°	229.9	230.0	230.3	230.6	230.8	231.1	230.8	230.6	230.3	230.0	229.9
105°	279.8	280.2	281.0	281.7	282.5	283.3	282.5	281.7	281.0	280.2	279.8
107.5°	334.4	334.3	334.0	333.8	333.5	333.3	333.5	333.8	334.0	334.3	334.4
110°	384.3	384.7	385.5	386.2	387.0	387.8	387.0	386.2	385.5	384.7	384.3

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6	443.6
115°	502.8	502.7	502.4	502.1	501.9	501.6	501.9	502.1	502.4	502.7	502.8
117.5°	558.5	558.1	557.3	556.6	555.8	555.0	555.8	556.6	557.3	558.1	558.5
120°	615.4	615.7	616.2	616.7	617.2	617.7	617.2	616.7	616.2	615.7	615.4
122.5°	675.8	675.2	673.9	672.6	671.3	670.0	671.3	672.6	673.9	675.2	675.8
125°	733.9	733.6	733.1	732.6	732.0	731.5	732.0	732.6	733.1	733.6	733.9
127.5°	788.4	788.3	788.0	787.8	787.5	787.3	787.5	787.8	788.0	788.3	788.4
130°	846.5	846.0	844.9	843.9	842.8	841.8	842.8	843.9	844.9	846.0	846.5
132.5°	901.1	901.0	900.7	900.4	900.2	899.9	900.2	900.4	900.7	901.0	901.1
135°	955.6	955.2	954.5	953.7	953.0	952.2	953.0	953.7	954.5	955.2	955.6
137.5°	1007.9	1008.0	1008.3	1008.6	1008.8	1009.1	1008.8	1008.6	1008.3	1008.0	1007.9
140°	1061.3	1061.2	1060.9	1060.6	1060.4	1060.1	1060.4	1060.6	1060.9	1061.2	1061.3
142.5°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2
145°	1160.0	1159.6	1158.8	1158.1	1157.3	1156.5	1157.3	1158.1	1158.8	1159.6	1160.0
147.5°	1205.3	1205.2	1204.9	1204.6	1204.4	1204.1	1204.4	1204.6	1204.9	1205.2	1205.3
150°	1248.3	1248.2	1247.9	1247.6	1247.4	1247.1	1247.4	1247.6	1247.9	1248.2	1248.3
152.5°	1290.1	1289.7	1288.9	1288.2	1287.4	1286.6	1287.4	1288.2	1288.9	1289.7	1290.1
155°	1327.2	1326.7	1325.7	1324.6	1323.6	1322.6	1323.6	1324.6	1325.7	1326.7	1327.2
157.5°	1359.7	1359.3	1358.5	1357.8	1357.0	1356.2	1357.0	1357.8	1358.5	1359.3	1359.7
160°	1389.9	1389.3	1388.0	1386.7	1385.4	1384.1	1385.4	1386.7	1388.0	1389.3	1389.9
162.5°	1418.9	1418.3	1417.0	1415.7	1414.4	1413.1	1414.4	1415.7	1417.0	1418.3	1418.9
165°	1442.2	1441.7	1440.6	1439.6	1438.5	1437.5	1438.5	1439.6	1440.6	1441.7	1442.2
167.5°	1463.1	1462.3	1460.8	1459.2	1457.7	1456.1	1457.7	1459.2	1460.8	1462.3	1463.1
170°	1479.3	1478.4	1476.6	1474.8	1473.0	1471.2	1473.0	1474.8	1476.6	1478.4	1479.3
172.5°	1492.1	1491.2	1489.4	1487.6	1485.8	1484.0	1485.8	1487.6	1489.4	1491.2	1492.1
175°	1500.2	1499.3	1497.5	1495.7	1493.9	1492.1	1493.9	1495.7	1497.5	1499.3	1500.2
177.5°	1506.0	1505.0	1502.9	1500.8	1498.8	1496.7	1498.8	1500.8	1502.9	1505.0	1506.0
180°	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4	1705.4
2.5°	1614.7	1621.6	1618.8	1609.2	1613.3	1621.6	1629.8	1640.8	1647.7	1653.2	1655.9
5°	1519.9	1532.2	1529.5	1529.5	1535.0	1548.7	1562.5	1585.8	1594.1	1603.7	1617.4
7.5°	1436.0	1445.7	1453.9	1456.6	1464.9	1482.8	1500.6	1526.7	1547.3	1558.3	1566.6
10°	1361.8	1368.7	1381.1	1387.9	1396.2	1418.2	1444.3	1471.8	1492.4	1511.6	1522.6
12.5°	1267.0	1294.5	1311.0	1322.0	1333.0	1366.0	1386.6	1416.8	1441.5	1459.4	1475.9
15°	1161.2	1194.2	1203.8	1246.4	1273.9	1300.0	1331.6	1367.3	1390.7	1411.3	1433.3
17.5°	1071.9	1095.2	1106.2	1151.6	1174.9	1216.2	1261.5	1306.9	1342.6	1357.7	1379.7
20°	1015.5	1027.9	1049.9	1065.0	1089.7	1137.8	1187.3	1242.3	1295.9	1311.0	1333.0
22.5°	957.8	974.3	989.4	1010.0	1029.3	1062.3	1111.7	1172.2	1229.9	1257.4	1283.5
25°	905.6	922.1	931.7	953.7	971.6	1004.5	1038.9	1100.7	1169.4	1192.8	1234.0
27.5°	864.4	874.0	890.5	900.1	920.7	950.9	982.6	1029.3	1096.6	1136.5	1176.3
30°	823.1	830.0	843.8	857.5	872.6	893.2	929.0	974.3	1036.1	1070.5	1110.4
32.5°	781.9	792.9	801.2	810.8	827.3	852.0	876.7	920.7	970.2	1008.7	1048.5
35°	747.6	751.7	762.7	773.7	784.7	806.7	832.8	875.4	919.3	949.6	985.3
37.5°	710.5	717.3	725.6	729.7	747.6	761.3	788.8	821.8	874.0	893.2	929.0
40°	681.6	680.2	688.5	695.3	703.6	725.6	742.1	777.8	819.0	849.3	871.2
42.5°	645.9	645.9	648.6	656.9	667.9	681.6	700.8	731.1	773.7	795.7	821.8
45°	617.0	612.9	614.3	619.8	626.6	640.4	659.6	685.7	728.3	746.2	773.7
47.5°	582.7	578.5	578.5	584.0	589.5	599.2	614.3	644.5	678.9	702.2	722.8
50°	544.2	545.6	544.2	548.3	551.1	560.7	577.2	601.9	633.5	652.7	676.1
52.5°	508.5	505.7	504.3	507.1	512.6	519.4	537.3	559.3	589.5	608.8	629.4
55°	464.5	467.2	467.2	467.2	475.5	478.2	492.0	514.0	544.2	559.3	578.5
57.5°	424.6	423.3	426.0	424.6	431.5	441.1	452.1	468.6	498.8	514.0	531.8
60°	380.7	382.0	383.4	383.4	388.9	398.5	410.9	426.0	450.7	465.9	482.3
62.5°	327.1	333.9	340.8	343.5	351.8	358.7	366.9	383.4	405.4	416.4	431.5
65°	276.2	285.8	295.5	302.3	307.8	314.7	325.7	340.8	358.7	369.7	384.8
67.5°	232.2	239.1	251.5	258.3	269.3	277.6	284.5	296.8	318.8	322.9	335.3
70°	200.6	203.4	208.9	214.4	226.7	233.6	241.9	254.2	270.7	280.3	287.2
72.5°	169.0	170.4	173.1	178.6	184.1	192.4	202.0	213.0	228.1	232.2	241.9
75°	134.7	142.9	142.9	147.0	151.2	155.3	163.5	174.5	184.1	191.0	196.5
77.5°	100.3	104.4	107.2	114.1	119.6	123.7	129.2	137.4	142.9	148.4	152.5
80°	78.3	79.7	81.1	81.1	83.8	89.3	94.8	100.3	107.2	109.9	114.1
82.5°	57.7	57.7	57.7	60.5	61.8	63.2	63.2	66.0	72.8	75.6	79.7
85°	37.1	37.1	37.1	37.1	38.5	39.9	41.2	42.6	42.6	42.6	45.3
87.5°	15.1	17.9	16.5	17.9	17.9	17.9	17.9	19.2	19.2	20.6	20.6
90°	31.7	30.2	28.6	27.1	25.5	23.5	21.4	19.4	17.3	16.3	14.9
92.5°	54.2	53.4	52.7	51.9	51.1	49.8	48.5	47.2	45.9	45.3	43.6
95°	91.3	90.5	89.8	89.0	88.2	86.4	84.6	82.8	81.0	80.1	78.9
97.5°	134.2	133.2	132.1	131.1	130.1	128.0	126.0	123.9	121.8	120.8	119.8
100°	179.7	179.2	178.7	178.2	177.7	175.4	173.0	170.7	168.4	167.2	166.7
102.5°	229.5	228.7	228.0	227.2	226.4	224.3	222.3	220.2	218.1	217.1	217.0
105°	279.4	278.7	277.9	277.2	276.4	275.4	274.3	273.3	272.2	271.7	271.6
107.5°	333.9	332.9	331.8	330.8	329.8	329.5	329.3	329.0	328.7	328.6	328.5
110°	384.6	385.1	385.6	386.2	386.7	386.9	387.2	387.4	387.7	387.8	387.5

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	443.6	443.6	443.6	443.6	443.6	444.1	444.6	445.1	445.6	445.9	445.9
115°	502.9	503.2	503.4	503.7	503.9	504.4	505.0	505.5	506.0	506.3	506.3
117.5°	558.9	559.7	560.4	561.2	562.0	562.3	562.5	562.8	563.1	563.2	563.2
120°	616.0	617.3	618.6	619.9	621.2	622.0	622.8	623.5	624.3	624.7	624.2
122.5°	676.2	677.0	677.7	678.5	679.3	679.5	679.8	680.0	680.3	680.4	680.3
125°	734.2	734.7	735.2	735.7	736.2	736.4	736.7	736.9	737.2	737.3	737.3
127.5°	788.7	789.2	789.7	790.3	790.8	791.3	791.8	792.3	792.8	793.1	792.7
130°	846.8	847.3	847.8	848.3	848.8	848.8	848.8	848.8	848.8	848.8	848.4
132.5°	901.4	901.9	902.4	902.9	903.4	903.6	903.9	904.1	904.4	904.5	904.2
135°	955.9	956.4	956.9	957.5	958.0	958.0	958.0	958.0	958.0	958.0	957.2
137.5°	1008.3	1009.1	1009.8	1010.6	1011.4	1010.9	1010.4	1009.9	1009.4	1009.1	1008.7
140°	1061.4	1061.7	1062.0	1062.2	1062.5	1062.5	1062.5	1062.5	1062.5	1062.5	1062.2
142.5°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.5	1111.7	1112.0	1112.3	1112.4	1112.1
145°	1160.1	1160.4	1160.7	1160.9	1161.2	1160.9	1160.7	1160.4	1160.1	1160.0	1159.5
147.5°	1205.4	1205.7	1205.9	1206.2	1206.4	1206.7	1206.9	1207.2	1207.5	1207.6	1207.0
150°	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1248.3	1247.8
152.5°	1289.7	1288.9	1288.2	1287.4	1286.6	1286.3	1286.1	1285.8	1285.5	1285.4	1285.1
155°	1326.7	1325.7	1324.6	1323.6	1322.6	1322.8	1323.1	1323.3	1323.6	1323.7	1323.7
157.5°	1359.3	1358.5	1357.8	1357.0	1356.2	1356.2	1356.2	1356.2	1356.2	1356.2	1356.5
160°	1389.5	1388.7	1388.0	1387.2	1386.4	1386.7	1386.9	1387.2	1387.5	1387.6	1387.7
162.5°	1418.1	1416.6	1415.1	1413.5	1412.0	1412.2	1412.5	1412.7	1413.0	1413.1	1413.5
165°	1441.4	1439.9	1438.3	1436.8	1435.2	1435.7	1436.2	1436.7	1437.2	1437.5	1437.9
167.5°	1462.3	1460.8	1459.2	1457.7	1456.1	1456.1	1456.1	1456.1	1456.1	1456.1	1456.6
170°	1478.5	1477.0	1475.5	1473.9	1472.4	1472.1	1471.9	1471.6	1471.3	1471.2	1471.8
172.5°	1491.2	1489.4	1487.6	1485.8	1484.0	1484.0	1484.0	1484.0	1484.0	1484.0	1484.5
175°	1499.3	1497.5	1495.7	1493.9	1492.1	1492.4	1492.6	1492.9	1493.2	1493.3	1493.9
177.5°	1505.1	1503.3	1501.5	1499.7	1497.9	1497.9	1497.9	1497.9	1497.9	1497.9	1498.5
180°	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4	1501.4

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1705.4	1705.4	1705.4	1705.4
2.5°	1666.9	1675.1	1688.9	1708.1
5°	1628.4	1651.8	1673.8	1702.6
7.5°	1594.1	1621.6	1651.8	1693.0
10°	1554.2	1588.6	1627.1	1677.9
12.5°	1507.5	1555.6	1599.6	1654.5
15°	1473.1	1508.9	1565.2	1629.8
17.5°	1425.0	1473.1	1529.5	1602.3
20°	1379.7	1430.5	1493.8	1569.3
22.5°	1331.6	1389.3	1452.5	1533.6
25°	1282.1	1344.0	1407.2	1493.8
27.5°	1236.8	1293.1	1364.6	1452.5
30°	1181.8	1246.4	1315.1	1407.2
32.5°	1128.2	1195.6	1265.6	1357.7
35°	1070.5	1137.8	1214.8	1302.7
37.5°	1014.2	1088.4	1158.4	1243.6
40°	952.3	1029.3	1102.1	1188.7
42.5°	891.9	971.6	1044.4	1118.6
45°	835.5	913.8	979.8	1049.9
47.5°	781.9	852.0	919.3	982.6
50°	729.7	788.8	850.6	902.8
52.5°	674.7	731.1	780.5	827.3
55°	625.3	669.2	713.2	755.8
57.5°	566.2	610.1	648.6	681.6
60°	516.7	544.2	581.3	615.6
62.5°	460.4	492.0	520.8	542.8
65°	405.4	432.9	454.9	474.1
67.5°	358.7	375.2	391.6	412.3
70°	302.3	316.1	335.3	350.4
72.5°	254.2	265.2	274.8	292.7
75°	206.1	215.7	221.2	237.7
77.5°	159.4	169.0	173.1	182.8
80°	122.3	123.7	129.2	137.4
82.5°	83.8	86.6	87.9	94.8
85°	48.1	55.0	53.6	56.3
87.5°	20.6	22.0	24.7	27.5
90°	12.0	9.2	6.3	3.5
92.5°	40.3	36.9	33.6	30.2
95°	76.6	74.3	72.0	69.7
97.5°	117.7	115.6	113.6	111.5
100°	165.7	164.6	163.6	162.6
102.5°	216.7	216.5	216.2	216.0
105°	271.3	271.1	270.8	270.6
107.5°	328.2	327.9	327.7	327.4
110°	387.0	386.5	386.0	385.5

TEST NUMBER: P1025966

CATALOG NUMBER: S124RDIP-B1020D1205UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	445.9	445.9	445.9	445.9
115°	506.3	506.3	506.3	506.3
117.5°	563.2	563.2	563.2	563.2
120°	623.2	622.1	621.1	620.1
122.5°	680.0	679.8	679.5	679.3
125°	737.3	737.3	737.3	737.3
127.5°	791.9	791.2	790.4	789.6
130°	847.6	846.9	846.1	845.3
132.5°	903.7	903.2	902.7	902.2
135°	955.7	954.1	952.6	951.0
137.5°	1007.9	1007.2	1006.4	1005.6
140°	1061.7	1061.2	1060.6	1060.1
142.5°	1111.6	1111.1	1110.6	1110.1
145°	1158.5	1157.4	1156.4	1155.4
147.5°	1205.7	1204.4	1203.1	1201.8
150°	1246.7	1245.7	1244.6	1243.6
152.5°	1284.6	1284.1	1283.6	1283.1
155°	1323.7	1323.7	1323.7	1323.7
157.5°	1357.0	1357.5	1358.1	1358.6
160°	1388.0	1388.3	1388.5	1388.8
162.5°	1414.3	1415.0	1415.8	1416.6
165°	1438.7	1439.4	1440.2	1441.0
167.5°	1457.6	1458.7	1459.7	1460.7
170°	1473.1	1474.4	1475.7	1477.0
172.5°	1485.5	1486.6	1487.6	1488.6
175°	1495.2	1496.5	1497.8	1499.1
177.5°	1499.8	1501.1	1502.4	1503.7
180°	1501.4	1501.4	1501.4	1501.4

(END OF REPORT)