

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1026068

Luminaire Tested: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1026068
REPORT IS A COMBINATION OF REPORTS P999008 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1
Description: Define 4 Regressed Direct/Indirect Pendant with 4000K BioUP LEDs {m-DER=0.865}
{m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7013.0 lumens
Efficiency: N/A
Efficacy: 103.3 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.27 / 1.38
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 67.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

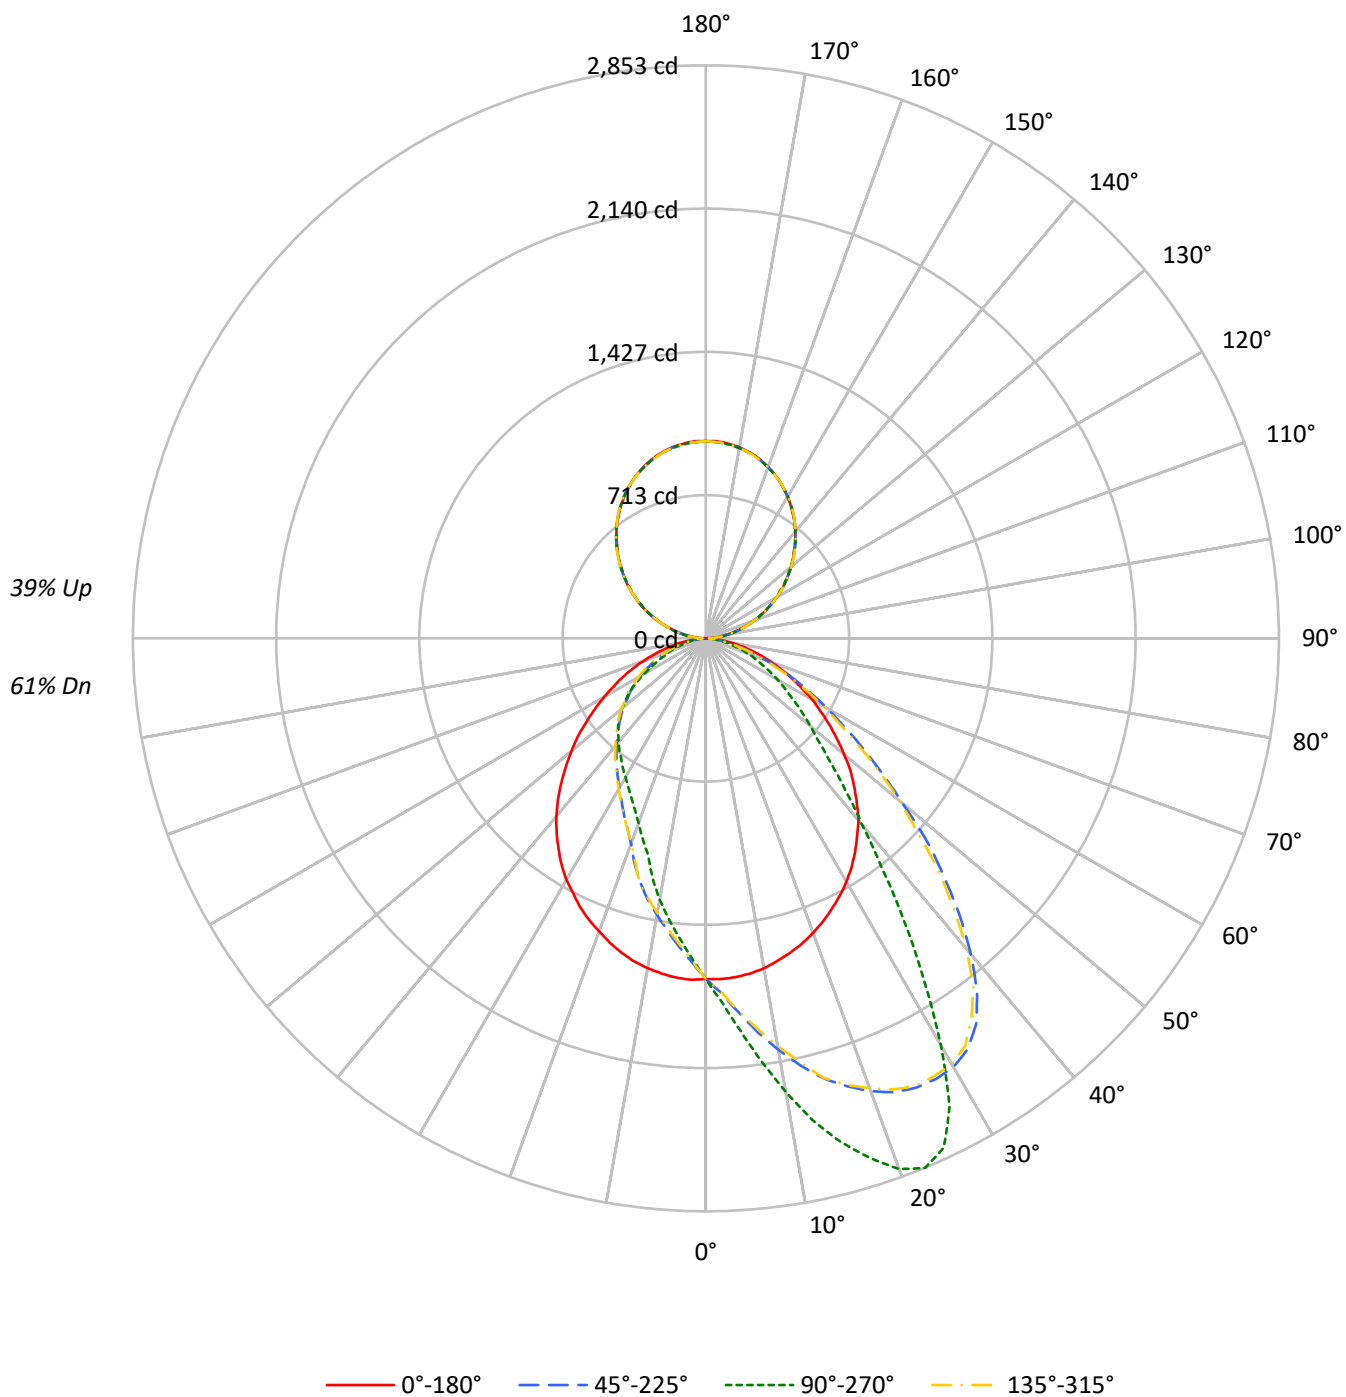

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	77	77	77	66	66	66
1	101	97	93	90	94	91	87	85	79	77	75	69	67	66	60	58	57
2	92	85	79	74	86	80	75	70	70	66	63	61	58	56	53	51	49
3	85	75	68	62	79	71	65	59	62	58	54	55	51	48	48	45	42
4	78	67	59	53	72	63	56	51	56	50	46	49	45	41	43	40	37
5	71	60	52	46	67	57	49	44	50	45	40	44	40	36	39	35	32
6	66	54	46	40	62	51	44	39	46	40	35	40	36	32	35	32	29
7	61	49	41	36	57	46	39	34	41	36	31	37	32	29	32	29	26
8	57	45	37	32	53	42	35	30	38	32	28	34	29	26	30	26	23
9	53	41	33	28	50	39	32	27	35	29	25	31	26	23	28	24	21
10	50	38	30	26	47	36	29	25	32	27	23	29	24	21	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13829	13829	13829	13829
5°	13830	15626	13852	11943
10°	13756	18013	13744	10387
15°	13591	20273	13591	8696
20°	13420	21981	13350	7658
25°	13211	22075	13150	6916
30°	12988	18771	12887	6406
35°	12675	14163	12514	6026
40°	12325	10264	12082	5730
45°	11746	7801	11455	5467
50°	11060	6304	10757	5082
55°	10317	5220	9979	4569
60°	9570	4414	9143	3800
65°	8635	3596	8358	3021
70°	7775	2916	7409	2454
75°	6813	2101	6340	1798
80°	5622	1392	5116	1321
85°	4075	717	3384	717

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 17312 cd/sqm

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	164.2	2.3
10°-20°	495.9	7.1
20°-30°	776.8	11.1
30°-40°	862.6	12.3
40°-50°	764.4	10.9
50°-60°	595.7	8.5
60°-70°	389.7	5.6
70°-80°	191.2	2.7
80°-90°	48.7	0.7
90°-100°	64.0	0.9
100°-110°	191.7	2.7
110°-120°	325.6	4.6
120°-130°	429.4	6.1
130°-140°	482.3	6.9
140°-150°	474.0	6.8
150°-160°	398.7	5.7
160°-170°	265.3	3.8
170°-180°	92.9	1.3
0°-30°	1436.9	20.5
0°-40°	2299.5	32.8
0°-60°	3659.6	52.2
0°-90°	4289.1	61.2
90°-120°	581.3	8.3
90°-150°	1967.0	28.0
90°-180°	2724.0	38.8
0°-180°	7013.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1696	1696	1696	1696	1696	
5°	1693	1960	1696	1498	1693	161
15°	1621	2596	1621	1114	1621	457
25°	1485	2800	1479	877	1485	685
35°	1296	1725	1279	734	1296	810
45°	1044	881	1018	618	1044	805
55°	752	526	727	460	752	672
65°	472	308	456	258	472	470
75°	236	142	220	122	236	251
85°	56	34	46	34	56	63
90°	2	23	2	23	2	7
95°	46	60	46	60	46	49
105°	177	185	177	185	177	188
115°	331	328	331	328	331	326
125°	482	478	482	478	482	430
135°	622	623	622	623	622	481
145°	756	756	756	756	756	473
155°	866	865	866	865	866	398
165°	942	940	942	940	942	266
175°	980	976	980	976	980	93
180°	982	982	982	982	982	

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9
2.5°	1698.6	1713.7	1721.9	1728.7	1742.3	1747.8	1758.7	1761.5	1772.4	1771.0	1766.9
5°	1693.2	1719.1	1738.2	1758.7	1783.3	1797.0	1812.0	1833.9	1844.8	1859.9	1869.4
7.5°	1683.6	1719.1	1750.5	1782.0	1821.6	1843.5	1862.6	1896.8	1925.5	1950.1	1977.4
10°	1668.6	1713.7	1760.1	1802.5	1857.1	1883.1	1911.8	1962.4	2002.0	2036.2	2079.9
12.5°	1645.3	1708.2	1760.1	1817.5	1887.2	1922.7	1961.0	2021.1	2067.6	2123.6	2178.3
15°	1620.7	1690.4	1758.7	1833.9	1913.2	1954.2	1992.4	2073.1	2144.1	2208.3	2268.5
17.5°	1593.4	1669.9	1745.1	1828.4	1924.1	1974.7	2019.8	2116.8	2194.7	2278.0	2338.2
20°	1560.6	1644.0	1730.0	1823.0	1930.9	1987.0	2037.5	2148.2	2234.3	2324.5	2399.7
22.5°	1525.1	1615.3	1709.6	1810.7	1922.7	1984.2	2043.0	2161.9	2261.6	2345.0	2446.1
25°	1485.4	1581.1	1678.1	1784.7	1910.4	1977.4	2037.5	2155.0	2261.6	2371.0	2469.4
27.5°	1444.4	1542.8	1644.0	1756.0	1884.5	1950.1	2018.4	2131.8	2256.2	2375.1	2474.8
30°	1399.3	1495.0	1601.6	1708.2	1844.8	1910.4	1980.1	2103.1	2238.4	2357.3	2465.3
32.5°	1350.1	1448.5	1549.7	1660.4	1794.3	1865.3	1929.6	2069.0	2207.0	2324.5	2425.6
35°	1295.5	1388.4	1484.1	1597.5	1730.0	1794.3	1870.8	2015.7	2155.0	2279.4	2345.0
37.5°	1236.7	1325.6	1414.4	1526.4	1653.5	1731.4	1806.6	1952.8	2100.4	2183.7	2217.9
40°	1182.1	1260.0	1337.9	1445.8	1574.3	1654.9	1731.4	1883.1	2012.9	2077.2	2051.2
42.5°	1112.4	1193.0	1262.7	1362.4	1492.3	1567.4	1645.3	1802.5	1907.7	1933.7	1869.4
45°	1044.0	1111.0	1178.0	1275.0	1411.6	1475.9	1559.2	1705.5	1792.9	1769.7	1675.4
47.5°	977.1	1031.7	1094.6	1188.9	1311.9	1388.4	1466.3	1593.4	1654.9	1622.1	1490.9
50°	897.8	952.5	1018.1	1100.1	1219.0	1292.8	1354.2	1471.8	1518.2	1437.6	1279.1
52.5°	822.7	870.5	926.5	1003.0	1116.5	1183.4	1250.4	1351.5	1366.5	1273.6	1106.9
55°	751.6	789.9	848.6	910.1	1014.0	1085.0	1131.5	1217.6	1213.5	1097.3	953.9
57.5°	677.8	713.3	753.0	817.2	915.6	968.9	1019.4	1094.6	1055.0	956.6	814.5
60°	612.2	632.7	672.3	733.8	817.2	863.7	903.3	944.3	910.1	803.5	694.2
62.5°	539.8	563.0	591.7	640.9	714.7	758.4	787.1	804.9	769.4	687.4	587.6
65°	471.5	492.0	522.0	565.8	621.8	654.6	669.6	681.9	662.8	569.9	490.6
67.5°	410.0	423.6	451.0	479.7	539.8	548.0	568.5	574.0	535.7	464.6	401.8
70°	348.5	362.1	374.4	408.6	435.9	451.0	455.1	455.1	416.8	370.3	318.4
72.5°	291.1	299.3	311.6	334.8	349.8	360.8	366.2	359.4	323.9	285.6	247.3
75°	236.4	240.5	251.4	266.5	278.8	274.7	273.3	265.1	239.1	211.8	190.0
77.5°	181.8	184.5	196.8	200.9	200.9	205.0	199.5	191.3	169.5	149.0	139.4
80°	136.7	140.8	142.1	144.9	142.1	142.1	138.0	124.4	113.4	103.9	97.0
82.5°	94.3	97.0	98.4	94.3	97.0	92.9	86.1	76.5	69.7	68.3	65.6
85°	56.0	57.4	56.0	56.0	51.9	50.6	45.1	43.7	41.0	41.0	39.6
87.5°	27.3	26.0	23.2	20.5	20.5	19.1	20.5	17.8	20.5	19.1	17.8
90°	2.3	4.1	6.0	7.8	9.7	10.6	11.3	12.6	14.0	15.3	16.7
92.5°	19.7	21.9	24.1	26.3	28.5	29.6	30.0	30.9	31.7	32.6	33.4
95°	45.6	47.1	48.6	50.1	51.6	52.4	53.0	54.2	55.3	56.5	57.7
97.5°	72.9	74.3	75.6	77.0	78.3	79.0	79.7	81.0	82.3	83.7	85.0
100°	106.3	107.0	107.6	108.3	109.0	109.3	110.1	111.6	113.1	114.7	116.2
102.5°	141.2	141.4	141.6	141.7	141.9	142.0	142.7	144.0	145.4	146.7	148.1
105°	176.9	177.1	177.3	177.4	177.6	177.7	178.0	178.7	179.4	180.0	180.7
107.5°	214.1	214.3	214.5	214.6	214.8	214.9	215.0	215.1	215.3	215.4	215.6
110°	252.1	252.4	252.8	253.1	253.4	253.6	253.5	253.3	253.2	253.0	252.8

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	291.6	291.6	291.6	291.6	291.6	291.6	291.4	291.1	290.7	290.4	290.0
115°	331.0	331.0	331.0	331.0	331.0	331.0	330.8	330.5	330.2	329.8	329.5
117.5°	368.2	368.2	368.2	368.2	368.2	368.2	368.1	368.0	367.8	367.7	367.5
120°	405.4	406.1	406.8	407.5	408.2	408.5	408.2	407.7	407.2	406.7	406.2
122.5°	444.2	444.4	444.5	444.7	444.8	444.9	444.8	444.7	444.5	444.4	444.2
125°	482.1	482.1	482.1	482.1	482.1	482.1	482.0	481.9	481.7	481.6	481.4
127.5°	516.3	516.8	517.3	517.8	518.3	518.6	518.4	518.1	517.8	517.4	517.1
130°	552.7	553.2	553.7	554.2	554.7	555.0	555.0	555.0	555.0	555.0	555.0
132.5°	589.9	590.3	590.6	591.0	591.3	591.5	591.4	591.2	591.1	590.9	590.7
135°	621.8	622.8	623.8	624.9	625.9	626.4	626.4	626.4	626.4	626.4	626.4
137.5°	657.5	658.0	658.5	659.0	659.5	659.8	660.0	660.3	660.6	661.0	661.3
140°	693.2	693.5	693.9	694.2	694.5	694.7	694.7	694.7	694.7	694.7	694.7
142.5°	725.8	726.2	726.5	726.9	727.2	727.4	727.3	727.1	727.0	726.8	726.6
145°	755.5	756.2	756.8	757.5	758.2	758.5	758.6	758.8	758.9	759.1	759.3
147.5°	785.8	786.6	787.5	788.3	789.2	789.6	789.5	789.4	789.2	789.1	788.9
150°	813.2	813.9	814.5	815.2	815.9	816.2	816.2	816.2	816.2	816.2	816.2
152.5°	839.0	839.3	839.7	840.0	840.3	840.5	840.6	840.8	840.9	841.1	841.3
155°	865.6	865.6	865.6	865.6	865.6	865.6	865.5	865.3	865.2	865.0	864.8
157.5°	888.3	888.0	887.6	887.3	887.0	886.8	886.8	886.8	886.8	886.8	886.8
160°	908.1	907.9	907.7	907.6	907.4	907.3	907.2	907.0	906.9	906.7	906.5
162.5°	926.3	925.8	925.3	924.8	924.3	924.0	923.9	923.8	923.6	923.5	923.3
165°	942.2	941.7	941.2	940.7	940.2	940.0	939.8	939.5	939.1	938.8	938.4
167.5°	955.1	954.4	953.8	953.1	952.4	952.1	952.1	952.1	952.1	952.1	952.1
170°	965.8	965.0	964.1	963.3	962.4	962.0	962.1	962.2	962.4	962.5	962.7
172.5°	973.4	972.7	972.0	971.3	970.6	970.3	970.3	970.3	970.3	970.3	970.3
175°	980.2	979.4	978.5	977.7	976.8	976.4	976.3	976.1	976.0	975.8	975.6
177.5°	983.2	982.4	981.5	980.7	979.8	979.4	979.4	979.4	979.4	979.4	979.4
180°	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9
2.5°	1777.9	1792.9	1794.3	1807.9	1803.8	1797.0	1809.3	1801.1	1817.5	1812.0	1818.9
5°	1881.7	1902.2	1920.0	1930.9	1950.1	1946.0	1966.5	1959.6	1974.7	1959.6	1978.8
7.5°	2003.4	2037.5	2055.3	2084.0	2092.2	2093.6	2118.1	2123.6	2133.2	2123.6	2134.5
10°	2122.2	2163.2	2204.2	2227.5	2242.5	2263.0	2284.9	2294.4	2301.3	2291.7	2298.5
12.5°	2230.2	2294.4	2339.5	2386.0	2396.9	2414.7	2437.9	2435.2	2462.5	2457.1	2469.4
15°	2330.0	2401.0	2455.7	2492.6	2522.6	2537.7	2581.4	2584.1	2582.8	2596.4	2588.2
17.5°	2418.8	2478.9	2556.8	2604.6	2641.5	2641.5	2666.1	2716.7	2712.6	2711.2	2719.4
20°	2491.2	2559.5	2632.0	2712.6	2742.7	2748.1	2782.3	2808.3	2812.4	2812.4	2812.4
22.5°	2545.9	2626.5	2704.4	2761.8	2785.0	2804.2	2834.2	2850.6	2856.1	2853.4	2856.1
25°	2573.2	2649.7	2729.0	2780.9	2794.6	2805.5	2808.3	2817.8	2816.5	2800.1	2809.6
27.5°	2578.7	2652.5	2704.4	2718.1	2711.2	2704.4	2660.7	2664.8	2652.5	2627.9	2637.4
30°	2554.1	2593.7	2592.3	2550.0	2537.7	2509.0	2469.4	2410.6	2362.8	2342.3	2349.1
32.5°	2465.3	2465.3	2416.1	2320.4	2278.0	2226.1	2155.0	2101.8	2038.9	2025.2	2051.2
35°	2342.3	2272.6	2182.4	2056.7	1992.4	1954.2	1831.2	1792.9	1739.6	1724.6	1736.9
37.5°	2150.9	2034.8	1903.6	1786.1	1731.4	1663.1	1555.1	1500.5	1462.2	1436.2	1448.5
40°	1936.4	1795.6	1659.0	1514.1	1454.0	1398.0	1317.4	1268.2	1206.7	1209.4	1213.5
42.5°	1731.4	1566.1	1413.0	1279.1	1221.7	1175.2	1119.2	1059.1	1037.2	1030.4	1023.5
45°	1514.1	1337.9	1194.4	1094.6	1042.7	998.9	947.0	912.9	886.9	881.4	888.3
47.5°	1309.2	1160.2	1023.5	930.6	888.3	866.4	825.4	794.0	777.6	763.9	772.1
50°	1123.3	983.9	874.6	796.7	766.6	751.6	713.3	696.9	680.5	676.4	675.1
52.5°	970.2	851.4	757.1	694.2	671.0	662.8	634.1	610.8	597.2	601.3	604.0
55°	830.9	729.7	655.9	605.4	586.2	576.7	556.2	539.8	530.2	526.1	528.9
57.5°	707.9	620.4	567.1	526.1	511.1	507.0	485.1	479.7	472.8	468.7	468.7
60°	595.8	534.3	485.1	461.9	445.5	441.4	425.0	418.2	416.8	412.7	410.0
62.5°	501.5	451.0	416.8	392.2	385.4	384.0	373.1	364.9	360.8	358.0	358.0
65°	419.5	382.6	353.9	336.2	330.7	328.0	315.7	312.9	310.2	307.5	306.1
67.5°	349.8	317.0	296.5	284.2	277.4	278.8	271.9	266.5	266.5	265.1	263.7
70°	282.9	262.4	244.6	237.8	235.0	232.3	229.6	225.5	224.1	224.1	224.1
72.5°	222.7	209.1	199.5	195.4	192.7	190.0	187.2	187.2	187.2	185.9	185.9
75°	170.8	165.4	158.5	154.4	154.4	157.2	153.1	149.0	144.9	142.1	143.5
77.5°	128.5	125.7	121.6	114.8	116.2	113.4	113.4	110.7	112.1	112.1	109.3
80°	94.3	90.2	88.8	84.7	86.1	84.7	83.4	83.4	80.6	80.6	80.6
82.5°	65.6	61.5	61.5	60.1	58.8	58.8	57.4	57.4	58.8	56.0	56.0
85°	39.6	38.3	38.3	35.5	35.5	35.5	35.5	36.9	35.5	34.2	34.2
87.5°	17.8	19.1	17.8	16.4	16.4	16.4	15.0	15.0	13.7	15.0	15.0
90°	17.7	18.7	19.8	20.8	21.3	21.5	21.8	22.1	22.5	22.8	22.5
92.5°	33.9	34.4	34.9	35.4	35.7	35.8	35.9	36.1	36.2	36.4	36.2
95°	58.2	58.7	59.2	59.7	60.0	60.0	60.0	60.0	60.0	60.0	60.0
97.5°	85.7	86.4	87.1	87.8	88.1	88.1	88.1	88.1	88.1	88.1	88.1
100°	116.5	116.9	117.2	117.5	117.7	117.7	117.7	117.7	117.7	117.7	117.7
102.5°	148.6	149.1	149.6	150.1	150.3	150.4	150.6	150.7	150.9	151.1	150.9
105°	181.2	181.7	182.2	182.7	183.0	183.3	183.8	184.3	184.8	185.3	184.8
107.5°	216.3	217.0	217.7	218.4	218.7	218.6	218.4	218.3	218.1	217.9	218.1
110°	252.5	252.1	251.8	251.5	251.3	251.6	252.1	252.6	253.1	253.6	253.1

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0
115°	329.3	329.2	329.0	328.9	328.8	328.7	328.5	328.4	328.2	328.0	328.2
117.5°	367.0	366.5	366.0	365.5	365.2	364.9	364.4	363.9	363.4	362.9	363.4
120°	405.4	404.5	403.7	402.8	402.4	402.6	402.9	403.2	403.6	403.9	403.6
122.5°	443.7	443.2	442.7	442.2	441.9	441.5	440.6	439.8	438.9	438.1	438.9
125°	481.0	480.7	480.3	480.0	479.8	479.6	479.3	479.0	478.6	478.3	478.6
127.5°	516.7	516.4	516.0	515.7	515.5	515.4	515.3	515.1	515.0	514.8	515.0
130°	554.7	554.3	554.0	553.7	553.5	553.2	552.5	551.8	551.2	550.5	551.2
132.5°	590.4	590.0	589.7	589.4	589.2	589.1	588.9	588.8	588.6	588.4	588.6
135°	626.1	625.7	625.4	625.1	624.9	624.6	624.1	623.6	623.1	622.6	623.1
137.5°	660.8	660.3	659.8	659.3	659.0	659.1	659.3	659.4	659.6	659.8	659.6
140°	694.5	694.4	694.2	694.1	694.0	693.9	693.7	693.6	693.4	693.2	693.4
142.5°	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6
145°	759.1	758.9	758.8	758.6	758.5	758.2	757.7	757.2	756.7	756.2	756.7
147.5°	788.7	788.5	788.4	788.2	788.1	788.0	787.8	787.7	787.5	787.3	787.5
150°	816.2	816.2	816.2	816.2	816.2	816.1	815.9	815.8	815.6	815.4	815.6
152.5°	841.8	842.3	842.8	843.3	843.5	843.3	842.8	842.3	841.8	841.3	841.8
155°	865.5	866.1	866.8	867.5	867.8	867.5	866.8	866.1	865.5	864.8	865.5
157.5°	887.3	887.8	888.3	888.8	889.1	888.8	888.3	887.8	887.3	886.8	887.3
160°	907.0	907.5	908.0	908.5	908.8	908.4	907.5	906.7	905.8	905.0	905.8
162.5°	924.3	925.3	926.3	927.3	927.8	927.4	926.5	925.7	924.8	924.0	924.8
165°	939.4	940.4	941.5	942.5	943.0	942.7	942.0	941.3	940.7	940.0	940.7
167.5°	953.1	954.1	955.2	956.2	956.7	956.2	955.2	954.1	953.1	952.1	953.1
170°	963.7	964.7	965.8	966.8	967.3	966.7	965.5	964.4	963.2	962.0	963.2
172.5°	971.5	972.7	973.8	975.0	975.6	975.0	973.8	972.7	971.5	970.3	971.5
175°	976.8	978.0	979.2	980.4	981.0	980.4	979.2	978.0	976.8	975.6	976.8
177.5°	980.6	981.8	983.0	984.2	984.8	984.1	982.8	981.4	980.1	978.7	980.1
180°	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9
2.5°	1823.0	1813.4	1812.0	1812.0	1797.0	1805.2	1788.8	1771.0	1762.8	1762.8	1747.8
5°	1974.7	1965.1	1955.5	1940.5	1940.5	1932.3	1906.3	1880.4	1861.2	1844.8	1827.1
7.5°	2130.4	2120.9	2093.6	2078.5	2086.7	2070.3	2036.2	1992.4	1959.6	1933.7	1896.8
10°	2299.9	2273.9	2260.3	2252.1	2223.4	2205.6	2166.0	2101.8	2060.8	2026.6	1978.8
12.5°	2437.9	2446.1	2394.2	2398.3	2369.6	2345.0	2283.5	2222.0	2160.5	2112.7	2041.6
15°	2586.9	2562.3	2530.8	2506.2	2496.7	2466.6	2414.7	2332.7	2265.7	2190.6	2109.9
17.5°	2704.4	2685.3	2655.2	2632.0	2611.5	2539.0	2495.3	2422.9	2331.3	2257.5	2159.1
20°	2804.2	2786.4	2744.0	2729.0	2692.1	2640.2	2577.3	2465.3	2383.3	2302.6	2207.0
22.5°	2846.5	2828.8	2791.9	2772.7	2749.5	2698.9	2638.8	2532.2	2431.1	2330.0	2228.8
25°	2811.0	2811.0	2793.2	2786.4	2765.9	2720.8	2659.3	2569.1	2461.2	2351.8	2231.6
27.5°	2638.8	2673.0	2685.3	2692.1	2692.1	2693.5	2651.1	2563.6	2458.4	2351.8	2226.1
30°	2390.1	2447.5	2498.0	2513.1	2539.0	2567.7	2585.5	2543.1	2448.9	2336.8	2211.1
32.5°	2077.2	2150.9	2245.2	2268.5	2304.0	2390.1	2437.9	2455.7	2403.8	2305.4	2171.4
35°	1765.6	1858.5	1915.9	1987.0	2019.8	2146.8	2253.4	2317.7	2305.4	2246.6	2125.0
37.5°	1493.6	1546.9	1616.6	1691.8	1757.4	1879.0	2011.6	2135.9	2186.5	2157.8	2066.2
40°	1232.6	1295.5	1378.8	1440.3	1485.4	1607.1	1771.0	1906.3	2017.0	2034.8	1978.8
42.5°	1048.1	1111.0	1161.6	1228.5	1264.1	1381.6	1526.4	1695.9	1827.1	1896.8	1872.2
45°	906.0	944.3	985.3	1023.5	1067.3	1171.1	1305.1	1490.9	1638.5	1736.9	1746.4
47.5°	781.7	815.8	851.4	886.9	911.5	992.1	1115.1	1266.8	1428.0	1563.3	1616.6
50°	694.2	710.6	736.6	757.1	785.8	855.5	953.9	1085.0	1255.9	1402.1	1471.8
52.5°	608.1	628.6	649.1	666.9	686.0	735.2	825.4	938.8	1086.4	1236.7	1322.8
55°	535.7	552.1	571.2	583.5	594.4	638.2	706.5	794.0	921.1	1063.2	1169.8
57.5°	476.9	483.8	500.2	507.0	519.3	554.8	604.0	681.9	784.4	922.4	1009.9
60°	412.7	426.4	438.7	444.1	453.7	478.3	512.5	584.9	673.7	774.8	874.6
62.5°	360.8	366.2	375.8	382.6	389.5	415.4	444.1	498.8	565.8	650.5	742.0
65°	312.9	315.7	321.1	330.7	334.8	353.9	370.3	410.0	472.8	537.1	628.6
67.5°	263.7	266.5	273.3	278.8	282.9	295.2	312.9	341.6	375.8	446.9	497.4
70°	225.5	225.5	229.6	232.3	236.4	241.9	251.4	273.3	304.7	349.8	396.3
72.5°	188.6	188.6	188.6	192.7	192.7	196.8	202.2	217.3	239.1	274.7	304.7
75°	146.2	147.6	150.3	150.3	151.7	157.2	161.3	165.4	176.3	199.5	226.8
77.5°	110.7	113.4	114.8	112.1	114.8	114.8	120.3	125.7	131.2	138.0	158.5
80°	82.0	83.4	80.6	82.0	82.0	84.7	87.5	86.1	88.8	97.0	102.5
82.5°	54.7	56.0	56.0	56.0	56.0	60.1	60.1	58.8	60.1	61.5	62.9
85°	34.2	32.8	32.8	34.2	32.8	32.8	34.2	35.5	34.2	35.5	36.9
87.5°	15.0	15.0	15.0	15.0	13.7	13.7	15.0	13.7	15.0	13.7	12.3
90°	22.1	21.8	21.5	21.3	20.8	19.8	18.7	17.7	16.7	15.3	14.0
92.5°	36.1	35.9	35.8	35.7	35.4	34.9	34.4	33.9	33.4	32.6	31.7
95°	60.0	60.0	60.0	60.0	59.7	59.2	58.7	58.2	57.7	56.5	55.3
97.5°	88.1	88.1	88.1	88.1	87.8	87.1	86.4	85.7	85.0	83.7	82.3
100°	117.7	117.7	117.7	117.7	117.5	117.2	116.9	116.5	116.2	114.7	113.1
102.5°	150.7	150.6	150.4	150.3	150.1	149.6	149.1	148.6	148.1	146.7	145.4
105°	184.3	183.8	183.3	183.0	182.7	182.2	181.7	181.2	180.7	180.0	179.4
107.5°	218.3	218.4	218.6	218.7	218.4	217.7	217.0	216.3	215.6	215.4	215.3
110°	252.6	252.1	251.6	251.3	251.5	251.8	252.1	252.5	252.8	253.0	253.2

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.4	290.7
115°	328.4	328.5	328.7	328.8	328.9	329.0	329.2	329.3	329.5	329.8	330.2
117.5°	363.9	364.4	364.9	365.2	365.5	366.0	366.5	367.0	367.5	367.7	367.8
120°	403.2	402.9	402.6	402.4	402.8	403.7	404.5	405.4	406.2	406.7	407.2
122.5°	439.8	440.6	441.5	441.9	442.2	442.7	443.2	443.7	444.2	444.4	444.5
125°	479.0	479.3	479.6	479.8	480.0	480.3	480.7	481.0	481.4	481.6	481.7
127.5°	515.1	515.3	515.4	515.5	515.7	516.0	516.4	516.7	517.1	517.4	517.8
130°	551.8	552.5	553.2	553.5	553.7	554.0	554.3	554.7	555.0	555.0	555.0
132.5°	588.8	588.9	589.1	589.2	589.4	589.7	590.0	590.4	590.7	590.9	591.1
135°	623.6	624.1	624.6	624.9	625.1	625.4	625.7	626.1	626.4	626.4	626.4
137.5°	659.4	659.3	659.1	659.0	659.3	659.8	660.3	660.8	661.3	661.0	660.6
140°	693.6	693.7	693.9	694.0	694.1	694.2	694.4	694.5	694.7	694.7	694.7
142.5°	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.8	727.0
145°	757.2	757.7	758.2	758.5	758.6	758.8	758.9	759.1	759.3	759.1	758.9
147.5°	787.7	787.8	788.0	788.1	788.2	788.4	788.5	788.7	788.9	789.1	789.2
150°	815.8	815.9	816.1	816.2	816.2	816.2	816.2	816.2	816.2	816.2	816.2
152.5°	842.3	842.8	843.3	843.5	843.3	842.8	842.3	841.8	841.3	841.1	840.9
155°	866.1	866.8	867.5	867.8	867.5	866.8	866.1	865.5	864.8	865.0	865.2
157.5°	887.8	888.3	888.8	889.1	888.8	888.3	887.8	887.3	886.8	886.8	886.8
160°	906.7	907.5	908.4	908.8	908.5	908.0	907.5	907.0	906.5	906.7	906.9
162.5°	925.7	926.5	927.4	927.8	927.3	926.3	925.3	924.3	923.3	923.5	923.6
165°	941.3	942.0	942.7	943.0	942.5	941.5	940.4	939.4	938.4	938.8	939.1
167.5°	954.1	955.2	956.2	956.7	956.2	955.2	954.1	953.1	952.1	952.1	952.1
170°	964.4	965.5	966.7	967.3	966.8	965.8	964.7	963.7	962.7	962.5	962.4
172.5°	972.7	973.8	975.0	975.6	975.0	973.8	972.7	971.5	970.3	970.3	970.3
175°	978.0	979.2	980.4	981.0	980.4	979.2	978.0	976.8	975.6	975.8	976.0
177.5°	981.4	982.8	984.1	984.8	984.2	983.0	981.8	980.6	979.4	979.4	979.4
180°	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9
2.5°	1739.6	1732.8	1728.7	1727.3	1715.0	1708.2	1704.1	1701.4	1697.3	1686.3	1676.8
5°	1805.2	1786.1	1776.5	1765.6	1746.4	1724.6	1706.8	1695.9	1682.2	1660.4	1639.9
7.5°	1866.7	1838.0	1818.9	1803.8	1771.0	1735.5	1706.8	1683.6	1657.6	1627.6	1598.9
10°	1930.9	1884.5	1859.9	1836.6	1788.8	1742.3	1701.4	1667.2	1630.3	1590.7	1559.2
12.5°	1981.5	1920.0	1892.7	1859.9	1801.1	1746.4	1694.5	1648.1	1600.2	1557.9	1512.8
15°	2040.3	1963.7	1932.3	1889.9	1809.3	1738.2	1671.3	1620.7	1571.5	1508.7	1460.8
17.5°	2074.4	1985.6	1940.5	1903.6	1816.1	1730.0	1652.2	1589.3	1531.9	1469.0	1418.5
20°	2108.6	2007.5	1956.9	1905.0	1801.1	1709.6	1627.6	1552.4	1492.3	1423.9	1372.0
22.5°	2119.5	2002.0	1948.7	1900.9	1791.5	1689.1	1594.8	1518.2	1448.5	1380.2	1321.5
25°	2119.5	2000.6	1937.8	1876.3	1761.5	1656.3	1562.0	1478.6	1400.7	1332.4	1273.6
27.5°	2097.7	1973.3	1907.7	1851.7	1732.8	1619.4	1522.3	1430.8	1355.6	1287.3	1220.3
30°	2070.3	1933.7	1868.1	1801.1	1686.3	1578.4	1473.1	1388.4	1309.2	1231.3	1171.1
32.5°	2036.2	1891.3	1818.9	1750.5	1628.9	1516.9	1419.8	1336.5	1261.3	1180.7	1113.7
35°	1987.0	1828.4	1747.8	1687.7	1570.2	1454.0	1361.1	1279.1	1206.7	1123.3	1050.9
37.5°	1924.1	1771.0	1689.1	1615.3	1493.6	1387.0	1299.6	1220.3	1149.3	1072.7	992.1
40°	1850.3	1690.4	1619.4	1541.5	1413.0	1311.9	1229.9	1158.8	1087.8	1015.3	937.5
42.5°	1766.9	1608.4	1529.2	1454.0	1331.0	1231.3	1154.7	1090.5	1024.9	957.9	874.6
45°	1667.2	1518.2	1441.7	1370.6	1251.8	1149.3	1079.6	1018.1	962.0	893.7	819.9
47.5°	1555.1	1425.3	1347.4	1270.9	1154.7	1065.9	997.6	945.7	897.8	829.5	762.5
50°	1445.8	1317.4	1254.5	1176.6	1070.0	986.6	917.0	873.2	836.3	769.4	709.2
52.5°	1307.8	1210.8	1150.6	1083.7	981.2	896.5	841.8	803.5	759.8	707.9	654.6
55°	1186.2	1096.0	1048.1	985.3	884.2	809.0	762.5	727.0	692.8	646.4	604.0
57.5°	1048.1	992.1	944.3	889.6	789.9	725.6	684.6	654.6	623.1	584.9	550.7
60°	903.3	877.3	830.9	787.1	702.4	646.4	612.2	584.9	554.8	523.4	494.7
62.5°	774.8	759.8	732.5	698.3	619.0	571.2	537.1	516.6	494.7	466.0	438.7
65°	653.2	646.4	620.4	595.8	541.2	498.8	468.7	456.4	431.8	410.0	385.4
67.5°	545.3	537.1	522.0	511.1	464.6	425.0	410.0	393.6	373.1	356.7	336.2
70°	435.9	434.6	425.0	411.3	386.7	358.0	343.0	332.1	311.6	299.3	284.2
72.5°	338.9	345.7	337.5	332.1	315.7	295.2	281.5	274.7	258.3	248.7	237.8
75°	252.8	258.3	262.4	252.8	248.7	239.1	226.8	220.0	211.8	198.1	194.0
77.5°	172.2	184.5	184.5	187.2	188.6	183.1	173.6	168.1	158.5	155.8	150.3
80°	113.4	124.4	125.7	128.5	132.6	132.6	125.7	124.4	114.8	113.4	109.3
82.5°	65.6	75.2	80.6	84.7	83.4	88.8	83.4	82.0	76.5	76.5	73.8
85°	35.5	36.9	39.6	42.4	45.1	47.8	47.8	46.5	45.1	43.7	41.0
87.5°	13.7	13.7	15.0	13.7	15.0	17.8	19.1	19.1	17.8	16.4	13.7
90°	12.6	11.3	10.6	9.7	7.8	6.0	4.1	2.3	4.1	6.0	7.8
92.5°	30.9	30.0	29.6	28.5	26.3	24.1	21.9	19.7	21.9	24.1	26.3
95°	54.2	53.0	52.4	51.6	50.1	48.6	47.1	45.6	47.1	48.6	50.1
97.5°	81.0	79.7	79.0	78.3	77.0	75.6	74.3	72.9	74.3	75.6	77.0
100°	111.6	110.1	109.3	109.0	108.3	107.6	107.0	106.3	107.0	107.6	108.3
102.5°	144.0	142.7	142.0	141.9	141.7	141.6	141.4	141.2	141.4	141.6	141.7
105°	178.7	178.0	177.7	177.6	177.4	177.3	177.1	176.9	177.1	177.3	177.4
107.5°	215.1	215.0	214.9	214.8	214.6	214.5	214.3	214.1	214.3	214.5	214.6
110°	253.3	253.5	253.6	253.4	253.1	252.8	252.4	252.1	252.4	252.8	253.1

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	291.1	291.4	291.6	291.6	291.6	291.6	291.6	291.6	291.6	291.6	291.6
115°	330.5	330.8	331.0	331.0	331.0	331.0	331.0	331.0	331.0	331.0	331.0
117.5°	368.0	368.1	368.2	368.2	368.2	368.2	368.2	368.2	368.2	368.2	368.2
120°	407.7	408.2	408.5	408.2	407.5	406.8	406.1	405.4	406.1	406.8	407.5
122.5°	444.7	444.8	444.9	444.8	444.7	444.5	444.4	444.2	444.4	444.5	444.7
125°	481.9	482.0	482.1	482.1	482.1	482.1	482.1	482.1	482.1	482.1	482.1
127.5°	518.1	518.4	518.6	518.3	517.8	517.3	516.8	516.3	516.8	517.3	517.8
130°	555.0	555.0	555.0	554.7	554.2	553.7	553.2	552.7	553.2	553.7	554.2
132.5°	591.2	591.4	591.5	591.3	591.0	590.6	590.3	589.9	590.3	590.6	591.0
135°	626.4	626.4	626.4	625.9	624.9	623.8	622.8	621.8	622.8	623.8	624.9
137.5°	660.3	660.0	659.8	659.5	659.0	658.5	658.0	657.5	658.0	658.5	659.0
140°	694.7	694.7	694.7	694.5	694.2	693.9	693.5	693.2	693.5	693.9	694.2
142.5°	727.1	727.3	727.4	727.2	726.9	726.5	726.2	725.8	726.2	726.5	726.9
145°	758.8	758.6	758.5	758.2	757.5	756.8	756.2	755.5	756.2	756.8	757.5
147.5°	789.4	789.5	789.6	789.2	788.3	787.5	786.6	785.8	786.6	787.5	788.3
150°	816.2	816.2	816.2	815.9	815.2	814.5	813.9	813.2	813.9	814.5	815.2
152.5°	840.8	840.6	840.5	840.3	840.0	839.7	839.3	839.0	839.3	839.7	840.0
155°	865.3	865.5	865.6	865.6	865.6	865.6	865.6	865.6	865.6	865.6	865.6
157.5°	886.8	886.8	886.8	887.0	887.3	887.6	888.0	888.3	888.0	887.6	887.3
160°	907.0	907.2	907.3	907.4	907.6	907.7	907.9	908.1	907.9	907.7	907.6
162.5°	923.8	923.9	924.0	924.3	924.8	925.3	925.8	926.3	925.8	925.3	924.8
165°	939.5	939.8	940.0	940.2	940.7	941.2	941.7	942.2	941.7	941.2	940.7
167.5°	952.1	952.1	952.1	952.4	953.1	953.8	954.4	955.1	954.4	953.8	953.1
170°	962.2	962.1	962.0	962.4	963.3	964.1	965.0	965.8	965.0	964.1	963.3
172.5°	970.3	970.3	970.3	970.6	971.3	972.0	972.7	973.4	972.7	972.0	971.3
175°	976.1	976.3	976.4	976.8	977.7	978.5	979.4	980.2	979.4	978.5	977.7
177.5°	979.4	979.4	979.4	979.8	980.7	981.5	982.4	983.2	982.4	981.5	980.7
180°	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4FO-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9
2.5°	1668.6	1665.8	1663.1	1652.2	1642.6	1626.2	1612.5	1607.1	1605.7	1607.1	1603.0
5°	1620.7	1619.4	1609.8	1590.7	1572.9	1553.8	1540.1	1526.4	1518.2	1518.2	1508.7
7.5°	1575.6	1566.1	1557.9	1533.3	1512.8	1486.8	1466.3	1454.0	1447.2	1432.1	1432.1
10°	1527.8	1514.1	1503.2	1480.0	1449.9	1423.9	1398.0	1382.9	1370.6	1359.7	1355.6
12.5°	1480.0	1469.0	1448.5	1423.9	1393.9	1361.1	1333.8	1322.8	1294.1	1270.9	1272.3
15°	1434.9	1410.3	1400.7	1365.2	1329.7	1298.2	1258.6	1227.2	1203.9	1188.9	1169.8
17.5°	1384.3	1359.7	1341.9	1311.9	1265.4	1216.2	1178.0	1135.6	1112.4	1086.4	1074.1
20°	1328.3	1307.8	1294.1	1246.3	1190.3	1131.5	1089.1	1063.2	1037.2	1018.1	1007.1
22.5°	1280.5	1254.5	1238.1	1173.9	1112.4	1053.6	1020.8	998.9	977.1	960.7	955.2
25°	1219.0	1203.9	1164.3	1108.3	1033.1	993.5	964.8	936.1	923.8	912.9	900.6
27.5°	1168.4	1131.5	1104.2	1030.4	983.9	938.8	910.1	888.3	873.2	862.3	852.7
30°	1105.5	1071.4	1033.1	971.6	929.3	886.9	860.9	843.2	826.8	819.9	811.7
32.5°	1039.9	1008.5	971.6	922.4	870.5	837.7	817.2	798.1	787.1	780.3	770.7
35°	981.2	941.6	917.0	870.5	828.1	791.2	772.1	755.7	743.4	740.7	739.3
37.5°	918.3	888.3	865.0	817.2	781.7	750.2	732.5	714.7	707.9	706.5	701.0
40°	863.7	837.7	815.8	770.7	732.5	703.8	690.1	679.2	672.3	672.3	671.0
42.5°	815.8	788.5	766.6	725.6	691.5	665.5	650.5	639.5	636.8	638.2	636.8
45°	762.5	739.3	717.4	675.1	646.4	627.2	610.8	605.4	601.3	602.6	604.0
47.5°	712.0	692.8	671.0	636.8	604.0	583.5	574.0	568.5	568.5	568.5	571.2
50°	666.9	645.0	625.9	590.3	560.3	543.9	535.7	528.9	530.2	531.6	533.0
52.5°	613.6	594.4	580.8	545.3	523.4	502.9	493.3	494.7	493.3	493.3	496.1
55°	567.1	548.0	534.3	501.5	479.7	466.0	457.8	453.7	455.1	452.3	457.8
57.5°	515.2	498.8	489.2	457.8	438.7	426.4	419.5	412.7	415.4	414.1	412.7
60°	470.1	451.0	435.9	414.1	397.7	382.6	378.5	371.7	374.4	371.7	370.3
62.5°	418.2	403.1	392.2	370.3	356.7	344.4	334.8	330.7	329.3	325.2	321.1
65°	366.2	358.0	347.1	325.2	311.6	302.0	296.5	292.4	291.1	280.1	267.8
67.5°	318.4	312.9	302.0	285.6	273.3	263.7	255.5	248.7	240.5	232.3	225.5
70°	273.3	265.1	258.3	243.2	232.3	222.7	214.5	206.3	202.2	194.0	191.3
72.5°	229.6	221.4	214.5	200.9	191.3	181.8	179.0	169.5	165.4	164.0	164.0
75°	184.5	177.7	173.6	161.3	153.1	146.2	142.1	139.4	136.7	133.9	129.8
77.5°	140.8	136.7	133.9	125.7	118.9	114.8	113.4	103.9	101.1	98.4	95.7
80°	102.5	101.1	98.4	91.6	88.8	79.3	79.3	76.5	75.2	75.2	75.2
82.5°	69.7	67.0	65.6	58.8	57.4	56.0	54.7	53.3	54.7	53.3	54.7
85°	36.9	35.5	34.2	34.2	34.2	34.2	34.2	34.2	34.2	32.8	34.2
87.5°	13.7	13.7	13.7	13.7	12.3	13.7	13.7	12.3	13.7	13.7	13.7
90°	9.7	10.6	11.3	12.6	14.0	15.3	16.7	17.7	18.7	19.8	20.8
92.5°	28.5	29.6	30.0	30.9	31.7	32.6	33.4	33.9	34.4	34.9	35.4
95°	51.6	52.4	53.0	54.2	55.3	56.5	57.7	58.2	58.7	59.2	59.7
97.5°	78.3	79.0	79.7	81.0	82.3	83.7	85.0	85.7	86.4	87.1	87.8
100°	109.0	109.3	110.1	111.6	113.1	114.7	116.2	116.5	116.9	117.2	117.5
102.5°	141.9	142.0	142.7	144.0	145.4	146.7	148.1	148.6	149.1	149.6	150.1
105°	177.6	177.7	178.0	178.7	179.4	180.0	180.7	181.2	181.7	182.2	182.7
107.5°	214.8	214.9	215.0	215.1	215.3	215.4	215.6	216.3	217.0	217.7	218.4
110°	253.4	253.6	253.5	253.3	253.2	253.0	252.8	252.5	252.1	251.8	251.5

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	291.6	291.6	291.4	291.1	290.7	290.4	290.0	290.0	290.0	290.0	290.0
115°	331.0	331.0	330.8	330.5	330.2	329.8	329.5	329.3	329.2	329.0	328.9
117.5°	368.2	368.2	368.1	368.0	367.8	367.7	367.5	367.0	366.5	366.0	365.5
120°	408.2	408.5	408.2	407.7	407.2	406.7	406.2	405.4	404.5	403.7	402.8
122.5°	444.8	444.9	444.8	444.7	444.5	444.4	444.2	443.7	443.2	442.7	442.2
125°	482.1	482.1	482.0	481.9	481.7	481.6	481.4	481.0	480.7	480.3	480.0
127.5°	518.3	518.6	518.4	518.1	517.8	517.4	517.1	516.7	516.4	516.0	515.7
130°	554.7	555.0	555.0	555.0	555.0	555.0	555.0	554.7	554.3	554.0	553.7
132.5°	591.3	591.5	591.4	591.2	591.1	590.9	590.7	590.4	590.0	589.7	589.4
135°	625.9	626.4	626.4	626.4	626.4	626.4	626.4	626.1	625.7	625.4	625.1
137.5°	659.5	659.8	660.0	660.3	660.6	661.0	661.3	660.8	660.3	659.8	659.3
140°	694.5	694.7	694.7	694.7	694.7	694.7	694.7	694.5	694.4	694.2	694.1
142.5°	727.2	727.4	727.3	727.1	727.0	726.8	726.6	726.6	726.6	726.6	726.6
145°	758.2	758.5	758.6	758.8	758.9	759.1	759.3	759.1	758.9	758.8	758.6
147.5°	789.2	789.6	789.5	789.4	789.2	789.1	788.9	788.7	788.5	788.4	788.2
150°	815.9	816.2	816.2	816.2	816.2	816.2	816.2	816.2	816.2	816.2	816.2
152.5°	840.3	840.5	840.6	840.8	840.9	841.1	841.3	841.8	842.3	842.8	843.3
155°	865.6	865.6	865.5	865.3	865.2	865.0	864.8	865.5	866.1	866.8	867.5
157.5°	887.0	886.8	886.8	886.8	886.8	886.8	886.8	887.3	887.8	888.3	888.8
160°	907.4	907.3	907.2	907.0	906.9	906.7	906.5	907.0	907.5	908.0	908.5
162.5°	924.3	924.0	923.9	923.8	923.6	923.5	923.3	924.3	925.3	926.3	927.3
165°	940.2	940.0	939.8	939.5	939.1	938.8	938.4	939.4	940.4	941.5	942.5
167.5°	952.4	952.1	952.1	952.1	952.1	952.1	952.1	953.1	954.1	955.2	956.2
170°	962.4	962.0	962.1	962.2	962.4	962.5	962.7	963.7	964.7	965.8	966.8
172.5°	970.6	970.3	970.3	970.3	970.3	970.3	970.3	971.5	972.7	973.8	975.0
175°	976.8	976.4	976.3	976.1	976.0	975.8	975.6	976.8	978.0	979.2	980.4
177.5°	979.8	979.4	979.4	979.4	979.4	979.4	979.4	980.6	981.8	983.0	984.2
180°	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4FO-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9
2.5°	1603.0	1608.4	1601.6	1605.7	1596.1	1594.8	1596.1	1596.1	1597.5	1598.9	1600.2
5°	1512.8	1511.4	1503.2	1497.7	1493.6	1497.7	1500.5	1503.2	1500.5	1503.2	1504.6
7.5°	1428.0	1423.9	1419.8	1410.3	1413.0	1410.3	1418.5	1414.4	1414.4	1421.2	1426.7
10°	1352.9	1344.7	1341.9	1331.0	1322.8	1321.5	1331.0	1335.1	1339.2	1341.9	1352.9
12.5°	1255.9	1243.6	1234.0	1238.1	1214.9	1224.4	1227.2	1221.7	1238.1	1257.2	1246.3
15°	1152.0	1153.4	1134.2	1127.4	1108.3	1113.7	1115.1	1128.8	1142.4	1141.1	1157.5
17.5°	1075.5	1067.3	1050.9	1049.5	1041.3	1045.4	1044.0	1055.0	1050.9	1057.7	1071.4
20°	1004.4	998.9	985.3	979.8	982.5	979.8	981.2	982.5	986.6	1001.7	998.9
22.5°	948.4	941.6	941.6	934.7	926.5	923.8	930.6	934.7	940.2	942.9	949.8
25°	899.2	893.7	886.9	882.8	876.0	877.3	881.4	886.9	891.0	896.5	901.9
27.5°	848.6	848.6	841.8	840.4	837.7	836.3	841.8	844.5	844.5	848.6	854.1
30°	809.0	809.0	802.2	800.8	799.4	799.4	803.5	804.9	806.3	810.4	813.1
32.5°	770.7	769.4	766.6	768.0	766.6	768.0	768.0	769.4	772.1	773.5	778.9
35°	735.2	736.6	733.8	733.8	732.5	733.8	736.6	737.9	739.3	742.0	742.0
37.5°	701.0	703.8	702.4	706.5	706.5	706.5	706.5	709.2	709.2	709.2	707.9
40°	671.0	671.0	669.6	672.3	675.1	675.1	676.4	676.4	677.8	677.8	676.4
42.5°	636.8	639.5	643.6	645.0	647.7	646.4	650.5	649.1	650.5	647.7	645.0
45°	605.4	605.4	610.8	616.3	617.7	617.7	617.7	620.4	617.7	613.6	612.2
47.5°	571.2	574.0	576.7	583.5	584.9	584.9	584.9	584.9	582.1	582.1	582.1
50°	537.1	538.4	539.8	542.5	546.6	545.3	545.3	545.3	550.7	545.3	546.6
52.5°	496.1	497.4	498.8	504.3	502.9	502.9	504.3	504.3	508.4	507.0	504.3
55°	455.1	455.1	457.8	457.8	457.8	460.5	461.9	464.6	463.3	464.6	466.0
57.5°	414.1	411.3	410.0	410.0	414.1	412.7	414.1	414.1	419.5	422.3	423.6
60°	366.2	366.2	364.9	356.7	356.7	355.3	359.4	362.1	364.9	377.2	375.8
62.5°	317.0	311.6	306.1	307.5	299.3	303.4	300.6	303.4	311.6	321.1	322.5
65°	267.8	263.7	258.3	256.9	254.2	258.3	256.9	258.3	262.4	267.8	274.7
67.5°	224.1	222.7	220.0	218.6	218.6	218.6	221.4	221.4	222.7	226.8	230.9
70°	191.3	190.0	191.3	188.6	190.0	188.6	190.0	191.3	192.7	194.0	198.1
72.5°	161.3	161.3	161.3	158.5	161.3	159.9	159.9	161.3	162.6	164.0	166.7
75°	128.5	125.7	123.0	120.3	118.9	121.6	123.0	121.6	125.7	131.2	131.2
77.5°	97.0	95.7	95.7	95.7	97.0	95.7	98.4	97.0	98.4	98.4	101.1
80°	75.2	73.8	75.2	75.2	73.8	76.5	75.2	75.2	76.5	77.9	76.5
82.5°	54.7	56.0	54.7	54.7	54.7	57.4	54.7	54.7	54.7	56.0	56.0
85°	34.2	34.2	34.2	34.2	35.5	34.2	35.5	34.2	36.9	35.5	35.5
87.5°	12.3	13.7	15.0	15.0	15.0	15.0	13.7	15.0	16.4	15.0	16.4
90°	21.3	21.5	21.8	22.1	22.5	22.8	22.5	22.1	21.8	21.5	21.3
92.5°	35.7	35.8	35.9	36.1	36.2	36.4	36.2	36.1	35.9	35.8	35.7
95°	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
97.5°	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1
100°	117.7	117.7	117.7	117.7	117.7	117.7	117.7	117.7	117.7	117.7	117.7
102.5°	150.3	150.4	150.6	150.7	150.9	151.1	150.9	150.7	150.6	150.4	150.3
105°	183.0	183.3	183.8	184.3	184.8	185.3	184.8	184.3	183.8	183.3	183.0
107.5°	218.7	218.6	218.4	218.3	218.1	217.9	218.1	218.3	218.4	218.6	218.7
110°	251.3	251.6	252.1	252.6	253.1	253.6	253.1	252.6	252.1	251.6	251.3

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0	290.0
115°	328.8	328.7	328.5	328.4	328.2	328.0	328.2	328.4	328.5	328.7	328.8
117.5°	365.2	364.9	364.4	363.9	363.4	362.9	363.4	363.9	364.4	364.9	365.2
120°	402.4	402.6	402.9	403.2	403.6	403.9	403.6	403.2	402.9	402.6	402.4
122.5°	441.9	441.5	440.6	439.8	438.9	438.1	438.9	439.8	440.6	441.5	441.9
125°	479.8	479.6	479.3	479.0	478.6	478.3	478.6	479.0	479.3	479.6	479.8
127.5°	515.5	515.4	515.3	515.1	515.0	514.8	515.0	515.1	515.3	515.4	515.5
130°	553.5	553.2	552.5	551.8	551.2	550.5	551.2	551.8	552.5	553.2	553.5
132.5°	589.2	589.1	588.9	588.8	588.6	588.4	588.6	588.8	588.9	589.1	589.2
135°	624.9	624.6	624.1	623.6	623.1	622.6	623.1	623.6	624.1	624.6	624.9
137.5°	659.0	659.1	659.3	659.4	659.6	659.8	659.6	659.4	659.3	659.1	659.0
140°	694.0	693.9	693.7	693.6	693.4	693.2	693.4	693.6	693.7	693.9	694.0
142.5°	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6	726.6
145°	758.5	758.2	757.7	757.2	756.7	756.2	756.7	757.2	757.7	758.2	758.5
147.5°	788.1	788.0	787.8	787.7	787.5	787.3	787.5	787.7	787.8	788.0	788.1
150°	816.2	816.1	815.9	815.8	815.6	815.4	815.6	815.8	815.9	816.1	816.2
152.5°	843.5	843.3	842.8	842.3	841.8	841.3	841.8	842.3	842.8	843.3	843.5
155°	867.8	867.5	866.8	866.1	865.5	864.8	865.5	866.1	866.8	867.5	867.8
157.5°	889.1	888.8	888.3	887.8	887.3	886.8	887.3	887.8	888.3	888.8	889.1
160°	908.8	908.4	907.5	906.7	905.8	905.0	905.8	906.7	907.5	908.4	908.8
162.5°	927.8	927.4	926.5	925.7	924.8	924.0	924.8	925.7	926.5	927.4	927.8
165°	943.0	942.7	942.0	941.3	940.7	940.0	940.7	941.3	942.0	942.7	943.0
167.5°	956.7	956.2	955.2	954.1	953.1	952.1	953.1	954.1	955.2	956.2	956.7
170°	967.3	966.7	965.5	964.4	963.2	962.0	963.2	964.4	965.5	966.7	967.3
172.5°	975.6	975.0	973.8	972.7	971.5	970.3	971.5	972.7	973.8	975.0	975.6
175°	981.0	980.4	979.2	978.0	976.8	975.6	976.8	978.0	979.2	980.4	981.0
177.5°	984.8	984.1	982.8	981.4	980.1	978.7	980.1	981.4	982.8	984.1	984.8
180°	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9	1695.9
2.5°	1605.7	1612.5	1609.8	1600.2	1604.3	1612.5	1620.7	1631.7	1638.5	1644.0	1646.7
5°	1511.4	1523.7	1521.0	1521.0	1526.4	1540.1	1553.8	1577.0	1585.2	1594.8	1608.4
7.5°	1428.0	1437.6	1445.8	1448.5	1456.7	1474.5	1492.3	1518.2	1538.7	1549.7	1557.9
10°	1354.2	1361.1	1373.4	1380.2	1388.4	1410.3	1436.2	1463.6	1484.1	1503.2	1514.1
12.5°	1260.0	1287.3	1303.7	1314.6	1325.6	1358.3	1378.8	1408.9	1433.5	1451.3	1467.7
15°	1154.7	1187.5	1197.1	1239.5	1266.8	1292.8	1324.2	1359.7	1382.9	1403.4	1425.3
17.5°	1065.9	1089.1	1100.1	1145.2	1168.4	1209.4	1254.5	1299.6	1335.1	1350.1	1372.0
20°	1009.9	1022.2	1044.0	1059.1	1083.7	1131.5	1180.7	1235.4	1288.7	1303.7	1325.6
22.5°	952.5	968.9	983.9	1004.4	1023.5	1056.3	1105.5	1165.7	1223.1	1250.4	1276.4
25°	900.6	917.0	926.5	948.4	966.1	998.9	1033.1	1094.6	1162.9	1186.2	1227.2
27.5°	859.6	869.1	885.5	895.1	915.6	945.7	977.1	1023.5	1090.5	1130.1	1169.8
30°	818.6	825.4	839.1	852.7	867.8	888.3	923.8	968.9	1030.4	1064.5	1104.2
32.5°	777.6	788.5	796.7	806.3	822.7	847.3	871.9	915.6	964.8	1003.0	1042.7
35°	743.4	747.5	758.4	769.4	780.3	802.2	828.1	870.5	914.2	944.3	979.8
37.5°	706.5	713.3	721.5	725.6	743.4	757.1	784.4	817.2	869.1	888.3	923.8
40°	677.8	676.4	684.6	691.5	699.7	721.5	737.9	773.5	814.5	844.5	866.4
42.5°	642.3	642.3	645.0	653.2	664.1	677.8	696.9	727.0	769.4	791.2	817.2
45°	613.6	609.5	610.8	616.3	623.1	636.8	655.9	681.9	724.3	742.0	769.4
47.5°	579.4	575.3	575.3	580.8	586.2	595.8	610.8	640.9	675.1	698.3	718.8
50°	541.2	542.5	541.2	545.3	548.0	557.6	574.0	598.5	630.0	649.1	672.3
52.5°	505.6	502.9	501.5	504.3	509.7	516.6	534.3	556.2	586.2	605.4	625.9
55°	461.9	464.6	464.6	464.6	472.8	475.6	489.2	511.1	541.2	556.2	575.3
57.5°	422.3	420.9	423.6	422.3	429.1	438.7	449.6	466.0	496.1	511.1	528.9
60°	378.5	379.9	381.3	381.3	386.7	396.3	408.6	423.6	448.2	463.3	479.7
62.5°	325.2	332.1	338.9	341.6	349.8	356.7	364.9	381.3	403.1	414.1	429.1
65°	274.7	284.2	293.8	300.6	306.1	312.9	323.9	338.9	356.7	367.6	382.6
67.5°	230.9	237.8	250.1	256.9	267.8	276.0	282.9	295.2	317.0	321.1	333.4
70°	199.5	202.2	207.7	213.2	225.5	232.3	240.5	252.8	269.2	278.8	285.6
72.5°	168.1	169.5	172.2	177.7	183.1	191.3	200.9	211.8	226.8	230.9	240.5
75°	133.9	142.1	142.1	146.2	150.3	154.4	162.6	173.6	183.1	190.0	195.4
77.5°	99.8	103.9	106.6	113.4	118.9	123.0	128.5	136.7	142.1	147.6	151.7
80°	77.9	79.3	80.6	80.6	83.4	88.8	94.3	99.8	106.6	109.3	113.4
82.5°	57.4	57.4	57.4	60.1	61.5	62.9	62.9	65.6	72.4	75.2	79.3
85°	36.9	36.9	36.9	36.9	38.3	39.6	41.0	42.4	42.4	42.4	45.1
87.5°	15.0	17.8	16.4	17.8	17.8	17.8	17.8	19.1	19.1	20.5	20.5
90°	20.8	19.8	18.7	17.7	16.7	15.3	14.0	12.6	11.3	10.6	9.7
92.5°	35.4	34.9	34.4	33.9	33.4	32.6	31.7	30.9	30.0	29.6	28.5
95°	59.7	59.2	58.7	58.2	57.7	56.5	55.3	54.2	53.0	52.4	51.6
97.5°	87.8	87.1	86.4	85.7	85.0	83.7	82.3	81.0	79.7	79.0	78.3
100°	117.5	117.2	116.9	116.5	116.2	114.7	113.1	111.6	110.1	109.3	109.0
102.5°	150.1	149.6	149.1	148.6	148.1	146.7	145.4	144.0	142.7	142.0	141.9
105°	182.7	182.2	181.7	181.2	180.7	180.0	179.4	178.7	178.0	177.7	177.6
107.5°	218.4	217.7	217.0	216.3	215.6	215.4	215.3	215.1	215.0	214.9	214.8
110°	251.5	251.8	252.1	252.5	252.8	253.0	253.2	253.3	253.5	253.6	253.4

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	290.0	290.0	290.0	290.0	290.0	290.4	290.7	291.1	291.4	291.6	291.6
115°	328.9	329.0	329.2	329.3	329.5	329.8	330.2	330.5	330.8	331.0	331.0
117.5°	365.5	366.0	366.5	367.0	367.5	367.7	367.8	368.0	368.1	368.2	368.2
120°	402.8	403.7	404.5	405.4	406.2	406.7	407.2	407.7	408.2	408.5	408.2
122.5°	442.2	442.7	443.2	443.7	444.2	444.4	444.5	444.7	444.8	444.9	444.8
125°	480.0	480.3	480.7	481.0	481.4	481.6	481.7	481.9	482.0	482.1	482.1
127.5°	515.7	516.0	516.4	516.7	517.1	517.4	517.8	518.1	518.4	518.6	518.3
130°	553.7	554.0	554.3	554.7	555.0	555.0	555.0	555.0	555.0	555.0	554.7
132.5°	589.4	589.7	590.0	590.4	590.7	590.9	591.1	591.2	591.4	591.5	591.3
135°	625.1	625.4	625.7	626.1	626.4	626.4	626.4	626.4	626.4	626.4	625.9
137.5°	659.3	659.8	660.3	660.8	661.3	661.0	660.6	660.3	660.0	659.8	659.5
140°	694.1	694.2	694.4	694.5	694.7	694.7	694.7	694.7	694.7	694.7	694.5
142.5°	726.6	726.6	726.6	726.6	726.6	726.8	727.0	727.1	727.3	727.4	727.2
145°	758.6	758.8	758.9	759.1	759.3	759.1	758.9	758.8	758.6	758.5	758.2
147.5°	788.2	788.4	788.5	788.7	788.9	789.1	789.2	789.4	789.5	789.6	789.2
150°	816.2	816.2	816.2	816.2	816.2	816.2	816.2	816.2	816.2	816.2	815.9
152.5°	843.3	842.8	842.3	841.8	841.3	841.1	840.9	840.8	840.6	840.5	840.3
155°	867.5	866.8	866.1	865.5	864.8	865.0	865.2	865.3	865.5	865.6	865.6
157.5°	888.8	888.3	887.8	887.3	886.8	886.8	886.8	886.8	886.8	886.8	887.0
160°	908.5	908.0	907.5	907.0	906.5	906.7	906.9	907.0	907.2	907.3	907.4
162.5°	927.3	926.3	925.3	924.3	923.3	923.5	923.6	923.8	923.9	924.0	924.3
165°	942.5	941.5	940.4	939.4	938.4	938.8	939.1	939.5	939.8	940.0	940.2
167.5°	956.2	955.2	954.1	953.1	952.1	952.1	952.1	952.1	952.1	952.1	952.4
170°	966.8	965.8	964.7	963.7	962.7	962.5	962.4	962.2	962.1	962.0	962.4
172.5°	975.0	973.8	972.7	971.5	970.3	970.3	970.3	970.3	970.3	970.3	970.6
175°	980.4	979.2	978.0	976.8	975.6	975.8	976.0	976.1	976.3	976.4	976.8
177.5°	984.2	983.0	981.8	980.6	979.4	979.4	979.4	979.4	979.4	979.4	979.8
180°	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7	981.7

TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1695.9	1695.9	1695.9	1695.9
2.5°	1657.6	1665.8	1679.5	1698.6
5°	1619.4	1642.6	1664.5	1693.2
7.5°	1585.2	1612.5	1642.6	1683.6
10°	1545.6	1579.7	1618.0	1668.6
12.5°	1499.1	1546.9	1590.7	1645.3
15°	1464.9	1500.5	1556.5	1620.7
17.5°	1417.1	1464.9	1521.0	1593.4
20°	1372.0	1422.6	1485.4	1560.6
22.5°	1324.2	1381.6	1444.4	1525.1
25°	1275.0	1336.5	1399.3	1485.4
27.5°	1229.9	1285.9	1357.0	1444.4
30°	1175.2	1239.5	1307.8	1399.3
32.5°	1121.9	1188.9	1258.6	1350.1
35°	1064.5	1131.5	1208.0	1295.5
37.5°	1008.5	1082.3	1152.0	1236.7
40°	947.0	1023.5	1096.0	1182.1
42.5°	886.9	966.1	1038.6	1112.4
45°	830.9	908.8	974.3	1044.0
47.5°	777.6	847.3	914.2	977.1
50°	725.6	784.4	845.9	897.8
52.5°	671.0	727.0	776.2	822.7
55°	621.8	665.5	709.2	751.6
57.5°	563.0	606.7	645.0	677.8
60°	513.8	541.2	578.0	612.2
62.5°	457.8	489.2	517.9	539.8
65°	403.1	430.5	452.3	471.5
67.5°	356.7	373.1	389.5	410.0
70°	300.6	314.3	333.4	348.5
72.5°	252.8	263.7	273.3	291.1
75°	205.0	214.5	220.0	236.4
77.5°	158.5	168.1	172.2	181.8
80°	121.6	123.0	128.5	136.7
82.5°	83.4	86.1	87.5	94.3
85°	47.8	54.7	53.3	56.0
87.5°	20.5	21.9	24.6	27.3
90°	7.8	6.0	4.1	2.3
92.5°	26.3	24.1	21.9	19.7
95°	50.1	48.6	47.1	45.6
97.5°	77.0	75.6	74.3	72.9
100°	108.3	107.6	107.0	106.3
102.5°	141.7	141.6	141.4	141.2
105°	177.4	177.3	177.1	176.9
107.5°	214.6	214.5	214.3	214.1
110°	253.1	252.8	252.4	252.1



TEST NUMBER: P1026068

CATALOG NUMBER: S124RDIP-B1020D810UB40-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	291.6	291.6	291.6	291.6
115°	331.0	331.0	331.0	331.0
117.5°	368.2	368.2	368.2	368.2
120°	407.5	406.8	406.1	405.4
122.5°	444.7	444.5	444.4	444.2
125°	482.1	482.1	482.1	482.1
127.5°	517.8	517.3	516.8	516.3
130°	554.2	553.7	553.2	552.7
132.5°	591.0	590.6	590.3	589.9
135°	624.9	623.8	622.8	621.8
137.5°	659.0	658.5	658.0	657.5
140°	694.2	693.9	693.5	693.2
142.5°	726.9	726.5	726.2	725.8
145°	757.5	756.8	756.2	755.5
147.5°	788.3	787.5	786.6	785.8
150°	815.2	814.5	813.9	813.2
152.5°	840.0	839.7	839.3	839.0
155°	865.6	865.6	865.6	865.6
157.5°	887.3	887.6	888.0	888.3
160°	907.6	907.7	907.9	908.1
162.5°	924.8	925.3	925.8	926.3
165°	940.7	941.2	941.7	942.2
167.5°	953.1	953.8	954.4	955.1
170°	963.3	964.1	965.0	965.8
172.5°	971.3	972.0	972.7	973.4
175°	977.7	978.5	979.4	980.2
177.5°	980.7	981.5	982.4	983.2
180°	981.7	981.7	981.7	981.7

(END OF REPORT)