

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1026981

Luminaire Tested: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1026981
REPORT IS A COMBINATION OF REPORTS P1002430 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K
Description: Define 5 Direct/Indirect Pendant with 3500K BioUP LEDs {m-DER=0.721} {m-EER=0.792}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7601.0 lumens
Efficiency: N/A
Efficacy: 118.0 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.43 / 1.52
Luminous Opening: Rectangular w/ Sides (W: 0.42' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 64.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

Luminous Intensity Polar Plot

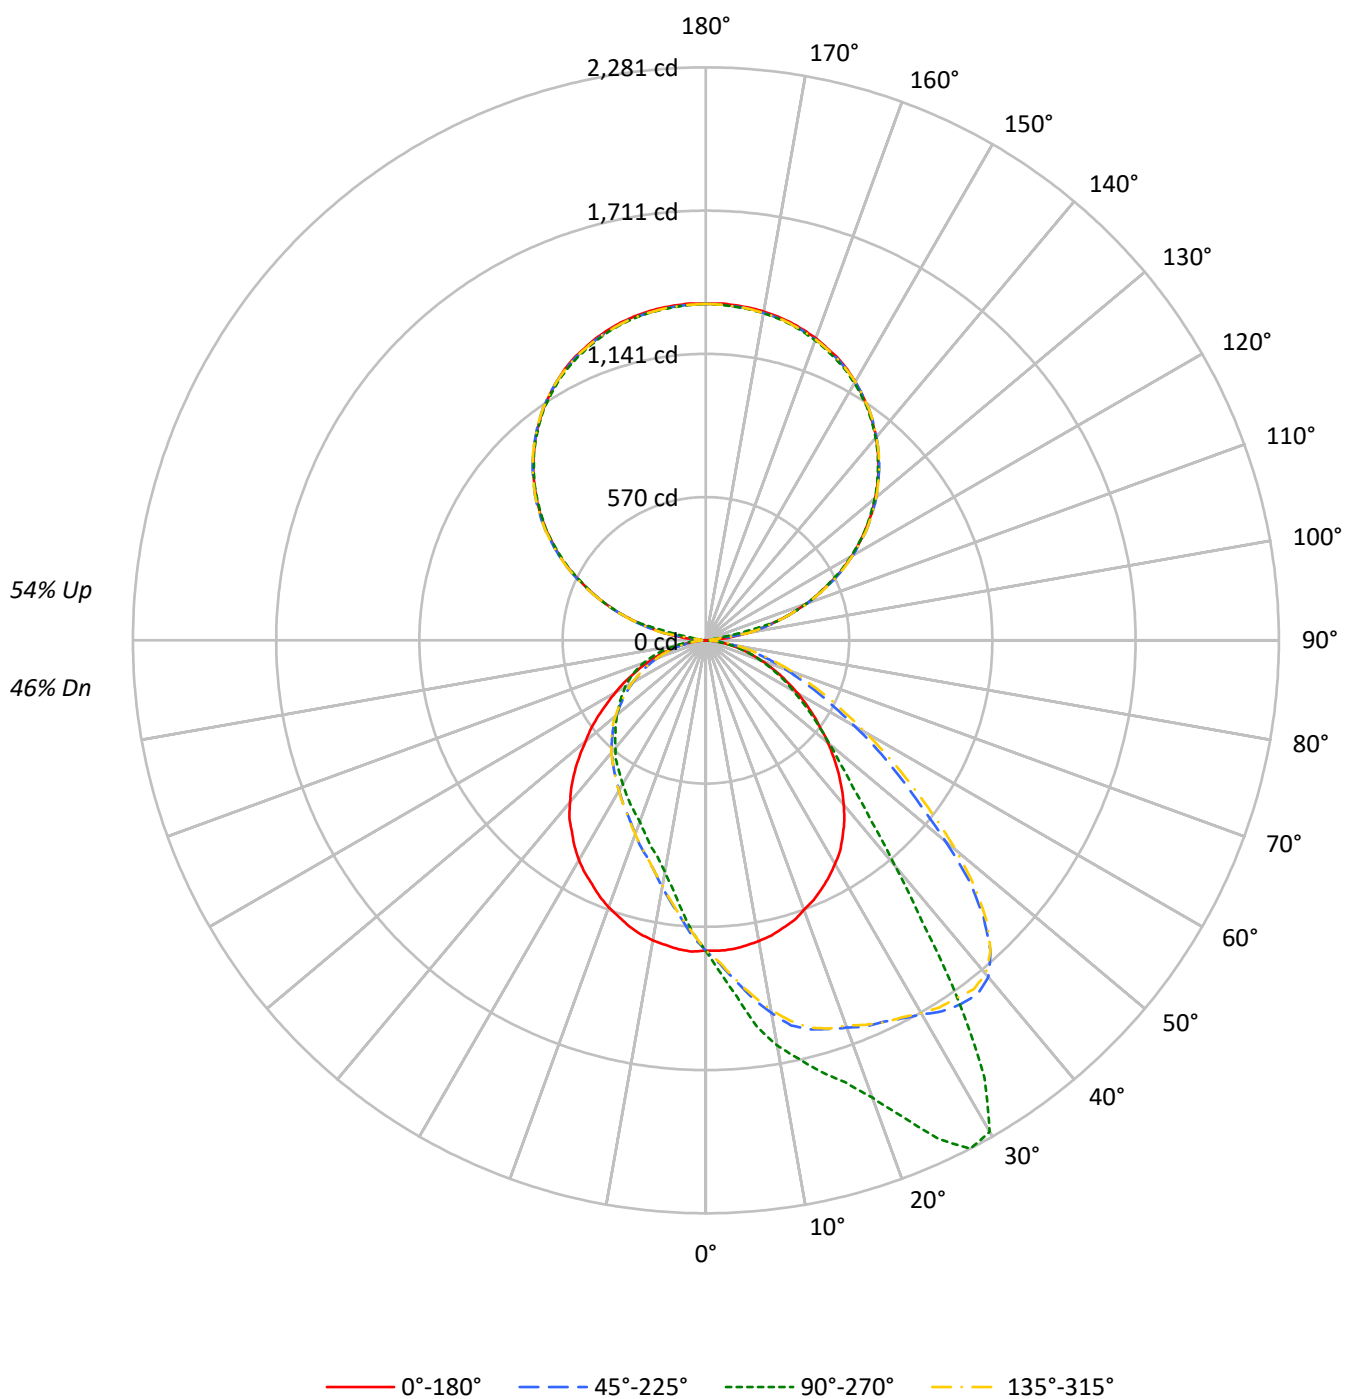

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46		
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	47	46	45	39		
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	41	39	38	33		
3	81	72	64	59	74	66	60	55	55	51	47	46	42	40	37	34	32	28		
4	74	63	56	50	68	59	52	47	49	44	40	41	37	34	33	30	28	24		
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	30	27	24	21		
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19		
7	58	46	38	32	53	42	35	30	36	31	27	30	26	23	25	21	19	17		
8	54	41	34	29	49	39	32	27	33	27	24	28	23	20	23	19	17	15		
9	50	38	30	25	46	35	29	24	30	25	21	25	21	18	21	18	15	13		
10	47	35	28	23	43	32	26	21	28	23	19	23	19	16	19	16	14	12		

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	7913	7913	7913	7913
5°	7919	8977	7926	6810
10°	7871	10231	7857	5845
15°	7813	11093	7764	5282
20°	7714	12156	7643	4822
25°	7627	13929	7488	4550
30°	7501	14695	7370	4303
35°	7301	11780	7148	4105
40°	6991	8142	6888	3895
45°	6599	6061	6525	3721
50°	6149	4990	6048	3582
55°	5664	4256	5619	3461
60°	5189	3643	5100	3367
65°	4676	3146	4602	3231
70°	4135	2612	4079	2992
75°	3562	2020	3514	2597
80°	2811	1366	2711	1909
85°	1801	683	1738	974

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 135°

Vertical Angle: 45°

Luminance: 12086 cd/sqm

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.9	1.6
10°-20°	354.0	4.7
20°-30°	575.1	7.6
30°-40°	702.9	9.2
40°-50°	637.5	8.4
50°-60°	507.8	6.7
60°-70°	353.7	4.7
70°-80°	188.4	2.5
80°-90°	48.7	0.6
90°-100°	45.4	0.6
100°-110°	302.3	4.0
110°-120°	544.3	7.2
120°-130°	698.7	9.2
130°-140°	751.4	9.9
140°-150°	705.3	9.3
150°-160°	570.5	7.5
160°-170°	368.9	4.9
170°-180°	127.2	1.7
0°-30°	1048.0	13.8
0°-40°	1750.8	23.0
0°-60°	2896.2	38.1
0°-90°	3487.0	45.9
90°-120°	892.0	11.7
90°-150°	3047.4	40.1
90°-180°	4114.0	54.1
0°-180°	7601.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1235	1235	1235	1235	1235	
5°	1234	1425	1235	1081	1234	117
15°	1186	1779	1178	847	1186	335
25°	1091	2189	1072	715	1091	503
35°	950	1757	930	612	950	593
45°	746	828	738	508	746	575
55°	525	511	521	415	525	470
65°	325	314	320	322	325	322
75°	157	154	155	198	157	167
85°	32	35	30	49	32	38
90°	1	24	1	24	1	5
95°	57	21	57	21	57	69
105°	292	295	292	295	292	309
115°	548	544	548	544	548	543
125°	779	779	779	779	779	696
135°	972	968	972	968	972	749
145°	1127	1124	1127	1124	1127	705
155°	1241	1232	1241	1232	1241	572
165°	1310	1303	1310	1303	1310	370
175°	1339	1333	1339	1333	1339	128
180°	1339	1339	1339	1339	1339	

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0
2.5°	1237.1	1244.4	1252.8	1259.1	1269.6	1272.7	1278.0	1281.1	1284.3	1287.4	1289.5
5°	1234.0	1251.8	1267.5	1279.0	1299.0	1306.3	1315.7	1327.3	1340.9	1352.4	1359.8
7.5°	1225.6	1253.9	1274.8	1297.9	1325.2	1343.0	1352.4	1376.5	1398.6	1415.3	1437.3
10°	1215.1	1248.6	1281.1	1315.7	1354.5	1374.4	1393.3	1426.9	1457.3	1484.5	1506.5
12.5°	1203.6	1244.4	1283.2	1328.3	1380.7	1404.8	1417.4	1475.1	1512.8	1527.5	1570.5
15°	1185.7	1234.0	1289.5	1345.1	1389.1	1417.4	1452.0	1498.1	1535.9	1568.4	1603.0
17.5°	1169.0	1221.4	1278.0	1339.8	1403.8	1440.5	1466.7	1507.6	1548.5	1590.4	1622.9
20°	1141.7	1209.8	1267.5	1333.6	1409.0	1435.2	1462.5	1510.7	1554.8	1599.8	1640.7
22.5°	1119.7	1184.7	1263.3	1326.2	1390.2	1416.4	1449.9	1500.2	1552.7	1604.0	1663.8
25°	1091.4	1163.7	1231.9	1299.0	1365.0	1393.3	1423.7	1488.7	1543.2	1609.3	1675.3
27.5°	1061.0	1135.4	1203.6	1264.4	1326.2	1365.0	1397.5	1465.6	1538.0	1610.3	1696.3
30°	1028.5	1098.7	1163.7	1223.5	1291.6	1331.5	1364.0	1443.6	1524.4	1616.6	1719.4
32.5°	993.9	1059.9	1115.5	1176.3	1248.6	1285.3	1329.4	1416.4	1511.8	1621.9	1750.8
35°	949.8	1012.7	1062.0	1123.9	1196.2	1243.4	1289.5	1387.0	1498.1	1620.8	1768.6
37.5°	905.8	955.1	1002.3	1068.3	1152.2	1195.2	1243.4	1350.3	1477.2	1617.7	1776.0
40°	853.4	901.6	942.5	1009.6	1097.7	1146.9	1197.3	1309.4	1453.1	1606.1	1749.8
42.5°	801.0	841.9	886.9	957.2	1042.1	1094.5	1148.0	1272.7	1421.6	1572.6	1677.4
45°	746.5	777.9	827.2	891.1	981.3	1031.6	1092.4	1227.7	1377.6	1511.8	1564.2
47.5°	689.8	721.3	767.4	829.3	918.4	978.1	1035.8	1171.1	1322.0	1425.8	1425.8
50°	635.3	660.5	705.6	767.4	857.6	912.1	970.8	1114.4	1236.1	1312.6	1244.4
52.5°	576.6	604.9	642.7	707.7	796.8	846.1	910.0	1032.7	1148.0	1179.4	1074.6
55°	525.2	548.3	584.0	645.8	728.6	780.0	834.5	951.9	1049.4	1047.3	935.2
57.5°	471.8	490.6	528.4	585.0	661.5	707.7	762.2	863.9	943.6	915.2	809.4
60°	422.5	436.1	472.8	519.0	592.3	635.3	687.7	770.6	831.4	791.5	684.6
62.5°	371.1	386.9	416.2	461.3	526.3	560.9	599.7	683.6	722.3	686.7	577.7
65°	325.0	337.6	363.8	401.5	460.2	491.7	525.2	594.4	631.1	579.8	489.6
67.5°	278.9	293.5	312.4	346.0	392.1	421.5	450.8	510.6	527.3	481.2	405.7
70°	235.9	248.5	266.3	290.4	329.2	355.4	377.4	426.7	438.2	395.2	335.5
72.5°	194.0	202.3	217.0	236.9	272.6	287.3	310.3	343.9	358.5	319.8	276.8
75°	157.3	163.5	173.0	187.7	211.8	227.5	246.4	277.8	276.8	249.5	219.1
77.5°	121.6	122.7	133.1	146.8	161.5	175.1	184.5	206.5	208.6	191.9	166.7
80°	87.0	90.2	94.4	104.8	117.4	122.7	134.2	147.8	149.9	137.3	120.6
82.5°	55.6	57.7	60.8	67.1	75.5	81.8	88.1	93.3	98.5	91.2	77.6
85°	31.5	32.5	35.6	37.7	41.9	45.1	50.3	55.6	54.5	49.3	45.1
87.5°	15.7	15.7	15.7	17.8	19.9	19.9	22.0	23.1	24.1	22.0	19.9
90°	1.0	2.8	4.5	6.3	8.0	8.9	9.7	11.2	12.8	14.3	15.9
92.5°	18.9	16.9	14.9	12.9	10.9	9.9	10.6	11.9	13.2	14.6	15.9
95°	56.6	55.9	55.3	54.6	53.9	53.6	49.4	41.0	32.7	24.3	15.9
97.5°	106.2	107.5	108.9	110.2	111.5	112.2	101.7	80.8	59.8	38.9	17.9
100°	165.8	166.5	167.1	167.8	168.5	168.8	169.2	170.1	171.0	171.8	172.7
102.5°	226.4	227.3	228.1	229.0	229.9	230.3	230.5	231.0	231.4	231.9	232.3
105°	291.9	292.8	293.7	294.6	295.5	295.9	295.9	295.9	295.9	295.9	295.9
107.5°	359.4	359.4	359.4	359.4	359.4	359.4	359.6	360.1	360.5	361.0	361.4
110°	424.9	424.9	424.9	424.9	424.9	424.9	425.1	425.6	426.0	426.5	426.9

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	486.5	487.2	487.8	488.5	489.2	489.5	489.6	489.8	490.0	490.2	490.4
115°	548.0	549.1	550.2	551.3	552.4	553.0	553.1	553.3	553.6	553.8	554.0
117.5°	612.6	612.6	612.6	612.6	612.6	612.6	613.0	613.9	614.8	615.6	616.5
120°	672.1	671.9	671.7	671.4	671.2	671.1	671.4	672.1	672.8	673.4	674.1
122.5°	724.7	725.8	726.9	728.0	729.1	729.7	729.8	730.0	730.3	730.5	730.7
125°	779.3	780.9	782.4	784.0	785.5	786.3	786.3	786.3	786.3	786.3	786.3
127.5°	832.0	833.1	834.2	835.3	836.4	836.9	836.8	836.6	836.3	836.1	835.9
130°	879.6	880.7	881.8	882.9	884.0	884.6	884.7	884.9	885.2	885.4	885.6
132.5°	927.3	928.6	929.9	931.2	932.5	933.2	932.9	932.2	931.6	930.9	930.3
135°	972.0	973.3	974.6	975.9	977.2	977.9	977.7	977.2	976.8	976.3	975.9
137.5°	1013.7	1015.0	1016.3	1017.6	1018.9	1019.6	1019.4	1018.9	1018.5	1018.0	1017.6
140°	1054.4	1054.8	1055.2	1055.7	1056.1	1056.3	1056.2	1056.0	1055.7	1055.5	1055.3
142.5°	1091.1	1091.3	1091.5	1091.8	1092.0	1092.1	1092.3	1092.8	1093.2	1093.7	1094.1
145°	1126.8	1127.2	1127.7	1128.1	1128.6	1128.8	1128.8	1128.8	1128.8	1128.8	1128.8
147.5°	1158.6	1158.6	1158.6	1158.6	1158.6	1158.6	1158.7	1158.9	1159.2	1159.4	1159.6
150°	1188.4	1188.0	1187.5	1187.1	1186.6	1186.4	1186.6	1187.1	1187.5	1188.0	1188.4
152.5°	1217.2	1216.1	1215.0	1213.9	1212.8	1212.2	1212.4	1212.9	1213.3	1213.8	1214.2
155°	1241.0	1239.7	1238.3	1237.0	1235.7	1235.0	1235.2	1235.7	1236.1	1236.6	1237.0
157.5°	1259.9	1259.2	1258.6	1257.9	1257.2	1256.9	1256.9	1256.9	1256.9	1256.9	1256.9
160°	1279.7	1278.4	1277.1	1275.8	1274.5	1273.8	1273.9	1274.1	1274.4	1274.6	1274.8
162.5°	1295.6	1294.3	1292.9	1291.6	1290.3	1289.6	1289.7	1289.9	1290.2	1290.4	1290.6
165°	1309.5	1308.2	1306.8	1305.5	1304.2	1303.5	1303.6	1303.8	1304.1	1304.3	1304.5
167.5°	1320.4	1319.1	1317.8	1316.5	1315.2	1314.5	1314.6	1314.8	1315.1	1315.3	1315.5
170°	1329.4	1327.8	1326.3	1324.7	1323.2	1322.4	1322.5	1322.7	1323.0	1323.2	1323.4
172.5°	1335.3	1333.8	1332.2	1330.7	1329.2	1328.4	1328.6	1329.1	1329.5	1330.0	1330.4
175°	1339.3	1338.0	1336.6	1335.3	1334.0	1333.3	1333.4	1333.6	1333.9	1334.1	1334.3
177.5°	1342.3	1341.0	1339.6	1338.3	1337.0	1336.3	1336.4	1336.6	1336.9	1337.1	1337.3
180°	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0
2.5°	1291.6	1299.0	1305.2	1310.5	1314.7	1321.0	1316.8	1317.8	1319.9	1324.1	1324.1
5°	1375.5	1387.0	1393.3	1414.3	1419.5	1418.5	1415.3	1432.1	1431.1	1424.8	1423.7
7.5°	1457.3	1477.2	1495.0	1511.8	1517.0	1530.6	1533.8	1541.1	1539.0	1549.5	1544.3
10°	1531.7	1563.1	1579.9	1605.1	1611.4	1617.7	1626.1	1630.2	1639.7	1638.6	1638.6
12.5°	1589.4	1627.1	1649.1	1655.4	1679.5	1686.9	1694.2	1707.8	1704.7	1705.7	1712.0
15°	1634.4	1671.1	1690.0	1719.4	1736.1	1744.5	1757.1	1771.8	1769.7	1779.1	1777.0
17.5°	1668.0	1702.6	1737.2	1781.2	1782.3	1804.3	1833.6	1839.9	1853.6	1844.1	1844.1
20°	1695.2	1741.4	1790.6	1847.3	1853.6	1867.2	1902.8	1926.9	1942.7	1937.4	1940.6
22.5°	1724.6	1790.6	1848.3	1904.9	1935.3	1959.4	1994.0	2031.8	2045.4	2053.8	2051.7
25°	1762.3	1831.5	1916.5	1995.1	2026.5	2072.7	2118.8	2155.5	2166.0	2189.0	2168.1
27.5°	1801.1	1898.6	2004.5	2096.8	2136.6	2174.4	2229.9	2257.2	2270.8	2281.3	2274.0
30°	1833.6	1967.8	2083.2	2168.1	2196.4	2218.4	2249.8	2256.1	2250.9	2259.3	2269.8
32.5°	1884.0	2015.0	2112.5	2153.4	2150.2	2149.2	2125.1	2091.5	2084.2	2064.3	2091.5
35°	1911.2	2016.1	2053.8	1999.3	1977.3	1937.4	1860.9	1810.6	1766.5	1757.1	1759.2
37.5°	1895.5	1936.4	1891.3	1747.7	1712.0	1651.2	1549.5	1478.2	1445.7	1420.6	1453.1
40°	1810.6	1765.5	1641.8	1466.7	1415.3	1357.7	1262.3	1223.5	1177.3	1167.9	1210.9
42.5°	1670.1	1532.7	1357.7	1222.4	1169.0	1136.5	1056.8	1020.1	987.6	972.9	997.0
45°	1479.3	1312.6	1136.5	1025.3	980.2	941.5	894.3	855.5	834.5	828.2	848.1
47.5°	1282.2	1106.1	965.6	882.7	835.6	806.2	762.2	740.2	723.4	725.5	728.6
50°	1093.5	933.1	825.1	742.3	719.2	696.1	666.8	647.9	639.5	642.7	640.6
52.5°	931.0	801.0	709.8	645.8	635.3	613.3	589.2	573.5	570.3	571.4	574.5
55°	788.4	686.7	614.4	568.2	556.7	541.0	526.3	515.8	507.4	510.6	509.5
57.5°	680.4	591.3	535.7	498.0	489.6	480.2	466.5	461.3	458.1	451.9	457.1
60°	585.0	512.7	464.4	441.4	434.0	427.7	413.1	406.8	404.7	401.5	409.9
62.5°	494.8	443.5	406.8	385.8	378.5	372.2	364.8	359.6	360.6	356.5	360.6
65°	423.5	381.6	355.4	336.5	327.1	322.9	321.9	313.5	312.4	313.5	314.5
67.5°	357.5	321.9	301.9	290.4	283.1	278.9	275.7	270.5	274.7	271.5	273.6
70°	297.7	273.6	252.7	241.1	238.0	239.0	233.8	231.7	232.7	230.6	232.7
72.5°	240.1	220.2	211.8	203.4	199.2	198.1	195.0	191.9	195.0	194.0	194.0
75°	191.9	177.2	167.7	162.5	162.5	160.4	155.2	155.2	155.2	154.1	155.2
77.5°	147.8	135.2	131.0	125.8	125.8	122.7	121.6	121.6	119.5	122.7	120.6
80°	110.1	100.6	94.4	91.2	91.2	90.2	88.1	87.0	88.1	87.0	87.0
82.5°	71.3	67.1	64.0	60.8	59.8	60.8	59.8	57.7	58.7	57.7	59.8
85°	40.9	36.7	36.7	34.6	35.6	33.5	34.6	32.5	31.5	34.6	32.5
87.5°	17.8	16.8	16.8	14.7	14.7	14.7	13.6	14.7	13.6	12.6	13.6
90°	17.0	18.1	19.2	20.3	20.8	21.1	21.8	22.5	23.1	23.8	23.1
92.5°	17.0	18.1	19.2	20.3	20.8	20.9	21.1	21.4	21.6	21.8	21.6
95°	17.0	18.1	19.2	20.3	20.8	20.8	20.8	20.8	20.8	20.8	20.8
97.5°	18.3	18.8	19.2	19.7	19.9	20.0	20.2	20.4	20.6	20.8	20.6
100°	139.8	107.0	74.1	41.2	24.8	24.4	23.5	22.6	21.7	20.8	21.7
102.5°	232.7	233.2	233.6	234.1	234.3	225.0	206.5	188.0	169.4	150.9	169.4
105°	295.9	295.9	295.9	295.9	295.9	295.8	295.6	295.3	295.1	294.9	295.1
107.5°	361.6	361.8	362.1	362.3	362.4	362.0	361.1	360.2	359.3	358.4	359.3
110°	426.2	425.6	424.9	424.2	423.9	424.0	424.2	424.5	424.7	424.9	424.7

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	489.5	488.7	487.8	486.9	486.5	486.3	485.8	485.4	484.9	484.5	484.9
115°	553.1	552.2	551.3	550.4	550.0	549.3	548.0	546.7	545.4	544.1	545.4
117.5°	615.2	613.9	612.6	611.3	610.6	610.4	609.9	609.5	609.0	608.6	609.0
120°	673.7	673.2	672.8	672.3	672.1	671.6	670.5	669.4	668.3	667.2	668.3
122.5°	730.3	729.8	729.4	728.9	728.7	728.0	726.7	725.4	724.1	722.8	724.1
125°	785.4	784.5	783.6	782.7	782.3	782.0	781.3	780.6	780.0	779.3	780.0
127.5°	835.5	835.1	834.6	834.2	834.0	833.1	831.3	829.6	827.8	826.0	827.8
130°	884.9	884.3	883.6	882.9	882.6	882.0	880.9	879.8	878.7	877.6	878.7
132.5°	930.3	930.3	930.3	930.3	930.3	929.7	928.6	927.5	926.4	925.3	926.4
135°	975.5	975.0	974.6	974.1	973.9	973.2	971.9	970.6	969.3	968.0	969.3
137.5°	1017.6	1017.6	1017.6	1017.6	1017.6	1017.1	1016.0	1014.9	1013.8	1012.7	1013.8
140°	1055.7	1056.2	1056.6	1057.1	1057.3	1056.6	1055.3	1054.0	1052.7	1051.4	1052.7
142.5°	1094.1	1094.1	1094.1	1094.1	1094.1	1093.4	1092.1	1090.8	1089.4	1088.1	1089.4
145°	1129.0	1129.2	1129.5	1129.7	1129.8	1129.1	1127.8	1126.5	1125.2	1123.9	1125.2
147.5°	1159.8	1160.0	1160.3	1160.5	1160.6	1159.8	1158.3	1156.7	1155.2	1153.6	1155.2
150°	1188.8	1189.3	1189.7	1190.2	1190.4	1189.5	1187.7	1186.0	1184.2	1182.4	1184.2
152.5°	1214.6	1215.1	1215.5	1216.0	1216.2	1215.4	1213.9	1212.3	1210.8	1209.2	1210.8
155°	1237.7	1238.3	1239.0	1239.7	1240.0	1239.1	1237.4	1235.6	1233.9	1232.1	1233.9
157.5°	1257.6	1258.2	1258.9	1259.6	1259.9	1259.0	1257.2	1255.5	1253.7	1251.9	1253.7
160°	1275.7	1276.5	1277.4	1278.3	1278.7	1277.8	1276.1	1274.3	1272.6	1270.8	1272.6
162.5°	1291.9	1293.3	1294.6	1295.9	1296.6	1295.6	1293.6	1291.7	1289.7	1287.7	1289.7
165°	1305.8	1307.2	1308.5	1309.8	1310.5	1309.6	1307.9	1306.1	1304.4	1302.6	1304.4
167.5°	1317.0	1318.6	1320.1	1321.6	1322.4	1321.4	1319.4	1317.5	1315.5	1313.5	1315.5
170°	1325.2	1326.9	1328.7	1330.4	1331.3	1330.3	1328.3	1326.4	1324.4	1322.4	1324.4
172.5°	1331.9	1333.5	1335.0	1336.5	1337.3	1336.3	1334.3	1332.4	1330.4	1328.4	1330.4
175°	1336.1	1337.9	1339.6	1341.4	1342.3	1341.3	1339.3	1337.3	1335.3	1333.3	1335.3
177.5°	1338.9	1340.4	1342.0	1343.5	1344.3	1343.4	1341.6	1339.9	1338.1	1336.3	1338.1
180°	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0
2.5°	1322.0	1314.7	1316.8	1314.7	1309.4	1306.3	1297.9	1287.4	1283.2	1278.0	1274.8
5°	1427.9	1422.7	1421.6	1413.2	1411.1	1398.6	1377.6	1367.1	1354.5	1341.9	1329.4
7.5°	1543.2	1536.9	1516.0	1512.8	1514.9	1499.2	1471.9	1451.0	1424.8	1406.9	1382.8
10°	1638.6	1626.1	1608.2	1609.3	1601.9	1581.0	1553.7	1531.7	1494.0	1470.9	1436.3
12.5°	1696.3	1685.8	1683.7	1673.2	1666.9	1639.7	1607.2	1578.9	1550.6	1519.1	1492.9
15°	1766.5	1752.9	1743.5	1728.8	1724.6	1696.3	1660.6	1628.1	1595.6	1566.3	1510.7
17.5°	1844.1	1829.4	1793.8	1790.6	1765.5	1738.2	1703.6	1655.4	1620.8	1578.9	1538.0
20°	1932.2	1911.2	1865.1	1853.6	1833.6	1788.6	1741.4	1687.9	1632.3	1589.4	1541.1
22.5°	2030.7	1994.0	1960.5	1923.8	1909.1	1853.6	1788.6	1723.6	1656.5	1597.7	1540.1
25°	2158.6	2110.4	2063.2	2026.5	2001.4	1929.0	1842.0	1756.1	1678.5	1601.9	1526.5
27.5°	2259.3	2217.3	2166.0	2117.7	2085.2	1999.3	1899.7	1788.6	1692.1	1598.8	1518.1
30°	2266.6	2254.0	2222.6	2196.4	2160.7	2068.5	1958.4	1832.6	1713.1	1599.8	1501.3
32.5°	2129.3	2154.4	2168.1	2172.3	2164.9	2111.5	2010.8	1872.4	1731.9	1590.4	1486.6
35°	1833.6	1900.7	1983.6	2015.0	2045.4	2073.7	2021.3	1900.7	1738.2	1588.3	1463.6
37.5°	1509.7	1570.5	1707.8	1770.7	1806.4	1918.6	1961.5	1896.5	1750.8	1590.4	1441.5
40°	1218.2	1314.7	1413.2	1498.1	1553.7	1679.5	1812.7	1827.3	1733.0	1570.5	1413.2
42.5°	1025.3	1081.9	1156.4	1235.0	1284.3	1433.1	1613.5	1719.4	1677.4	1538.0	1378.6
45°	873.3	915.2	985.5	1011.7	1074.6	1217.2	1408.0	1561.1	1582.0	1486.6	1338.8
47.5°	749.6	785.2	830.3	862.8	913.1	1020.1	1181.5	1350.3	1451.0	1416.4	1283.2
50°	660.5	689.8	727.6	746.5	779.0	875.4	997.0	1164.8	1300.0	1311.5	1210.9
52.5°	586.0	602.8	632.2	653.1	679.4	738.1	848.1	986.5	1138.6	1201.5	1121.8
55°	521.0	534.7	560.9	574.5	588.1	638.5	724.4	850.2	992.8	1075.6	1030.6
57.5°	462.3	473.9	495.9	508.5	515.8	564.0	630.1	728.6	856.5	957.2	932.0
60°	414.1	424.6	437.2	446.6	455.0	494.8	541.0	620.6	734.9	832.4	826.1
62.5°	362.7	372.2	385.8	395.2	402.6	427.7	466.5	527.3	624.8	715.0	732.8
65°	317.7	325.0	334.4	338.6	348.1	366.9	398.4	452.9	532.6	613.3	625.9
67.5°	276.8	278.9	285.2	294.6	296.7	313.5	341.8	382.7	444.5	510.6	530.5
70°	232.7	235.9	241.1	248.5	252.7	263.1	287.3	314.5	368.0	425.6	440.3
72.5°	194.0	198.1	200.2	204.4	206.5	223.3	233.8	261.0	297.7	346.0	361.7
75°	157.3	161.5	162.5	164.6	166.7	174.0	188.7	205.5	235.9	267.3	288.3
77.5°	124.8	123.7	125.8	129.0	127.9	134.2	143.6	158.3	178.2	204.4	218.1
80°	88.1	88.1	91.2	94.4	93.3	99.6	102.7	113.2	130.0	146.8	152.0
82.5°	58.7	58.7	61.9	61.9	64.0	65.0	69.2	74.4	88.1	96.5	99.6
85°	33.5	33.5	34.6	34.6	34.6	36.7	39.8	41.9	46.1	51.4	53.5
87.5°	13.6	14.7	14.7	14.7	14.7	16.8	16.8	18.9	19.9	22.0	22.0
90°	22.5	21.8	21.1	20.8	20.3	19.2	18.1	17.0	15.9	14.3	12.8
92.5°	21.4	21.1	20.9	20.8	20.3	19.2	18.1	17.0	15.9	14.6	13.2
95°	20.8	20.8	20.8	20.8	20.3	19.2	18.1	17.0	15.9	24.3	32.7
97.5°	20.4	20.2	20.0	19.9	19.7	19.2	18.8	18.3	17.9	38.9	59.8
100°	22.6	23.5	24.4	24.8	41.2	74.1	107.0	139.8	172.7	171.8	171.0
102.5°	188.0	206.5	225.0	234.3	234.1	233.6	233.2	232.7	232.3	231.9	231.4
105°	295.3	295.6	295.8	295.9	295.9	295.9	295.9	295.9	295.9	295.9	295.9
107.5°	360.2	361.1	362.0	362.4	362.3	362.1	361.8	361.6	361.4	361.0	360.5
110°	424.5	424.2	424.0	423.9	424.2	424.9	425.6	426.2	426.9	426.5	426.0

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	485.4	485.8	486.3	486.5	486.9	487.8	488.7	489.5	490.4	490.2	490.0
115°	546.7	548.0	549.3	550.0	550.4	551.3	552.2	553.1	554.0	553.8	553.6
117.5°	609.5	609.9	610.4	610.6	611.3	612.6	613.9	615.2	616.5	615.6	614.8
120°	669.4	670.5	671.6	672.1	672.3	672.8	673.2	673.7	674.1	673.4	672.8
122.5°	725.4	726.7	728.0	728.7	728.9	729.4	729.8	730.3	730.7	730.5	730.3
125°	780.6	781.3	782.0	782.3	782.7	783.6	784.5	785.4	786.3	786.3	786.3
127.5°	829.6	831.3	833.1	834.0	834.2	834.6	835.1	835.5	835.9	836.1	836.3
130°	879.8	880.9	882.0	882.6	882.9	883.6	884.3	884.9	885.6	885.4	885.2
132.5°	927.5	928.6	929.7	930.3	930.3	930.3	930.3	930.3	930.3	930.9	931.6
135°	970.6	971.9	973.2	973.9	974.1	974.6	975.0	975.5	975.9	976.3	976.8
137.5°	1014.9	1016.0	1017.1	1017.6	1017.6	1017.6	1017.6	1017.6	1017.6	1018.0	1018.5
140°	1054.0	1055.3	1056.6	1057.3	1057.1	1056.6	1056.2	1055.7	1055.3	1055.5	1055.7
142.5°	1090.8	1092.1	1093.4	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1093.7	1093.2
145°	1126.5	1127.8	1129.1	1129.8	1129.7	1129.5	1129.2	1129.0	1128.8	1128.8	1128.8
147.5°	1156.7	1158.3	1159.8	1160.6	1160.5	1160.3	1160.0	1159.8	1159.6	1159.4	1159.2
150°	1186.0	1187.7	1189.5	1190.4	1190.2	1189.7	1189.3	1188.8	1188.4	1188.0	1187.5
152.5°	1212.3	1213.9	1215.4	1216.2	1216.0	1215.5	1215.1	1214.6	1214.2	1213.8	1213.3
155°	1235.6	1237.4	1239.1	1240.0	1239.7	1239.0	1238.3	1237.7	1237.0	1236.6	1236.1
157.5°	1255.5	1257.2	1259.0	1259.9	1259.6	1258.9	1258.2	1257.6	1256.9	1256.9	1256.9
160°	1274.3	1276.1	1277.8	1278.7	1278.3	1277.4	1276.5	1275.7	1274.8	1274.6	1274.4
162.5°	1291.7	1293.6	1295.6	1296.6	1295.9	1294.6	1293.3	1291.9	1290.6	1290.4	1290.2
165°	1306.1	1307.9	1309.6	1310.5	1309.8	1308.5	1307.2	1305.8	1304.5	1304.3	1304.1
167.5°	1317.5	1319.4	1321.4	1322.4	1321.6	1320.1	1318.6	1317.0	1315.5	1315.3	1315.1
170°	1326.4	1328.3	1330.3	1331.3	1330.4	1328.7	1326.9	1325.2	1323.4	1323.2	1323.0
172.5°	1332.4	1334.3	1336.3	1337.3	1336.5	1335.0	1333.5	1331.9	1330.4	1330.0	1329.5
175°	1337.3	1339.3	1341.3	1342.3	1341.4	1339.6	1337.9	1336.1	1334.3	1334.1	1333.9
177.5°	1339.9	1341.6	1343.4	1344.3	1343.5	1342.0	1340.4	1338.9	1337.3	1337.1	1336.9
180°	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0
2.5°	1270.6	1265.4	1259.1	1259.1	1251.8	1248.6	1242.3	1240.2	1235.0	1226.6	1220.3
5°	1315.7	1302.1	1293.7	1286.4	1270.6	1259.1	1247.6	1235.0	1222.4	1207.7	1191.0
7.5°	1359.8	1334.6	1323.1	1310.5	1287.4	1263.3	1240.2	1223.5	1206.7	1183.6	1162.7
10°	1405.9	1374.4	1353.5	1336.7	1301.1	1270.6	1237.1	1213.0	1186.8	1157.4	1130.2
12.5°	1444.7	1403.8	1386.0	1354.5	1313.6	1276.9	1235.0	1198.3	1163.7	1129.1	1095.6
15°	1477.2	1438.4	1394.4	1381.8	1325.2	1272.7	1225.6	1178.4	1135.4	1100.8	1062.0
17.5°	1487.7	1438.4	1416.4	1386.0	1318.9	1264.4	1204.6	1153.2	1112.3	1061.0	1030.6
20°	1490.8	1443.6	1413.2	1384.9	1325.2	1252.8	1194.1	1131.2	1081.9	1030.6	982.3
22.5°	1482.4	1426.9	1397.5	1370.2	1303.1	1241.3	1173.1	1104.0	1046.3	999.1	950.9
25°	1466.7	1401.7	1373.4	1344.0	1280.1	1211.9	1137.5	1071.5	1018.0	961.4	914.2
27.5°	1445.7	1371.3	1338.8	1308.4	1245.5	1181.5	1111.3	1043.1	983.4	923.6	879.6
30°	1419.5	1333.6	1304.2	1264.4	1203.6	1142.7	1078.8	1010.6	943.6	886.9	838.7
32.5°	1386.0	1295.8	1257.0	1219.3	1153.2	1097.7	1036.9	972.9	907.9	852.3	802.0
35°	1355.6	1252.8	1209.8	1172.1	1098.7	1040.0	989.7	929.9	872.3	814.6	769.5
37.5°	1314.7	1209.8	1158.5	1119.7	1045.2	985.5	938.3	892.2	831.4	775.8	733.9
40°	1271.7	1156.4	1108.1	1069.4	991.8	926.8	881.7	840.8	791.5	740.2	696.1
42.5°	1232.9	1105.0	1053.6	1006.5	927.8	870.2	824.0	792.6	747.5	701.4	661.5
45°	1183.6	1050.5	994.9	945.6	870.2	807.3	763.2	738.1	704.5	659.4	624.8
47.5°	1133.3	991.8	934.1	885.9	804.1	748.6	705.6	681.5	658.4	622.7	588.1
50°	1067.3	929.9	877.5	821.9	741.2	684.6	649.0	624.8	607.0	581.9	552.5
52.5°	994.9	866.0	809.4	761.1	681.5	630.1	589.2	575.6	557.7	538.9	513.7
55°	918.4	796.8	742.3	695.1	621.7	569.3	535.7	521.0	507.4	492.7	476.0
57.5°	841.9	724.4	673.1	631.1	563.0	512.7	485.4	465.5	456.0	447.7	434.0
60°	746.5	646.9	607.0	569.3	502.2	456.0	429.8	415.2	406.8	402.6	396.3
62.5°	662.6	580.8	536.8	500.1	446.6	405.7	380.6	369.0	361.7	359.6	352.3
65°	573.5	503.2	468.6	437.2	391.0	354.4	333.4	319.8	314.5	313.5	313.5
67.5°	489.6	433.0	398.4	376.4	336.5	304.0	284.1	278.9	275.7	271.5	270.5
70°	411.0	365.9	335.5	316.6	281.0	256.9	241.1	232.7	232.7	229.6	227.5
72.5°	341.8	296.7	276.8	261.0	231.7	210.7	199.2	197.1	189.8	188.7	188.7
75°	267.3	233.8	220.2	206.5	184.5	169.8	160.4	155.2	151.0	151.0	152.0
77.5°	201.3	178.2	165.6	155.2	139.4	130.0	122.7	120.6	116.4	116.4	116.4
80°	142.6	130.0	120.6	112.2	100.6	92.3	88.1	83.9	83.9	82.8	83.9
82.5°	92.3	81.8	76.5	75.5	65.0	61.9	56.6	57.7	54.5	53.5	55.6
85°	53.5	48.2	41.9	39.8	35.6	31.5	29.4	30.4	29.4	28.3	29.4
87.5°	21.0	17.8	16.8	16.8	13.6	12.6	11.5	12.6	10.5	10.5	11.5
90°	11.2	9.7	8.9	8.0	6.3	4.5	2.8	1.0	2.8	4.5	6.3
92.5°	11.9	10.6	9.9	10.9	12.9	14.9	16.9	18.9	16.9	14.9	12.9
95°	41.0	49.4	53.6	53.9	54.6	55.3	55.9	56.6	55.9	55.3	54.6
97.5°	80.8	101.7	112.2	111.5	110.2	108.9	107.5	106.2	107.5	108.9	110.2
100°	170.1	169.2	168.8	168.5	167.8	167.1	166.5	165.8	166.5	167.1	167.8
102.5°	231.0	230.5	230.3	229.9	229.0	228.1	227.3	226.4	227.3	228.1	229.0
105°	295.9	295.9	295.9	295.5	294.6	293.7	292.8	291.9	292.8	293.7	294.6
107.5°	360.1	359.6	359.4	359.4	359.4	359.4	359.4	359.4	359.4	359.4	359.4
110°	425.6	425.1	424.9	424.9	424.9	424.9	424.9	424.9	424.9	424.9	424.9

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	489.8	489.6	489.5	489.2	488.5	487.8	487.2	486.5	487.2	487.8	488.5
115°	553.3	553.1	553.0	552.4	551.3	550.2	549.1	548.0	549.1	550.2	551.3
117.5°	613.9	613.0	612.6	612.6	612.6	612.6	612.6	612.6	612.6	612.6	612.6
120°	672.1	671.4	671.1	671.2	671.4	671.7	671.9	672.1	671.9	671.7	671.4
122.5°	730.0	729.8	729.7	729.1	728.0	726.9	725.8	724.7	725.8	726.9	728.0
125°	786.3	786.3	786.3	785.5	784.0	782.4	780.9	779.3	780.9	782.4	784.0
127.5°	836.6	836.8	836.9	836.4	835.3	834.2	833.1	832.0	833.1	834.2	835.3
130°	884.9	884.7	884.6	884.0	882.9	881.8	880.7	879.6	880.7	881.8	882.9
132.5°	932.2	932.9	933.2	932.5	931.2	929.9	928.6	927.3	928.6	929.9	931.2
135°	977.2	977.7	977.9	977.2	975.9	974.6	973.3	972.0	973.3	974.6	975.9
137.5°	1018.9	1019.4	1019.6	1018.9	1017.6	1016.3	1015.0	1013.7	1015.0	1016.3	1017.6
140°	1056.0	1056.2	1056.3	1056.1	1055.7	1055.2	1054.8	1054.4	1054.8	1055.2	1055.7
142.5°	1092.8	1092.3	1092.1	1092.0	1091.8	1091.5	1091.3	1091.1	1091.3	1091.5	1091.8
145°	1128.8	1128.8	1128.8	1128.6	1128.1	1127.7	1127.2	1126.8	1127.2	1127.7	1128.1
147.5°	1158.9	1158.7	1158.6	1158.6	1158.6	1158.6	1158.6	1158.6	1158.6	1158.6	1158.6
150°	1187.1	1186.6	1186.4	1186.6	1187.1	1187.5	1188.0	1188.4	1188.0	1187.5	1187.1
152.5°	1212.9	1212.4	1212.2	1212.8	1213.9	1215.0	1216.1	1217.2	1216.1	1215.0	1213.9
155°	1235.7	1235.2	1235.0	1235.7	1237.0	1238.3	1239.7	1241.0	1239.7	1238.3	1237.0
157.5°	1256.9	1256.9	1256.9	1257.2	1257.9	1258.6	1259.2	1259.9	1259.2	1258.6	1257.9
160°	1274.1	1273.9	1273.8	1274.5	1275.8	1277.1	1278.4	1279.7	1278.4	1277.1	1275.8
162.5°	1289.9	1289.7	1289.6	1290.3	1291.6	1292.9	1294.3	1295.6	1294.3	1292.9	1291.6
165°	1303.8	1303.6	1303.5	1304.2	1305.5	1306.8	1308.2	1309.5	1308.2	1306.8	1305.5
167.5°	1314.8	1314.6	1314.5	1315.2	1316.5	1317.8	1319.1	1320.4	1319.1	1317.8	1316.5
170°	1322.7	1322.5	1322.4	1323.2	1324.7	1326.3	1327.8	1329.4	1327.8	1326.3	1324.7
172.5°	1329.1	1328.6	1328.4	1329.2	1330.7	1332.2	1333.8	1335.3	1333.8	1332.2	1330.7
175°	1333.6	1333.4	1333.3	1334.0	1335.3	1336.6	1338.0	1339.3	1338.0	1336.6	1335.3
177.5°	1336.6	1336.4	1336.3	1337.0	1338.3	1339.6	1341.0	1342.3	1341.0	1339.6	1338.3
180°	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0
2.5°	1218.2	1216.1	1210.9	1207.7	1197.3	1184.7	1180.5	1170.0	1174.2	1166.9	1166.9
5°	1185.7	1176.3	1170.0	1160.6	1140.6	1127.0	1112.3	1105.0	1100.8	1095.6	1091.4
7.5°	1143.8	1136.5	1130.2	1112.3	1090.3	1071.5	1053.6	1046.3	1032.7	1023.2	1019.0
10°	1107.1	1096.6	1081.9	1061.0	1037.9	1013.8	998.1	982.3	971.9	966.6	955.1
12.5°	1069.4	1056.8	1041.1	1010.6	985.5	970.8	942.5	927.8	922.6	918.4	904.8
15°	1030.6	1016.9	998.1	969.8	947.7	913.1	896.4	884.8	872.3	871.2	860.7
17.5°	996.0	979.2	963.5	928.9	901.6	871.2	861.8	849.2	837.7	825.1	819.8
20°	951.9	936.2	924.7	886.9	856.5	837.7	821.9	811.5	804.1	791.5	789.4
22.5°	912.1	895.3	879.6	851.3	825.1	801.0	782.1	770.6	767.4	762.2	752.7
25°	873.3	856.5	837.7	811.5	784.2	767.4	750.6	743.3	737.0	728.6	721.3
27.5°	840.8	825.1	807.3	774.8	751.7	739.1	721.3	712.9	704.5	700.3	697.2
30°	802.0	784.2	770.6	745.4	720.2	703.5	690.9	683.6	676.2	672.0	669.9
32.5°	764.3	747.5	738.1	710.8	690.9	671.0	661.5	656.3	652.1	647.9	643.7
35°	733.9	717.1	702.4	677.3	657.3	643.7	636.4	628.0	624.8	620.6	620.6
37.5°	696.1	683.6	668.9	644.8	626.9	616.5	610.2	599.7	598.6	596.5	593.4
40°	663.6	651.1	637.4	616.5	600.7	588.1	579.8	574.5	571.4	569.3	567.2
42.5°	629.0	615.4	609.1	585.0	571.4	558.8	554.6	549.4	548.3	544.1	538.9
45°	595.5	584.0	571.4	553.5	542.0	531.5	525.2	521.0	515.8	514.8	511.6
47.5°	566.1	552.5	541.0	524.2	511.6	503.2	498.0	492.7	488.5	485.4	482.3
50°	528.4	517.9	508.5	490.6	480.2	471.8	464.4	460.2	456.0	456.0	456.0
52.5°	491.7	482.3	473.9	461.3	448.7	441.4	433.0	429.8	427.7	424.6	427.7
55°	456.0	446.6	438.2	428.8	414.1	407.8	399.4	396.3	397.3	397.3	400.5
57.5°	418.3	411.0	405.7	394.2	380.6	374.3	369.0	365.9	365.9	370.1	371.1
60°	381.6	374.3	364.8	354.4	346.0	338.6	335.5	336.5	336.5	338.6	343.9
62.5°	340.7	336.5	331.3	316.6	311.4	306.1	301.9	305.1	304.0	309.3	316.6
65°	303.0	298.8	291.5	284.1	277.8	272.6	271.5	272.6	274.7	279.9	288.3
67.5°	261.0	261.0	254.8	248.5	243.2	238.0	239.0	240.1	242.2	248.5	261.0
70°	226.5	222.3	216.0	211.8	207.6	205.5	203.4	207.6	213.9	218.1	227.5
72.5°	188.7	185.6	180.3	176.1	175.1	173.0	171.9	174.0	180.3	187.7	198.1
75°	148.9	149.9	146.8	143.6	143.6	140.5	142.6	142.6	148.9	156.2	164.6
77.5°	115.3	114.3	113.2	111.1	110.1	110.1	110.1	112.2	118.5	122.7	131.0
80°	81.8	82.8	79.7	80.7	79.7	80.7	80.7	84.9	88.1	93.3	99.6
82.5°	54.5	54.5	52.4	53.5	53.5	53.5	54.5	56.6	60.8	65.0	69.2
85°	30.4	31.5	29.4	31.5	31.5	31.5	32.5	33.5	36.7	37.7	41.9
87.5°	11.5	13.6	13.6	11.5	12.6	13.6	14.7	13.6	15.7	17.8	18.9
90°	8.0	8.9	9.7	11.2	12.8	14.3	15.9	17.0	18.1	19.2	20.3
92.5°	10.9	9.9	10.6	11.9	13.2	14.6	15.9	17.0	18.1	19.2	20.3
95°	53.9	53.6	49.4	41.0	32.7	24.3	15.9	17.0	18.1	19.2	20.3
97.5°	111.5	112.2	101.7	80.8	59.8	38.9	17.9	18.3	18.8	19.2	19.7
100°	168.5	168.8	169.2	170.1	171.0	171.8	172.7	139.8	107.0	74.1	41.2
102.5°	229.9	230.3	230.5	231.0	231.4	231.9	232.3	232.7	233.2	233.6	234.1
105°	295.5	295.9	295.9	295.9	295.9	295.9	295.9	295.9	295.9	295.9	295.9
107.5°	359.4	359.4	359.6	360.1	360.5	361.0	361.4	361.6	361.8	362.1	362.3
110°	424.9	424.9	425.1	425.6	426.0	426.5	426.9	426.2	425.6	424.9	424.2

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	489.2	489.5	489.6	489.8	490.0	490.2	490.4	489.5	488.7	487.8	486.9
115°	552.4	553.0	553.1	553.3	553.6	553.8	554.0	553.1	552.2	551.3	550.4
117.5°	612.6	612.6	613.0	613.9	614.8	615.6	616.5	615.2	613.9	612.6	611.3
120°	671.2	671.1	671.4	672.1	672.8	673.4	674.1	673.7	673.2	672.8	672.3
122.5°	729.1	729.7	729.8	730.0	730.3	730.5	730.7	730.3	729.8	729.4	728.9
125°	785.5	786.3	786.3	786.3	786.3	786.3	786.3	785.4	784.5	783.6	782.7
127.5°	836.4	836.9	836.8	836.6	836.3	836.1	835.9	835.5	835.1	834.6	834.2
130°	884.0	884.6	884.7	884.9	885.2	885.4	885.6	884.9	884.3	883.6	882.9
132.5°	932.5	933.2	932.9	932.2	931.6	930.9	930.3	930.3	930.3	930.3	930.3
135°	977.2	977.9	977.7	977.2	976.8	976.3	975.9	975.5	975.0	974.6	974.1
137.5°	1018.9	1019.6	1019.4	1018.9	1018.5	1018.0	1017.6	1017.6	1017.6	1017.6	1017.6
140°	1056.1	1056.3	1056.2	1056.0	1055.7	1055.5	1055.3	1055.7	1056.2	1056.6	1057.1
142.5°	1092.0	1092.1	1092.3	1092.8	1093.2	1093.7	1094.1	1094.1	1094.1	1094.1	1094.1
145°	1128.6	1128.8	1128.8	1128.8	1128.8	1128.8	1128.8	1129.0	1129.2	1129.5	1129.7
147.5°	1158.6	1158.6	1158.7	1158.9	1159.2	1159.4	1159.6	1159.8	1160.0	1160.3	1160.5
150°	1186.6	1186.4	1186.6	1187.1	1187.5	1188.0	1188.4	1188.8	1189.3	1189.7	1190.2
152.5°	1212.8	1212.2	1212.4	1212.9	1213.3	1213.8	1214.2	1214.6	1215.1	1215.5	1216.0
155°	1235.7	1235.0	1235.2	1235.7	1236.1	1236.6	1237.0	1237.7	1238.3	1239.0	1239.7
157.5°	1257.2	1256.9	1256.9	1256.9	1256.9	1256.9	1256.9	1257.6	1258.2	1258.9	1259.6
160°	1274.5	1273.8	1273.9	1274.1	1274.4	1274.6	1274.8	1275.7	1276.5	1277.4	1278.3
162.5°	1290.3	1289.6	1289.7	1289.9	1290.2	1290.4	1290.6	1291.9	1293.3	1294.6	1295.9
165°	1304.2	1303.5	1303.6	1303.8	1304.1	1304.3	1304.5	1305.8	1307.2	1308.5	1309.8
167.5°	1315.2	1314.5	1314.6	1314.8	1315.1	1315.3	1315.5	1317.0	1318.6	1320.1	1321.6
170°	1323.2	1322.4	1322.5	1322.7	1323.0	1323.2	1323.4	1325.2	1326.9	1328.7	1330.4
172.5°	1329.2	1328.4	1328.6	1329.1	1329.5	1330.0	1330.4	1331.9	1333.5	1335.0	1336.5
175°	1334.0	1333.3	1333.4	1333.6	1333.9	1334.1	1334.3	1336.1	1337.9	1339.6	1341.4
177.5°	1337.0	1336.3	1336.4	1336.6	1336.9	1337.1	1337.3	1338.9	1340.4	1342.0	1343.5
180°	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0
2.5°	1171.1	1163.7	1162.7	1164.8	1160.6	1166.9	1164.8	1166.9	1161.6	1166.9	1163.7
5°	1090.3	1088.2	1084.0	1078.8	1079.8	1080.9	1086.1	1080.9	1085.1	1086.1	1091.4
7.5°	1014.8	1010.6	1013.8	1011.7	1002.3	1000.2	1002.3	1005.4	1011.7	1015.9	1019.0
10°	954.0	951.9	947.7	944.6	939.4	936.2	940.4	936.2	944.6	951.9	951.9
12.5°	907.9	899.5	894.3	893.2	881.7	883.8	888.0	891.1	900.6	904.8	904.8
15°	859.7	853.4	851.3	847.1	842.9	847.1	845.0	848.1	852.3	856.5	858.6
17.5°	817.7	816.7	817.7	807.3	810.4	805.2	806.2	811.5	808.3	811.5	817.7
20°	780.0	782.1	779.0	774.8	774.8	768.5	775.8	773.7	774.8	781.1	790.5
22.5°	751.7	750.6	747.5	744.4	740.2	741.2	742.3	740.2	748.6	753.8	754.8
25°	721.3	719.2	718.1	715.0	710.8	715.0	714.0	715.0	717.1	725.5	719.2
27.5°	693.0	688.8	690.9	687.7	686.7	687.7	687.7	688.8	690.9	691.9	693.0
30°	668.9	664.7	663.6	661.5	660.5	661.5	663.6	661.5	669.9	668.9	668.9
32.5°	642.7	639.5	637.4	637.4	636.4	635.3	636.4	637.4	643.7	639.5	643.7
35°	617.5	615.4	615.4	613.3	612.3	612.3	612.3	616.5	614.4	617.5	617.5
37.5°	593.4	593.4	592.3	590.2	589.2	590.2	589.2	591.3	590.2	591.3	592.3
40°	568.2	566.1	565.1	565.1	561.9	558.8	561.9	561.9	563.0	566.1	567.2
42.5°	537.8	538.9	538.9	534.7	534.7	534.7	535.7	536.8	536.8	538.9	538.9
45°	511.6	509.5	509.5	509.5	507.4	508.5	510.6	510.6	510.6	510.6	508.5
47.5°	482.3	482.3	483.3	483.3	486.5	485.4	485.4	484.4	482.3	482.3	483.3
50°	455.0	458.1	459.2	459.2	460.2	461.3	461.3	459.2	458.1	455.0	455.0
52.5°	428.8	430.9	433.0	436.1	438.2	437.2	437.2	435.1	430.9	429.8	428.8
55°	400.5	403.6	407.8	411.0	414.1	415.2	415.2	411.0	406.8	401.5	401.5
57.5°	374.3	377.4	384.8	387.9	392.1	392.1	390.0	386.9	380.6	376.4	373.2
60°	348.1	353.3	358.5	364.8	370.1	371.1	368.0	363.8	356.5	351.2	347.0
62.5°	319.8	325.0	335.5	341.8	346.0	346.0	346.0	340.7	331.3	324.0	317.7
65°	292.5	297.7	307.2	315.6	318.7	321.9	318.7	313.5	306.1	297.7	291.5
67.5°	264.2	270.5	279.9	286.2	290.4	293.5	291.5	287.3	277.8	266.3	262.1
70°	232.7	235.9	249.5	255.8	262.1	264.2	262.1	255.8	246.4	233.8	229.6
72.5°	203.4	206.5	219.1	224.4	229.6	231.7	228.5	224.4	216.0	204.4	199.2
75°	169.8	175.1	181.4	189.8	196.0	198.1	195.0	191.9	181.4	174.0	169.8
77.5°	134.2	139.4	147.8	155.2	161.5	160.4	156.2	157.3	145.7	137.3	134.2
80°	101.7	105.9	112.2	118.5	121.6	121.6	120.6	116.4	112.2	105.9	100.6
82.5°	70.2	75.5	80.7	84.9	84.9	86.0	83.9	82.8	78.6	73.4	72.3
85°	41.9	43.0	47.2	47.2	51.4	49.3	48.2	51.4	47.2	44.0	43.0
87.5°	18.9	17.8	18.9	18.9	17.8	19.9	19.9	18.9	19.9	18.9	18.9
90°	20.8	21.1	21.8	22.5	23.1	23.8	23.1	22.5	21.8	21.1	20.8
92.5°	20.8	20.9	21.1	21.4	21.6	21.8	21.6	21.4	21.1	20.9	20.8
95°	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8
97.5°	19.9	20.0	20.2	20.4	20.6	20.8	20.6	20.4	20.2	20.0	19.9
100°	24.8	24.4	23.5	22.6	21.7	20.8	21.7	22.6	23.5	24.4	24.8
102.5°	234.3	225.0	206.5	188.0	169.4	150.9	169.4	188.0	206.5	225.0	234.3
105°	295.9	295.8	295.6	295.3	295.1	294.9	295.1	295.3	295.6	295.8	295.9
107.5°	362.4	362.0	361.1	360.2	359.3	358.4	359.3	360.2	361.1	362.0	362.4
110°	423.9	424.0	424.2	424.5	424.7	424.9	424.7	424.5	424.2	424.0	423.9

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	486.5	486.3	485.8	485.4	484.9	484.5	484.9	485.4	485.8	486.3	486.5
115°	550.0	549.3	548.0	546.7	545.4	544.1	545.4	546.7	548.0	549.3	550.0
117.5°	610.6	610.4	609.9	609.5	609.0	608.6	609.0	609.5	609.9	610.4	610.6
120°	672.1	671.6	670.5	669.4	668.3	667.2	668.3	669.4	670.5	671.6	672.1
122.5°	728.7	728.0	726.7	725.4	724.1	722.8	724.1	725.4	726.7	728.0	728.7
125°	782.3	782.0	781.3	780.6	780.0	779.3	780.0	780.6	781.3	782.0	782.3
127.5°	834.0	833.1	831.3	829.6	827.8	826.0	827.8	829.6	831.3	833.1	834.0
130°	882.6	882.0	880.9	879.8	878.7	877.6	878.7	879.8	880.9	882.0	882.6
132.5°	930.3	929.7	928.6	927.5	926.4	925.3	926.4	927.5	928.6	929.7	930.3
135°	973.9	973.2	971.9	970.6	969.3	968.0	969.3	970.6	971.9	973.2	973.9
137.5°	1017.6	1017.1	1016.0	1014.9	1013.8	1012.7	1013.8	1014.9	1016.0	1017.1	1017.6
140°	1057.3	1056.6	1055.3	1054.0	1052.7	1051.4	1052.7	1054.0	1055.3	1056.6	1057.3
142.5°	1094.1	1093.4	1092.1	1090.8	1089.4	1088.1	1089.4	1090.8	1092.1	1093.4	1094.1
145°	1129.8	1129.1	1127.8	1126.5	1125.2	1123.9	1125.2	1126.5	1127.8	1129.1	1129.8
147.5°	1160.6	1159.8	1158.3	1156.7	1155.2	1153.6	1155.2	1156.7	1158.3	1159.8	1160.6
150°	1190.4	1189.5	1187.7	1186.0	1184.2	1182.4	1184.2	1186.0	1187.7	1189.5	1190.4
152.5°	1216.2	1215.4	1213.9	1212.3	1210.8	1209.2	1210.8	1212.3	1213.9	1215.4	1216.2
155°	1240.0	1239.1	1237.4	1235.6	1233.9	1232.1	1233.9	1235.6	1237.4	1239.1	1240.0
157.5°	1259.9	1259.0	1257.2	1255.5	1253.7	1251.9	1253.7	1255.5	1257.2	1259.0	1259.9
160°	1278.7	1277.8	1276.1	1274.3	1272.6	1270.8	1272.6	1274.3	1276.1	1277.8	1278.7
162.5°	1296.6	1295.6	1293.6	1291.7	1289.7	1287.7	1289.7	1291.7	1293.6	1295.6	1296.6
165°	1310.5	1309.6	1307.9	1306.1	1304.4	1302.6	1304.4	1306.1	1307.9	1309.6	1310.5
167.5°	1322.4	1321.4	1319.4	1317.5	1315.5	1313.5	1315.5	1317.5	1319.4	1321.4	1322.4
170°	1331.3	1330.3	1328.3	1326.4	1324.4	1322.4	1324.4	1326.4	1328.3	1330.3	1331.3
172.5°	1337.3	1336.3	1334.3	1332.4	1330.4	1328.4	1330.4	1332.4	1334.3	1336.3	1337.3
175°	1342.3	1341.3	1339.3	1337.3	1335.3	1333.3	1335.3	1337.3	1339.3	1341.3	1342.3
177.5°	1344.3	1343.4	1341.6	1339.9	1338.1	1336.3	1338.1	1339.9	1341.6	1343.4	1344.3
180°	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0	1235.0
2.5°	1173.1	1166.9	1174.2	1164.8	1166.9	1178.4	1177.3	1187.8	1194.1	1193.1	1198.3
5°	1095.6	1095.6	1098.7	1097.7	1108.1	1117.6	1130.2	1140.6	1152.2	1158.5	1165.8
7.5°	1019.0	1029.5	1031.6	1036.9	1049.4	1065.2	1077.7	1093.5	1110.2	1121.8	1130.2
10°	956.1	964.5	972.9	977.1	990.7	1011.7	1029.5	1054.7	1075.6	1088.2	1099.8
12.5°	900.6	910.0	914.2	933.1	942.5	956.1	981.3	1008.6	1031.6	1045.2	1054.7
15°	860.7	866.0	875.4	886.9	896.4	913.1	934.1	964.5	986.5	998.1	1030.6
17.5°	827.2	833.5	838.7	844.0	858.6	876.5	896.4	922.6	950.9	970.8	987.6
20°	792.6	795.7	802.0	810.4	820.9	837.7	855.5	882.7	907.9	923.6	945.6
22.5°	751.7	761.1	767.4	773.7	785.2	804.1	820.9	840.8	872.3	890.1	913.1
25°	727.6	731.8	736.0	743.3	751.7	768.5	787.3	808.3	833.5	852.3	872.3
27.5°	696.1	702.4	707.7	717.1	722.3	736.0	753.8	774.8	805.2	820.9	837.7
30°	669.9	676.2	680.4	684.6	691.9	706.6	723.4	740.2	768.5	788.4	805.2
32.5°	643.7	650.0	655.2	658.4	665.7	675.2	688.8	709.8	733.9	747.5	769.5
35°	620.6	620.6	626.9	631.1	637.4	645.8	658.4	674.1	699.3	717.1	737.0
37.5°	594.4	595.5	600.7	603.9	610.2	618.5	631.1	645.8	666.8	680.4	700.3
40°	567.2	570.3	572.4	577.7	585.0	588.1	600.7	617.5	638.5	651.1	667.8
42.5°	539.9	542.0	547.3	551.5	557.7	563.0	571.4	587.1	602.8	621.7	635.3
45°	509.5	514.8	517.9	525.2	528.4	533.6	542.0	554.6	573.5	585.0	600.7
47.5°	483.3	485.4	487.5	496.9	503.2	506.4	514.8	522.1	542.0	552.5	567.2
50°	455.0	455.0	458.1	462.3	469.7	476.0	483.3	491.7	507.4	517.9	532.6
52.5°	428.8	425.6	427.7	429.8	437.2	443.5	450.8	462.3	477.0	483.3	495.9
55°	400.5	395.2	398.4	401.5	403.6	412.0	420.4	427.7	439.3	448.7	460.2
57.5°	370.1	369.0	366.9	368.0	373.2	378.5	384.8	394.2	407.8	415.2	421.5
60°	342.8	336.5	334.4	336.5	339.7	342.8	351.2	359.6	371.1	378.5	385.8
62.5°	314.5	308.2	304.0	300.9	304.0	311.4	316.6	322.9	332.3	340.7	347.0
65°	287.3	277.8	273.6	271.5	270.5	275.7	279.9	288.3	296.7	299.8	307.2
67.5°	256.9	248.5	243.2	240.1	240.1	240.1	244.3	252.7	261.0	262.1	269.4
70°	226.5	217.0	211.8	207.6	205.5	207.6	212.8	213.9	221.2	223.3	227.5
72.5°	194.0	185.6	179.3	174.0	175.1	177.2	177.2	179.3	183.5	188.7	188.7
75°	163.5	152.0	148.9	144.7	142.6	142.6	142.6	146.8	149.9	154.1	153.1
77.5°	129.0	122.7	116.4	114.3	111.1	110.1	112.2	112.2	114.3	117.4	118.5
80°	99.6	92.3	88.1	86.0	81.8	80.7	81.8	81.8	84.9	83.9	84.9
82.5°	69.2	64.0	60.8	57.7	55.6	56.6	55.6	55.6	56.6	55.6	55.6
85°	39.8	38.8	36.7	35.6	34.6	32.5	34.6	33.5	32.5	31.5	33.5
87.5°	18.9	17.8	17.8	15.7	15.7	14.7	15.7	15.7	14.7	14.7	14.7
90°	20.3	19.2	18.1	17.0	15.9	14.3	12.8	11.2	9.7	8.9	8.0
92.5°	20.3	19.2	18.1	17.0	15.9	14.6	13.2	11.9	10.6	9.9	10.9
95°	20.3	19.2	18.1	17.0	15.9	24.3	32.7	41.0	49.4	53.6	53.9
97.5°	19.7	19.2	18.8	18.3	17.9	38.9	59.8	80.8	101.7	112.2	111.5
100°	41.2	74.1	107.0	139.8	172.7	171.8	171.0	170.1	169.2	168.8	168.5
102.5°	234.1	233.6	233.2	232.7	232.3	231.9	231.4	231.0	230.5	230.3	229.9
105°	295.9	295.9	295.9	295.9	295.9	295.9	295.9	295.9	295.9	295.9	295.5
107.5°	362.3	362.1	361.8	361.6	361.4	361.0	360.5	360.1	359.6	359.4	359.4
110°	424.2	424.9	425.6	426.2	426.9	426.5	426.0	425.6	425.1	424.9	424.9

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	486.9	487.8	488.7	489.5	490.4	490.2	490.0	489.8	489.6	489.5	489.2
115°	550.4	551.3	552.2	553.1	554.0	553.8	553.6	553.3	553.1	553.0	552.4
117.5°	611.3	612.6	613.9	615.2	616.5	615.6	614.8	613.9	613.0	612.6	612.6
120°	672.3	672.8	673.2	673.7	674.1	673.4	672.8	672.1	671.4	671.1	671.2
122.5°	728.9	729.4	729.8	730.3	730.7	730.5	730.3	730.0	729.8	729.7	729.1
125°	782.7	783.6	784.5	785.4	786.3	786.3	786.3	786.3	786.3	786.3	785.5
127.5°	834.2	834.6	835.1	835.5	835.9	836.1	836.3	836.6	836.8	836.9	836.4
130°	882.9	883.6	884.3	884.9	885.6	885.4	885.2	884.9	884.7	884.6	884.0
132.5°	930.3	930.3	930.3	930.3	930.3	930.9	931.6	932.2	932.9	933.2	932.5
135°	974.1	974.6	975.0	975.5	975.9	976.3	976.8	977.2	977.7	977.9	977.2
137.5°	1017.6	1017.6	1017.6	1017.6	1017.6	1018.0	1018.5	1018.9	1019.4	1019.6	1018.9
140°	1057.1	1056.6	1056.2	1055.7	1055.3	1055.5	1055.7	1056.0	1056.2	1056.3	1056.1
142.5°	1094.1	1094.1	1094.1	1094.1	1094.1	1093.7	1093.2	1092.8	1092.3	1092.1	1092.0
145°	1129.7	1129.5	1129.2	1129.0	1128.8	1128.8	1128.8	1128.8	1128.8	1128.8	1128.6
147.5°	1160.5	1160.3	1160.0	1159.8	1159.6	1159.4	1159.2	1158.9	1158.7	1158.6	1158.6
150°	1190.2	1189.7	1189.3	1188.8	1188.4	1188.0	1187.5	1187.1	1186.6	1186.4	1186.6
152.5°	1216.0	1215.5	1215.1	1214.6	1214.2	1213.8	1213.3	1212.9	1212.4	1212.2	1212.8
155°	1239.7	1239.0	1238.3	1237.7	1237.0	1236.6	1236.1	1235.7	1235.2	1235.0	1235.7
157.5°	1259.6	1258.9	1258.2	1257.6	1256.9	1256.9	1256.9	1256.9	1256.9	1256.9	1257.2
160°	1278.3	1277.4	1276.5	1275.7	1274.8	1274.6	1274.4	1274.1	1273.9	1273.8	1274.5
162.5°	1295.9	1294.6	1293.3	1291.9	1290.6	1290.4	1290.2	1289.9	1289.7	1289.6	1290.3
165°	1309.8	1308.5	1307.2	1305.8	1304.5	1304.3	1304.1	1303.8	1303.6	1303.5	1304.2
167.5°	1321.6	1320.1	1318.6	1317.0	1315.5	1315.3	1315.1	1314.8	1314.6	1314.5	1315.2
170°	1330.4	1328.7	1326.9	1325.2	1323.4	1323.2	1323.0	1322.7	1322.5	1322.4	1323.2
172.5°	1336.5	1335.0	1333.5	1331.9	1330.4	1330.0	1329.5	1329.1	1328.6	1328.4	1329.2
175°	1341.4	1339.6	1337.9	1336.1	1334.3	1334.1	1333.9	1333.6	1333.4	1333.3	1334.0
177.5°	1343.5	1342.0	1340.4	1338.9	1337.3	1337.1	1336.9	1336.6	1336.4	1336.3	1337.0
180°	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3	1339.3

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1235.0	1235.0	1235.0	1235.0
2.5°	1205.6	1216.1	1223.5	1237.1
5°	1178.4	1197.3	1215.1	1234.0
7.5°	1151.1	1173.1	1201.5	1225.6
10°	1120.7	1149.0	1182.6	1215.1
12.5°	1090.3	1123.9	1160.6	1203.6
15°	1053.6	1096.6	1139.6	1185.7
17.5°	1021.1	1065.2	1111.3	1169.0
20°	984.4	1032.7	1083.0	1141.7
22.5°	951.9	1005.4	1057.8	1119.7
25°	915.2	967.7	1025.3	1091.4
27.5°	884.8	933.1	989.7	1061.0
30°	848.1	900.6	957.2	1028.5
32.5°	813.6	863.9	923.6	993.9
35°	777.9	829.3	882.7	949.8
37.5°	744.4	788.4	841.9	905.8
40°	706.6	754.8	803.1	853.4
42.5°	672.0	716.1	761.1	801.0
45°	633.2	671.0	714.0	746.5
47.5°	597.6	631.1	664.7	689.8
50°	561.9	588.1	613.3	635.3
52.5°	520.0	549.4	563.0	576.6
55°	482.3	499.0	511.6	525.2
57.5°	445.6	452.9	459.2	471.8
60°	397.3	405.7	413.1	422.5
62.5°	355.4	359.6	361.7	371.1
65°	315.6	314.5	319.8	325.0
67.5°	272.6	271.5	276.8	278.9
70°	230.6	229.6	230.6	235.9
72.5°	190.8	190.8	191.9	194.0
75°	154.1	154.1	155.2	157.3
77.5°	116.4	118.5	117.4	121.6
80°	84.9	82.8	84.9	87.0
82.5°	55.6	57.7	57.7	55.6
85°	31.5	31.5	31.5	31.5
87.5°	13.6	13.6	14.7	15.7
90°	6.3	4.5	2.8	1.0
92.5°	12.9	14.9	16.9	18.9
95°	54.6	55.3	55.9	56.6
97.5°	110.2	108.9	107.5	106.2
100°	167.8	167.1	166.5	165.8
102.5°	229.0	228.1	227.3	226.4
105°	294.6	293.7	292.8	291.9
107.5°	359.4	359.4	359.4	359.4
110°	424.9	424.9	424.9	424.9

TEST NUMBER: P1026981

CATALOG NUMBER: S125DIP-B850D1090UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	488.5	487.8	487.2	486.5
115°	551.3	550.2	549.1	548.0
117.5°	612.6	612.6	612.6	612.6
120°	671.4	671.7	671.9	672.1
122.5°	728.0	726.9	725.8	724.7
125°	784.0	782.4	780.9	779.3
127.5°	835.3	834.2	833.1	832.0
130°	882.9	881.8	880.7	879.6
132.5°	931.2	929.9	928.6	927.3
135°	975.9	974.6	973.3	972.0
137.5°	1017.6	1016.3	1015.0	1013.7
140°	1055.7	1055.2	1054.8	1054.4
142.5°	1091.8	1091.5	1091.3	1091.1
145°	1128.1	1127.7	1127.2	1126.8
147.5°	1158.6	1158.6	1158.6	1158.6
150°	1187.1	1187.5	1188.0	1188.4
152.5°	1213.9	1215.0	1216.1	1217.2
155°	1237.0	1238.3	1239.7	1241.0
157.5°	1257.9	1258.6	1259.2	1259.9
160°	1275.8	1277.1	1278.4	1279.7
162.5°	1291.6	1292.9	1294.3	1295.6
165°	1305.5	1306.8	1308.2	1309.5
167.5°	1316.5	1317.8	1319.1	1320.4
170°	1324.7	1326.3	1327.8	1329.4
172.5°	1330.7	1332.2	1333.8	1335.3
175°	1335.3	1336.6	1338.0	1339.3
177.5°	1338.3	1339.6	1341.0	1342.3
180°	1339.3	1339.3	1339.3	1339.3

(END OF REPORT)