

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1007834

Luminaire Tested: S125IP-B375UB2750-4F0-XX-W2A-1_3500K

Issue Date: 5/5/2025

Test Information

Test Method: LM-79-2019
Report Number: P1007834
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11)
Test Lab: INNOVATION CENTER
Issue Date: 5/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S125IP-B375UB2750-4F0-XX-W2A-1_3500K
Description: Define 5 Indirect Pendant with 3500K BioUP LEDs {m-DER=0.721} {m-EER=0.792}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1281.0 lumens
Efficiency: N/A
Efficacy: 137.7 lumens/watt
Spacing Criteria (0/90/45): - / - / -
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Indirect

Input Watts (W): 9.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1007834

CATALOG NUMBER: S125IP-B375UB2750-4F0-XX-W2A-1_3500K

Luminous Intensity Polar Plot

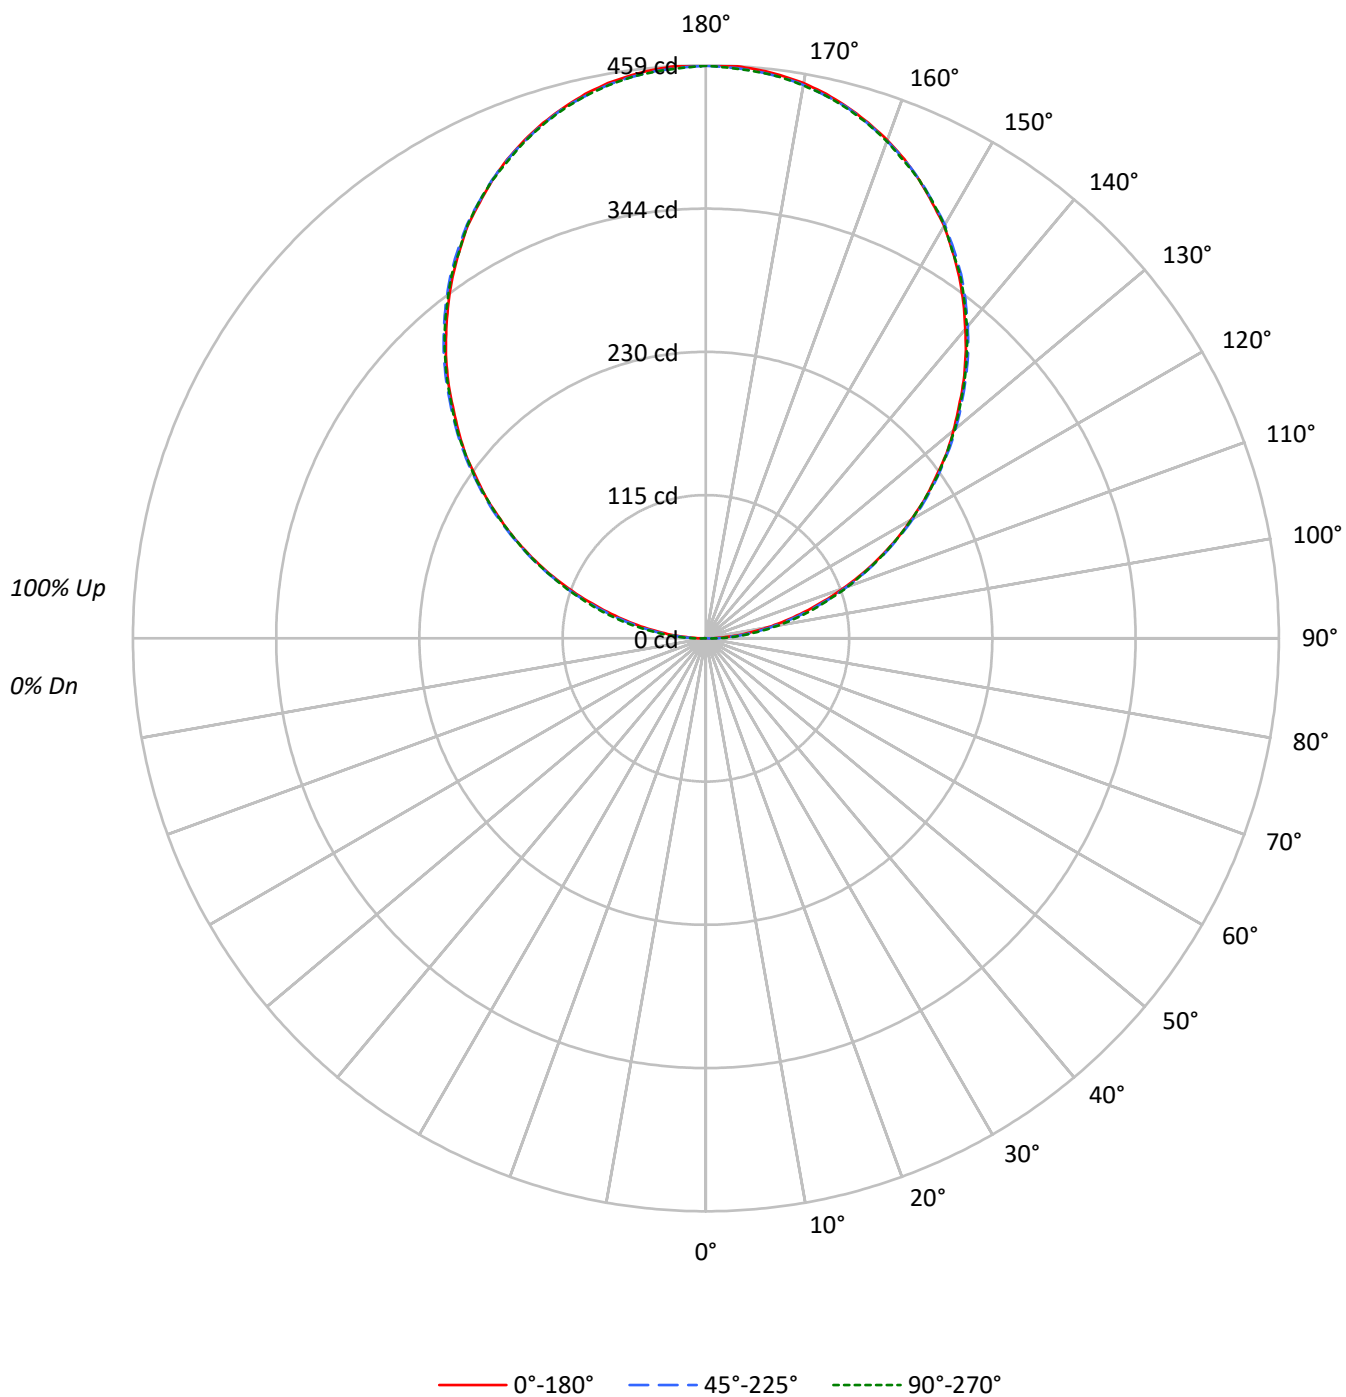

TEST NUMBER: P1007834

CATALOG NUMBER: S125IP-B375UB2750-4F0-XX-W2A-1_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	0	0	0
5°	0	0	0
10°	0	0	0
15°	0	0	0
20°	0	0	0
25°	0	0	0
30°	0	0	0
35°	0	0	0
40°	0	0	0
45°	0	0	0
50°	0	0	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 0°
Luminance: 0 cd/sqm

TEST NUMBER: P1007834

CATALOG NUMBER: S125IP-B375UB2750-4F0-XX-W2A-1_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.7	0.1
90°-100°	30.5	2.4
100°-110°	90.6	7.1
110°-120°	153.7	12.0
120°-130°	202.3	15.8
130°-140°	226.7	17.7
140°-150°	222.2	17.3
150°-160°	186.7	14.6
160°-170°	124.1	9.7
170°-180°	43.4	3.4
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.7	0.1
90°-120°	274.8	21.5
90°-150°	926.1	72.3
90°-180°	1280.0	99.9
0°-180°	1281.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	0	0	0	0	0	
5°	0	0	0	0	0	0
15°	0	0	0	0	0	0
25°	0	0	0	0	0	0
35°	0	0	0	0	0	0
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	3	6	8	9	2
95°	23	24	28	30	31	24
105°	81	83	85	88	88	87
115°	154	155	156	156	155	152
125°	224	227	227	226	226	201
135°	292	294	294	294	293	225
145°	354	355	356	356	355	221
155°	405	405	405	407	405	186
165°	440	440	440	441	439	124
175°	458	456	456	458	456	43
180°	459	459	459	459	459	

TEST NUMBER: P1007834

CATALOG NUMBER: S125IP-B375UB2750-4F0-XX-W2A-1_3500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	0.0	0.0	0.0	0.0	0.0
2.5°	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0
7.5°	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0
12.5°	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0
17.5°	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.4	3.2	5.7	7.5	8.6
92.5°	10.7	12.5	15.7	18.2	18.9
95°	23.2	23.9	27.5	30.0	30.7
97.5°	35.7	36.1	41.1	43.2	43.6
100°	50.0	50.0	54.6	57.8	58.5
102.5°	65.3	67.1	68.9	72.5	73.5
105°	81.4	83.2	85.3	87.5	88.5
107.5°	98.9	100.7	102.5	103.5	103.5
110°	117.1	118.9	119.9	121.0	120.7

TEST NUMBER: P1007834

CATALOG NUMBER: S125IP-B375UB2750-4F0-XX-W2A-1_3500K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	135.7	136.4	137.8	138.2	137.4
115°	153.9	155.3	156.0	155.6	155.3
117.5°	172.4	172.8	173.5	173.9	172.4
120°	189.6	191.3	191.7	191.7	190.3
122.5°	208.1	208.5	209.6	209.2	208.1
125°	224.5	226.7	227.0	226.3	226.0
127.5°	242.8	243.8	244.2	243.8	243.1
130°	258.8	260.6	261.3	261.0	260.2
132.5°	274.9	278.1	277.7	277.4	276.3
135°	292.0	294.2	294.5	294.5	293.1
137.5°	308.1	310.2	310.9	311.3	309.5
140°	323.4	325.2	326.3	327.0	325.2
142.5°	338.8	340.2	341.6	342.0	340.2
145°	353.8	355.2	356.3	356.3	355.2
147.5°	367.7	368.8	369.5	370.6	367.7
150°	381.6	381.3	382.7	382.7	382.0
152.5°	393.0	393.8	394.1	395.2	393.8
155°	404.8	404.8	405.2	406.6	404.8
157.5°	415.5	414.8	415.2	416.6	414.1
160°	424.8	423.7	424.1	425.5	423.7
162.5°	433.0	432.3	432.3	434.1	432.0
165°	440.2	439.5	439.8	441.2	439.1
167.5°	446.6	445.2	445.2	447.3	445.2
170°	451.6	450.2	450.2	452.3	449.8
172.5°	455.2	453.7	453.7	455.9	453.7
175°	457.7	456.2	456.2	458.4	455.9
177.5°	459.4	458.0	457.7	459.8	457.3
180°	458.7	458.7	458.7	458.7	458.7

(END OF REPORT)