

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904885

Luminaire Tested: DFN2DIP-4P2F0-030D030US835-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904885
REPORT IS A COMBINATION OF REPORTS P900540 AND P897455
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P2F0-030D030US835-RLLONL
Description: 2 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5520.0 lumens
Efficiency: N/A
Efficacy: 108.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.07' x L: 2.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 51
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904885
CATALOG NUMBER: DFN2DIP-4P2F0-030D030US835-RLLONL

Luminous Intensity Polar Plot

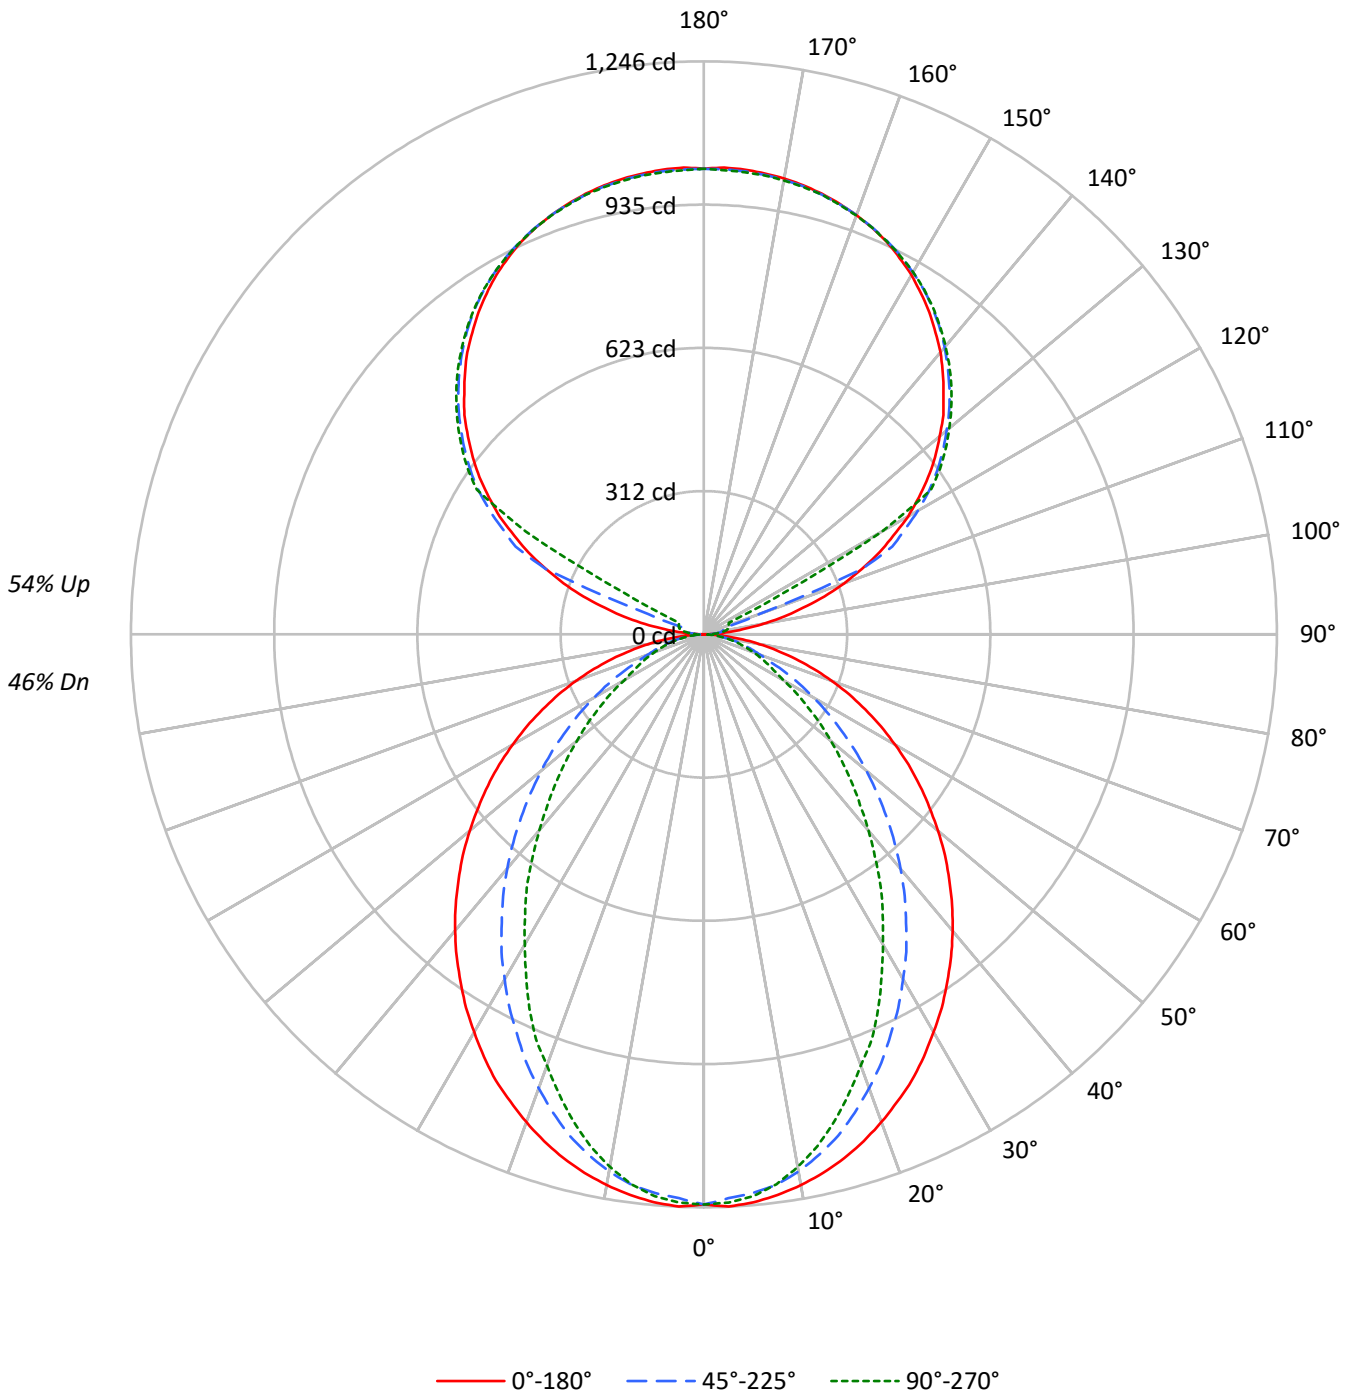



TEST NUMBER: P904885

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40			40
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39	34			34
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34	29			29
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29	26			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16			16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17	15			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15	13			13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3105	3105	3105
5°	3103	3048	3070
10°	3067	2980	2965
15°	3018	2874	2806
20°	2956	2731	2612
25°	2893	2572	2425
30°	2809	2410	2191
35°	2727	2236	1984
40°	2644	2057	1749
45°	2548	1860	1535
50°	2447	1662	1327
55°	2341	1450	1128
60°	2219	1231	923
65°	2079	1009	825
70°	1908	802	740
75°	1692	693	662
80°	1385	559	559
85°	893	344	394

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2548 cd/sqm



TEST NUMBER: P904885

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US835-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.2	2.1
10°-20°	319.0	5.8
20°-30°	447.9	8.1
30°-40°	488.2	8.8
40°-50°	448.7	8.1
50°-60°	352.4	6.4
60°-70°	229.4	4.2
70°-80°	118.1	2.1
80°-90°	31.9	0.6
90°-100°	33.4	0.6
100°-110°	124.4	2.3
110°-120°	330.1	6.0
120°-130°	547.5	9.9
130°-140°	581.5	10.5
140°-150°	540.5	9.8
150°-160°	434.5	7.9
160°-170°	280.0	5.1
170°-180°	96.4	1.7
0°-30°	883.1	16.0
0°-40°	1371.3	24.8
0°-60°	2172.4	39.4
0°-90°	2551.7	46.2
90°-120°	487.9	8.8
90°-150°	2157.3	39.1
90°-180°	2968.0	53.8
0°-180°	5520.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1240	1240	1240	1240	1240	
5°	1240	1234	1220	1230	1226	118
15°	1179	1167	1129	1108	1096	332
25°	1070	1034	960	914	898	492
35°	922	865	766	696	671	577
45°	754	679	561	481	454	582
55°	573	486	365	297	276	512
65°	387	296	195	157	154	384
75°	206	128	90	82	81	218
85°	48	25	21	21	21	55
90°	1	9	15	18	20	5
95°	48	23	28	32	32	56
105°	223	245	45	53	56	238
115°	421	434	452	113	60	415
125°	596	605	619	624	626	531
135°	737	749	755	763	761	569
145°	855	854	867	872	868	535
155°	941	935	944	948	942	434
165°	992	988	990	995	990	280
175°	1015	1010	1011	1016	1009	97
180°	1012	1012	1012	1012	1012	



TEST NUMBER: P904885

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1239.9	1239.9	1239.9	1239.9	1239.9
2.5°	1245.5	1239.9	1227.5	1238.8	1236.6
5°	1239.9	1234.3	1219.7	1229.8	1226.4
7.5°	1229.8	1223.1	1207.4	1211.8	1206.2
10°	1216.3	1208.5	1186.1	1182.6	1176.0
12.5°	1199.5	1189.4	1159.1	1152.4	1140.0
15°	1179.3	1166.9	1128.8	1107.5	1096.3
17.5°	1155.7	1137.8	1090.6	1066.0	1048.0
20°	1128.8	1106.3	1050.2	1022.3	997.5
22.5°	1099.7	1073.8	1008.7	970.6	953.8
25°	1070.5	1034.5	960.5	914.5	897.6
27.5°	1035.7	997.5	915.6	862.9	837.0
30°	998.7	956.0	866.2	809.1	778.7
32.5°	962.7	911.1	819.2	751.8	723.7
35°	922.4	865.1	766.4	695.7	671.0
37.5°	883.1	821.3	717.0	639.5	611.6
40°	841.6	774.3	665.4	585.7	556.6
42.5°	798.9	727.2	613.8	530.7	502.7
45°	754.1	678.8	561.1	481.3	454.4
47.5°	711.4	631.8	510.6	430.8	406.2
50°	664.3	584.6	461.2	383.7	360.2
52.5°	618.2	534.1	414.1	340.0	318.7
55°	573.3	485.8	364.6	297.4	276.1
57.5°	527.4	437.6	321.0	258.1	240.1
60°	480.2	390.5	274.9	217.7	199.8
62.5°	434.3	344.5	235.6	181.8	172.9
65°	387.1	296.2	195.2	157.1	153.7
67.5°	342.3	251.3	157.1	138.0	134.6
70°	295.1	207.6	130.1	118.9	114.4
72.5°	250.2	167.1	108.8	99.9	97.6
75°	206.4	127.9	89.8	81.9	80.8
77.5°	162.7	90.8	70.7	66.2	63.9
80°	122.3	65.1	53.8	49.4	49.4
82.5°	85.2	43.8	37.0	34.8	34.8
85°	48.2	24.6	21.3	21.3	21.3
87.5°	18.0	8.9	8.9	7.9	7.9
90°	0.7	8.8	14.6	18.4	19.7
92.5°	18.4	15.4	17.6	19.1	19.7
95°	47.6	23.4	28.5	32.3	31.5
97.5°	85.7	25.7	37.3	39.6	40.3
100°	129.7	29.3	41.8	47.6	49.1
102.5°	178.0	176.6	43.2	51.2	53.5
105°	222.7	244.7	44.7	52.7	55.7
107.5°	274.7	293.0	46.2	54.2	57.2
110°	324.6	339.9	128.2	55.0	57.9



TEST NUMBER: P904885

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	371.5	384.6	372.2	56.4	58.6
115°	421.2	433.7	452.0	112.8	60.1
117.5°	464.5	479.1	491.6	386.8	194.9
120°	512.8	523.8	537.0	545.8	446.9
122.5°	553.8	565.6	580.3	584.6	585.4
125°	595.6	605.1	619.1	624.2	626.4
127.5°	633.7	643.9	655.0	662.3	663.0
130°	669.6	681.4	689.4	697.4	696.8
132.5°	706.2	715.8	723.8	730.4	729.7
135°	737.0	748.8	755.3	762.7	761.2
137.5°	769.2	778.0	785.4	792.7	790.5
140°	800.7	806.6	814.6	821.2	817.6
142.5°	827.2	832.3	841.8	847.6	844.0
145°	855.0	854.2	866.7	871.8	868.1
147.5°	879.1	876.9	889.4	893.0	890.1
150°	902.6	897.5	909.2	913.5	909.9
152.5°	922.3	916.5	927.5	931.9	926.8
155°	941.4	934.9	943.6	948.0	942.2
157.5°	956.8	951.0	957.6	962.7	956.8
160°	970.0	965.6	970.0	974.4	969.2
162.5°	981.7	977.3	981.0	986.1	979.5
165°	991.9	987.6	989.8	994.9	989.8
167.5°	1000.0	995.6	997.8	1003.0	996.4
170°	1006.6	1002.2	1003.7	1008.8	1002.2
172.5°	1011.0	1006.6	1008.1	1013.2	1006.6
175°	1014.6	1009.5	1011.0	1016.1	1008.8
177.5°	1016.1	1011.0	1011.8	1016.9	1010.3
180°	1012.5	1012.5	1012.5	1012.5	1012.5



TEST NUMBER: P904885
 CATALOG NUMBER: DFN2DIP-4P2F0-030D030US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.59	11.39	11.58	12.39	13.71	6.55	7.35	7.54	8.35	9.68
	3H	12.24	12.95	13.24	13.96	15.31	7.71	8.43	8.72	9.44	10.79
	4H	12.83	13.51	13.85	14.52	15.88	8.15	8.82	9.16	9.84	11.19
	6H	13.23	13.85	14.26	14.87	16.24	8.45	9.07	9.48	10.09	11.46
	8H	13.35	13.94	14.38	14.97	16.34	8.53	9.12	9.56	10.15	11.52
	12H	13.40	13.96	14.44	14.99	16.38	8.56	9.12	9.60	10.15	11.54
4H	2H	10.59	11.27	11.62	12.29	13.64	7.13	7.80	8.15	8.82	10.17
	3H	12.39	12.96	13.43	14.00	15.37	8.45	9.01	9.48	10.05	11.42
	4H	13.07	13.58	14.11	14.62	16.01	8.98	9.49	10.02	10.53	11.92
	6H	13.56	14.00	14.61	15.06	16.45	9.37	9.81	10.42	10.87	12.26
	8H	13.72	14.13	14.77	15.18	16.59	9.49	9.90	10.54	10.95	12.35
	12H	13.80	14.17	14.87	15.24	16.65	9.54	9.91	10.61	10.98	12.39
8H	4H	13.03	13.44	14.08	14.49	15.89	9.24	9.65	10.29	10.70	12.11
	6H	13.57	13.91	14.64	15.00	16.40	9.73	10.07	10.80	11.16	12.56
	8H	13.77	14.07	14.85	15.14	16.56	9.91	10.20	10.99	11.28	12.70
	12H	13.89	14.15	14.97	15.22	16.68	10.01	10.27	11.09	11.34	12.80
12H	4H	12.98	13.35	14.05	14.42	15.82	9.24	9.61	10.31	10.68	12.09
	6H	13.54	13.84	14.62	14.92	16.34	9.77	10.07	10.85	11.15	12.57
	8H	13.74	14.01	14.83	15.08	16.54	9.96	10.23	11.05	11.30	12.76