

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921252

Luminaire Tested: DFN2DIP-4P2F0-030D030US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921252
REPORT IS A COMBINATION OF REPORTS P899020 AND P895899
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P2F0-030D030US940-RLLFLL
Description: 2 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4641.3 lumens
Efficiency: N/A
Efficacy: 91.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.07' x L: 2.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 51
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921252
CATALOG NUMBER: DFN2DIP-4P2F0-030D030US940-RLLFLL

Luminous Intensity Polar Plot

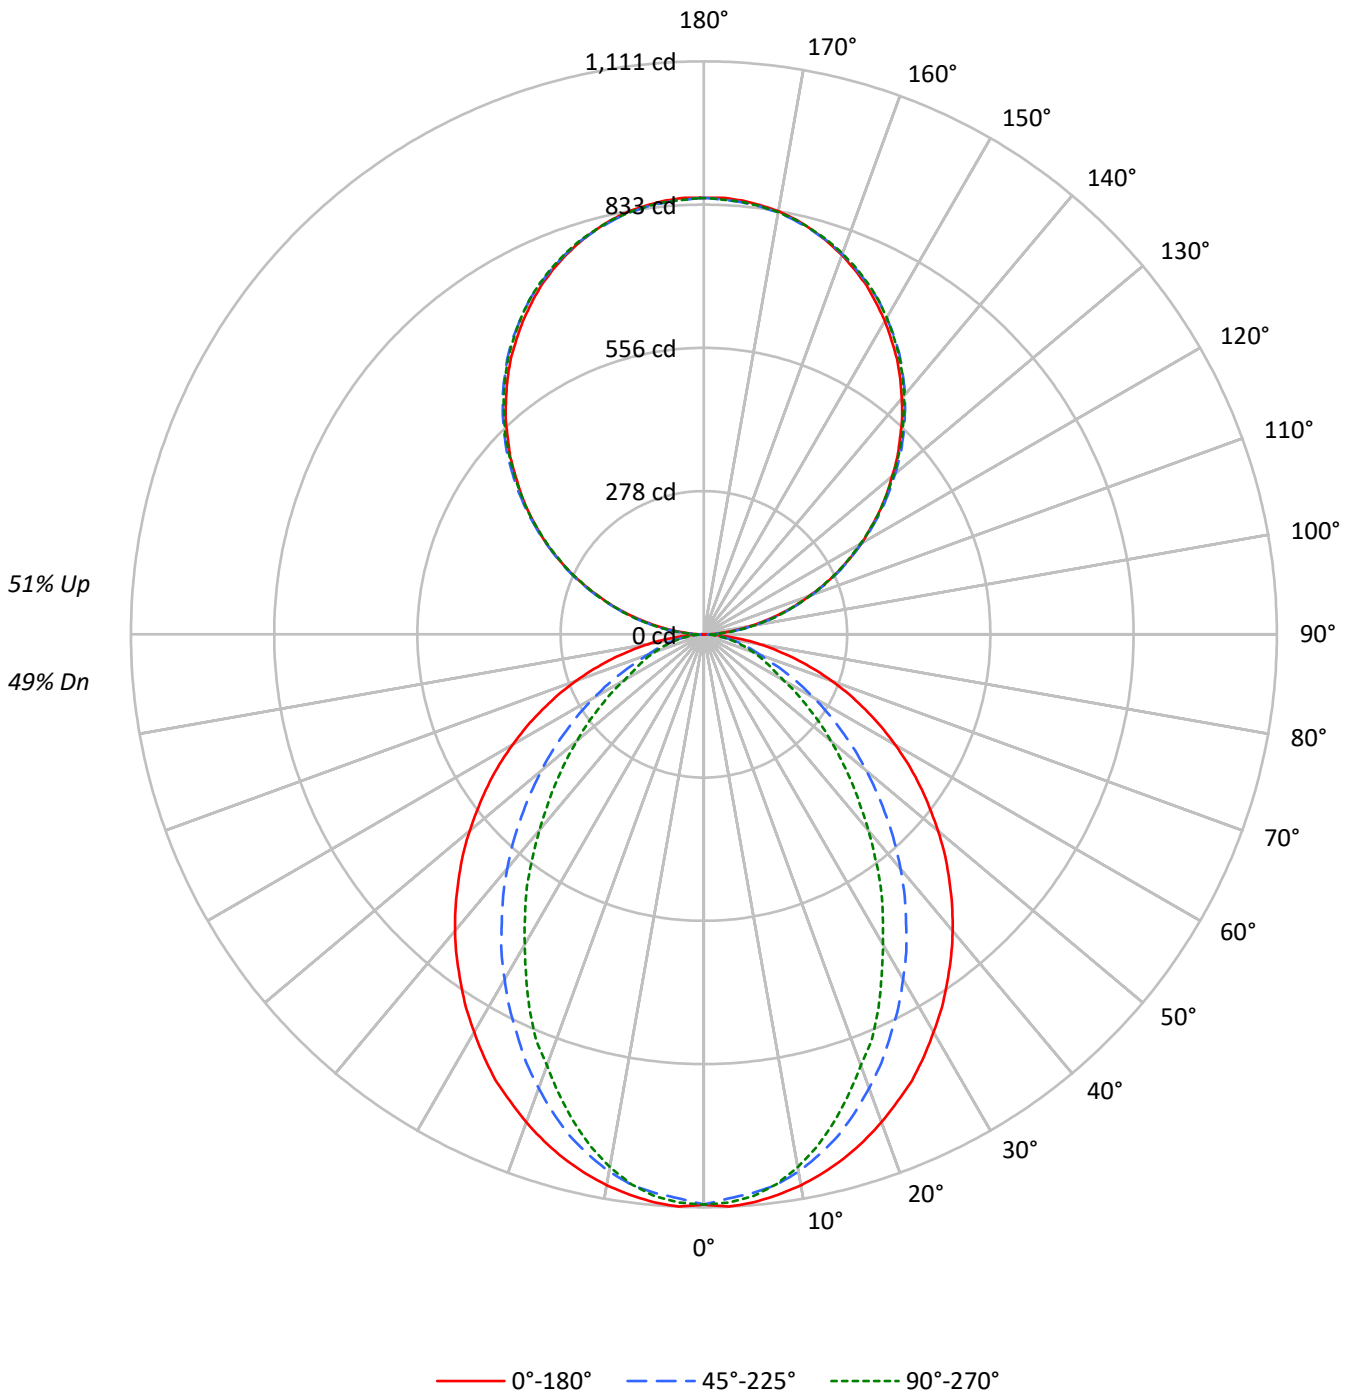



TEST NUMBER: P921252
 CATALOG NUMBER: DFN2DIP-4P2F0-030D030US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55	49				49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42				42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36				36
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35	31				31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31	27				27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24				24
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24	21				21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19				19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17				17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	16				16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14				14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2768	2768	2768
5°	2767	2718	2737
10°	2734	2657	2644
15°	2691	2563	2502
20°	2636	2435	2329
25°	2579	2293	2163
30°	2505	2149	1953
35°	2432	1994	1769
40°	2358	1834	1559
45°	2272	1659	1369
50°	2182	1482	1183
55°	2088	1293	1006
60°	1979	1098	824
65°	1854	900	736
70°	1701	715	659
75°	1509	618	591
80°	1235	499	499
85°	796	307	352

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2272 cd/sqm



TEST NUMBER: P921252

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US940-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.6	2.2
10°-20°	284.5	6.1
20°-30°	399.4	8.6
30°-40°	435.3	9.4
40°-50°	400.1	8.6
50°-60°	314.2	6.8
60°-70°	204.5	4.4
70°-80°	105.3	2.3
80°-90°	29.3	0.6
90°-100°	52.3	1.1
100°-110°	166.3	3.6
110°-120°	284.7	6.1
120°-130°	374.4	8.1
130°-140°	420.2	9.1
140°-150°	412.1	8.9
150°-160°	345.7	7.4
160°-170°	229.2	4.9
170°-180°	80.1	1.7
0°-30°	787.5	17.0
0°-40°	1222.8	26.3
0°-60°	1937.2	41.7
0°-90°	2276.3	49.0
90°-120°	503.4	10.8
90°-150°	1710.0	36.8
90°-180°	2365.0	51.0
0°-180°	4641.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1106	1106	1106	1106	1106	
5°	1106	1101	1088	1097	1094	105
15°	1052	1040	1007	988	978	296
25°	955	922	856	816	800	439
35°	822	771	683	620	598	515
45°	672	605	500	429	405	519
55°	511	433	325	265	246	457
65°	345	264	174	140	137	342
75°	184	114	80	73	72	195
85°	43	22	19	19	19	49
90°	1	9	25	24	24	5
95°	37	44	46	46	44	41
105°	154	156	157	158	158	162
115°	286	290	288	288	286	283
125°	416	422	420	418	417	371
135°	537	545	547	546	544	415
145°	652	658	662	662	660	408
155°	746	748	750	754	752	343
165°	812	811	811	816	812	229
175°	844	842	841	846	842	80
180°	846	846	846	846	846	



TEST NUMBER: P921252

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US940-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1105.6	1105.6	1105.6	1105.6	1105.6
2.5°	1110.6	1105.6	1094.6	1104.7	1102.7
5°	1105.6	1100.6	1087.6	1096.6	1093.6
7.5°	1096.6	1090.7	1076.7	1080.6	1075.6
10°	1084.6	1077.6	1057.7	1054.5	1048.7
12.5°	1069.6	1060.6	1033.6	1027.6	1016.5
15°	1051.6	1040.5	1006.6	987.6	977.6
17.5°	1030.5	1014.6	972.5	950.6	934.5
20°	1006.6	986.5	936.5	911.6	889.5
22.5°	980.6	957.5	899.5	865.5	850.5
25°	954.6	922.5	856.5	815.5	800.4
27.5°	923.5	889.5	816.5	769.5	746.4
30°	890.6	852.5	772.4	721.5	694.4
32.5°	858.4	812.4	730.5	670.4	645.3
35°	822.5	771.4	683.4	620.4	598.3
37.5°	787.5	732.4	639.4	570.2	545.4
40°	750.5	690.5	593.3	522.3	496.3
42.5°	712.4	648.5	547.3	473.2	448.3
45°	672.4	605.3	500.3	429.2	405.2
47.5°	634.4	563.4	455.3	384.1	362.2
50°	592.4	521.3	411.3	342.1	321.2
52.5°	551.3	476.3	369.3	303.2	284.2
55°	511.2	433.2	325.1	265.2	246.2
57.5°	470.3	390.2	286.2	230.2	214.1
60°	428.2	348.2	245.1	194.1	178.2
62.5°	387.3	307.2	210.1	162.1	154.2
65°	345.2	264.1	174.1	140.1	137.1
67.5°	305.2	224.1	140.1	123.1	120.0
70°	263.1	185.1	116.0	106.0	102.0
72.5°	223.1	149.0	97.0	89.1	87.0
75°	184.0	114.0	80.1	73.0	72.1
77.5°	145.1	81.0	63.0	59.0	57.0
80°	109.1	58.1	48.0	44.1	44.1
82.5°	76.0	39.1	33.0	31.0	31.0
85°	43.0	21.9	19.0	19.0	19.0
87.5°	16.1	7.9	7.9	7.0	7.0
90°	0.8	9.2	25.0	23.5	24.3
92.5°	15.8	21.4	22.2	22.9	22.9
95°	37.3	44.4	45.7	45.7	44.4
97.5°	62.0	68.6	71.4	71.4	71.4
100°	90.5	96.4	98.4	98.4	97.7
102.5°	120.6	125.0	127.8	128.6	127.8
105°	153.6	155.6	157.1	158.4	158.4
107.5°	186.2	189.2	189.2	189.8	186.2
110°	217.8	221.9	221.9	221.9	219.9



TEST NUMBER: P921252

CATALOG NUMBER: DFN2DIP-4P2F0-030D030US940-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	252.0	256.4	255.6	253.5	252.0
115°	285.7	289.7	288.5	287.8	285.7
117.5°	319.1	324.7	321.1	319.1	317.0
120°	352.8	358.4	352.8	352.8	350.4
122.5°	383.3	390.5	386.9	384.9	383.3
125°	415.5	421.9	419.8	417.5	416.8
127.5°	446.8	454.8	452.0	448.9	446.8
130°	476.2	485.4	484.1	482.6	479.7
132.5°	509.1	516.2	516.7	513.2	511.1
135°	537.4	545.3	546.9	546.1	544.0
137.5°	569.0	575.4	576.7	576.2	573.1
140°	596.8	603.2	606.8	606.8	604.0
142.5°	625.4	631.8	633.8	634.6	631.8
145°	652.5	657.5	661.6	662.4	659.6
147.5°	676.7	683.1	686.1	687.4	684.6
150°	701.7	706.1	708.8	711.1	708.8
152.5°	723.9	728.2	731.7	734.6	731.7
155°	746.1	748.1	750.4	753.9	751.7
157.5°	765.2	766.7	768.0	773.1	769.5
160°	782.3	783.8	784.6	788.9	785.9
162.5°	798.1	798.1	798.9	803.7	800.1
165°	811.6	810.8	810.8	815.9	812.3
167.5°	823.9	821.5	821.5	826.6	823.0
170°	833.0	831.0	830.3	835.4	831.0
172.5°	839.4	837.4	836.6	841.7	837.4
175°	844.5	842.5	841.0	846.1	841.7
177.5°	847.3	845.3	843.7	848.1	843.7
180°	846.1	846.1	846.1	846.1	846.1



TEST NUMBER: P921252
 CATALOG NUMBER: DFN2DIP-4P2F0-030D030US940-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.46	11.28	11.43	12.26	13.55	6.42	7.24	7.39	8.22	9.51
	3H	12.11	12.85	13.10	13.84	15.15	7.59	8.32	8.57	9.31	10.62
	4H	12.70	13.40	13.70	14.39	15.71	8.02	8.72	9.02	9.71	11.03
	6H	13.11	13.75	14.11	14.75	16.08	8.32	8.96	9.33	9.96	11.29
	8H	13.22	13.83	14.24	14.85	16.17	8.40	9.01	9.42	10.03	11.36
	12H	13.28	13.85	14.29	14.86	16.21	8.44	9.02	9.46	10.03	11.38
4H	2H	10.47	11.17	11.47	12.16	13.48	7.00	7.70	8.00	8.69	10.01
	3H	12.27	12.85	13.28	13.87	15.20	8.33	8.90	9.34	9.93	11.26
	4H	12.95	13.47	13.96	14.49	15.84	8.86	9.38	9.88	10.40	11.75
	6H	13.44	13.89	14.47	14.93	16.28	9.25	9.71	10.28	10.75	12.10
	8H	13.60	14.02	14.63	15.06	16.42	9.37	9.79	10.40	10.83	12.19
	12H	13.68	14.07	14.73	15.11	16.48	9.42	9.80	10.47	10.85	12.22
8H	4H	12.91	13.33	13.94	14.36	15.73	9.12	9.55	10.15	10.58	11.94
	6H	13.45	13.80	14.50	14.87	16.24	9.61	9.96	10.67	11.04	12.40
	8H	13.65	13.96	14.71	15.02	16.40	9.79	10.09	10.85	11.15	12.54
	12H	13.77	14.04	14.84	15.10	16.52	9.89	10.16	10.95	11.21	12.64
12H	4H	12.86	13.24	13.91	14.29	15.66	9.12	9.51	10.17	10.55	11.92
	6H	13.42	13.73	14.48	14.79	16.17	9.66	9.96	10.72	11.02	12.40
	8H	13.63	13.90	14.69	14.95	16.38	9.85	10.12	10.91	11.17	12.60