

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905109

Luminaire Tested: DFN2DIP-4P4F0-070D050US835-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905109
REPORT IS A COMBINATION OF REPORTS P900632 AND P897523
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-070D050US835-RLLONL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10900.0 lumens
Efficiency: N/A
Efficacy: 95.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 114.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905109
CATALOG NUMBER: DFN2DIP-4P4F0-070D050US835-RLLONL

Luminous Intensity Polar Plot

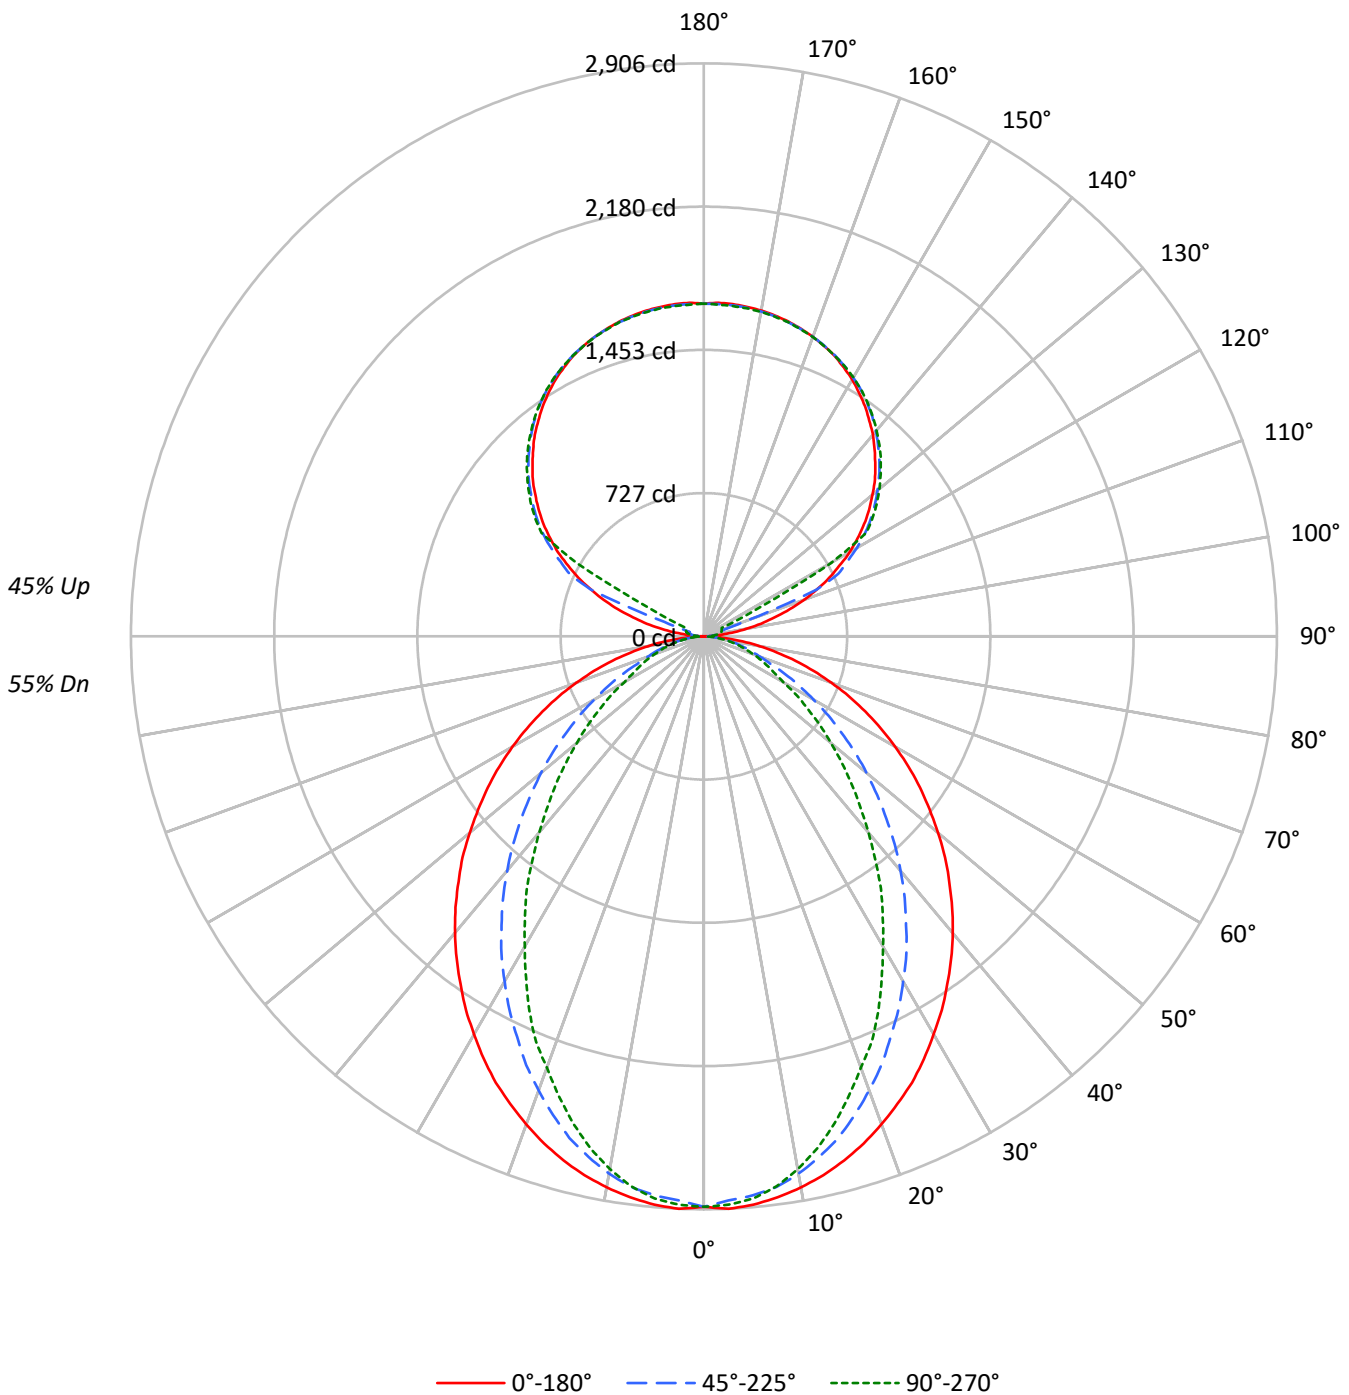



TEST NUMBER: P905109

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	47
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45	40
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39	35
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	30
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19	17
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1877	1877	1877
5°	1880	1848	1860
10°	1862	1812	1800
15°	1836	1753	1707
20°	1802	1671	1593
25°	1768	1579	1482
30°	1721	1484	1342
35°	1676	1383	1219
40°	1629	1278	1078
45°	1576	1161	949
50°	1520	1043	824
55°	1462	917	704
60°	1395	785	580
65°	1317	651	523
70°	1224	526	474
75°	1106	465	433
80°	936	392	378
85°	654	265	289

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1576 cd/sqm



TEST NUMBER: P905109

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US835-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	271.1	2.5
10°-20°	744.3	6.8
20°-30°	1045.0	9.6
30°-40°	1139.2	10.5
40°-50°	1047.0	9.6
50°-60°	822.3	7.5
60°-70°	535.2	4.9
70°-80°	275.5	2.5
80°-90°	73.3	0.7
90°-100°	55.7	0.5
100°-110°	207.4	1.9
110°-120°	550.1	5.0
120°-130°	912.4	8.4
130°-140°	969.2	8.9
140°-150°	900.8	8.3
150°-160°	724.2	6.6
160°-170°	466.6	4.3
170°-180°	160.6	1.5
0°-30°	2060.5	18.9
0°-40°	3199.7	29.4
0°-60°	5068.9	46.5
0°-90°	5952.9	54.6
90°-120°	813.2	7.5
90°-150°	3595.6	33.0
90°-180°	4947.0	45.4
0°-180°	10900.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2893	2893	2893	2893	2893	
5°	2893	2880	2846	2870	2862	274
15°	2752	2723	2634	2584	2558	775
25°	2498	2414	2241	2134	2094	1149
35°	2152	2019	1788	1623	1566	1347
45°	1760	1584	1309	1123	1060	1359
55°	1338	1134	851	694	644	1195
65°	903	691	456	367	359	896
75°	482	298	209	191	189	509
85°	112	58	50	50	50	129
90°	1	15	24	31	33	10
95°	79	39	48	54	52	94
105°	371	408	74	88	93	397
115°	702	723	753	188	100	691
125°	993	1009	1032	1040	1044	885
135°	1228	1248	1259	1271	1269	949
145°	1425	1424	1444	1453	1447	891
155°	1569	1558	1573	1580	1570	723
165°	1653	1646	1650	1658	1650	467
175°	1691	1682	1685	1694	1681	161
180°	1687	1687	1687	1687	1687	



TEST NUMBER: P905109

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2893.1	2893.1	2893.1	2893.1	2893.1
2.5°	2906.1	2893.1	2864.2	2890.6	2885.3
5°	2893.1	2880.0	2845.9	2869.5	2861.7
7.5°	2869.5	2853.9	2817.3	2827.5	2814.5
10°	2838.1	2819.8	2767.5	2759.5	2743.9
12.5°	2798.9	2775.3	2704.5	2688.9	2660.0
15°	2751.7	2722.8	2633.9	2584.2	2558.1
17.5°	2696.7	2654.8	2544.8	2487.2	2445.3
20°	2633.9	2581.4	2450.6	2385.3	2327.5
22.5°	2565.9	2505.6	2353.6	2264.7	2225.6
25°	2497.8	2413.9	2241.1	2133.9	2094.5
27.5°	2416.7	2327.5	2136.4	2013.4	1953.1
30°	2330.3	2230.6	2021.1	1887.8	1817.0
32.5°	2246.4	2125.9	1911.4	1754.2	1688.6
35°	2152.2	2018.6	1788.4	1623.4	1565.6
37.5°	2060.6	1916.4	1673.1	1492.2	1427.0
40°	1963.6	1806.7	1552.5	1366.7	1298.6
42.5°	1864.2	1696.7	1432.2	1238.3	1173.1
45°	1759.5	1583.9	1309.2	1123.1	1060.3
47.5°	1660.0	1474.2	1191.4	1005.3	947.8
50°	1550.0	1364.2	1076.1	895.3	840.6
52.5°	1442.5	1246.1	966.1	793.3	743.6
55°	1337.8	1133.6	850.8	693.9	644.2
57.5°	1230.6	1021.1	748.9	602.2	560.3
60°	1120.6	911.1	641.4	508.1	466.1
62.5°	1013.3	803.9	549.7	424.2	403.3
65°	903.3	691.1	455.6	366.7	358.6
67.5°	798.6	586.4	366.7	321.9	314.2
70°	688.6	484.4	303.6	277.5	266.9
72.5°	583.9	390.0	253.9	233.1	227.8
75°	481.7	298.3	209.4	191.1	188.6
77.5°	379.7	211.9	165.0	154.4	149.2
80°	285.3	151.9	125.6	115.3	115.3
82.5°	198.9	102.2	86.4	81.1	81.1
85°	112.5	57.5	49.7	49.7	49.7
87.5°	41.9	20.8	20.8	18.3	18.3
90°	1.2	14.6	24.4	30.6	32.9
92.5°	30.6	25.7	29.3	31.8	32.9
95°	79.3	39.0	47.6	53.8	52.5
97.5°	142.8	42.8	62.2	66.0	67.1
100°	216.2	48.9	69.6	79.3	81.8
102.5°	296.7	294.3	72.1	85.4	89.2
105°	371.2	407.9	74.5	87.9	92.8
107.5°	457.9	488.3	77.0	90.3	95.3
110°	541.0	566.5	213.7	91.6	96.4



TEST NUMBER: P905109

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	619.1	641.0	620.3	94.0	97.7
115°	702.1	722.8	753.4	188.1	100.2
117.5°	774.1	798.5	819.4	644.6	324.8
120°	854.7	873.0	895.0	909.7	744.8
122.5°	923.0	942.6	967.1	974.4	975.7
125°	992.6	1008.6	1031.8	1040.3	1044.0
127.5°	1056.1	1073.2	1091.7	1103.8	1105.0
130°	1116.0	1135.6	1148.9	1162.4	1161.3
132.5°	1177.1	1193.0	1206.3	1217.4	1216.2
135°	1228.4	1248.0	1258.8	1271.2	1268.7
137.5°	1282.0	1296.7	1309.0	1321.2	1317.6
140°	1334.5	1344.4	1357.7	1368.7	1362.7
142.5°	1378.6	1387.2	1403.0	1412.7	1406.6
145°	1425.0	1423.7	1444.4	1453.0	1446.9
147.5°	1465.2	1461.5	1482.3	1488.4	1483.6
150°	1504.3	1495.8	1515.3	1522.6	1516.5
152.5°	1537.2	1527.5	1545.8	1553.2	1544.6
155°	1569.0	1558.1	1572.7	1580.0	1570.3
157.5°	1594.6	1584.9	1595.9	1604.5	1594.6
160°	1616.7	1609.3	1616.7	1623.9	1615.4
162.5°	1636.1	1628.9	1634.9	1643.5	1632.5
165°	1653.2	1646.0	1649.6	1658.1	1649.6
167.5°	1666.7	1659.3	1663.1	1671.6	1660.6
170°	1677.7	1670.3	1672.8	1681.3	1670.3
172.5°	1685.0	1677.7	1680.2	1688.7	1677.7
175°	1691.1	1682.5	1685.0	1693.5	1681.3
177.5°	1693.5	1685.0	1686.3	1694.8	1683.8
180°	1687.4	1687.4	1687.4	1687.4	1687.4



TEST NUMBER: P905109
 CATALOG NUMBER: DFN2DIP-4P4F0-070D050US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.77	10.64	10.70	11.58	12.79	5.73	6.60	6.66	7.54	8.75
	3H	11.46	12.24	12.40	13.18	14.41	6.93	7.71	7.86	8.65	9.88
	4H	12.07	12.81	13.02	13.76	15.00	7.38	8.12	8.33	9.07	10.31
	6H	12.50	13.18	13.46	14.14	15.39	7.71	8.38	8.67	9.34	10.59
	8H	12.63	13.28	13.60	14.25	15.50	7.80	8.44	8.77	9.41	10.66
	12H	12.70	13.31	13.67	14.28	15.55	7.84	8.46	8.82	9.42	10.70
4H	2H	9.80	10.53	10.75	11.48	12.72	6.34	7.07	7.29	8.02	9.26
	3H	11.64	12.25	12.60	13.23	14.48	7.69	8.30	8.66	9.29	10.54
	4H	12.33	12.89	13.31	13.87	15.14	8.25	8.80	9.22	9.78	11.06
	6H	12.86	13.34	13.84	14.33	15.61	8.67	9.15	9.66	10.15	11.42
	8H	13.04	13.48	14.02	14.48	15.77	8.80	9.25	9.79	10.24	11.53
	12H	13.14	13.54	14.14	14.55	15.84	8.87	9.27	9.87	10.28	11.57
8H	4H	12.31	12.75	13.29	13.74	15.04	8.53	8.98	9.52	9.97	11.26
	6H	12.88	13.25	13.89	14.28	15.57	9.05	9.42	10.07	10.46	11.75
	8H	13.10	13.43	14.12	14.45	15.75	9.25	9.57	10.27	10.59	11.90
	12H	13.24	13.53	14.27	14.55	15.90	9.37	9.66	10.39	10.67	12.02
12H	4H	12.26	12.66	13.27	13.67	14.97	8.54	8.94	9.55	9.95	11.25
	6H	12.86	13.18	13.88	14.20	15.51	9.11	9.43	10.13	10.45	11.76
	8H	13.08	13.37	14.11	14.38	15.74	9.32	9.61	10.34	10.62	11.97