

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915998

Luminaire Tested: DFN2DIP-4P4F0-060D060US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915998
REPORT IS A COMBINATION OF REPORTS P899121 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-060D060US930-FLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9172.1 lumens
Efficiency: N/A
Efficacy: 82.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 111.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915998
CATALOG NUMBER: DFN2DIP-4P4F0-060D060US930-FLLFL

Luminous Intensity Polar Plot

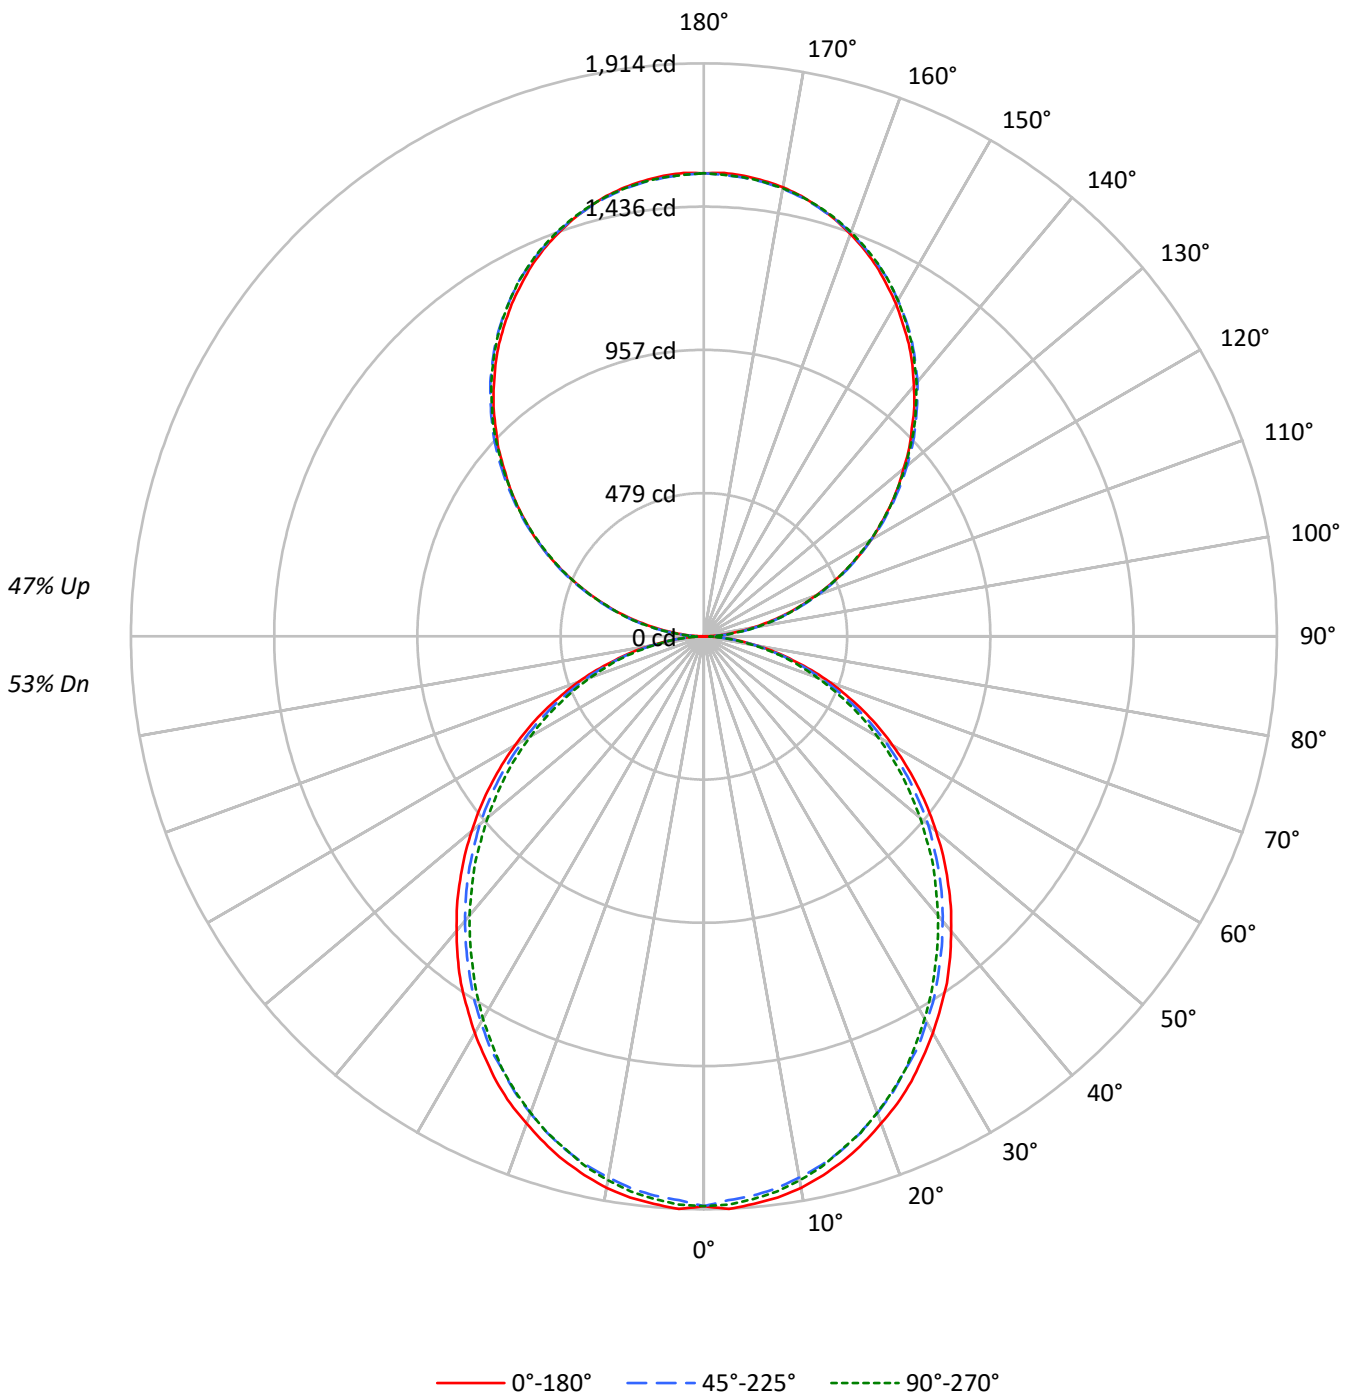



TEST NUMBER: P915998

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US930-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1235	1235	1235
5°	1237	1218	1226
10°	1227	1202	1210
15°	1209	1183	1185
20°	1185	1155	1159
25°	1161	1123	1128
30°	1130	1093	1090
35°	1102	1057	1049
40°	1066	1021	1010
45°	1031	985	970
50°	992	947	924
55°	952	903	882
60°	907	851	834
65°	857	798	777
70°	794	732	716
75°	706	654	660
80°	600	554	552
85°	435	380	373

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1171 cd/sqm



TEST NUMBER: P915998

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.1	2.0
10°-20°	504.1	5.5
20°-30°	740.8	8.1
30°-40°	860.4	9.4
40°-50°	859.3	9.4
50°-60°	749.3	8.2
60°-70°	553.9	6.0
70°-80°	313.4	3.4
80°-90°	87.1	0.9
90°-100°	95.7	1.0
100°-110°	304.2	3.3
110°-120°	520.6	5.7
120°-130°	684.6	7.5
130°-140°	768.4	8.4
140°-150°	753.5	8.2
150°-160°	632.1	6.9
160°-170°	419.2	4.6
170°-180°	146.5	1.6
0°-30°	1424.0	15.5
0°-40°	2284.3	24.9
0°-60°	3892.9	42.4
0°-90°	4847.3	52.8
90°-120°	920.5	10.0
90°-150°	3127.0	34.1
90°-180°	4325.0	47.2
0°-180°	9172.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1903	1903	1903	1903	1903	
5°	1903	1896	1876	1891	1887	181
15°	1812	1801	1777	1785	1776	510
25°	1640	1625	1594	1598	1594	755
35°	1415	1397	1367	1356	1347	884
45°	1151	1138	1111	1091	1084	889
55°	871	860	838	816	807	779
65°	588	577	558	542	533	581
75°	307	304	295	284	287	328
85°	75	73	71	66	64	84
90°	1	17	46	43	44	9
95°	68	81	84	84	81	76
105°	281	284	287	290	290	296
115°	522	530	528	526	522	517
125°	760	771	768	764	762	679
135°	983	997	1000	999	995	760
145°	1193	1202	1210	1211	1206	745
155°	1364	1368	1372	1379	1374	628
165°	1484	1483	1483	1492	1486	419
175°	1544	1541	1538	1547	1539	147
180°	1547	1547	1547	1547	1547	



TEST NUMBER: P915998

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US930-FLLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1903.4	1903.4	1903.4	1903.4	1903.4
2.5°	1914.5	1905.4	1885.1	1903.4	1899.9
5°	1903.4	1896.2	1876.0	1890.6	1887.1
7.5°	1890.6	1879.8	1859.5	1874.3	1870.6
10°	1870.6	1857.8	1835.8	1850.4	1844.9
12.5°	1843.1	1832.1	1810.2	1819.3	1815.7
15°	1811.9	1801.1	1777.2	1784.6	1775.5
17.5°	1773.5	1762.7	1738.8	1747.8	1738.8
20°	1731.4	1720.5	1694.8	1700.3	1693.1
22.5°	1689.5	1672.9	1649.0	1649.0	1645.4
25°	1639.9	1625.4	1594.2	1597.7	1594.2
27.5°	1584.9	1572.1	1548.4	1543.0	1533.9
30°	1530.2	1515.4	1488.1	1482.6	1475.2
32.5°	1471.5	1460.7	1431.3	1420.2	1412.9
35°	1414.9	1396.6	1367.3	1356.2	1347.0
37.5°	1350.8	1334.2	1305.0	1292.1	1283.0
40°	1284.9	1270.2	1240.9	1224.6	1217.2
42.5°	1220.8	1206.1	1177.0	1158.5	1147.6
45°	1151.4	1138.5	1110.9	1091.0	1083.5
47.5°	1083.5	1070.7	1041.5	1021.2	1010.3
50°	1012.1	1003.0	977.4	951.7	942.6
52.5°	942.6	929.8	906.0	885.9	873.1
55°	871.3	860.2	838.3	816.4	807.2
57.5°	799.9	790.8	766.9	744.9	737.5
60°	728.4	721.2	695.6	675.4	669.9
62.5°	658.8	646.0	627.8	609.5	602.2
65°	587.6	576.6	558.3	541.8	532.6
67.5°	514.4	505.1	488.8	476.0	468.6
70°	446.6	439.3	422.7	409.9	402.8
72.5°	377.1	369.7	360.6	347.8	342.3
75°	307.4	303.9	294.6	283.7	287.4
77.5°	245.2	237.9	234.2	228.8	223.3
80°	183.1	181.2	177.5	172.0	168.4
82.5°	124.5	124.5	122.7	115.4	115.4
85°	74.9	73.2	71.4	65.8	64.1
87.5°	33.0	29.4	25.6	20.2	18.3
90°	1.4	16.8	45.7	42.9	44.3
92.5°	28.9	39.2	40.6	42.0	42.0
95°	68.1	81.1	83.5	83.5	81.1
97.5°	113.3	125.5	130.6	130.6	130.6
100°	165.6	176.3	180.0	180.0	178.6
102.5°	220.6	228.5	233.7	235.1	233.7
105°	280.8	284.5	287.3	289.7	289.7
107.5°	340.5	346.1	346.1	347.0	340.5
110°	398.4	405.8	405.8	405.8	402.0



TEST NUMBER: P915998

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	460.8	468.7	467.3	463.6	460.8
115°	522.4	529.9	527.5	526.1	522.4
117.5°	583.5	593.8	587.2	583.5	579.8
120°	645.1	655.3	645.1	645.1	640.8
122.5°	701.0	714.0	707.5	703.8	701.0
125°	759.8	771.4	767.7	763.5	762.1
127.5°	817.2	831.6	826.5	820.9	817.2
130°	870.8	887.6	885.3	882.5	877.3
132.5°	931.0	944.0	944.9	938.4	934.7
135°	982.8	997.2	1000.0	998.6	994.8
137.5°	1040.6	1052.2	1054.6	1053.6	1048.1
140°	1091.4	1103.1	1109.6	1109.6	1104.5
142.5°	1143.6	1155.3	1159.0	1160.4	1155.3
145°	1193.1	1202.4	1209.9	1211.3	1206.2
147.5°	1237.4	1249.0	1254.7	1256.9	1251.8
150°	1283.1	1291.0	1296.2	1300.3	1296.2
152.5°	1323.6	1331.6	1338.1	1343.3	1338.1
155°	1364.2	1368.0	1372.1	1378.8	1374.5
157.5°	1399.2	1402.1	1404.4	1413.7	1407.2
160°	1430.5	1433.3	1434.7	1442.6	1437.0
162.5°	1459.4	1459.4	1460.8	1469.7	1463.1
165°	1484.1	1482.7	1482.7	1492.1	1485.6
167.5°	1506.5	1502.4	1502.4	1511.6	1505.1
170°	1523.3	1519.6	1518.2	1527.5	1519.6
172.5°	1535.0	1531.2	1529.8	1539.1	1531.2
175°	1544.3	1540.6	1537.7	1547.1	1539.1
177.5°	1549.4	1545.7	1542.9	1550.8	1542.9
180°	1547.1	1547.1	1547.1	1547.1	1547.1



TEST NUMBER: P915998
 CATALOG NUMBER: DFN2DIP-4P4F0-060D060US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.28	9.17	9.21	10.12	11.35	7.84	8.73	8.77	9.68	10.90
	3H	9.95	10.75	10.89	11.71	12.96	9.46	10.26	10.40	11.21	12.47
	4H	10.54	11.30	11.50	12.26	13.52	10.05	10.80	11.01	11.77	13.03
	6H	10.95	11.64	11.92	12.61	13.89	10.45	11.14	11.42	12.11	13.39
	8H	11.06	11.72	12.03	12.70	13.98	10.55	11.22	11.53	12.20	13.47
	12H	11.11	11.74	12.09	12.72	14.01	10.60	11.23	11.58	12.21	13.50
4H	2H	8.75	9.50	9.71	10.46	11.73	8.39	9.15	9.36	10.11	11.37
	3H	10.62	11.25	11.60	12.24	13.52	10.21	10.84	11.19	11.84	13.11
	4H	11.34	11.92	12.32	12.90	14.20	10.92	11.49	11.90	12.48	13.78
	6H	11.86	12.36	12.86	13.37	14.67	11.43	11.93	12.43	12.94	14.24
	8H	12.02	12.48	13.01	13.48	14.80	11.58	12.04	12.58	13.05	14.36
	12H	12.09	12.51	13.11	13.53	14.85	11.64	12.06	12.66	13.08	14.40
8H	4H	11.54	12.00	12.54	13.01	14.32	11.16	11.63	12.16	12.63	13.94
	6H	12.18	12.56	13.20	13.61	14.92	11.80	12.18	12.82	13.22	14.54
	8H	12.41	12.74	13.43	13.77	15.10	12.01	12.35	13.04	13.38	14.71
	12H	12.54	12.84	13.57	13.87	15.24	12.13	12.43	13.16	13.45	14.83
12H	4H	11.53	11.95	12.54	12.97	14.28	11.16	11.58	12.18	12.60	13.92
	6H	12.21	12.55	13.24	13.58	14.91	11.84	12.18	12.87	13.21	14.54
	8H	12.46	12.76	13.49	13.78	15.16	12.08	12.38	13.11	13.40	14.78