

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924108

Luminaire Tested: DFN2DIP-4P4F0-030D050US950-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P924108  
REPORT IS A COMBINATION OF REPORTS P899104 AND P895967  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P4F0-030D050US950-RLLFLL  
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6654.1 lumens  
Efficiency: N/A  
Efficacy: 98.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 67.9  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.983  
Total Harmonic Distortion (THDi): 0.073  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P924108  
CATALOG NUMBER: DFN2DIP-4P4F0-030D050US950-RLLFLL

### Luminous Intensity Polar Plot

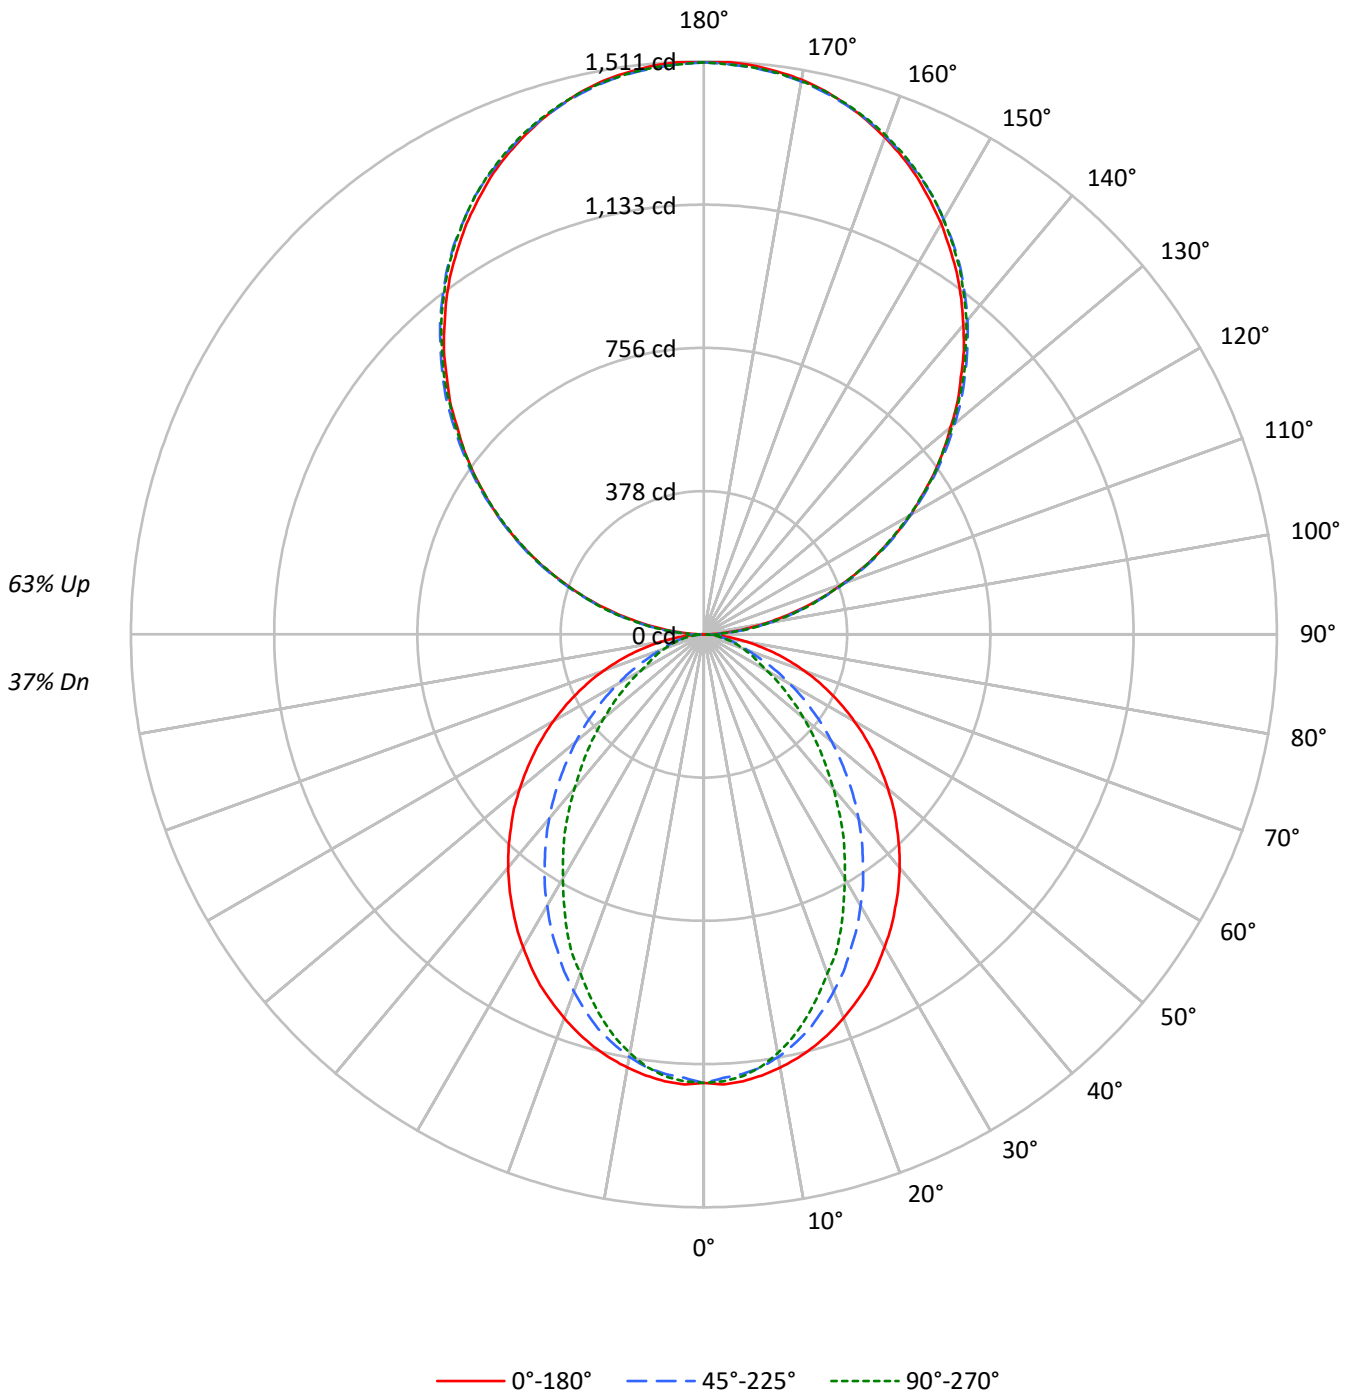



TEST NUMBER: P924108  
 CATALOG NUMBER: DFN2DIP-4P4F0-030D050US950-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37				37
1	95	91	87	84	86	83	80	77	67	65	63	53	51	50	39	38	38	32				32
2	87	80	74	69	79	73	68	63	59	56	53	47	44	42	35	34	32	27				27
3	79	70	64	58	72	64	58	53	52	48	45	41	39	36	31	29	28	23				23
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24	20				20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	26	23	21	18				18
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19	16				16
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17	14				14
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15	13				13
9	49	38	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14	12				12
10	46	34	27	23	42	32	25	21	26	22	18	22	18	16	17	14	13	11				11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	767	767	767
5°	769	755	760
10°	761	741	736
15°	751	717	698
20°	737	683	651
25°	723	645	606
30°	704	607	549
35°	685	565	498
40°	666	522	441
45°	644	475	388
50°	621	426	337
55°	598	375	288
60°	570	321	237
65°	539	266	214
70°	500	215	194
75°	452	190	177
80°	383	160	154
85°	267	108	118

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1142 cd/sqm



TEST NUMBER: P924108

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US950-RLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	110.9	1.7
10°-20°	304.3	4.6
20°-30°	427.3	6.4
30°-40°	465.7	7.0
40°-50°	428.1	6.4
50°-60°	336.2	5.1
60°-70°	218.8	3.3
70°-80°	112.6	1.7
80°-90°	33.0	0.5
90°-100°	93.4	1.4
100°-110°	296.6	4.5
110°-120°	507.6	7.6
120°-130°	667.5	10.0
130°-140°	749.3	11.3
140°-150°	734.8	11.0
150°-160°	616.4	9.3
160°-170°	408.8	6.1
170°-180°	142.9	2.1
0°-30°	842.5	12.7
0°-40°	1308.2	19.7
0°-60°	2072.5	31.1
0°-90°	2437.0	36.6
90°-120°	897.5	13.5
90°-150°	3049.2	45.8
90°-180°	4217.0	63.4
0°-180°	6654.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1183	1183	1183	1183	1183	
5°	1183	1178	1164	1173	1170	112
15°	1125	1113	1077	1057	1046	317
25°	1021	987	916	872	856	470
35°	880	825	731	664	640	551
45°	719	648	535	459	434	556
55°	547	464	348	284	263	489
65°	369	283	186	150	147	366
75°	197	122	86	78	77	208
85°	46	24	20	20	20	53
90°	1	16	45	42	43	7
95°	66	79	81	81	79	74
105°	274	277	280	282	282	289
115°	509	517	514	513	509	504
125°	741	752	749	744	743	662
135°	958	972	975	974	970	741
145°	1163	1172	1180	1181	1176	727
155°	1330	1334	1338	1344	1340	612
165°	1447	1446	1446	1455	1449	408
175°	1506	1502	1500	1509	1501	143
180°	1509	1509	1509	1509	1509	



TEST NUMBER: P924108

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US950-RLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1182.9	1182.9	1182.9	1182.9	1182.9
2.5°	1188.2	1182.9	1171.0	1181.8	1179.7
5°	1182.9	1177.5	1163.6	1173.2	1170.0
7.5°	1173.2	1166.8	1151.9	1156.1	1150.7
10°	1160.4	1152.9	1131.5	1128.2	1121.9
12.5°	1144.3	1134.7	1105.8	1099.4	1087.6
15°	1125.1	1113.2	1076.9	1056.6	1045.9
17.5°	1102.5	1085.5	1040.4	1017.0	999.8
20°	1076.9	1055.4	1001.9	975.3	951.6
22.5°	1049.1	1024.4	962.3	926.0	909.9
25°	1021.3	986.9	916.3	872.4	856.3
27.5°	988.1	951.6	873.5	823.2	798.5
30°	952.8	912.0	826.4	771.9	742.9
32.5°	918.4	869.2	781.5	717.2	690.4
35°	880.0	825.3	731.1	663.7	640.1
37.5°	842.5	783.5	684.0	610.1	583.5
40°	802.9	738.7	634.8	558.8	531.0
42.5°	762.2	693.7	585.6	506.3	479.6
45°	719.4	647.6	535.3	459.2	433.5
47.5°	678.7	602.7	487.1	411.0	387.5
50°	633.7	557.7	440.0	366.0	343.6
52.5°	589.8	509.5	395.1	324.4	304.0
55°	546.9	463.5	347.8	283.7	263.4
57.5°	503.1	417.5	306.2	246.2	229.1
60°	458.1	372.5	262.3	207.7	190.6
62.5°	414.3	328.7	224.8	173.4	164.9
65°	369.3	282.6	186.2	149.9	146.6
67.5°	326.6	239.7	149.9	131.7	128.4
70°	281.5	198.1	124.1	113.4	109.1
72.5°	238.7	159.4	103.8	95.3	93.1
75°	196.9	122.0	85.7	78.1	77.1
77.5°	155.2	86.6	67.4	63.2	61.0
80°	116.7	62.1	51.3	47.1	47.1
82.5°	81.3	41.8	35.3	33.2	33.2
85°	46.0	23.5	20.3	20.3	20.3
87.5°	17.2	8.5	8.5	7.5	7.5
90°	1.3	16.4	44.6	41.9	43.2
92.5°	28.2	38.2	39.6	40.9	40.9
95°	66.4	79.2	81.4	81.4	79.2
97.5°	110.5	122.3	127.4	127.4	127.4
100°	161.4	171.9	175.5	175.5	174.2
102.5°	215.1	222.9	227.8	229.2	227.8
105°	273.8	277.4	280.2	282.4	282.4
107.5°	332.0	337.4	337.4	338.4	332.0
110°	388.4	395.7	395.7	395.7	392.0



TEST NUMBER: P924108

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US950-RLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	449.3	457.1	455.7	452.1	449.3
115°	509.3	516.7	514.4	513.1	509.3
117.5°	569.0	579.0	572.6	569.0	565.3
120°	629.0	639.0	629.0	629.0	624.9
122.5°	683.5	696.3	689.9	686.3	683.5
125°	740.9	752.2	748.6	744.5	743.2
127.5°	796.8	810.9	805.9	800.4	796.8
130°	849.2	865.5	863.2	860.5	855.5
132.5°	907.8	920.5	921.5	915.1	911.5
135°	958.3	972.3	975.1	973.7	970.1
137.5°	1014.7	1026.0	1028.3	1027.4	1021.9
140°	1064.2	1075.6	1081.9	1081.9	1077.0
142.5°	1115.1	1126.6	1130.2	1131.5	1126.6
145°	1163.4	1172.5	1179.7	1181.1	1176.1
147.5°	1206.6	1218.0	1223.4	1225.7	1220.6
150°	1251.2	1258.9	1263.9	1268.0	1263.9
152.5°	1290.8	1298.5	1304.8	1309.8	1304.8
155°	1330.3	1333.9	1338.0	1344.4	1340.3
157.5°	1364.4	1367.1	1369.4	1378.5	1372.1
160°	1394.8	1397.6	1398.9	1406.7	1401.2
162.5°	1423.1	1423.1	1424.4	1433.1	1426.7
165°	1447.2	1445.8	1445.8	1454.9	1448.6
167.5°	1469.0	1464.9	1464.9	1474.0	1467.6
170°	1485.4	1481.8	1480.4	1489.5	1481.8
172.5°	1496.7	1493.1	1491.8	1500.8	1493.1
175°	1505.9	1502.2	1499.5	1508.6	1500.8
177.5°	1510.8	1507.2	1504.5	1512.2	1504.5
180°	1508.6	1508.6	1508.6	1508.6	1508.6



TEST NUMBER: P924108  
 CATALOG NUMBER: DFN2DIP-4P4F0-030D050US950-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.85	5.58	5.92	6.65	8.10	0.81	1.54	1.88	2.61	4.06
	3H	6.53	7.18	7.60	8.26	9.73	1.99	2.65	3.07	3.72	5.19
	4H	7.13	7.75	8.22	8.83	10.31	2.44	3.06	3.53	4.14	5.61
	6H	7.55	8.12	8.65	9.21	10.69	2.76	3.33	3.86	4.41	5.90
	8H	7.68	8.22	8.78	9.32	10.80	2.85	3.39	3.95	4.49	5.97
	12H	7.74	8.26	8.85	9.35	10.85	2.89	3.40	3.99	4.49	6.00
4H	2H	4.86	5.48	5.95	6.55	8.03	1.40	2.02	2.49	3.09	4.57
	3H	6.68	7.20	7.79	8.30	9.79	2.74	3.26	3.84	4.36	5.85
	4H	7.38	7.85	8.48	8.94	10.45	3.28	3.76	4.39	4.85	6.36
	6H	7.89	8.30	9.01	9.41	10.92	3.70	4.11	4.82	5.22	6.73
	8H	8.07	8.45	9.18	9.56	11.07	3.83	4.21	4.94	5.32	6.84
	12H	8.16	8.50	9.29	9.63	11.15	3.89	4.23	5.02	5.36	6.88
8H	4H	7.34	7.71	8.45	8.82	10.34	3.56	3.94	4.68	5.05	6.57
	6H	7.90	8.22	9.04	9.37	10.88	4.08	4.39	5.21	5.54	7.06
	8H	8.12	8.40	9.27	9.53	11.07	4.27	4.54	5.41	5.68	7.21
	12H	8.26	8.50	9.41	9.63	11.20	4.39	4.63	5.53	5.76	7.33
12H	4H	7.28	7.63	8.42	8.75	10.27	3.56	3.90	4.69	5.03	6.55
	6H	7.88	8.15	9.02	9.29	10.82	4.13	4.40	5.27	5.53	7.07
	8H	8.10	8.34	9.25	9.47	11.04	4.34	4.58	5.48	5.71	7.28