

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902677

Luminaire Tested: DFN2DIP-HX3F0-090D060US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902677
REPORT IS A COMBINATION OF REPORTS P900776 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-090D060US830-RLLONL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12809.1 lumens
Efficiency: N/A
Efficacy: 92.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 138
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902677

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US830-RLLONL

Luminous Intensity Polar Plot

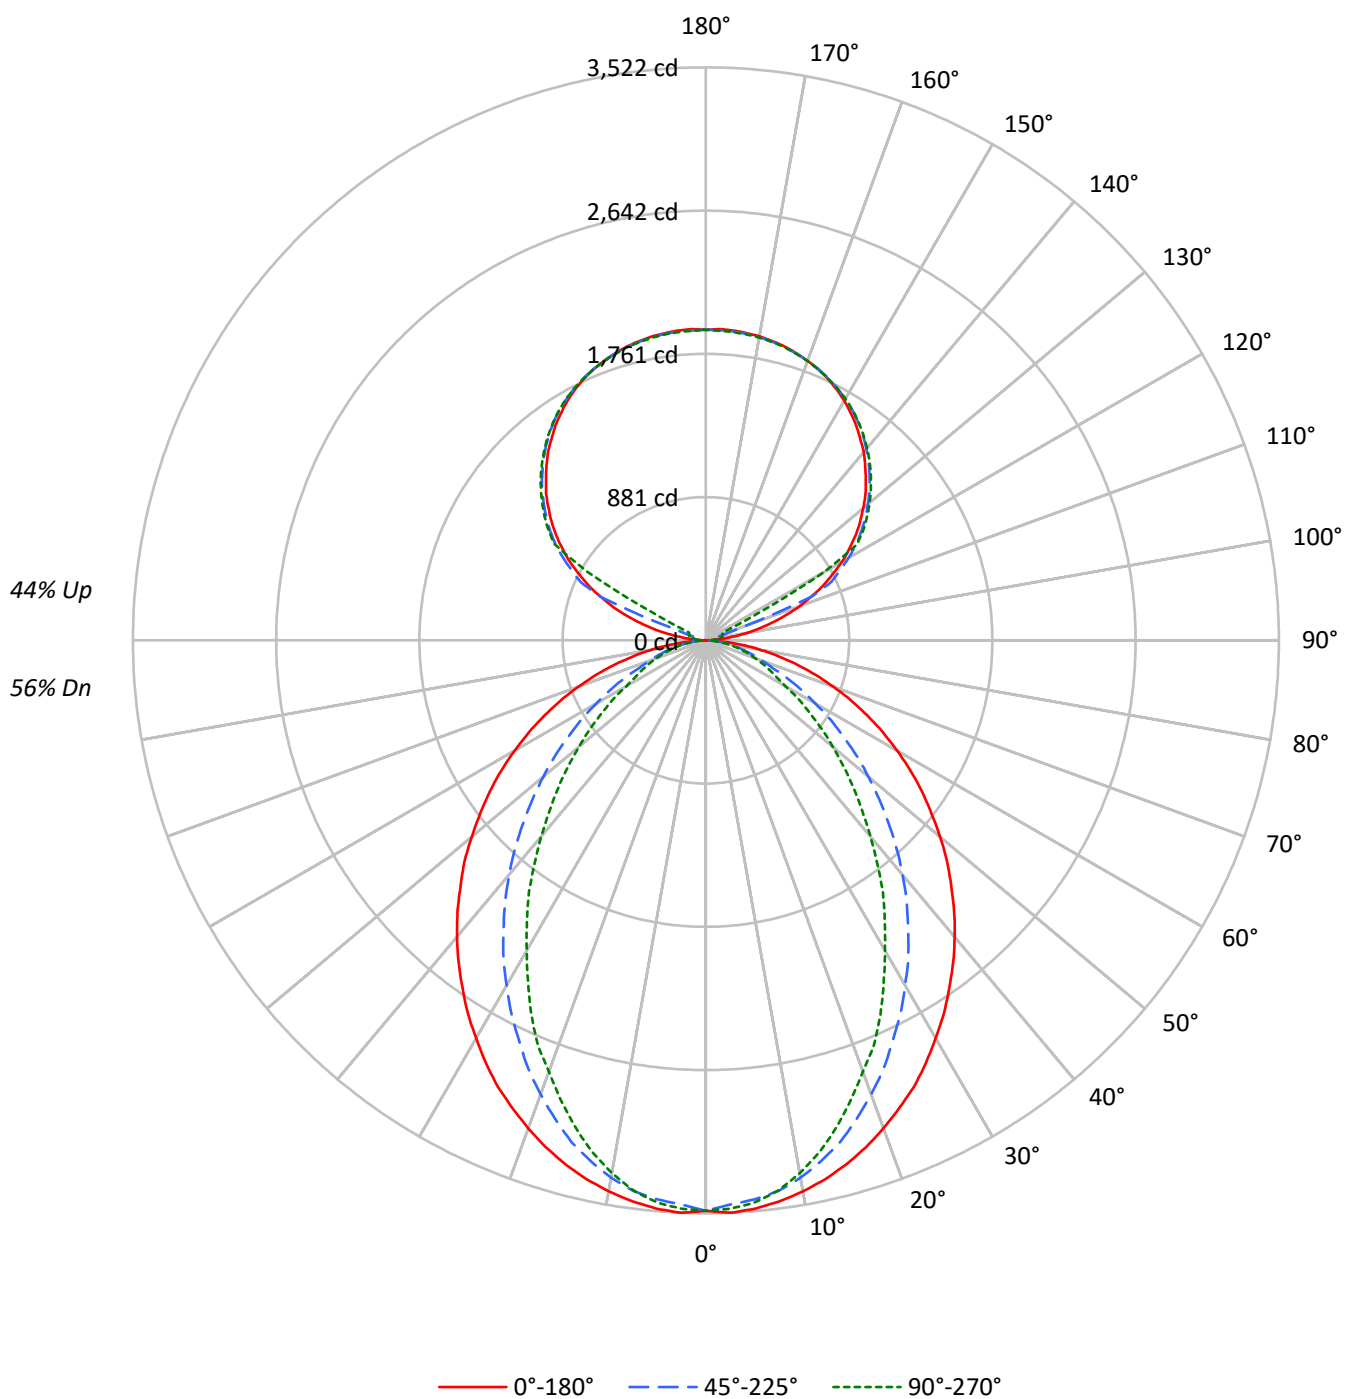

TEST NUMBER: P902677

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	109	109	109	109		101	101	101	101		87	87	87		74	74	74		62	62	62
1	100	96	92	88		93	89	86	83		77	75	72		66	64	63		56	54	53
2	91	84	78	73		85	79	73	69		68	64	61		58	56	53		50	48	46
3	84	74	67	62		78	70	63	58		61	56	52		52	49	46		44	42	40
4	77	66	59	53		71	62	55	50		54	49	45		47	43	40		40	37	35
5	71	59	51	46		66	56	49	43		49	43	39		42	38	35		36	33	31
6	65	54	46	40		61	50	43	38		44	39	34		39	34	31		33	30	27
7	61	49	41	35		56	46	39	34		40	35	30		35	31	27		30	27	24
8	56	44	37	31		52	42	35	30		37	31	27		32	28	25		28	25	22
9	53	41	33	28		49	38	32	27		34	28	25		30	25	22		26	23	20
10	49	37	30	25		46	35	29	24		31	26	22		28	23	20		24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4061	4061	4061
5°	4066	3994	4020
10°	4024	3913	3887
15°	3966	3781	3683
20°	3891	3600	3433
25°	3815	3397	3192
30°	3712	3190	2886
35°	3611	2968	2618
40°	3508	2738	2311
45°	3389	2483	2033
50°	3266	2227	1762
55°	3137	1952	1501
60°	2988	1667	1233
65°	2816	1376	1107
70°	2608	1105	999
75°	2345	968	904
80°	1966	803	777
85°	1343	522	570

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3389 cd/sqm

TEST NUMBER: P902677

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	328.6	2.6
10°-20°	902.0	7.0
20°-30°	1266.4	9.9
30°-40°	1380.5	10.8
40°-50°	1268.8	9.9
50°-60°	996.5	7.8
60°-70°	648.6	5.1
70°-80°	333.9	2.6
80°-90°	88.6	0.7
90°-100°	62.9	0.5
100°-110°	234.6	1.8
110°-120°	622.2	4.9
120°-130°	1032.0	8.1
130°-140°	1096.2	8.6
140°-150°	1018.8	8.0
150°-160°	819.1	6.4
160°-170°	527.8	4.1
170°-180°	181.7	1.4
0°-30°	2497.0	19.5
0°-40°	3877.5	30.3
0°-60°	6142.8	48.0
0°-90°	7213.8	56.3
90°-120°	919.8	7.2
90°-150°	4066.8	31.7
90°-180°	5595.0	43.7
0°-180°	12809.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3506	3506	3506	3506	3506	
5°	3506	3490	3449	3477	3468	332
15°	3335	3300	3192	3132	3100	940
25°	3027	2925	2716	2586	2538	1392
35°	2608	2446	2167	1967	1897	1632
45°	2132	1920	1586	1361	1285	1647
55°	1621	1374	1031	841	781	1449
65°	1095	838	552	444	435	1085
75°	584	362	254	232	229	617
85°	136	70	60	60	60	156
90°	1	17	28	35	37	12
95°	90	44	54	61	59	106
105°	420	461	84	99	105	449
115°	794	818	852	213	113	782
125°	1123	1141	1167	1177	1181	1001
135°	1389	1412	1424	1438	1435	1073
145°	1612	1610	1634	1643	1636	1008
155°	1775	1762	1779	1787	1776	818
165°	1870	1862	1866	1876	1866	528
175°	1913	1903	1906	1915	1902	182
180°	1909	1909	1909	1909	1909	

TEST NUMBER: P902677

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3506.0	3506.0	3506.0	3506.0	3506.0
2.5°	3521.8	3506.0	3470.9	3503.0	3496.5
5°	3506.0	3490.1	3448.8	3477.3	3467.9
7.5°	3477.3	3458.5	3414.1	3426.5	3410.7
10°	3439.3	3417.1	3353.8	3344.0	3325.2
12.5°	3391.8	3363.3	3277.4	3258.6	3223.5
15°	3334.6	3299.7	3191.9	3131.6	3100.0
17.5°	3268.0	3217.2	3083.8	3014.2	2963.4
20°	3191.9	3128.3	2969.7	2890.6	2820.6
22.5°	3109.4	3036.4	2852.2	2744.5	2697.1
25°	3027.0	2925.3	2715.9	2586.0	2538.2
27.5°	2928.7	2820.6	2589.0	2439.9	2366.8
30°	2824.0	2703.1	2449.3	2287.7	2201.9
32.5°	2722.3	2576.2	2316.3	2125.8	2046.4
35°	2608.2	2446.3	2167.2	1967.3	1897.2
37.5°	2497.1	2322.4	2027.5	1808.4	1729.3
40°	2379.6	2189.4	1881.4	1656.2	1573.8
42.5°	2259.1	2056.2	1735.6	1500.7	1421.5
45°	2132.2	1919.5	1586.5	1360.9	1284.9
47.5°	2011.7	1786.5	1443.8	1218.2	1148.6
50°	1878.4	1653.1	1304.1	1085.0	1018.6
52.5°	1748.1	1510.1	1170.8	961.4	901.2
55°	1621.2	1373.8	1031.0	840.9	780.6
57.5°	1491.3	1237.5	907.6	729.8	679.0
60°	1357.9	1104.1	777.3	615.7	564.9
62.5°	1228.0	974.2	666.2	514.1	488.8
65°	1094.7	837.5	552.0	444.3	434.6
67.5°	967.8	710.6	444.3	390.1	380.7
70°	834.5	587.1	368.0	336.3	323.5
72.5°	707.6	472.6	307.6	282.4	276.1
75°	583.7	361.6	253.8	231.6	228.6
77.5°	460.1	256.8	199.9	187.2	180.8
80°	345.7	184.2	152.1	139.7	139.7
82.5°	241.0	123.9	104.7	98.3	98.3
85°	136.3	69.7	60.2	60.2	60.2
87.5°	50.8	25.3	25.3	22.2	22.2
90°	1.3	16.6	27.5	34.6	37.2
92.5°	34.6	29.0	33.1	35.9	37.2
95°	89.7	44.1	53.8	60.9	59.4
97.5°	161.6	48.4	70.3	74.6	76.0
100°	244.5	55.2	78.7	89.7	92.5
102.5°	335.5	332.9	81.5	96.6	100.9
105°	419.8	461.3	84.3	99.3	105.0
107.5°	517.9	552.3	87.1	102.2	107.7
110°	611.9	640.7	241.8	103.7	109.1



TEST NUMBER: P902677

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	700.2	725.0	701.5	106.2	110.6
115°	794.1	817.6	852.2	212.7	113.3
117.5°	875.5	903.1	926.7	729.2	367.3
120°	966.8	987.4	1012.4	1028.9	842.4
122.5°	1044.0	1066.1	1093.8	1102.0	1103.5
125°	1122.8	1140.8	1167.0	1176.7	1180.7
127.5°	1194.6	1213.9	1234.7	1248.5	1249.8
130°	1262.3	1284.4	1299.5	1314.8	1313.4
132.5°	1331.3	1349.3	1364.4	1376.9	1375.5
135°	1389.4	1411.6	1423.8	1437.8	1434.9
137.5°	1450.0	1466.6	1480.5	1494.3	1490.3
140°	1509.4	1520.6	1535.7	1548.1	1541.2
142.5°	1559.2	1569.0	1586.9	1597.8	1590.9
145°	1611.7	1610.2	1633.7	1643.4	1636.5
147.5°	1657.2	1653.0	1676.5	1683.4	1678.0
150°	1701.5	1691.8	1713.9	1722.1	1715.2
152.5°	1738.7	1727.7	1748.3	1756.7	1747.0
155°	1774.6	1762.3	1778.9	1787.1	1776.0
157.5°	1803.6	1792.6	1805.1	1814.8	1803.6
160°	1828.5	1820.1	1828.5	1836.7	1827.1
162.5°	1850.5	1842.3	1849.2	1858.9	1846.4
165°	1869.9	1861.7	1865.8	1875.5	1865.8
167.5°	1885.1	1876.8	1881.0	1890.7	1878.2
170°	1897.6	1889.2	1892.1	1901.7	1889.2
172.5°	1905.8	1897.6	1900.4	1910.1	1897.6
175°	1912.7	1903.0	1905.8	1915.4	1901.7
177.5°	1915.4	1905.8	1907.2	1916.9	1904.5
180°	1908.6	1908.6	1908.6	1908.6	1908.6

TEST NUMBER: P902677

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.54	13.43	13.45	14.35	15.53	8.52	9.40	9.43	10.33	11.51
	3H	14.22	15.01	15.14	15.94	17.15	9.71	10.50	10.63	11.43	12.64
	4H	14.82	15.57	15.76	16.51	17.72	10.16	10.90	11.09	11.84	13.06
	6H	15.24	15.93	16.19	16.87	18.10	10.48	11.17	11.42	12.11	13.34
	8H	15.37	16.02	16.32	16.98	18.20	10.57	11.22	11.52	12.18	13.41
	12H	15.43	16.05	16.38	17.00	18.25	10.61	11.23	11.57	12.19	13.44
4H	2H	12.57	13.31	13.51	14.25	15.47	9.12	9.86	10.06	10.80	12.02
	3H	14.39	15.01	15.34	15.98	17.21	10.47	11.09	11.42	12.05	13.28
	4H	15.08	15.65	16.04	16.61	17.86	11.01	11.58	11.97	12.54	13.79
	6H	15.59	16.08	16.56	17.06	18.32	11.43	11.92	12.40	12.90	14.16
	8H	15.76	16.22	16.74	17.20	18.46	11.56	12.01	12.53	12.99	14.26
	12H	15.86	16.27	16.85	17.26	18.53	11.62	12.03	12.62	13.03	14.30
8H	4H	15.05	15.51	16.03	16.48	17.75	11.29	11.75	12.27	12.73	13.99
	6H	15.61	15.99	16.61	17.01	18.27	11.81	12.18	12.81	13.20	14.47
	8H	15.82	16.15	16.83	17.16	18.45	11.99	12.33	13.00	13.33	14.62
	12H	15.96	16.25	16.97	17.25	18.58	12.11	12.40	13.12	13.41	14.74
12H	4H	15.01	15.42	16.00	16.41	17.68	11.30	11.71	12.29	12.70	13.98
	6H	15.59	15.92	16.59	16.93	18.21	11.85	12.19	12.86	13.19	14.48
	8H	15.80	16.10	16.81	17.10	18.43	12.06	12.35	13.07	13.36	14.69