

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916185

Luminaire Tested: DFN2DIP-HX3F0-040D030US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916185
REPORT IS A COMBINATION OF REPORTS P900724 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-040D030US930-RLLONL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5193.5 lumens
Efficiency: N/A
Efficacy: 90.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 57.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916185

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US930-RLLONL

Luminous Intensity Polar Plot

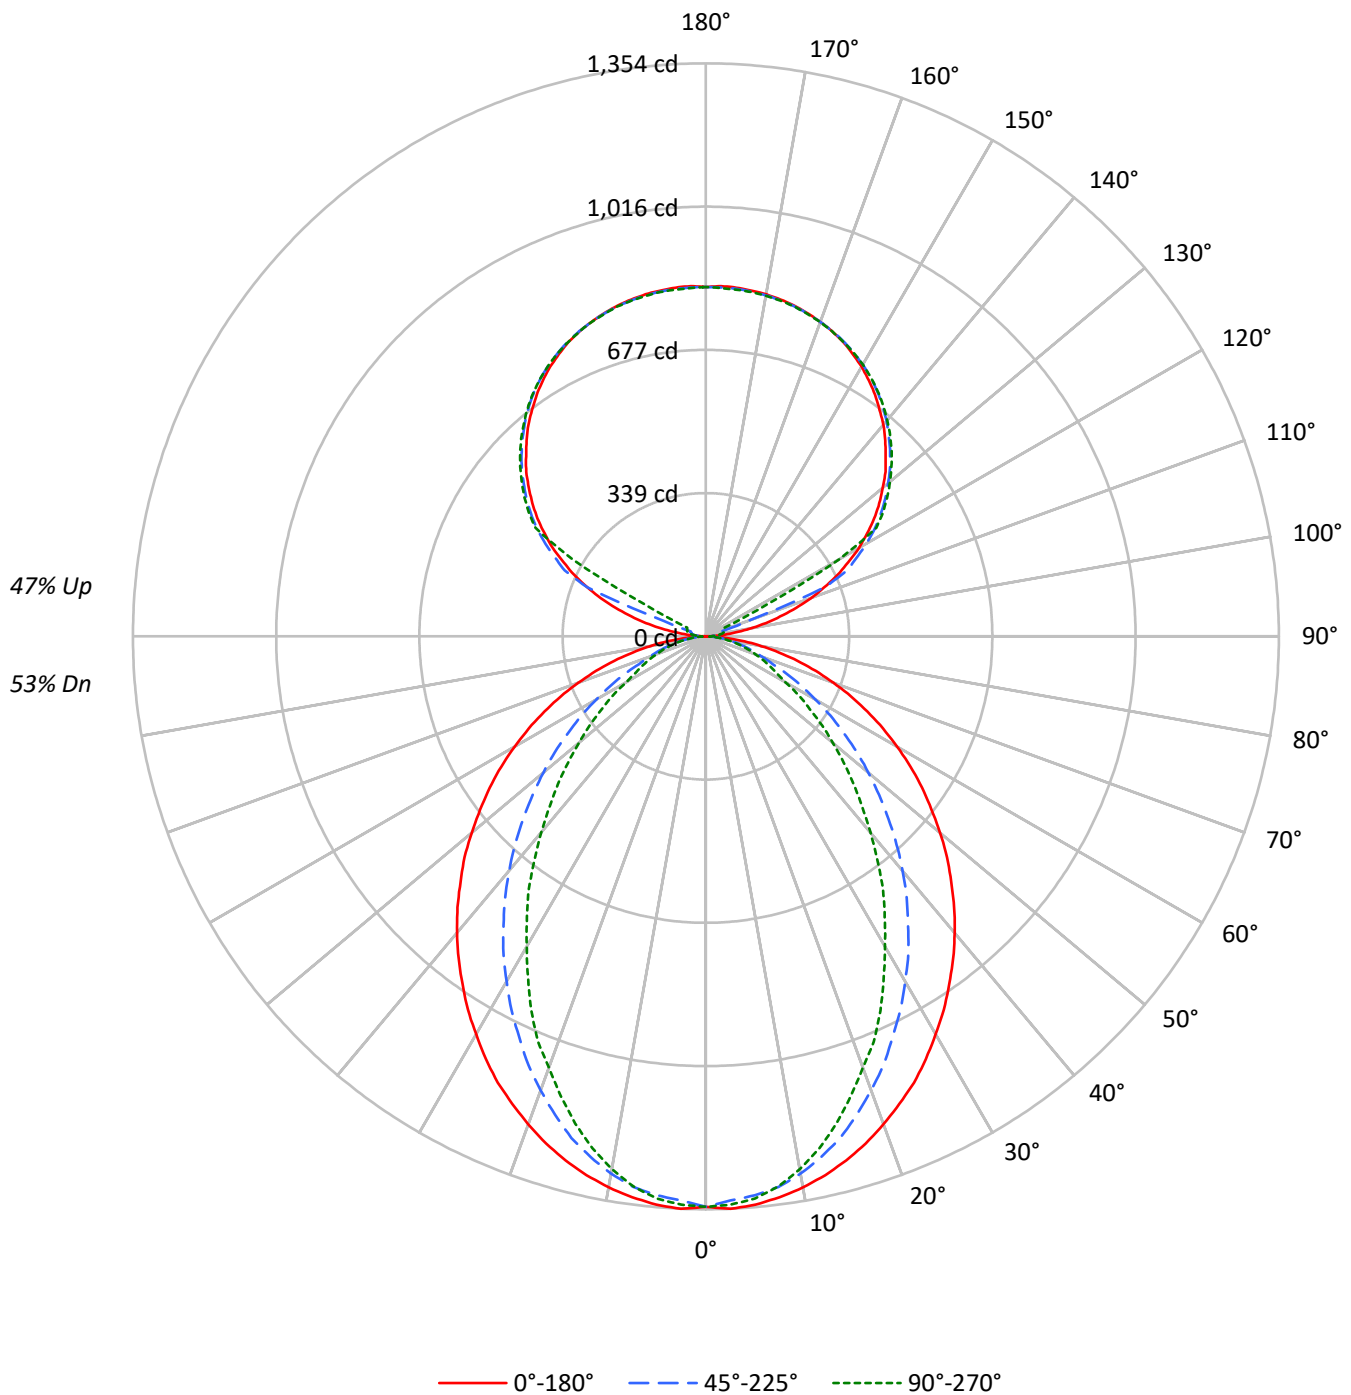

TEST NUMBER: P916185

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59
1	99	95	91	88	92	88	85	82	76	73	71	64	62	61	53	52	51
2	91	83	78	73	84	78	73	68	67	63	60	57	54	52	47	45	44
3	83	74	67	61	77	69	63	58	59	55	51	51	47	44	42	40	38
4	76	66	58	52	70	61	55	49	53	48	44	45	42	38	38	35	33
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29
6	65	53	45	39	60	50	43	37	43	38	34	37	33	30	32	28	26
7	60	48	40	35	56	45	38	33	39	34	30	34	30	26	29	26	23
8	56	44	36	31	52	41	34	29	36	31	27	31	27	24	27	24	21
9	52	40	33	28	48	38	31	26	33	28	24	29	25	22	25	22	19
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1561	1561	1561
5°	1563	1535	1546
10°	1547	1504	1494
15°	1525	1453	1416
20°	1496	1384	1320
25°	1466	1306	1227
30°	1427	1226	1110
35°	1388	1141	1007
40°	1349	1053	889
45°	1303	955	782
50°	1256	856	677
55°	1206	751	577
60°	1149	641	474
65°	1083	529	426
70°	1002	425	384
75°	902	372	348
80°	756	309	299
85°	516	201	220

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1303 cd/sqm

TEST NUMBER: P916185

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.3	2.4
10°-20°	346.8	6.7
20°-30°	486.9	9.4
30°-40°	530.7	10.2
40°-50°	487.8	9.4
50°-60°	383.1	7.4
60°-70°	249.3	4.8
70°-80°	128.4	2.5
80°-90°	34.2	0.7
90°-100°	27.2	0.5
100°-110°	101.5	2.0
110°-120°	269.1	5.2
120°-130°	446.3	8.6
130°-140°	474.1	9.1
140°-150°	440.6	8.5
150°-160°	354.3	6.8
160°-170°	228.3	4.4
170°-180°	78.6	1.5
0°-30°	960.0	18.5
0°-40°	1490.7	28.7
0°-60°	2361.5	45.5
0°-90°	2773.5	53.4
90°-120°	397.8	7.7
90°-150°	1758.9	33.9
90°-180°	2420.0	46.6
0°-180°	5193.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1348	1348	1348	1348	1348	
5°	1348	1342	1326	1337	1333	128
15°	1282	1268	1227	1204	1192	361
25°	1164	1125	1044	994	976	535
35°	1003	940	833	756	729	628
45°	820	738	610	523	494	633
55°	623	528	396	323	300	557
65°	421	322	212	171	167	417
75°	224	139	98	89	88	237
85°	52	27	23	23	23	60
90°	1	7	12	15	16	5
95°	39	19	23	26	26	46
105°	182	200	36	43	45	194
115°	343	354	368	92	49	338
125°	486	493	505	509	511	433
135°	601	610	616	622	621	464
145°	697	696	707	711	708	436
155°	768	762	769	773	768	354
165°	809	805	807	811	807	228
175°	827	823	824	828	822	79
180°	826	826	826	826	826	

TEST NUMBER: P916185

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1347.9	1347.9	1347.9	1347.9	1347.9
2.5°	1354.0	1347.9	1334.4	1346.7	1344.2
5°	1347.9	1341.7	1325.8	1336.8	1333.3
7.5°	1336.8	1329.6	1312.5	1317.3	1311.2
10°	1322.3	1313.7	1289.3	1285.6	1278.4
12.5°	1304.0	1293.0	1260.0	1252.7	1239.3
15°	1282.0	1268.5	1227.1	1204.0	1191.8
17.5°	1256.4	1236.8	1185.5	1158.8	1139.2
20°	1227.1	1202.6	1141.7	1111.3	1084.3
22.5°	1195.4	1167.3	1096.5	1055.1	1036.9
25°	1163.7	1124.6	1044.1	994.2	975.7
27.5°	1125.9	1084.3	995.3	938.0	909.9
30°	1085.7	1039.2	941.6	879.5	846.5
32.5°	1046.6	990.4	890.5	817.3	786.7
35°	1002.7	940.4	833.2	756.3	729.4
37.5°	960.0	892.8	779.4	695.2	664.8
40°	914.8	841.7	723.3	636.7	605.0
42.5°	868.5	790.4	667.2	576.9	546.5
45°	819.7	737.9	609.9	523.3	494.0
47.5°	773.4	686.8	555.1	468.4	441.6
50°	722.1	635.5	501.3	417.1	391.6
52.5°	672.1	580.6	450.1	369.6	346.4
55°	623.3	528.2	396.4	323.3	300.1
57.5°	573.3	475.7	348.9	280.5	261.1
60°	522.0	424.4	298.8	236.7	217.2
62.5°	472.1	374.5	256.1	197.6	187.9
65°	420.9	322.0	212.2	170.8	167.1
67.5°	372.1	273.2	170.8	150.0	146.3
70°	320.8	225.7	141.5	129.3	124.3
72.5°	272.1	181.7	118.3	108.6	106.2
75°	224.4	139.0	97.6	89.0	87.9
77.5°	176.9	98.7	76.9	72.0	69.5
80°	132.9	70.8	58.5	53.7	53.7
82.5°	92.7	47.6	40.3	37.7	37.7
85°	52.4	26.8	23.2	23.2	23.2
87.5°	19.6	9.7	9.7	8.6	8.6
90°	0.6	7.2	11.9	15.0	16.1
92.5°	15.0	12.6	14.3	15.6	16.1
95°	38.8	19.1	23.2	26.3	25.7
97.5°	69.9	21.0	30.4	32.3	32.9
100°	105.7	23.9	34.1	38.8	40.0
102.5°	145.1	144.0	35.2	41.7	43.6
105°	181.6	199.5	36.4	43.0	45.4
107.5°	224.0	238.9	37.7	44.2	46.6
110°	264.6	277.1	104.5	44.8	47.2



TEST NUMBER: P916185

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	302.9	313.6	303.5	46.0	47.8
115°	343.4	353.6	368.5	92.0	49.0
117.5°	378.7	390.6	400.8	315.4	158.9
120°	418.1	427.1	437.8	445.0	364.4
122.5°	451.5	461.1	473.1	476.6	477.3
125°	485.6	493.3	504.8	508.9	510.7
127.5°	516.7	525.0	534.0	540.0	540.5
130°	545.9	555.5	562.1	568.6	568.1
132.5°	575.8	583.6	590.1	595.5	594.9
135°	600.9	610.5	615.8	621.8	620.6
137.5°	627.1	634.3	640.3	646.3	644.5
140°	652.8	657.6	664.1	669.5	666.6
142.5°	674.4	678.6	686.3	691.0	688.1
145°	697.1	696.4	706.6	710.8	707.8
147.5°	716.7	714.9	725.1	728.1	725.7
150°	735.9	731.7	741.3	744.8	741.8
152.5°	751.9	747.2	756.2	759.8	755.6
155°	767.5	762.2	769.3	772.9	768.2
157.5°	780.1	775.3	780.7	784.9	780.1
160°	790.8	787.3	790.8	794.4	790.2
162.5°	800.4	796.8	799.8	804.0	798.6
165°	808.7	805.2	807.0	811.1	807.0
167.5°	815.3	811.7	813.5	817.7	812.4
170°	820.7	817.1	818.3	822.5	817.1
172.5°	824.3	820.7	821.9	826.1	820.7
175°	827.2	823.0	824.3	828.4	822.5
177.5°	828.4	824.3	824.9	829.1	823.7
180°	825.5	825.5	825.5	825.5	825.5

TEST NUMBER: P916185

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.96	9.82	9.90	10.77	11.99	4.94	5.80	5.87	6.74	7.97
	3H	10.64	11.40	11.58	12.36	13.61	6.13	6.89	7.07	7.85	9.10
	4H	11.24	11.97	12.20	12.93	14.18	6.57	7.30	7.54	8.26	9.52
	6H	11.66	12.33	12.63	13.29	14.56	6.89	7.56	7.86	8.53	9.80
	8H	11.78	12.42	12.76	13.40	14.67	6.98	7.62	7.96	8.60	9.87
	12H	11.84	12.44	12.82	13.42	14.71	7.02	7.63	8.01	8.61	9.90
4H	2H	8.98	9.71	9.95	10.67	11.93	5.53	6.26	6.50	7.22	8.48
	3H	10.81	11.41	11.78	12.40	13.67	6.88	7.48	7.86	8.47	9.75
	4H	11.50	12.05	12.48	13.03	14.32	7.43	7.98	8.41	8.96	10.26
	6H	12.00	12.48	13.00	13.48	14.78	7.84	8.32	8.84	9.32	10.62
	8H	12.18	12.62	13.17	13.62	14.93	7.97	8.41	8.97	9.41	10.72
	12H	12.27	12.67	13.28	13.68	15.00	8.03	8.43	9.05	9.45	10.76
8H	4H	11.46	11.91	12.46	12.91	14.21	7.70	8.15	8.70	9.15	10.45
	6H	12.02	12.39	13.04	13.43	14.74	8.22	8.58	9.24	9.63	10.93
	8H	12.23	12.56	13.26	13.58	14.91	8.40	8.73	9.44	9.76	11.08
	12H	12.37	12.65	13.40	13.67	15.04	8.52	8.80	9.55	9.83	11.20
12H	4H	11.42	11.81	12.43	12.83	14.14	7.71	8.11	8.73	9.12	10.44
	6H	12.00	12.32	13.03	13.35	14.67	8.27	8.59	9.30	9.62	10.94
	8H	12.21	12.50	13.25	13.52	14.89	8.47	8.75	9.51	9.78	11.15