

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P928176

Luminaire Tested: DFN2DIP-HX4F0-040D060US927-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P928176
REPORT IS A COMBINATION OF REPORTS P900855 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D060US927-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7840.8 lumens
Efficiency: N/A
Efficacy: 101.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 77.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P928176

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US927-FLLONL

Luminous Intensity Polar Plot

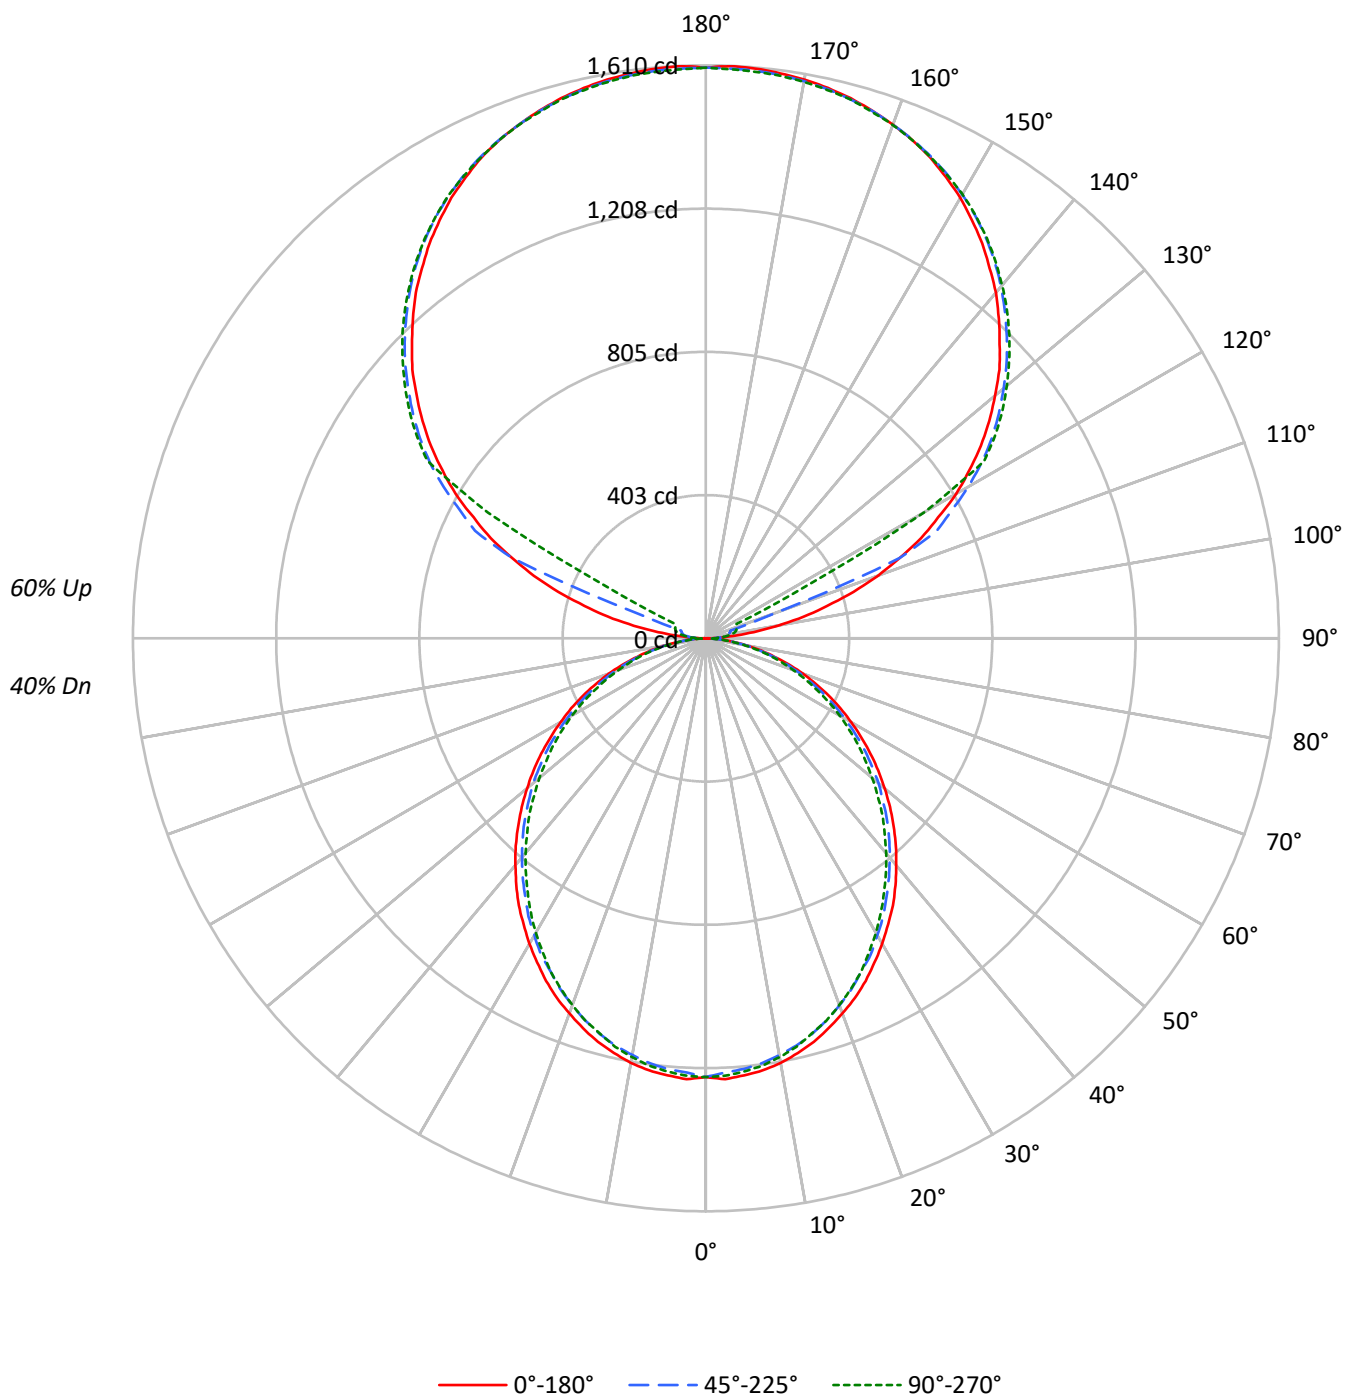

TEST NUMBER: P928176

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US927-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	41	41	40
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	33
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28
4	73	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24
5	67	55	47	41	60	50	44	38	42	37	33	34	30	27	26	23	21
6	61	49	41	36	56	45	38	33	38	32	28	30	26	23	24	21	19
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	15	13
10	46	34	27	22	41	31	25	20	26	21	18	21	18	15	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	917	917	917
5°	918	904	910
10°	911	892	898
15°	897	877	878
20°	879	857	859
25°	861	833	836
30°	839	810	807
35°	818	783	777
40°	792	756	747
45°	765	729	718
50°	737	701	683
55°	707	668	651
60°	673	629	615
65°	636	589	572
70°	589	540	526
75°	524	481	484
80°	446	406	403
85°	323	277	268

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 824 cd/sqm

TEST NUMBER: P928176

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US927-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.0	1.5
10°-20°	326.4	4.2
20°-30°	479.7	6.1
30°-40°	557.2	7.1
40°-50°	556.5	7.1
50°-60°	485.2	6.2
60°-70°	358.7	4.6
70°-80°	202.9	2.6
80°-90°	56.4	0.7
90°-100°	52.9	0.7
100°-110°	197.1	2.5
110°-120°	522.8	6.7
120°-130°	867.2	11.1
130°-140°	921.1	11.7
140°-150°	856.1	10.9
150°-160°	688.3	8.8
160°-170°	443.5	5.7
170°-180°	152.6	1.9
0°-30°	922.2	11.8
0°-40°	1479.4	18.9
0°-60°	2521.1	32.2
0°-90°	3139.1	40.0
90°-120°	772.9	9.9
90°-150°	3417.2	43.6
90°-180°	4702.0	60.0
0°-180°	7840.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1233	1233	1233	1233	1233	
5°	1233	1228	1215	1224	1222	117
15°	1173	1166	1151	1156	1150	330
25°	1062	1053	1032	1035	1032	489
35°	916	904	886	878	872	572
45°	746	737	720	706	702	575
55°	564	557	543	529	523	504
65°	381	373	362	351	345	376
75°	199	197	191	184	186	213
85°	48	47	46	43	42	54
90°	1	14	23	29	31	7
95°	75	37	45	51	50	89
105°	353	388	71	84	88	377
115°	667	687	716	179	95	657
125°	943	959	981	989	992	841
135°	1168	1186	1196	1208	1206	902
145°	1354	1353	1373	1381	1375	847
155°	1491	1481	1495	1502	1492	687
165°	1571	1564	1568	1576	1568	444
175°	1607	1599	1601	1610	1598	153
180°	1604	1604	1604	1604	1604	

TEST NUMBER: P928176

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US927-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1232.7	1232.7	1232.7	1232.7	1232.7
2.5°	1239.9	1233.9	1220.9	1232.7	1230.5
5°	1232.7	1228.0	1214.9	1224.4	1222.1
7.5°	1224.4	1217.3	1204.2	1213.8	1211.4
10°	1211.4	1203.1	1189.0	1198.4	1194.8
12.5°	1193.5	1186.5	1172.3	1178.3	1175.8
15°	1173.4	1166.4	1150.9	1155.7	1149.8
17.5°	1148.6	1141.5	1126.1	1131.9	1126.1
20°	1121.2	1114.2	1097.6	1101.1	1096.5
22.5°	1094.1	1083.4	1067.9	1067.9	1065.6
25°	1062.0	1052.6	1032.5	1034.7	1032.5
27.5°	1026.4	1018.1	1002.8	999.3	993.4
30°	991.0	981.4	963.7	960.1	955.4
32.5°	953.0	946.0	927.0	919.8	915.0
35°	916.3	904.5	885.5	878.3	872.4
37.5°	874.8	864.1	845.1	836.8	830.9
40°	832.2	822.6	803.6	793.0	788.3
42.5°	790.7	781.1	762.2	750.3	743.2
45°	745.6	737.4	719.5	706.5	701.7
47.5°	701.7	693.4	674.5	661.4	654.4
50°	655.5	649.5	633.0	616.3	610.4
52.5°	610.4	602.2	586.8	573.7	565.4
55°	564.3	557.1	542.9	528.7	522.8
57.5°	518.0	512.1	496.6	482.4	477.7
60°	471.7	467.0	450.5	437.4	433.9
62.5°	426.7	418.4	406.6	394.7	390.0
65°	380.6	373.3	361.5	350.9	345.0
67.5°	333.1	327.1	316.6	308.2	303.5
70°	289.2	284.5	273.8	265.5	260.8
72.5°	244.3	239.4	233.6	225.2	221.7
75°	199.1	196.8	190.8	183.7	186.1
77.5°	158.8	154.0	151.7	148.1	144.6
80°	118.6	117.3	114.9	111.4	109.1
82.5°	80.6	80.6	79.5	74.7	74.7
85°	48.5	47.4	46.3	42.6	41.5
87.5°	21.4	19.0	16.6	13.1	11.8
90°	1.1	13.9	23.1	29.1	31.3
92.5°	29.1	24.4	27.8	30.2	31.3
95°	75.4	37.1	45.2	51.2	49.9
97.5°	135.7	40.6	59.1	62.7	63.8
100°	205.4	46.4	66.1	75.4	77.7
102.5°	282.0	279.7	68.5	81.2	84.7
105°	352.8	387.6	70.8	83.5	88.2
107.5°	435.2	464.1	73.2	85.9	90.5
110°	514.2	538.4	203.1	87.1	91.6

TEST NUMBER: P928176

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US927-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	588.4	609.2	589.5	89.3	92.9
115°	667.3	687.0	716.0	178.8	95.2
117.5°	735.7	758.9	778.7	612.7	308.6
120°	812.4	829.7	850.7	864.5	707.9
122.5°	877.2	895.8	919.1	926.0	927.3
125°	943.4	958.6	980.6	988.7	992.1
127.5°	1003.8	1020.0	1037.5	1049.1	1050.2
130°	1060.6	1079.3	1091.9	1104.8	1103.7
132.5°	1118.7	1133.8	1146.5	1157.0	1155.8
135°	1167.5	1186.1	1196.4	1208.1	1205.7
137.5°	1218.4	1232.4	1244.1	1255.6	1252.2
140°	1268.3	1277.7	1290.4	1300.9	1295.1
142.5°	1310.2	1318.4	1333.4	1342.6	1336.8
145°	1354.3	1353.1	1372.8	1380.9	1375.1
147.5°	1392.5	1389.0	1408.7	1414.5	1410.0
150°	1429.7	1421.6	1440.2	1447.1	1441.3
152.5°	1461.0	1451.7	1469.1	1476.1	1468.0
155°	1491.2	1480.8	1494.7	1501.6	1492.4
157.5°	1515.6	1506.3	1516.8	1524.9	1515.6
160°	1536.5	1529.4	1536.5	1543.4	1535.3
162.5°	1554.9	1548.0	1553.8	1562.0	1551.5
165°	1571.2	1564.4	1567.8	1575.9	1567.8
167.5°	1584.0	1577.0	1580.6	1588.8	1578.2
170°	1594.5	1587.5	1589.9	1597.9	1587.5
172.5°	1601.4	1594.5	1596.8	1605.0	1594.5
175°	1607.2	1599.0	1601.4	1609.5	1597.9
177.5°	1609.5	1601.4	1602.6	1610.8	1600.3
180°	1603.7	1603.7	1603.7	1603.7	1603.7

TEST NUMBER: P928176

CATALOG NUMBER: DFN2DIP-HX4F0-040D060US927-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.97	6.75	7.01	7.80	9.20	5.54	6.32	6.58	7.36	8.77
	3H	7.63	8.33	8.68	9.38	10.80	7.16	7.85	8.20	8.91	10.33
	4H	8.21	8.87	9.27	9.93	11.36	7.74	8.40	8.80	9.46	10.89
	6H	8.61	9.22	9.68	10.28	11.72	8.13	8.74	9.20	9.80	11.25
	8H	8.71	9.29	9.79	10.37	11.81	8.24	8.82	9.31	9.89	11.33
	12H	8.76	9.31	9.84	10.38	11.84	8.28	8.83	9.35	9.90	11.36
4H	2H	6.42	7.09	7.49	8.14	9.57	6.08	6.74	7.15	7.80	9.23
	3H	8.28	8.84	9.36	9.92	11.37	7.89	8.44	8.97	9.53	10.97
	4H	9.00	9.50	10.08	10.58	12.04	8.59	9.10	9.67	10.17	11.64
	6H	9.51	9.94	10.60	11.04	12.50	9.10	9.53	10.19	10.63	12.09
	8H	9.66	10.06	10.74	11.15	12.63	9.24	9.65	10.33	10.74	12.22
	12H	9.73	10.09	10.83	11.19	12.68	9.30	9.67	10.41	10.77	12.25
8H	4H	9.19	9.59	10.28	10.68	12.16	8.83	9.23	9.91	10.32	11.80
	6H	9.82	10.15	10.93	11.28	12.76	9.45	9.79	10.56	10.92	12.39
	8H	10.04	10.33	11.15	11.44	12.94	9.67	9.96	10.78	11.07	12.57
	12H	10.16	10.42	11.29	11.53	13.06	9.78	10.04	10.90	11.15	12.68
12H	4H	9.17	9.54	10.27	10.64	12.12	8.82	9.18	9.92	10.29	11.77
	6H	9.85	10.14	10.96	11.25	12.75	9.49	9.79	10.61	10.90	12.39
	8H	10.08	10.34	11.21	11.45	12.98	9.73	9.99	10.85	11.09	12.63