

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916916

Luminaire Tested: DFN2DIP-PN4F0-070D100US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916916
REPORT IS A COMBINATION OF REPORTS P899723 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-070D100US930-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12865.4 lumens
Efficiency: N/A
Efficacy: 90.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 141.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916916

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US930-FLLFLL

Luminous Intensity Polar Plot

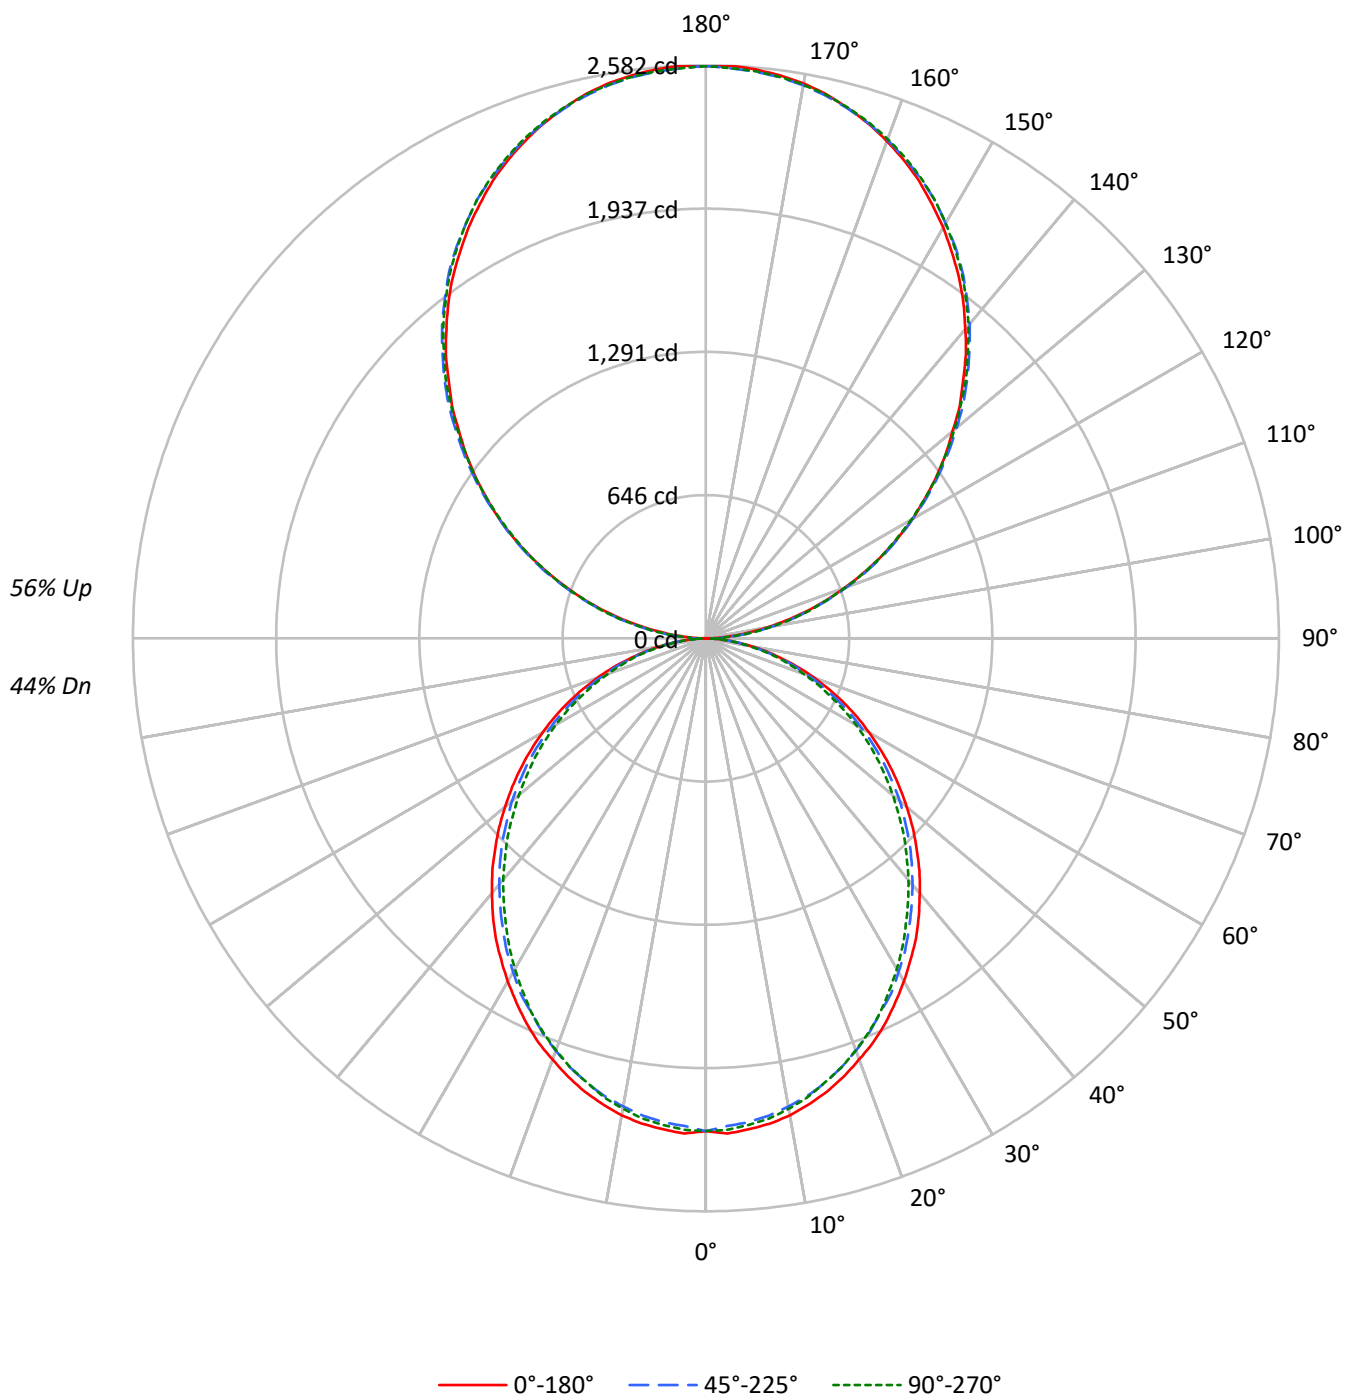

TEST NUMBER: P916916

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US930-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51
1	96	92	88	85	88	84	81	78	70	68	66	57	55	54	45	44	43
2	88	80	74	69	80	74	69	64	61	58	54	50	47	45	39	38	36
3	80	71	63	58	73	65	59	54	54	49	46	44	41	38	35	33	31
4	73	63	55	49	67	58	51	45	48	43	39	39	36	33	31	29	26
5	67	56	48	42	61	51	44	39	43	38	33	35	31	28	28	25	23
6	62	50	42	36	56	46	39	34	39	33	29	32	28	25	25	23	20
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18
8	53	41	33	28	48	38	31	26	32	27	23	26	22	19	21	18	16
9	49	37	30	25	45	35	28	23	29	24	20	24	20	17	20	17	15
10	46	34	27	22	42	32	25	21	27	22	18	22	19	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1621	1621	1621
5°	1624	1599	1609
10°	1610	1577	1588
15°	1587	1552	1554
20°	1555	1516	1520
25°	1523	1473	1480
30°	1483	1433	1429
35°	1445	1386	1375
40°	1399	1338	1323
45°	1352	1290	1271
50°	1302	1240	1210
55°	1248	1182	1155
60°	1188	1114	1091
65°	1123	1043	1015
70°	1040	956	934
75°	924	852	860
80°	785	720	717
85°	568	492	480

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2020 cd/sqm

TEST NUMBER: P916916

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.0	1.6
10°-20°	588.1	4.6
20°-30°	864.2	6.7
30°-40°	1003.7	7.8
40°-50°	1002.5	7.8
50°-60°	874.2	6.8
60°-70°	646.2	5.0
70°-80°	365.6	2.8
80°-90°	103.8	0.8
90°-100°	159.6	1.2
100°-110°	507.0	3.9
110°-120°	867.6	6.7
120°-130°	1141.0	8.9
130°-140°	1280.7	10.0
140°-150°	1255.9	9.8
150°-160°	1053.5	8.2
160°-170°	698.7	5.4
170°-180°	244.2	1.9
0°-30°	1661.3	12.9
0°-40°	2665.1	20.7
0°-60°	4541.7	35.3
0°-90°	5657.4	44.0
90°-120°	1534.1	11.9
90°-150°	5211.7	40.5
90°-180°	7208.0	56.0
0°-180°	12865.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2221	2221	2221	2221	2221	
5°	2221	2212	2189	2206	2202	211
15°	2114	2101	2073	2082	2071	595
25°	1913	1896	1860	1864	1860	880
35°	1651	1629	1595	1582	1572	1031
45°	1343	1328	1296	1273	1264	1037
55°	1016	1004	978	952	942	909
65°	686	673	651	632	621	678
75°	359	355	344	331	335	383
85°	88	85	83	77	75	98
90°	2	28	76	72	74	13
95°	114	135	139	139	135	126
105°	468	474	479	483	483	494
115°	871	883	879	877	871	861
125°	1266	1286	1280	1272	1270	1132
135°	1638	1662	1667	1664	1658	1266
145°	1988	2004	2016	2019	2010	1242
155°	2274	2280	2287	2298	2291	1047
165°	2474	2471	2471	2487	2476	698
175°	2574	2568	2563	2578	2565	245
180°	2578	2578	2578	2578	2578	

TEST NUMBER: P916916

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US930-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2220.6	2220.6	2220.6	2220.6	2220.6
2.5°	2233.6	2222.9	2199.3	2220.6	2216.6
5°	2220.6	2212.3	2188.7	2205.7	2201.6
7.5°	2205.7	2193.0	2169.4	2186.7	2182.4
10°	2182.4	2167.4	2141.8	2158.8	2152.5
12.5°	2150.2	2137.5	2111.9	2122.5	2118.2
15°	2114.0	2101.3	2073.4	2082.0	2071.3
17.5°	2069.1	2056.4	2028.5	2039.2	2028.5
20°	2019.9	2007.3	1977.3	1983.7	1975.3
22.5°	1971.0	1951.7	1923.9	1923.9	1919.5
25°	1913.3	1896.2	1860.0	1864.1	1860.0
27.5°	1849.1	1834.2	1806.5	1800.2	1789.5
30°	1785.3	1768.0	1736.1	1729.7	1721.1
32.5°	1716.8	1704.1	1669.9	1657.0	1648.4
35°	1650.7	1629.4	1595.1	1582.2	1571.6
37.5°	1575.9	1556.6	1522.4	1507.5	1496.8
40°	1499.1	1481.9	1447.6	1428.6	1420.0
42.5°	1424.3	1407.1	1373.1	1351.6	1338.9
45°	1343.2	1328.3	1296.1	1272.8	1264.1
47.5°	1264.1	1249.2	1215.0	1191.4	1178.8
50°	1180.8	1170.1	1140.2	1110.4	1099.7
52.5°	1099.7	1084.8	1057.1	1033.6	1018.6
55°	1016.5	1003.6	978.0	952.4	941.8
57.5°	933.2	922.5	894.6	869.0	860.5
60°	849.8	841.4	811.5	788.0	781.6
62.5°	768.7	753.7	732.5	711.2	702.5
65°	685.6	672.6	651.3	632.1	621.4
67.5°	600.1	589.3	570.2	555.3	546.7
70°	521.1	512.5	493.2	478.3	469.9
72.5°	439.9	431.4	420.7	405.8	399.4
75°	358.6	354.6	343.6	331.0	335.3
77.5°	286.2	277.5	273.2	266.8	260.6
80°	213.6	211.4	207.1	200.7	196.4
82.5°	145.2	145.2	143.2	134.6	134.6
85°	87.5	85.4	83.4	76.8	74.8
87.5°	38.5	34.2	29.9	23.6	21.3
90°	2.4	28.0	76.1	71.5	73.9
92.5°	48.2	65.3	67.7	70.0	70.0
95°	113.5	135.3	139.2	139.2	135.3
97.5°	188.9	209.1	217.7	217.7	217.7
100°	276.0	293.8	300.0	300.0	297.7
102.5°	367.7	380.9	389.5	391.8	389.5
105°	468.0	474.2	478.8	482.7	482.7
107.5°	567.4	576.8	576.8	578.4	567.4
110°	663.9	676.3	676.3	676.3	670.1

TEST NUMBER: P916916

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	768.0	781.2	778.9	772.7	768.0
115°	870.7	883.0	879.2	876.9	870.7
117.5°	972.5	989.6	978.7	972.5	966.2
120°	1075.1	1092.2	1075.1	1075.1	1068.1
122.5°	1168.3	1190.1	1179.2	1173.1	1168.3
125°	1266.3	1285.7	1279.5	1272.5	1270.2
127.5°	1362.0	1386.0	1377.4	1368.2	1362.0
130°	1451.3	1479.3	1475.4	1470.7	1462.2
132.5°	1551.6	1573.4	1574.9	1564.1	1557.8
135°	1637.9	1662.0	1666.6	1664.3	1658.1
137.5°	1734.3	1753.7	1757.6	1756.1	1746.7
140°	1819.0	1838.4	1849.3	1849.3	1840.8
142.5°	1906.1	1925.5	1931.7	1934.1	1925.5
145°	1988.4	2004.0	2016.5	2018.8	2010.2
147.5°	2062.3	2081.8	2091.1	2095.0	2086.4
150°	2138.5	2151.7	2160.3	2167.2	2160.3
152.5°	2206.1	2219.3	2230.2	2238.8	2230.2
155°	2273.8	2280.0	2287.0	2297.8	2290.8
157.5°	2332.1	2336.7	2340.6	2356.1	2345.3
160°	2384.2	2388.8	2391.1	2404.3	2395.0
162.5°	2432.4	2432.4	2434.6	2449.4	2438.6
165°	2473.5	2471.2	2471.2	2486.7	2475.9
167.5°	2510.9	2503.9	2503.9	2519.4	2508.5
170°	2538.8	2532.6	2530.3	2545.9	2532.6
172.5°	2558.2	2552.0	2549.7	2565.3	2552.0
175°	2573.8	2567.6	2563.0	2578.5	2565.3
177.5°	2582.4	2576.2	2571.5	2584.7	2571.5
180°	2578.5	2578.5	2578.5	2578.5	2578.5

TEST NUMBER: P916916

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.37	9.18	9.38	10.20	11.55	7.93	8.74	8.94	9.76	11.11
	3H	10.03	10.76	11.05	11.78	13.16	9.55	10.27	10.56	11.30	12.67
	4H	10.62	11.31	11.65	12.33	13.72	10.13	10.82	11.16	11.85	13.23
	6H	11.02	11.65	12.06	12.68	14.08	10.53	11.16	11.57	12.19	13.59
	8H	11.12	11.72	12.17	12.77	14.16	10.63	11.23	11.67	12.28	13.67
	12H	11.17	11.74	12.22	12.79	14.20	10.67	11.24	11.72	12.29	13.70
4H	2H	8.83	9.51	9.86	10.54	11.93	8.47	9.16	9.51	10.19	11.57
	3H	10.69	11.26	11.74	12.32	13.72	10.29	10.86	11.33	11.92	13.32
	4H	11.41	11.93	12.46	12.98	14.40	10.99	11.51	12.04	12.56	13.98
	6H	11.92	12.37	12.98	13.44	14.86	11.50	11.95	12.56	13.02	14.43
	8H	12.07	12.49	13.13	13.56	14.99	11.64	12.06	12.70	13.13	14.56
	12H	12.14	12.52	13.22	13.60	15.04	11.70	12.08	12.78	13.16	14.60
8H	4H	11.60	12.02	12.66	13.08	14.51	11.23	11.65	12.29	12.71	14.14
	6H	12.23	12.58	13.32	13.69	15.11	11.85	12.20	12.94	13.31	14.74
	8H	12.45	12.76	13.54	13.85	15.29	12.07	12.37	13.16	13.46	14.91
	12H	12.58	12.85	13.68	13.94	15.42	12.18	12.45	13.28	13.54	15.02
12H	4H	11.58	11.96	12.66	13.04	14.48	11.22	11.60	12.30	12.68	14.11
	6H	12.26	12.57	13.35	13.66	15.10	11.90	12.20	12.99	13.29	14.74
	8H	12.50	12.77	13.60	13.86	15.34	12.13	12.40	13.23	13.48	14.97