

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922563

Luminaire Tested: DFN2DIP-PN4F0-120D120US940-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922563
REPORT IS A COMBINATION OF REPORTS P901290 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D120US940-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19689.0 lumens
Efficiency: N/A
Efficacy: 85.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 229.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922563

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US940-RLLONL

Luminous Intensity Polar Plot

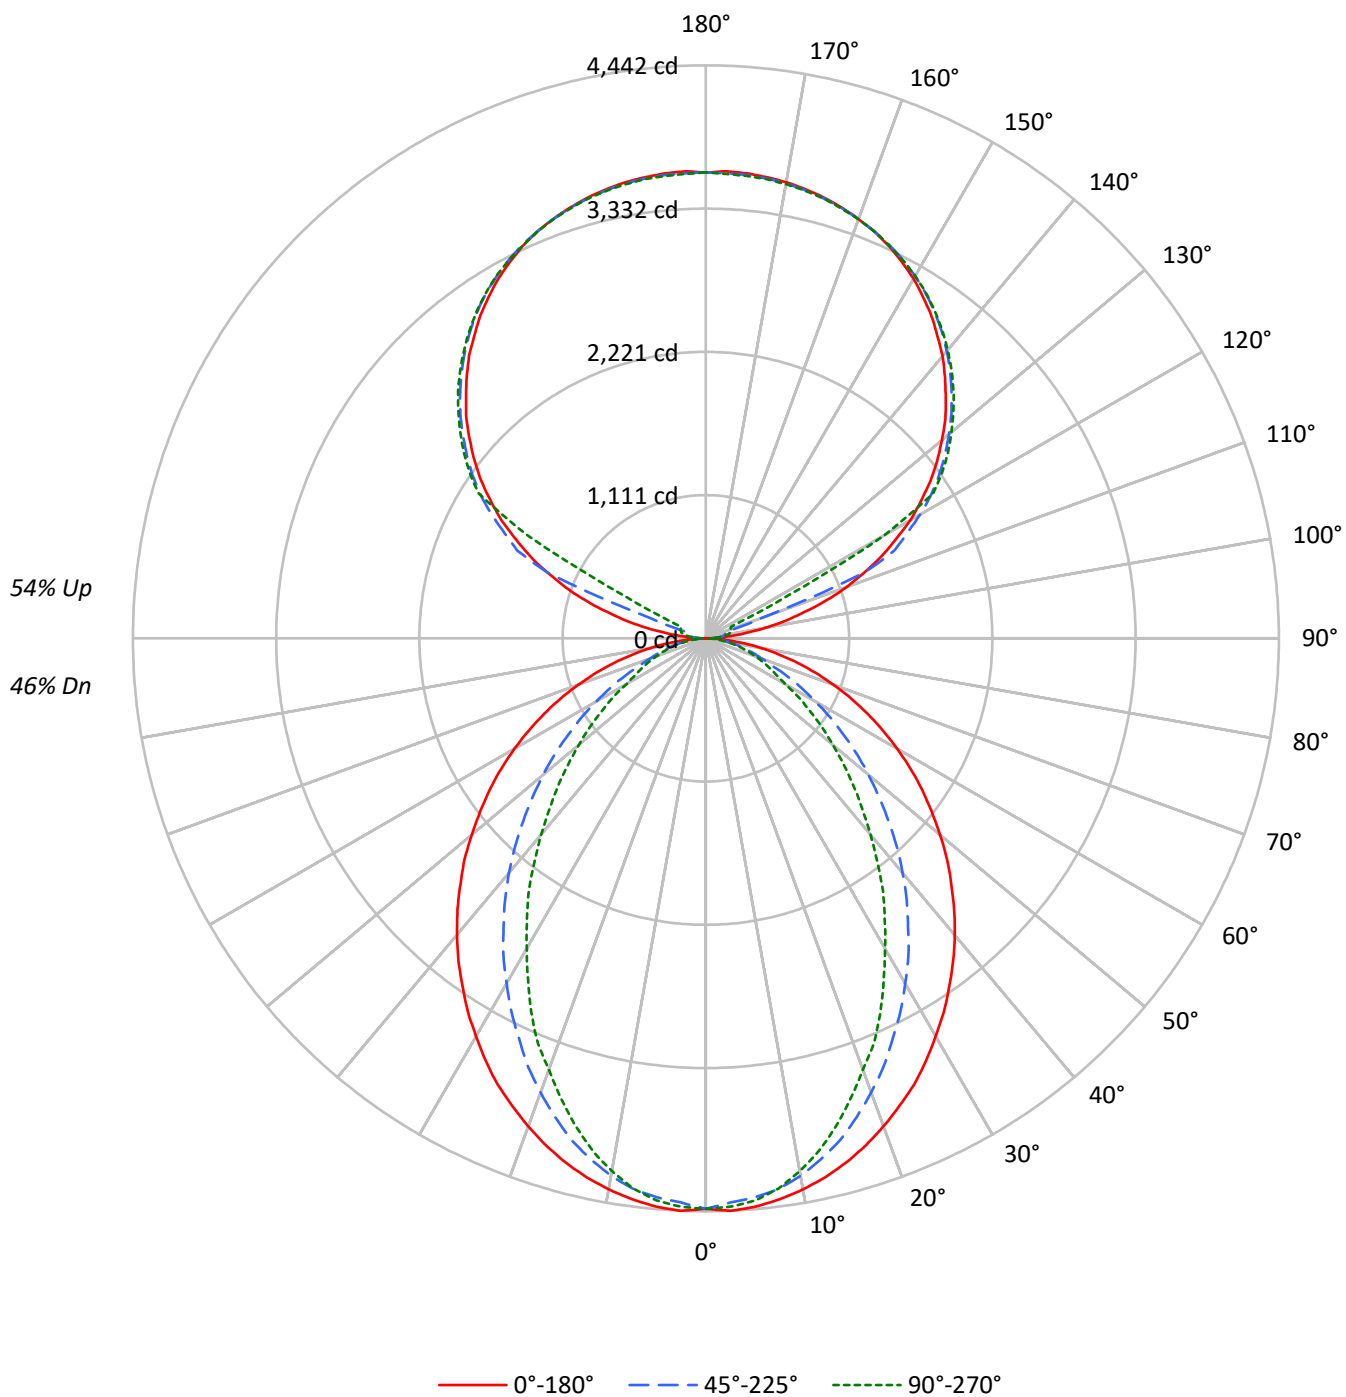

TEST NUMBER: P922563

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3228	3228	3228
5°	3233	3177	3198
10°	3201	3115	3094
15°	3157	3013	2934
20°	3099	2871	2737
25°	3039	2713	2547
30°	2959	2550	2306
35°	2881	2375	2093
40°	2801	2194	1850
45°	2708	1993	1630
50°	2612	1790	1414
55°	2511	1572	1207
60°	2395	1345	994
65°	2262	1115	896
70°	2100	899	811
75°	1897	794	739
80°	1602	667	643
85°	1116	448	488

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2708 cd/sqm

TEST NUMBER: P922563

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US940-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	414.5	2.1
10°-20°	1137.8	5.8
20°-30°	1597.5	8.1
30°-40°	1741.4	8.8
40°-50°	1600.5	8.1
50°-60°	1256.9	6.4
60°-70°	818.2	4.2
70°-80°	421.2	2.1
80°-90°	113.9	0.6
90°-100°	119.1	0.6
100°-110°	443.9	2.3
110°-120°	1177.3	6.0
120°-130°	1952.7	9.9
130°-140°	2074.2	10.5
140°-150°	1927.7	9.8
150°-160°	1549.8	7.9
160°-170°	998.7	5.1
170°-180°	343.7	1.7
0°-30°	3149.8	16.0
0°-40°	4891.2	24.8
0°-60°	7748.6	39.4
0°-90°	9101.8	46.2
90°-120°	1740.3	8.8
90°-150°	7694.9	39.1
90°-180°	10587.0	53.8
0°-180°	19689.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4422	4422	4422	4422	4422	
5°	4422	4403	4350	4386	4375	419
15°	4206	4162	4026	3950	3910	1185
25°	3818	3690	3426	3262	3202	1756
35°	3290	3086	2734	2482	2393	2059
45°	2690	2421	2001	1717	1621	2077
55°	2045	1733	1301	1061	985	1827
65°	1381	1056	696	560	548	1369
75°	736	456	320	292	288	779
85°	172	88	76	76	76	197
90°	2	31	52	66	70	18
95°	170	84	102	115	112	201
105°	794	873	160	188	199	849
115°	1502	1547	1612	402	214	1479
125°	2124	2158	2208	2226	2234	1895
135°	2629	2671	2694	2720	2715	2031
145°	3050	3047	3091	3110	3096	1907
155°	3358	3334	3366	3381	3361	1547
165°	3538	3522	3530	3549	3530	1000
175°	3619	3601	3606	3624	3598	344
180°	3611	3611	3611	3611	3611	

TEST NUMBER: P922563

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4422.5	4422.5	4422.5	4422.5	4422.5
2.5°	4442.5	4422.5	4378.4	4418.7	4410.6
5°	4422.5	4402.6	4350.3	4386.4	4374.6
7.5°	4386.4	4362.6	4306.6	4322.3	4302.3
10°	4338.4	4310.4	4230.5	4218.2	4194.5
12.5°	4278.5	4242.5	4134.1	4110.4	4066.3
15°	4206.4	4162.2	4026.3	3950.3	3910.4
17.5°	4122.3	4058.2	3890.0	3802.2	3738.0
20°	4026.3	3946.1	3746.1	3646.3	3557.9
22.5°	3922.3	3830.2	3597.9	3462.0	3402.1
25°	3818.3	3690.0	3425.9	3262.0	3201.7
27.5°	3694.3	3557.9	3265.8	3077.7	2985.5
30°	3562.2	3409.8	3089.6	2885.8	2777.5
32.5°	3434.0	3249.7	2921.9	2681.6	2581.3
35°	3290.1	3085.8	2733.7	2481.5	2393.2
37.5°	3149.9	2929.5	2557.5	2281.1	2181.3
40°	3001.7	2761.8	2373.3	2089.2	1985.1
42.5°	2849.6	2593.6	2189.4	1893.0	1793.2
45°	2689.6	2421.3	2001.3	1716.8	1620.8
47.5°	2537.5	2253.5	1821.2	1536.8	1448.9
50°	2369.5	2085.4	1645.0	1368.6	1285.0
52.5°	2205.1	1904.9	1476.9	1212.7	1136.8
55°	2045.0	1732.9	1300.6	1060.7	984.7
57.5°	1881.1	1560.9	1144.8	920.6	856.5
60°	1713.0	1392.8	980.4	776.7	712.6
62.5°	1549.1	1228.9	840.3	648.5	616.5
65°	1380.9	1056.5	696.4	560.5	548.2
67.5°	1220.8	896.3	560.5	492.1	480.3
70°	1052.7	740.6	464.1	424.2	408.0
72.5°	892.6	596.2	388.1	356.2	348.2
75°	736.3	456.0	320.2	292.1	288.3
77.5°	580.5	324.0	252.3	236.1	228.0
80°	436.1	232.3	191.9	176.2	176.2
82.5°	304.1	156.2	132.1	123.9	123.9
85°	172.0	87.9	76.0	76.0	76.0
87.5°	64.1	31.8	31.8	28.0	28.0
90°	2.5	31.3	52.2	65.5	70.4
92.5°	65.5	54.9	62.7	67.9	70.4
95°	169.7	83.5	101.7	115.1	112.4
97.5°	305.7	91.6	133.1	141.2	143.7
100°	462.6	104.6	148.9	169.7	175.0
102.5°	634.9	629.9	154.2	182.8	190.8
105°	794.3	872.9	159.5	188.1	198.6
107.5°	979.9	1045.1	164.8	193.3	203.8
110°	1157.7	1212.4	457.4	196.1	206.3



TEST NUMBER: P922563

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1325.0	1371.8	1327.5	201.1	209.1
115°	1502.4	1546.8	1612.3	402.4	214.5
117.5°	1656.7	1708.9	1753.5	1379.6	695.1
120°	1829.3	1868.3	1915.5	1946.9	1594.0
122.5°	1975.4	2017.3	2069.7	2085.3	2088.0
125°	2124.3	2158.5	2208.1	2226.4	2234.2
127.5°	2260.2	2296.9	2336.3	2362.3	2364.8
130°	2388.4	2430.3	2458.8	2487.7	2485.2
132.5°	2519.0	2553.1	2581.7	2605.3	2602.8
135°	2628.9	2670.8	2694.0	2720.4	2715.2
137.5°	2743.7	2775.0	2801.4	2827.4	2819.7
140°	2856.1	2877.1	2905.6	2929.3	2916.2
142.5°	2950.3	2968.7	3002.5	3023.3	3010.2
145°	3049.6	3046.9	3091.2	3109.6	3096.5
147.5°	3135.6	3127.9	3172.3	3185.3	3175.0
150°	3219.3	3201.1	3243.0	3258.5	3245.5
152.5°	3289.8	3269.0	3308.2	3323.9	3305.7
155°	3357.7	3334.5	3365.8	3381.4	3360.6
157.5°	3412.7	3391.9	3415.5	3433.8	3412.7
160°	3459.8	3444.1	3459.8	3475.4	3457.1
162.5°	3501.5	3486.0	3499.0	3517.3	3493.7
165°	3538.0	3522.5	3530.3	3548.7	3530.3
167.5°	3566.9	3551.1	3559.2	3577.5	3553.9
170°	3590.5	3574.7	3579.9	3598.2	3574.7
172.5°	3606.0	3590.5	3595.8	3614.1	3590.5
175°	3619.0	3600.7	3606.0	3624.4	3598.2
177.5°	3624.4	3606.0	3608.8	3627.1	3603.6
180°	3611.3	3611.3	3611.3	3611.3	3611.3

TEST NUMBER: P922563

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.86	11.66	11.86	12.67	13.99	6.83	7.63	7.82	8.63	9.96
	3H	12.54	13.26	13.55	14.27	15.62	8.01	8.73	9.02	9.74	11.09
	4H	13.15	13.83	14.17	14.84	16.20	8.46	9.14	9.48	10.16	11.51
	6H	13.57	14.20	14.60	15.21	16.58	8.78	9.41	9.81	10.43	11.79
	8H	13.70	14.29	14.73	15.33	16.69	8.87	9.47	9.91	10.50	11.87
	12H	13.76	14.32	14.80	15.35	16.74	8.92	9.48	9.96	10.51	11.90
4H	2H	10.88	11.55	11.90	12.57	13.92	7.42	8.10	8.45	9.11	10.47
	3H	12.71	13.27	13.74	14.31	15.68	8.77	9.33	9.80	10.38	11.74
	4H	13.40	13.91	14.44	14.95	16.34	9.32	9.83	10.36	10.87	12.26
	6H	13.92	14.36	14.97	15.42	16.80	9.74	10.18	10.79	11.24	12.62
	8H	14.09	14.51	15.14	15.56	16.96	9.86	10.28	10.92	11.33	12.73
	12H	14.19	14.56	15.26	15.63	17.03	9.93	10.30	11.00	11.37	12.77
8H	4H	13.37	13.78	14.42	14.83	16.23	9.60	10.01	10.65	11.06	12.46
	6H	13.93	14.27	15.01	15.37	16.77	10.12	10.46	11.19	11.55	12.95
	8H	14.15	14.45	15.23	15.53	16.95	10.31	10.61	11.39	11.68	13.10
	12H	14.29	14.56	15.38	15.63	17.09	10.43	10.69	11.51	11.76	13.22
12H	4H	13.32	13.69	14.39	14.75	16.16	9.60	9.97	10.67	11.04	12.45
	6H	13.91	14.21	14.99	15.29	16.70	10.17	10.46	11.25	11.54	12.96
	8H	14.13	14.39	15.22	15.47	16.93	10.38	10.64	11.46	11.71	13.17

END OF REPORT