

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903543

Luminaire Tested: DFN2DIP-SQ2F0-060D030US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903543
REPORT IS A COMBINATION OF REPORTS P901298 AND P898215
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-060D030US830-RLLONL
Description: 2 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7606.3 lumens
Efficiency: N/A
Efficacy: 97.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 77.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903543

CATALOG NUMBER: DFN2DIP-SQ2F0-060D030US830-RLLONL

Luminous Intensity Polar Plot

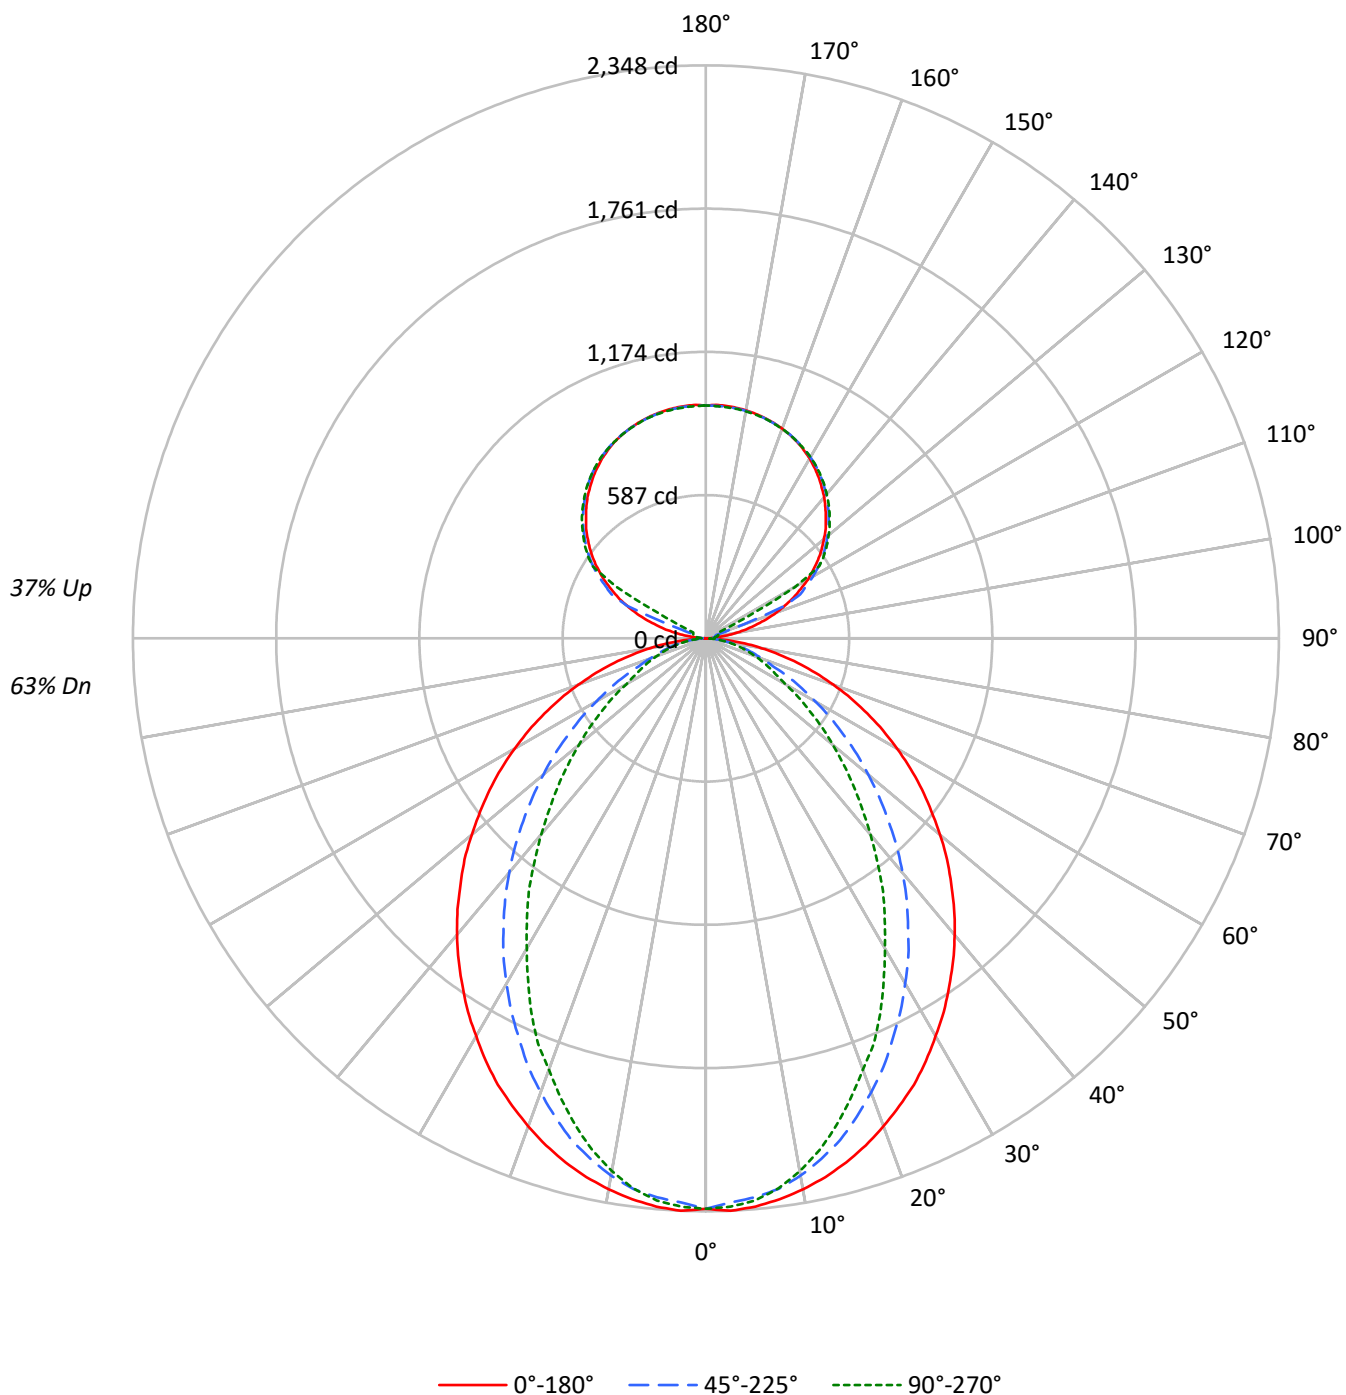

TEST NUMBER: P903543

CATALOG NUMBER: DFN2DIP-SQ2F0-060D030US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	61	60	59
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	52	51
3	85	76	69	63	80	72	65	60	63	58	54	56	52	49	49	46	44
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38
5	72	61	53	47	67	57	50	45	51	45	41	46	41	37	40	37	34
6	67	55	47	41	62	52	45	39	46	41	36	41	37	33	37	33	30
7	62	50	42	36	58	47	40	35	42	36	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24
9	54	42	34	29	51	40	33	28	36	30	26	32	27	24	29	25	22
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5139	5139	5139
5°	5139	5047	5083
10°	5079	4937	4911
15°	5000	4763	4648
20°	4899	4527	4329
25°	4795	4266	4021
30°	4658	3998	3632
35°	4524	3712	3291
40°	4387	3417	2901
45°	4229	3092	2549
50°	4065	2764	2204
55°	3892	2415	1874
60°	3692	2052	1536
65°	3462	1684	1374
70°	3181	1341	1234
75°	2829	1161	1108
80°	2323	942	938
85°	1512	586	669

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4229 cd/sqm

TEST NUMBER: P903543

CATALOG NUMBER: DFN2DIP-SQ2F0-060D030US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.1	2.9
10°-20°	601.3	7.9
20°-30°	844.3	11.1
30°-40°	920.3	12.1
40°-50°	845.9	11.1
50°-60°	664.3	8.7
60°-70°	432.4	5.7
70°-80°	222.6	2.9
80°-90°	58.5	0.8
90°-100°	31.5	0.4
100°-110°	117.3	1.5
110°-120°	311.1	4.1
120°-130°	516.0	6.8
130°-140°	548.1	7.2
140°-150°	509.4	6.7
150°-160°	409.6	5.4
160°-170°	263.9	3.5
170°-180°	90.8	1.2
0°-30°	1664.7	21.9
0°-40°	2585.0	34.0
0°-60°	4095.1	53.8
0°-90°	4808.6	63.2
90°-120°	459.9	6.0
90°-150°	2033.4	26.7
90°-180°	2798.0	36.8
0°-180°	7606.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2337	2337	2337	2337	2337	
5°	2337	2327	2299	2318	2312	222
15°	2223	2200	2128	2088	2067	626
25°	2018	1950	1811	1724	1692	928
35°	1739	1631	1445	1312	1265	1088
45°	1421	1280	1058	907	857	1098
55°	1081	916	687	561	520	966
65°	730	558	368	296	290	724
75°	389	241	169	154	152	412
85°	91	46	40	40	40	104
90°	1	8	14	17	19	7
95°	45	22	27	30	30	53
105°	210	231	42	50	52	224
115°	397	409	426	106	57	391
125°	561	570	584	588	590	501
135°	695	706	712	719	718	537
145°	806	805	817	822	818	504
155°	887	881	889	894	888	409
165°	935	931	933	938	933	264
175°	956	952	953	958	951	91
180°	954	954	954	954	954	

TEST NUMBER: P903543

CATALOG NUMBER: DFN2DIP-SQ2F0-060D030US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2337.3	2337.3	2337.3	2337.3	2337.3
2.5°	2347.9	2337.3	2313.9	2335.2	2331.0
5°	2337.3	2326.8	2299.1	2318.3	2312.0
7.5°	2318.3	2305.6	2276.1	2284.3	2273.8
10°	2292.8	2278.0	2235.9	2229.4	2216.8
12.5°	2261.3	2242.1	2184.9	2172.4	2149.0
15°	2223.1	2199.7	2127.9	2087.7	2066.6
17.5°	2178.7	2144.8	2055.9	2009.4	1975.6
20°	2127.9	2085.5	1979.8	1927.0	1880.4
22.5°	2072.9	2024.2	1901.5	1829.7	1798.0
25°	2018.0	1950.2	1810.6	1724.0	1692.1
27.5°	1952.5	1880.4	1726.0	1626.5	1577.9
30°	1882.6	1802.0	1632.9	1525.1	1467.9
32.5°	1814.9	1717.5	1544.3	1417.2	1364.2
35°	1738.8	1630.9	1444.8	1311.5	1264.8
37.5°	1664.7	1548.2	1351.7	1205.6	1152.8
40°	1586.4	1459.6	1254.2	1104.1	1049.1
42.5°	1506.1	1370.7	1157.1	1000.4	947.7
45°	1421.4	1279.6	1057.7	907.3	856.6
47.5°	1341.1	1191.0	962.5	812.2	765.7
50°	1252.3	1102.1	869.4	723.3	679.1
52.5°	1165.4	1006.7	780.5	640.9	600.8
55°	1080.8	915.9	687.4	560.6	520.4
57.5°	994.2	824.9	605.0	486.5	452.6
60°	905.3	736.1	518.2	410.5	376.5
62.5°	818.7	649.5	444.1	342.7	325.8
65°	729.8	558.4	368.1	296.2	289.7
67.5°	645.2	473.7	296.2	260.1	253.8
70°	556.3	391.3	245.2	224.2	215.7
72.5°	471.7	315.1	205.1	188.3	184.0
75°	389.2	241.0	169.2	154.4	152.4
77.5°	306.8	171.3	133.3	124.8	120.6
80°	230.5	122.7	101.4	93.1	93.1
82.5°	160.7	82.6	69.7	65.5	65.5
85°	90.9	46.5	40.2	40.2	40.2
87.5°	33.9	16.9	16.9	14.8	14.8
90°	0.7	8.3	13.8	17.3	18.6
92.5°	17.3	14.5	16.6	18.0	18.6
95°	44.9	22.1	26.9	30.4	29.7
97.5°	80.8	24.2	35.2	37.3	38.0
100°	122.2	27.6	39.4	44.9	46.3
102.5°	167.8	166.5	40.7	48.3	50.4
105°	209.9	230.6	42.1	49.7	52.5
107.5°	258.9	276.2	43.5	51.1	53.9
110°	305.9	320.4	120.8	51.8	54.6

TEST NUMBER: P903543

CATALOG NUMBER: DFN2DIP-SQ2F0-060D030US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	350.2	362.5	350.8	53.2	55.2
115°	397.0	408.8	426.0	106.3	56.6
117.5°	437.8	451.6	463.4	364.6	183.7
120°	483.3	493.7	506.1	514.4	421.2
122.5°	522.0	533.1	547.0	551.0	551.8
125°	561.4	570.3	583.5	588.3	590.4
127.5°	597.3	606.9	617.4	624.2	624.9
130°	631.1	642.2	649.8	657.3	656.8
132.5°	665.6	674.7	682.2	688.4	687.8
135°	694.7	705.8	711.9	718.9	717.5
137.5°	725.0	733.3	740.3	747.2	745.1
140°	754.7	760.3	767.8	774.0	770.6
142.5°	779.7	784.5	793.4	798.9	795.5
145°	805.9	805.1	816.9	821.7	818.2
147.5°	828.6	826.5	838.3	841.7	839.0
150°	850.7	845.9	857.0	861.0	857.6
152.5°	869.3	863.8	874.2	878.4	873.5
155°	887.3	881.2	889.4	893.5	888.1
157.5°	901.8	896.4	902.6	907.4	901.8
160°	914.3	910.1	914.3	918.4	913.5
162.5°	925.3	921.1	924.6	929.4	923.2
165°	934.9	930.9	932.9	937.7	932.9
167.5°	942.5	938.4	940.5	945.4	939.1
170°	948.8	944.6	946.0	950.8	944.6
172.5°	952.9	948.8	950.2	955.0	948.8
175°	956.3	951.5	952.9	957.7	950.8
177.5°	957.7	952.9	953.7	958.5	952.3
180°	954.3	954.3	954.3	954.3	954.3

TEST NUMBER: P903543

CATALOG NUMBER: DFN2DIP-SQ2F0-060D030US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.87	14.82	14.71	15.68	16.75	9.83	10.78	10.67	11.64	12.71
	3H	15.54	16.39	16.39	17.26	18.36	11.01	11.86	11.87	12.73	13.83
	4H	16.14	16.94	17.01	17.82	18.93	11.45	12.26	12.33	13.13	14.24
	6H	16.55	17.29	17.43	18.17	19.30	11.77	12.51	12.65	13.39	14.51
	8H	16.67	17.38	17.56	18.28	19.40	11.85	12.55	12.74	13.45	14.58
	12H	16.73	17.40	17.63	18.29	19.44	11.89	12.56	12.79	13.45	14.60
4H	2H	13.90	14.70	14.78	15.58	16.69	10.43	11.23	11.31	12.11	13.22
	3H	15.72	16.38	16.60	17.29	18.42	11.77	12.44	12.66	13.35	14.47
	4H	16.40	17.01	17.30	17.91	19.06	12.31	12.92	13.21	13.82	14.97
	6H	16.90	17.42	17.82	18.35	19.51	12.72	13.24	13.63	14.17	15.32
	8H	17.07	17.56	17.98	18.48	19.64	12.84	13.32	13.75	14.25	15.41
	12H	17.16	17.60	18.09	18.54	19.71	12.90	13.33	13.83	14.28	15.45
8H	4H	16.37	16.86	17.29	17.78	18.95	12.59	13.07	13.50	14.00	15.16
	6H	16.92	17.32	17.86	18.29	19.45	13.08	13.49	14.03	14.45	15.62
	8H	17.12	17.48	18.08	18.44	19.62	13.26	13.62	14.21	14.57	15.76
	12H	17.25	17.57	18.21	18.52	19.75	13.37	13.69	14.33	14.63	15.87
12H	4H	16.33	16.77	17.26	17.71	18.88	12.59	13.03	13.53	13.97	15.14
	6H	16.89	17.25	17.85	18.21	19.39	13.13	13.49	14.08	14.44	15.62
	8H	17.11	17.42	18.06	18.37	19.60	13.33	13.64	14.28	14.59	15.82