

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906199

Luminaire Tested: DFN2DIP-SQ2F0-030D030US835-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906199
REPORT IS A COMBINATION OF REPORTS P901292 AND P898215
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-030D030US835-RLLONL
Description: 2 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5520.0 lumens
Efficiency: N/A
Efficacy: 120.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 45.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906199

CATALOG NUMBER: DFN2DIP-SQ2F0-030D030US835-RLLONL

Luminous Intensity Polar Plot

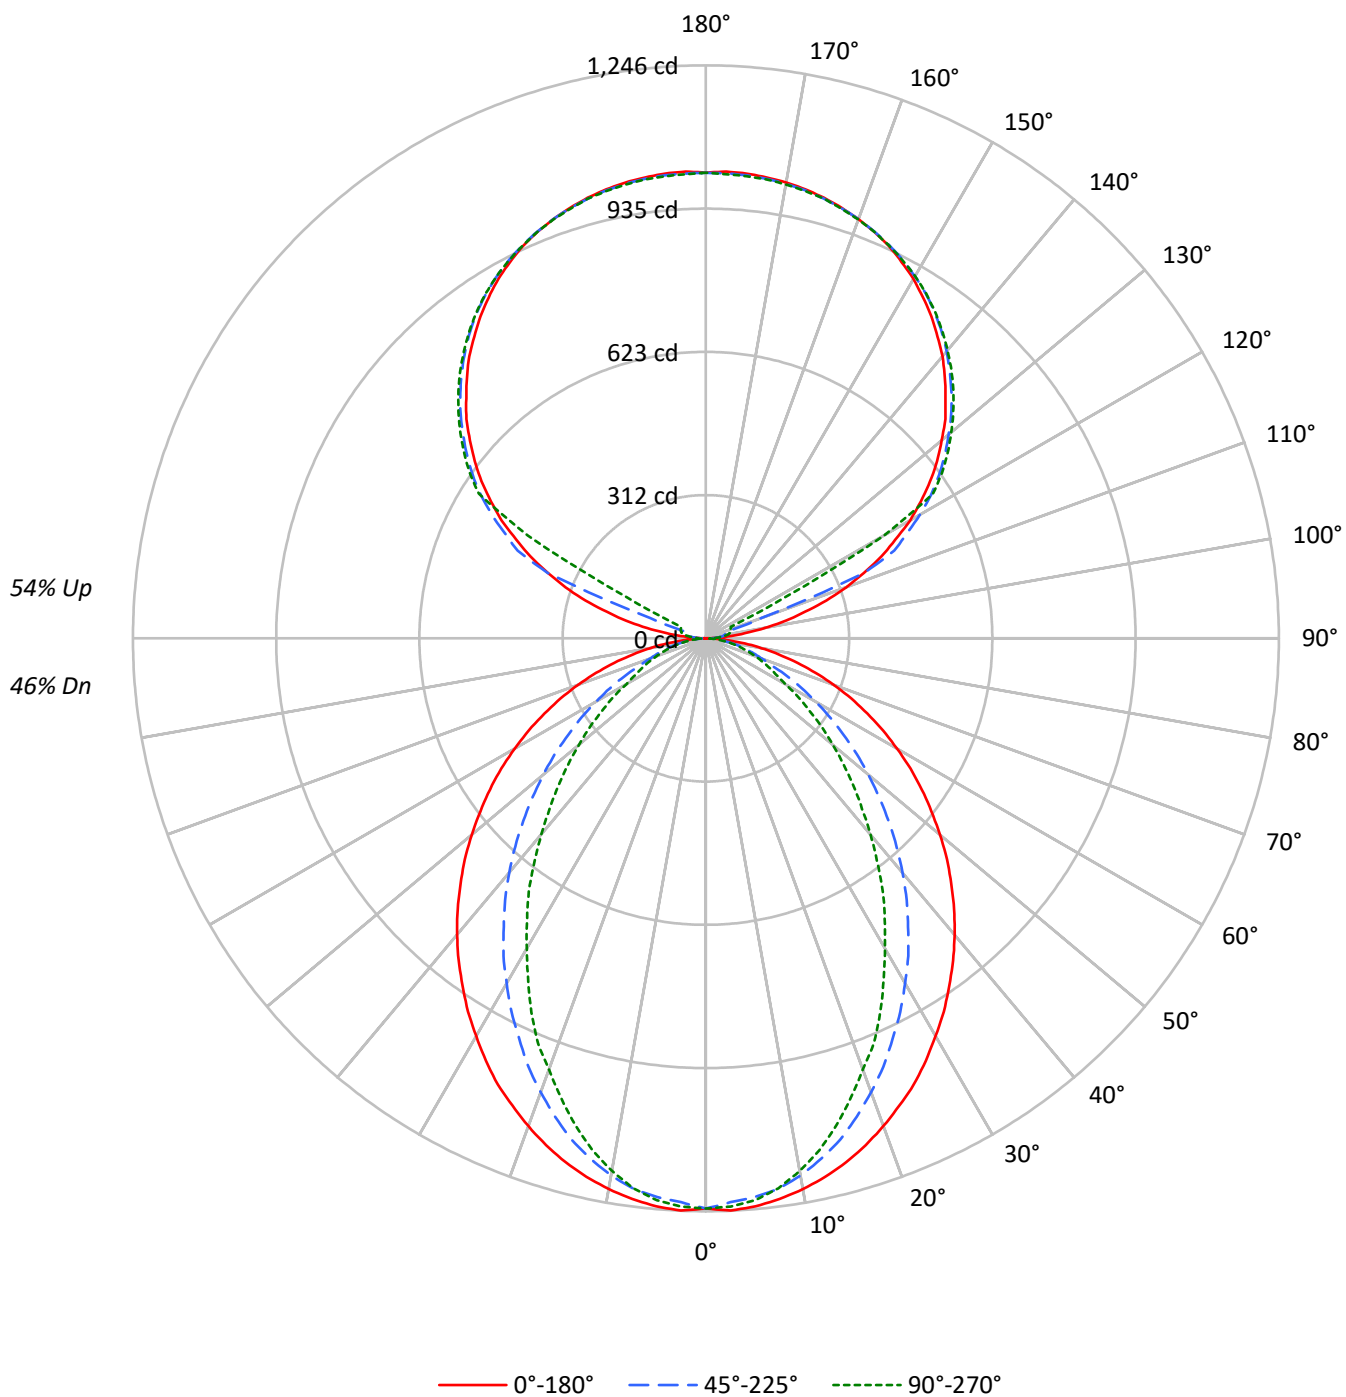

TEST NUMBER: P906199

CATALOG NUMBER: DFN2DIP-SQ2F0-030D030US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2726	2726	2726
5°	2726	2677	2696
10°	2694	2619	2605
15°	2653	2526	2466
20°	2599	2402	2296
25°	2544	2263	2133
30°	2471	2121	1927
35°	2400	1969	1746
40°	2327	1813	1539
45°	2244	1640	1352
50°	2156	1466	1169
55°	2065	1281	994
60°	1958	1088	815
65°	1836	893	729
70°	1688	711	654
75°	1500	616	587
80°	1233	500	498
85°	802	311	354

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2244 cd/sqm

TEST NUMBER: P906199

CATALOG NUMBER: DFN2DIP-SQ2F0-030D030US835-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.2	2.1
10°-20°	319.0	5.8
20°-30°	447.9	8.1
30°-40°	488.2	8.8
40°-50°	448.7	8.1
50°-60°	352.4	6.4
60°-70°	229.4	4.2
70°-80°	118.1	2.1
80°-90°	31.9	0.6
90°-100°	33.4	0.6
100°-110°	124.4	2.3
110°-120°	330.1	6.0
120°-130°	547.5	9.9
130°-140°	581.5	10.5
140°-150°	540.5	9.8
150°-160°	434.5	7.9
160°-170°	280.0	5.1
170°-180°	96.4	1.7
0°-30°	883.1	16.0
0°-40°	1371.3	24.8
0°-60°	2172.4	39.4
0°-90°	2551.7	46.2
90°-120°	487.9	8.8
90°-150°	2157.3	39.1
90°-180°	2968.0	53.8
0°-180°	5520.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1240	1240	1240	1240	1240	
5°	1240	1234	1220	1230	1226	118
15°	1179	1167	1129	1108	1096	332
25°	1070	1034	960	914	898	492
35°	922	865	766	696	671	577
45°	754	679	561	481	454	582
55°	573	486	365	297	276	512
65°	387	296	195	157	154	384
75°	206	128	90	82	81	218
85°	48	25	21	21	21	55
90°	1	9	15	18	20	5
95°	48	23	28	32	32	56
105°	223	245	45	53	56	238
115°	421	434	452	113	60	415
125°	596	605	619	624	626	531
135°	737	749	755	763	761	569
145°	855	854	867	872	868	535
155°	941	935	944	948	942	434
165°	992	988	990	995	990	280
175°	1015	1010	1011	1016	1009	97
180°	1012	1012	1012	1012	1012	

TEST NUMBER: P906199

CATALOG NUMBER: DFN2DIP-SQ2F0-030D030US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1239.9	1239.9	1239.9	1239.9	1239.9
2.5°	1245.5	1239.9	1227.5	1238.8	1236.6
5°	1239.9	1234.3	1219.7	1229.8	1226.4
7.5°	1229.8	1223.1	1207.4	1211.8	1206.2
10°	1216.3	1208.5	1186.1	1182.6	1176.0
12.5°	1199.5	1189.4	1159.1	1152.4	1140.0
15°	1179.3	1166.9	1128.8	1107.5	1096.3
17.5°	1155.7	1137.8	1090.6	1066.0	1048.0
20°	1128.8	1106.3	1050.2	1022.3	997.5
22.5°	1099.7	1073.8	1008.7	970.6	953.8
25°	1070.5	1034.5	960.5	914.5	897.6
27.5°	1035.7	997.5	915.6	862.9	837.0
30°	998.7	956.0	866.2	809.1	778.7
32.5°	962.7	911.1	819.2	751.8	723.7
35°	922.4	865.1	766.4	695.7	671.0
37.5°	883.1	821.3	717.0	639.5	611.6
40°	841.6	774.3	665.4	585.7	556.6
42.5°	798.9	727.2	613.8	530.7	502.7
45°	754.1	678.8	561.1	481.3	454.4
47.5°	711.4	631.8	510.6	430.8	406.2
50°	664.3	584.6	461.2	383.7	360.2
52.5°	618.2	534.1	414.1	340.0	318.7
55°	573.3	485.8	364.6	297.4	276.1
57.5°	527.4	437.6	321.0	258.1	240.1
60°	480.2	390.5	274.9	217.7	199.8
62.5°	434.3	344.5	235.6	181.8	172.9
65°	387.1	296.2	195.2	157.1	153.7
67.5°	342.3	251.3	157.1	138.0	134.6
70°	295.1	207.6	130.1	118.9	114.4
72.5°	250.2	167.1	108.8	99.9	97.6
75°	206.4	127.9	89.8	81.9	80.8
77.5°	162.7	90.8	70.7	66.2	63.9
80°	122.3	65.1	53.8	49.4	49.4
82.5°	85.2	43.8	37.0	34.8	34.8
85°	48.2	24.6	21.3	21.3	21.3
87.5°	18.0	8.9	8.9	7.9	7.9
90°	0.7	8.8	14.6	18.4	19.7
92.5°	18.4	15.4	17.6	19.1	19.7
95°	47.6	23.4	28.5	32.3	31.5
97.5°	85.7	25.7	37.3	39.6	40.3
100°	129.7	29.3	41.8	47.6	49.1
102.5°	178.0	176.6	43.2	51.2	53.5
105°	222.7	244.7	44.7	52.7	55.7
107.5°	274.7	293.0	46.2	54.2	57.2
110°	324.6	339.9	128.2	55.0	57.9



TEST NUMBER: P906199

CATALOG NUMBER: DFN2DIP-SQ2F0-030D030US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	371.5	384.6	372.2	56.4	58.6
115°	421.2	433.7	452.0	112.8	60.1
117.5°	464.5	479.1	491.6	386.8	194.9
120°	512.8	523.8	537.0	545.8	446.9
122.5°	553.8	565.6	580.3	584.6	585.4
125°	595.6	605.1	619.1	624.2	626.4
127.5°	633.7	643.9	655.0	662.3	663.0
130°	669.6	681.4	689.4	697.4	696.8
132.5°	706.2	715.8	723.8	730.4	729.7
135°	737.0	748.8	755.3	762.7	761.2
137.5°	769.2	778.0	785.4	792.7	790.5
140°	800.7	806.6	814.6	821.2	817.6
142.5°	827.2	832.3	841.8	847.6	844.0
145°	855.0	854.2	866.7	871.8	868.1
147.5°	879.1	876.9	889.4	893.0	890.1
150°	902.6	897.5	909.2	913.5	909.9
152.5°	922.3	916.5	927.5	931.9	926.8
155°	941.4	934.9	943.6	948.0	942.2
157.5°	956.8	951.0	957.6	962.7	956.8
160°	970.0	965.6	970.0	974.4	969.2
162.5°	981.7	977.3	981.0	986.1	979.5
165°	991.9	987.6	989.8	994.9	989.8
167.5°	1000.0	995.6	997.8	1003.0	996.4
170°	1006.6	1002.2	1003.7	1008.8	1002.2
172.5°	1011.0	1006.6	1008.1	1013.2	1006.6
175°	1014.6	1009.5	1011.0	1016.1	1008.8
177.5°	1016.1	1011.0	1011.8	1016.9	1010.3
180°	1012.5	1012.5	1012.5	1012.5	1012.5

TEST NUMBER: P906199

CATALOG NUMBER: DFN2DIP-SQ2F0-030D030US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.15	10.95	11.15	11.96	13.28	6.11	6.91	7.11	7.92	9.24
	3H	11.81	12.52	12.82	13.54	14.88	7.28	8.00	8.29	9.01	10.36
	4H	12.40	13.08	13.42	14.09	15.45	7.72	8.39	8.74	9.41	10.77
	6H	12.81	13.43	13.84	14.45	15.82	8.02	8.64	9.05	9.66	11.03
	8H	12.92	13.52	13.96	14.55	15.92	8.10	8.69	9.14	9.73	11.09
	12H	12.98	13.54	14.02	14.57	15.96	8.14	8.70	9.18	9.73	11.12
4H	2H	10.16	10.84	11.19	11.85	13.21	6.70	7.37	7.72	8.39	9.74
	3H	11.97	12.53	13.00	13.57	14.94	8.02	8.58	9.05	9.63	11.00
	4H	12.64	13.16	13.68	14.19	15.58	8.55	9.07	9.59	10.10	11.49
	6H	13.14	13.58	14.19	14.64	16.03	8.95	9.39	10.00	10.45	11.84
	8H	13.30	13.71	14.35	14.76	16.17	9.07	9.48	10.12	10.53	11.93
	12H	13.38	13.76	14.45	14.82	16.23	9.12	9.49	10.19	10.56	11.97
8H	4H	12.60	13.02	13.65	14.07	15.47	8.82	9.23	9.87	10.28	11.68
	6H	13.15	13.49	14.22	14.58	15.98	9.31	9.65	10.39	10.74	12.14
	8H	13.35	13.65	14.43	14.73	16.15	9.49	9.79	10.57	10.86	12.28
	12H	13.47	13.74	14.56	14.81	16.27	9.59	9.85	10.68	10.93	12.39
12H	4H	12.55	12.93	13.62	13.99	15.40	8.82	9.19	9.89	10.26	11.66
	6H	13.12	13.42	14.20	14.50	15.92	9.36	9.65	10.44	10.73	12.15
	8H	13.33	13.59	14.41	14.66	16.12	9.55	9.81	10.63	10.88	12.34

END OF REPORT