

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912044

Luminaire Tested: DFN2DIP-SQ3F0-100D120US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912044
REPORT IS A COMBINATION OF REPORTS P900017 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-100D120US850-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 22756.7 lumens
Efficiency: N/A
Efficacy: 118.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 192.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912044

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US850-FLLFLL

Luminous Intensity Polar Plot

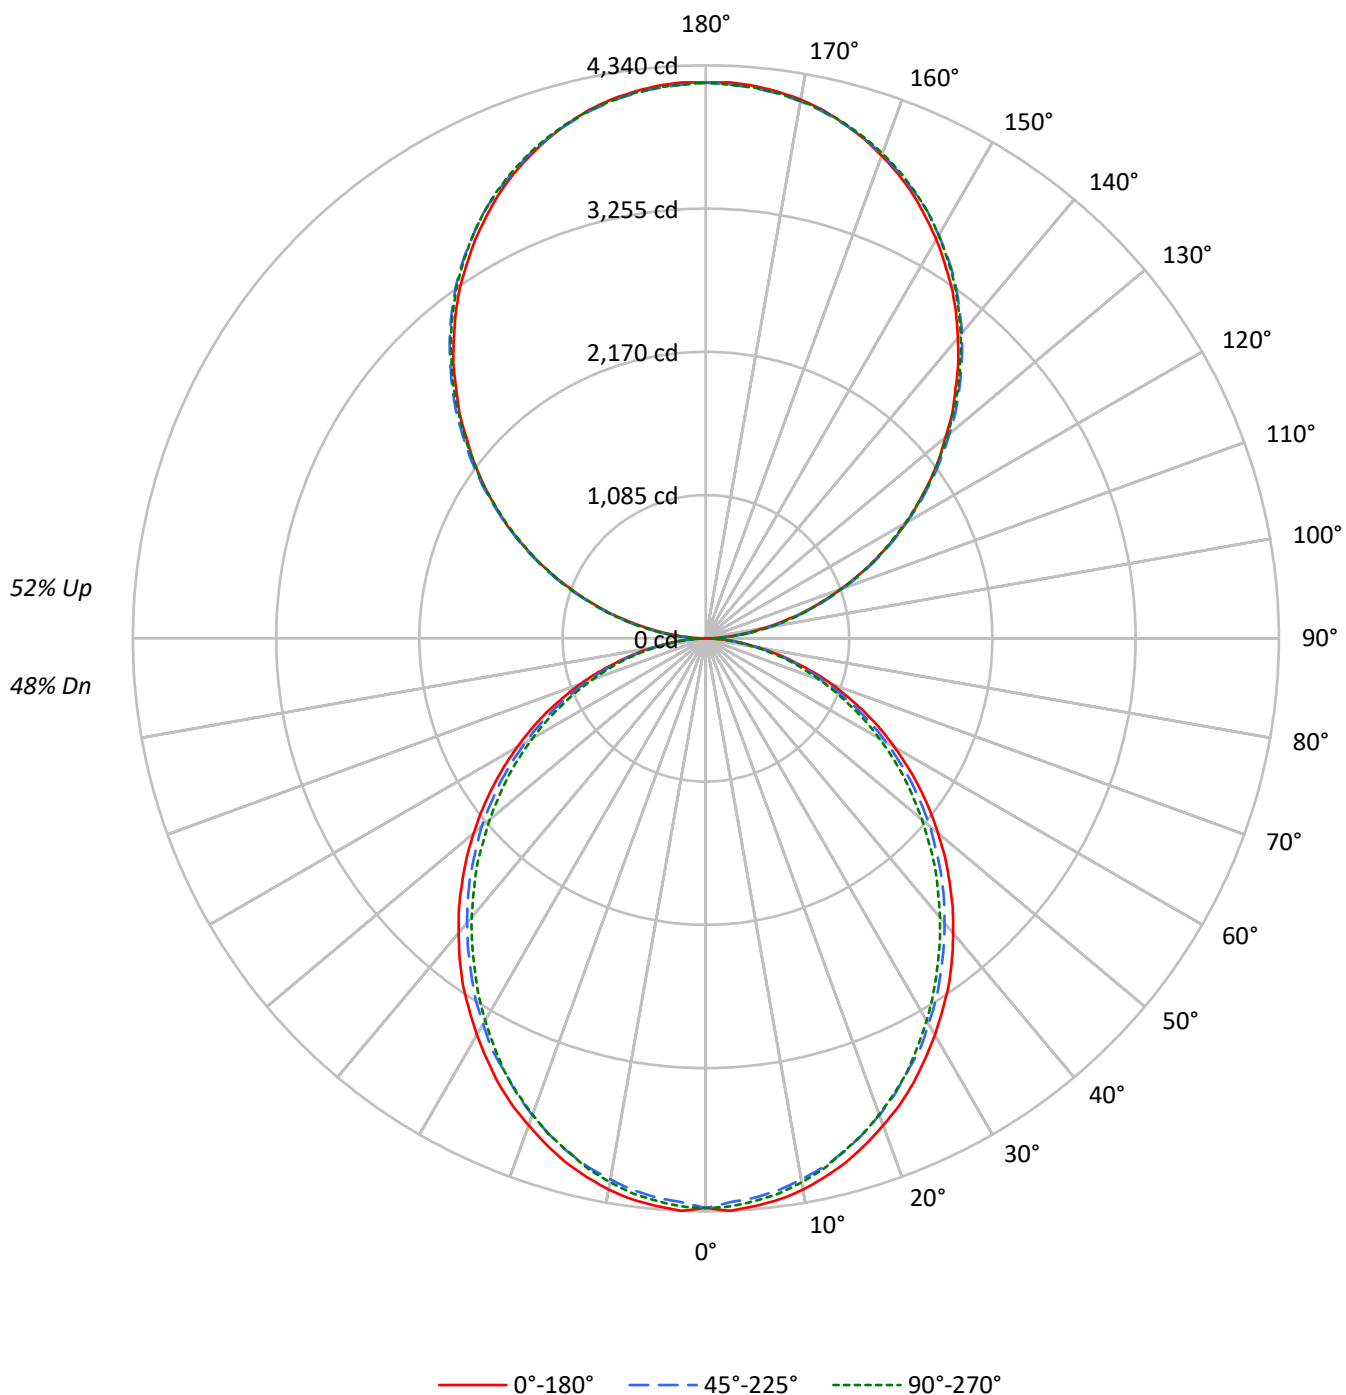

TEST NUMBER: P912044

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US850-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	55	55	55
1	97	93	89	86	89	86	82	79	72	70	68	60	58	57	48	47	46
2	89	81	75	70	81	75	70	65	63	59	56	52	50	47	42	41	39
3	81	71	64	58	74	66	60	54	56	51	47	46	43	40	38	35	33
4	74	63	55	49	68	59	52	46	50	44	40	41	37	34	34	31	28
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25
6	63	51	42	37	57	47	40	34	40	34	30	34	29	26	27	24	22
7	58	46	38	32	53	42	35	30	36	31	27	30	26	23	25	22	19
8	54	41	34	28	49	39	32	27	33	28	24	28	24	20	23	20	17
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4944	4944	4944
5°	4949	4872	4907
10°	4906	4803	4839
15°	4831	4721	4733
20°	4730	4608	4625
25°	4630	4473	4501
30°	4505	4348	4343
35°	4386	4200	4176
40°	4241	4051	4017
45°	4096	3901	3855
50°	3937	3744	3667
55°	3770	3562	3493
60°	3582	3346	3294
65°	3375	3123	3060
70°	3113	2850	2807
75°	2750	2522	2571
80°	2311	2104	2125
85°	1627	1394	1391

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 4232 cd/sqm

TEST NUMBER: P912044

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	406.1	1.8
10°-20°	1142.7	5.0
20°-30°	1679.4	7.4
30°-40°	1950.5	8.6
40°-50°	1948.1	8.6
50°-60°	1698.7	7.5
60°-70°	1255.7	5.5
70°-80°	710.4	3.1
80°-90°	199.5	0.9
90°-100°	260.4	1.1
100°-110°	827.5	3.6
110°-120°	1416.1	6.2
120°-130°	1862.4	8.2
130°-140°	2090.5	9.2
140°-150°	2050.0	9.0
150°-160°	1719.6	7.6
160°-170°	1140.4	5.0
170°-180°	398.6	1.8
0°-30°	3228.3	14.2
0°-40°	5178.7	22.8
0°-60°	8825.5	38.8
0°-90°	10991.1	48.3
90°-120°	2504.0	11.0
90°-150°	8506.9	37.4
90°-180°	11766.0	51.7
0°-180°	22756.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4315	4315	4315	4315	4315	
5°	4315	4299	4253	4286	4278	410
15°	4108	4083	4029	4046	4025	1157
25°	3718	3685	3614	3622	3614	1711
35°	3208	3166	3100	3075	3054	2003
45°	2610	2581	2518	2473	2456	2014
55°	1975	1950	1900	1851	1830	1766
65°	1332	1307	1266	1228	1208	1317
75°	697	689	668	643	652	744
85°	170	166	162	149	145	190
90°	4	46	124	117	120	22
95°	185	221	227	227	221	206
105°	764	774	782	788	788	806
115°	1421	1442	1435	1431	1421	1406
125°	2067	2099	2089	2077	2073	1847
135°	2674	2713	2720	2717	2706	2066
145°	3246	3271	3291	3295	3281	2028
155°	3711	3722	3733	3751	3739	1708
165°	4038	4034	4034	4059	4041	1139
175°	4201	4191	4184	4209	4187	399
180°	4209	4209	4209	4209	4209	

TEST NUMBER: P912044

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4315.2	4315.2	4315.2	4315.2	4315.2
2.5°	4340.3	4319.6	4273.8	4315.2	4307.2
5°	4315.2	4298.9	4253.1	4286.2	4278.2
7.5°	4286.2	4261.4	4215.6	4249.1	4240.8
10°	4240.8	4211.8	4162.0	4195.0	4182.7
12.5°	4178.3	4153.6	4103.9	4124.6	4116.2
15°	4107.8	4083.2	4029.0	4045.7	4025.1
17.5°	4020.7	3996.1	3941.8	3962.6	3941.8
20°	3925.1	3900.5	3842.4	3854.7	3838.4
22.5°	3830.0	3792.7	3738.4	3738.4	3730.1
25°	3717.8	3684.8	3614.3	3622.2	3614.3
27.5°	3593.2	3564.1	3510.4	3498.1	3477.4
30°	3469.1	3435.6	3373.5	3361.2	3344.4
32.5°	3336.1	3311.5	3244.9	3219.9	3203.1
35°	3207.6	3166.2	3099.7	3074.6	3053.9
37.5°	3062.3	3024.8	2958.4	2929.3	2908.6
40°	2913.0	2879.5	2813.1	2776.2	2759.4
42.5°	2767.7	2734.2	2668.3	2626.4	2601.8
45°	2610.1	2581.1	2518.5	2473.2	2456.5
47.5°	2456.5	2427.5	2361.0	2315.1	2290.5
50°	2294.5	2273.8	2215.7	2157.6	2136.9
52.5°	2136.9	2107.9	2054.1	2008.4	1979.3
55°	1975.4	1950.3	1900.5	1850.7	1830.1
57.5°	1813.3	1792.6	1738.5	1688.8	1672.0
60°	1651.3	1635.0	1576.9	1531.1	1518.8
62.5°	1493.7	1464.7	1423.3	1381.9	1365.2
65°	1332.1	1307.1	1265.7	1228.2	1207.6
67.5°	1166.2	1145.0	1108.1	1079.1	1062.3
70°	1012.5	995.8	958.4	929.3	913.0
72.5°	854.9	838.2	817.6	788.5	776.1
75°	696.9	689.0	667.8	643.2	651.5
77.5°	556.1	539.3	530.9	518.6	506.3
80°	415.1	410.8	402.3	390.0	381.7
82.5°	282.2	282.2	278.2	261.5	261.5
85°	169.9	166.0	162.0	149.3	145.3
87.5°	74.9	66.4	58.1	45.8	41.4
90°	3.8	45.7	124.3	116.8	120.5
92.5°	78.6	106.6	110.3	114.2	114.2
95°	185.2	220.8	227.1	227.1	220.8
97.5°	308.3	341.4	355.3	355.3	355.3
100°	450.5	479.6	489.7	489.7	486.0
102.5°	600.2	621.7	635.7	639.6	635.7
105°	763.9	774.0	781.6	787.9	787.9
107.5°	926.2	941.5	941.5	944.0	926.2
110°	1083.6	1103.9	1103.9	1103.9	1093.8

TEST NUMBER: P912044

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1253.6	1275.2	1271.4	1261.3	1253.6
115°	1421.1	1441.5	1435.0	1431.3	1421.1
117.5°	1587.3	1615.3	1597.5	1587.3	1577.2
120°	1754.9	1782.7	1754.9	1754.9	1743.5
122.5°	1907.1	1942.6	1924.9	1914.7	1907.1
125°	2067.0	2098.7	2088.6	2077.2	2073.3
127.5°	2223.1	2262.4	2248.4	2233.2	2223.1
130°	2368.9	2414.6	2408.3	2400.7	2386.7
132.5°	2532.6	2568.2	2570.7	2552.9	2542.8
135°	2673.5	2712.8	2720.5	2716.6	2706.5
137.5°	2830.8	2862.6	2868.9	2866.3	2851.1
140°	2969.1	3000.8	3018.6	3018.6	3004.6
142.5°	3111.3	3143.0	3153.1	3156.9	3143.0
145°	3245.7	3271.1	3291.4	3295.3	3281.3
147.5°	3366.3	3398.0	3413.3	3419.6	3405.6
150°	3490.7	3512.2	3526.2	3537.6	3526.2
152.5°	3601.0	3622.5	3640.4	3654.4	3640.4
155°	3711.4	3721.6	3733.0	3750.7	3739.3
157.5°	3806.6	3814.2	3820.5	3845.9	3828.2
160°	3891.6	3899.2	3903.0	3924.6	3909.3
162.5°	3970.2	3970.2	3974.1	3998.2	3980.4
165°	4037.5	4033.8	4033.8	4059.1	4041.3
167.5°	4098.4	4087.0	4087.0	4112.4	4094.6
170°	4144.1	4133.9	4130.1	4155.5	4133.9
172.5°	4175.8	4165.6	4161.9	4187.3	4165.6
175°	4201.2	4191.0	4183.5	4208.8	4187.3
177.5°	4215.2	4205.0	4197.3	4219.0	4197.3
180°	4208.8	4208.8	4208.8	4208.8	4208.8

TEST NUMBER: P912044

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.63	13.48	13.60	14.46	15.76	12.19	13.03	13.16	14.02	15.31
	3H	14.28	15.04	15.27	16.04	17.35	13.79	14.55	14.78	15.55	16.86
	4H	14.87	15.59	15.86	16.58	17.91	14.37	15.09	15.37	16.09	17.42
	6H	15.26	15.93	16.27	16.93	18.27	14.76	15.43	15.77	16.43	17.77
	8H	15.37	16.00	16.38	17.02	18.35	14.86	15.49	15.88	16.51	17.85
	12H	15.41	16.01	16.43	17.03	18.38	14.90	15.50	15.92	16.52	17.88
4H	2H	13.08	13.80	14.09	14.80	16.13	12.73	13.45	13.73	14.45	15.77
	3H	14.94	15.54	15.95	16.57	17.91	14.54	15.14	15.55	16.16	17.50
	4H	15.65	16.20	16.67	17.22	18.58	15.23	15.78	16.25	16.80	18.16
	6H	16.16	16.64	17.19	17.68	19.04	15.73	16.20	16.76	17.25	18.61
	8H	16.31	16.75	17.34	17.79	19.16	15.87	16.31	16.90	17.35	18.72
	12H	16.38	16.78	17.43	17.83	19.21	15.93	16.33	16.98	17.38	18.76
8H	4H	15.84	16.29	16.88	17.32	18.70	15.47	15.91	16.50	16.95	18.32
	6H	16.47	16.83	17.52	17.91	19.28	16.09	16.45	17.14	17.53	18.90
	8H	16.69	17.01	17.75	18.07	19.46	16.29	16.61	17.36	17.68	19.07
	12H	16.81	17.10	17.88	18.15	19.59	16.40	16.69	17.47	17.74	19.18
12H	4H	15.83	16.23	16.88	17.28	18.66	15.46	15.86	16.51	16.91	18.29
	6H	16.50	16.82	17.56	17.88	19.27	16.12	16.45	17.19	17.51	18.90
	8H	16.73	17.02	17.80	18.07	19.51	16.35	16.64	17.42	17.69	19.13