

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903991

Luminaire Tested: DFN2DIP-SQ4F0-070D100US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903991
REPORT IS A COMBINATION OF REPORTS P901654 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-070D100US830-RLLONL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14939.3 lumens
Efficiency: N/A
Efficacy: 109.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 136
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903991

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US830-RLLONL

Luminous Intensity Polar Plot

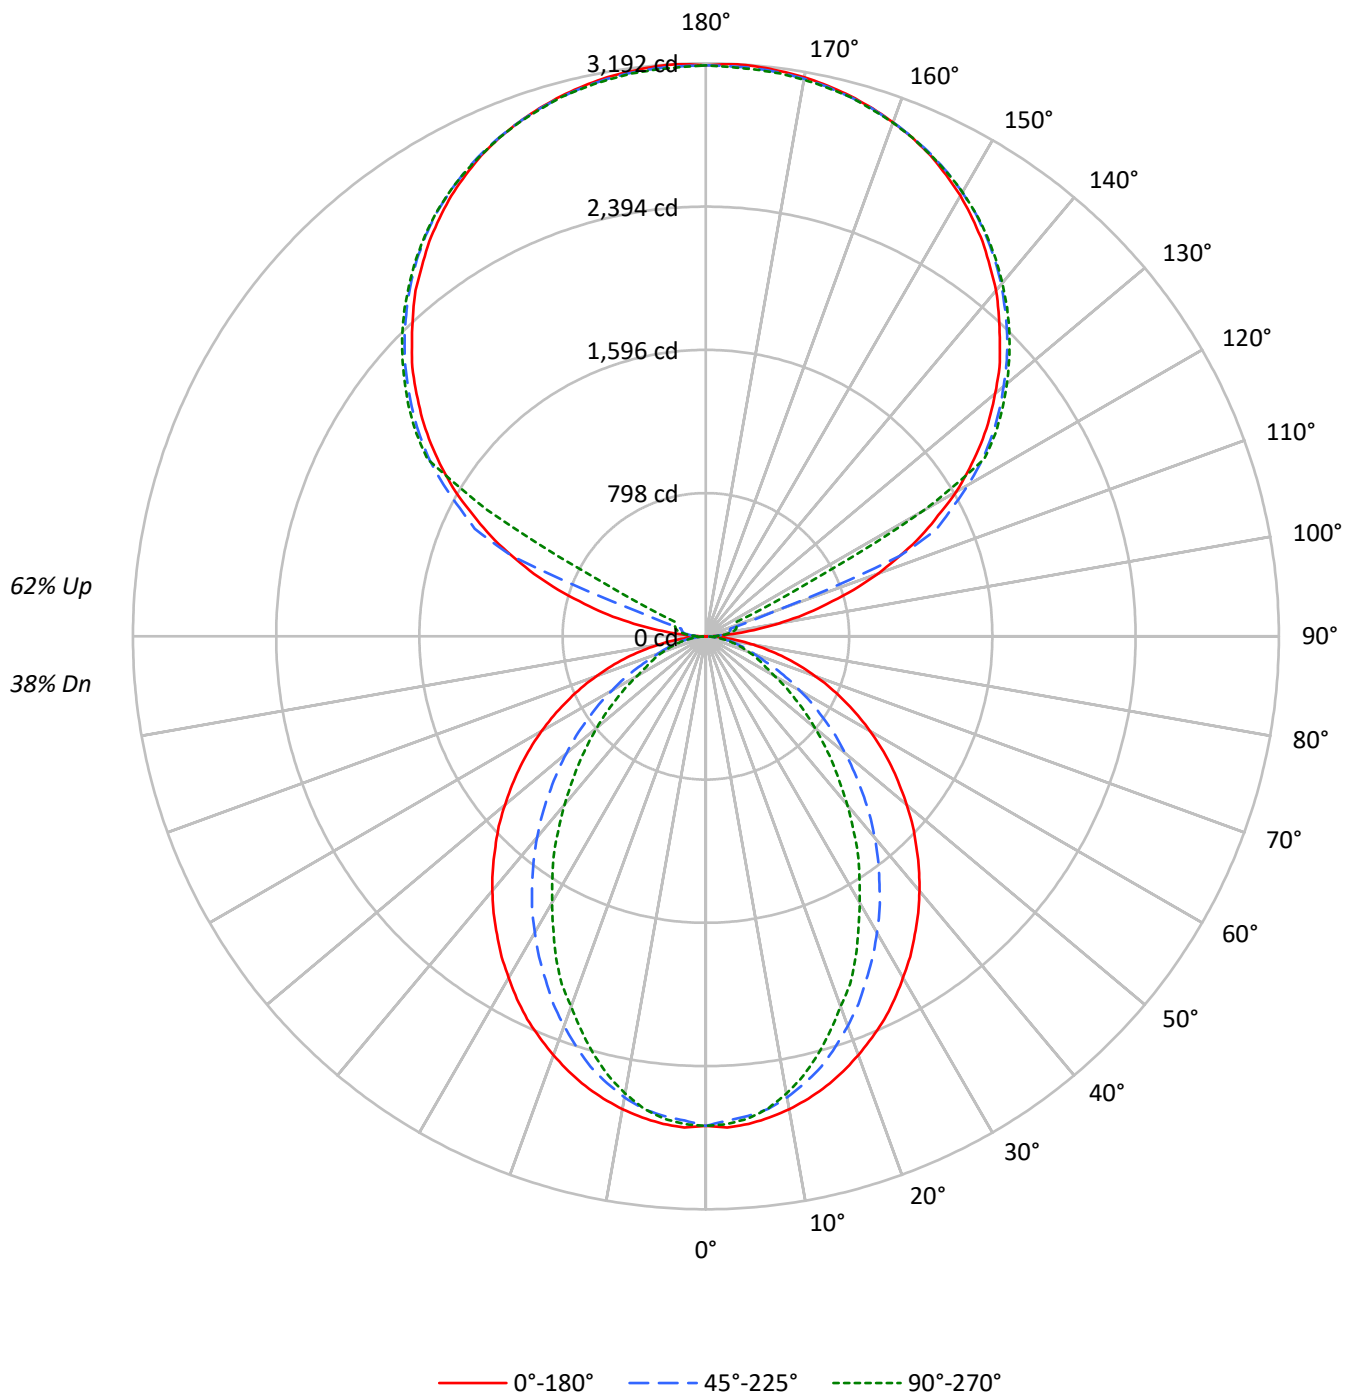

TEST NUMBER: P903991

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	76	76	76	60	60	60	45	45	45
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	21	19
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1913	1913	1913
5°	1916	1883	1896
10°	1897	1847	1834
15°	1871	1786	1740
20°	1837	1702	1623
25°	1801	1608	1510
30°	1754	1512	1367
35°	1707	1408	1242
40°	1660	1301	1098
45°	1605	1182	967
50°	1548	1062	839
55°	1488	933	717
60°	1419	798	590
65°	1340	662	532
70°	1244	534	482
75°	1124	472	440
80°	949	397	384
85°	661	267	292

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1704 cd/sqm

TEST NUMBER: P903991

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.6	1.7
10°-20°	701.6	4.7
20°-30°	985.0	6.6
30°-40°	1073.7	7.2
40°-50°	986.9	6.6
50°-60°	775.0	5.2
60°-70°	504.5	3.4
70°-80°	259.7	1.7
80°-90°	71.9	0.5
90°-100°	104.9	0.7
100°-110°	391.0	2.6
110°-120°	1037.0	6.9
120°-130°	1720.0	11.5
130°-140°	1827.0	12.2
140°-150°	1698.0	11.4
150°-160°	1365.2	9.1
160°-170°	879.7	5.9
170°-180°	302.8	2.0
0°-30°	1942.1	13.0
0°-40°	3015.8	20.2
0°-60°	4777.7	32.0
0°-90°	5613.7	37.6
90°-120°	1532.9	10.3
90°-150°	6778.0	45.4
90°-180°	9326.0	62.4
0°-180°	14939.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2727	2727	2727	2727	2727	
5°	2727	2714	2682	2705	2697	259
15°	2594	2566	2483	2436	2411	731
25°	2354	2275	2112	2011	1974	1083
35°	2028	1903	1686	1530	1476	1270
45°	1658	1493	1234	1059	999	1281
55°	1261	1068	802	654	607	1127
65°	851	651	429	346	338	844
75°	454	281	197	180	178	480
85°	106	54	47	47	47	122
90°	2	28	46	58	62	14
95°	150	74	90	101	99	177
105°	700	769	140	166	175	748
115°	1323	1362	1420	354	189	1303
125°	1871	1901	1945	1961	1968	1669
135°	2316	2352	2373	2396	2392	1789
145°	2686	2684	2723	2739	2728	1680
155°	2958	2937	2965	2978	2960	1363
165°	3116	3103	3110	3126	3110	880
175°	3188	3172	3176	3192	3170	303
180°	3181	3181	3181	3181	3181	

TEST NUMBER: P903991

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2726.9	2726.9	2726.9	2726.9	2726.9
2.5°	2739.1	2726.9	2699.6	2724.5	2719.5
5°	2726.9	2714.5	2682.4	2704.6	2697.3
7.5°	2704.6	2689.9	2655.4	2665.0	2652.8
10°	2675.0	2657.8	2608.5	2600.9	2586.2
12.5°	2638.1	2615.8	2549.1	2534.4	2507.2
15°	2593.6	2566.4	2482.6	2435.7	2411.1
17.5°	2541.8	2502.3	2398.6	2344.3	2304.8
20°	2482.6	2433.1	2309.8	2248.2	2193.8
22.5°	2418.5	2361.6	2218.4	2134.6	2097.7
25°	2354.3	2275.2	2112.3	2011.3	1974.2
27.5°	2277.8	2193.8	2013.6	1897.7	1840.9
30°	2196.4	2102.4	1905.0	1779.3	1712.6
32.5°	2117.3	2003.8	1801.6	1653.4	1591.6
35°	2028.5	1902.6	1685.6	1530.1	1475.6
37.5°	1942.2	1806.3	1577.0	1406.5	1345.0
40°	1850.8	1702.9	1463.3	1288.2	1224.0
42.5°	1757.1	1599.2	1349.9	1167.2	1105.7
45°	1658.4	1492.9	1234.0	1058.6	999.4
47.5°	1564.6	1389.5	1122.9	947.5	893.3
50°	1460.9	1285.8	1014.3	843.9	792.3
52.5°	1359.6	1174.5	910.6	747.7	700.9
55°	1260.9	1068.5	801.9	654.0	607.2
57.5°	1159.9	962.4	705.9	567.6	528.1
60°	1056.2	858.8	604.5	478.9	439.3
62.5°	955.1	757.7	518.1	399.8	380.1
65°	851.4	651.4	429.4	345.6	338.0
67.5°	752.7	552.7	345.6	303.4	296.1
70°	649.0	456.6	286.2	261.6	251.6
72.5°	550.4	367.6	239.3	219.7	214.7
75°	454.0	281.2	197.4	180.1	177.8
77.5°	357.9	199.7	155.5	145.5	140.6
80°	268.9	143.2	118.4	108.7	108.7
82.5°	187.5	96.3	81.4	76.4	76.4
85°	106.0	54.2	46.8	46.8	46.8
87.5°	39.5	19.6	19.6	17.2	17.2
90°	2.2	27.6	45.9	57.7	62.0
92.5°	57.7	48.4	55.2	59.9	62.0
95°	149.5	73.5	89.6	101.4	99.0
97.5°	269.2	80.6	117.3	124.3	126.6
100°	407.6	92.1	131.2	149.5	154.2
102.5°	559.2	554.9	135.8	161.0	168.1
105°	699.7	768.8	140.5	165.6	174.9
107.5°	863.2	920.6	145.2	170.3	179.6
110°	1019.7	1067.9	402.8	172.8	181.7

TEST NUMBER: P903991

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1167.1	1208.3	1169.3	177.1	184.3
115°	1323.4	1362.5	1420.2	354.5	188.9
117.5°	1459.2	1505.2	1544.5	1215.2	612.3
120°	1611.3	1645.7	1687.2	1714.9	1404.1
122.5°	1740.0	1776.9	1823.1	1836.7	1839.2
125°	1871.2	1901.3	1945.0	1961.1	1967.9
127.5°	1990.9	2023.2	2057.9	2080.9	2083.0
130°	2103.8	2140.7	2165.9	2191.2	2189.1
132.5°	2218.8	2248.9	2274.1	2294.8	2292.6
135°	2315.6	2352.5	2373.0	2396.2	2391.6
137.5°	2416.8	2444.4	2467.6	2490.6	2483.7
140°	2515.6	2534.3	2559.4	2580.2	2568.7
142.5°	2598.8	2614.9	2644.7	2663.0	2651.6
145°	2686.2	2683.8	2722.9	2739.0	2727.5
147.5°	2761.9	2755.1	2794.2	2805.7	2796.7
150°	2835.7	2819.6	2856.6	2870.2	2858.7
152.5°	2897.8	2879.5	2914.0	2927.8	2911.7
155°	2957.7	2937.2	2964.8	2978.4	2960.1
157.5°	3006.1	2987.8	3008.5	3024.6	3006.1
160°	3047.6	3033.7	3047.6	3061.3	3045.2
162.5°	3084.2	3070.5	3082.0	3098.1	3077.4
165°	3116.4	3102.8	3109.6	3125.8	3109.6
167.5°	3141.9	3127.9	3135.1	3151.2	3130.4
170°	3162.6	3148.8	3153.4	3169.5	3148.8
172.5°	3176.3	3162.6	3167.3	3183.4	3162.6
175°	3187.8	3171.7	3176.3	3192.5	3169.5
177.5°	3192.5	3176.3	3178.8	3194.9	3174.1
180°	3181.0	3181.0	3181.0	3181.0	3181.0

TEST NUMBER: P903991

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.13	8.87	9.19	9.93	11.37	4.09	4.83	5.15	5.89	7.33
	3H	9.81	10.47	10.88	11.54	13.00	5.27	5.93	6.35	7.00	8.46
	4H	10.41	11.04	11.50	12.11	13.58	5.72	6.35	6.80	7.42	8.88
	6H	10.83	11.41	11.93	12.48	13.96	6.04	6.61	7.13	7.69	9.17
	8H	10.96	11.51	12.06	12.60	14.07	6.13	6.67	7.22	7.76	9.24
	12H	11.02	11.54	12.12	12.62	14.12	6.17	6.69	7.27	7.77	9.26
4H	2H	8.14	8.76	9.23	9.84	11.30	4.68	5.30	5.77	6.38	7.84
	3H	9.96	10.48	11.06	11.58	13.06	6.02	6.54	7.12	7.64	9.12
	4H	10.66	11.13	11.76	12.22	13.72	6.57	7.04	7.67	8.13	9.63
	6H	11.17	11.58	12.28	12.69	14.18	6.98	7.39	8.09	8.50	9.99
	8H	11.35	11.73	12.45	12.83	14.34	7.11	7.49	8.22	8.59	10.10
	12H	11.44	11.78	12.56	12.90	14.41	7.17	7.51	8.30	8.63	10.14
8H	4H	10.62	11.00	11.73	12.10	13.61	6.84	7.22	7.95	8.33	9.84
	6H	11.18	11.50	12.31	12.65	14.15	7.36	7.67	8.49	8.82	10.32
	8H	11.40	11.68	12.54	12.81	14.33	7.55	7.82	8.69	8.95	10.48
	12H	11.54	11.78	12.68	12.91	14.47	7.67	7.91	8.81	9.03	10.59
12H	4H	10.56	10.91	11.69	12.03	13.54	6.84	7.19	7.97	8.31	9.82
	6H	11.16	11.43	12.30	12.56	14.09	7.41	7.68	8.55	8.81	10.34
	8H	11.38	11.62	12.52	12.74	14.31	7.62	7.86	8.76	8.98	10.54