

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917629

Luminaire Tested: DFN2DIP-SQ4F0-070D100US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917629
REPORT IS A COMBINATION OF REPORTS P901653 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-070D100US930-FLLONL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13721.5 lumens
Efficiency: N/A
Efficacy: 100.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 136
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917629

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US930-FLLONL

Luminous Intensity Polar Plot

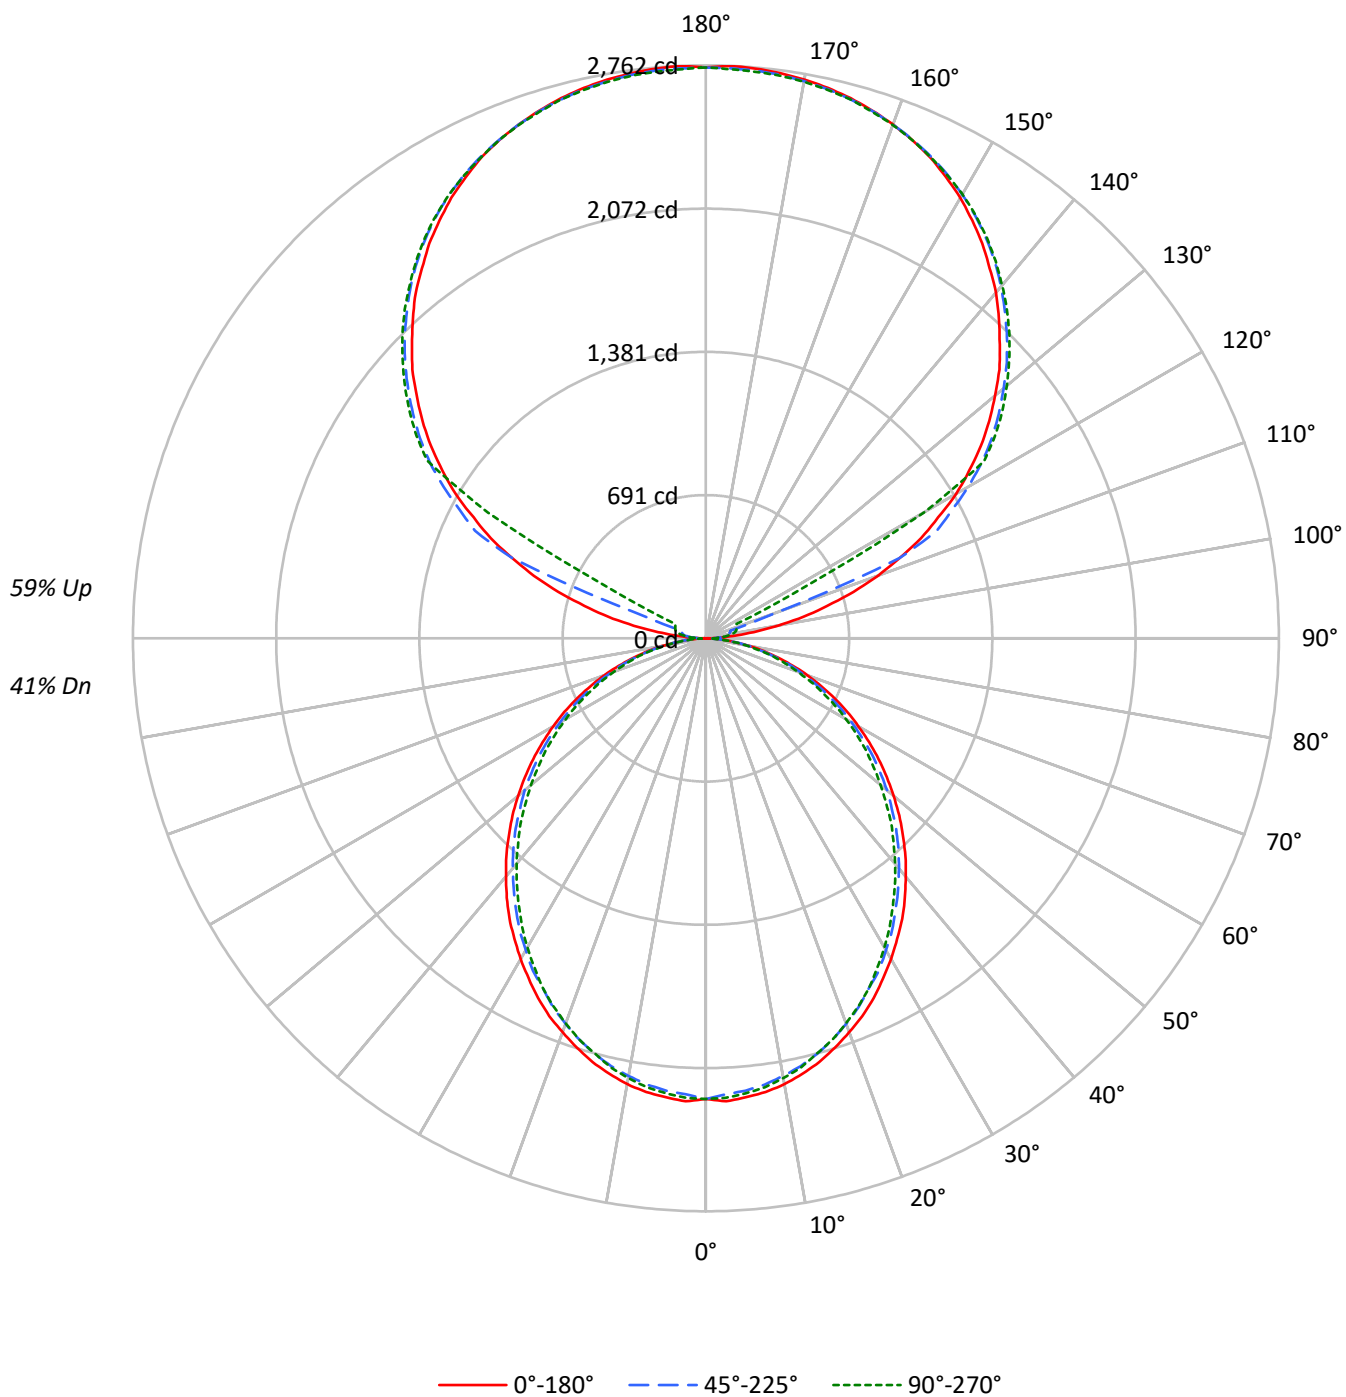

TEST NUMBER: P917629

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US930-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48
1	96	92	88	84	87	84	80	77	69	66	64	55	54	52	42	41	41
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34
3	80	70	63	57	72	64	58	53	53	49	45	43	39	37	33	31	29
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22
6	61	50	42	36	56	46	38	33	38	33	29	31	27	24	24	21	19
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15
9	49	37	30	25	45	34	27	23	29	23	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1558	1558	1558
5°	1561	1537	1547
10°	1548	1516	1527
15°	1525	1492	1494
20°	1494	1457	1461
25°	1464	1416	1423
30°	1425	1378	1374
35°	1389	1333	1323
40°	1344	1287	1273
45°	1300	1241	1223
50°	1251	1193	1165
55°	1200	1138	1112
60°	1142	1072	1050
65°	1079	1004	978
70°	999	921	901
75°	888	821	830
80°	754	695	693
85°	545	475	466

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1473 cd/sqm

TEST NUMBER: P917629

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US930-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.0	1.5
10°-20°	588.1	4.3
20°-30°	864.2	6.3
30°-40°	1003.7	7.3
40°-50°	1002.5	7.3
50°-60°	874.2	6.4
60°-70°	646.2	4.7
70°-80°	365.6	2.7
80°-90°	101.3	0.7
90°-100°	90.7	0.7
100°-110°	338.2	2.5
110°-120°	897.0	6.5
120°-130°	1487.8	10.8
130°-140°	1580.4	11.5
140°-150°	1468.8	10.7
150°-160°	1180.9	8.6
160°-170°	760.9	5.5
170°-180°	261.9	1.9
0°-30°	1661.3	12.1
0°-40°	2665.1	19.4
0°-60°	4541.7	33.1
0°-90°	5654.9	41.2
90°-120°	1326.0	9.7
90°-150°	5862.9	42.7
90°-180°	8067.0	58.8
0°-180°	13721.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2221	2221	2221	2221	2221	
5°	2221	2212	2189	2206	2202	211
15°	2114	2101	2073	2082	2071	595
25°	1913	1896	1860	1864	1860	880
35°	1651	1629	1595	1582	1572	1031
45°	1343	1328	1296	1273	1264	1037
55°	1016	1004	978	952	942	909
65°	686	673	651	632	621	678
75°	359	355	344	331	335	383
85°	88	85	83	77	75	98
90°	2	24	40	50	54	13
95°	129	64	78	88	86	153
105°	605	665	122	143	151	647
115°	1145	1179	1228	307	163	1127
125°	1619	1645	1682	1696	1702	1444
135°	2003	2035	2053	2073	2069	1547
145°	2324	2322	2355	2369	2359	1453
155°	2558	2541	2564	2576	2560	1179
165°	2696	2684	2690	2704	2690	762
175°	2757	2744	2748	2762	2742	262
180°	2752	2752	2752	2752	2752	

TEST NUMBER: P917629

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2220.6	2220.6	2220.6	2220.6	2220.6
2.5°	2233.6	2222.9	2199.3	2220.6	2216.6
5°	2220.6	2212.3	2188.7	2205.7	2201.6
7.5°	2205.7	2193.0	2169.4	2186.7	2182.4
10°	2182.4	2167.4	2141.8	2158.8	2152.5
12.5°	2150.2	2137.5	2111.9	2122.5	2118.2
15°	2114.0	2101.3	2073.4	2082.0	2071.3
17.5°	2069.1	2056.4	2028.5	2039.2	2028.5
20°	2019.9	2007.3	1977.3	1983.7	1975.3
22.5°	1971.0	1951.7	1923.9	1923.9	1919.5
25°	1913.3	1896.2	1860.0	1864.1	1860.0
27.5°	1849.1	1834.2	1806.5	1800.2	1789.5
30°	1785.3	1768.0	1736.1	1729.7	1721.1
32.5°	1716.8	1704.1	1669.9	1657.0	1648.4
35°	1650.7	1629.4	1595.1	1582.2	1571.6
37.5°	1575.9	1556.6	1522.4	1507.5	1496.8
40°	1499.1	1481.9	1447.6	1428.6	1420.0
42.5°	1424.3	1407.1	1373.1	1351.6	1338.9
45°	1343.2	1328.3	1296.1	1272.8	1264.1
47.5°	1264.1	1249.2	1215.0	1191.4	1178.8
50°	1180.8	1170.1	1140.2	1110.4	1099.7
52.5°	1099.7	1084.8	1057.1	1033.6	1018.6
55°	1016.5	1003.6	978.0	952.4	941.8
57.5°	933.2	922.5	894.6	869.0	860.5
60°	849.8	841.4	811.5	788.0	781.6
62.5°	768.7	753.7	732.5	711.2	702.5
65°	685.6	672.6	651.3	632.1	621.4
67.5°	600.1	589.3	570.2	555.3	546.7
70°	521.1	512.5	493.2	478.3	469.9
72.5°	439.9	431.4	420.7	405.8	399.4
75°	358.6	354.6	343.6	331.0	335.3
77.5°	286.2	277.5	273.2	266.8	260.6
80°	213.6	211.4	207.1	200.7	196.4
82.5°	145.2	145.2	143.2	134.6	134.6
85°	87.5	85.4	83.4	76.8	74.8
87.5°	38.5	34.2	29.9	23.6	21.3
90°	1.9	23.9	39.7	49.9	53.6
92.5°	49.9	41.8	47.8	51.8	53.6
95°	129.3	63.6	77.5	87.7	85.6
97.5°	232.8	69.7	101.4	107.5	109.5
100°	352.5	79.7	113.5	129.3	133.4
102.5°	483.7	480.0	117.5	139.3	145.4
105°	605.3	665.0	121.6	143.2	151.3
107.5°	746.7	796.3	125.6	147.3	155.3
110°	882.1	923.7	348.5	149.4	157.2

TEST NUMBER: P917629

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1009.5	1045.2	1011.5	153.2	159.4
115°	1144.8	1178.6	1228.5	306.6	163.4
117.5°	1262.2	1302.0	1336.0	1051.2	529.6
120°	1393.8	1423.5	1459.5	1483.4	1214.5
122.5°	1505.1	1537.0	1576.9	1588.8	1590.9
125°	1618.6	1644.6	1682.4	1696.4	1702.3
127.5°	1722.2	1750.0	1780.0	1799.9	1801.8
130°	1819.7	1851.7	1873.5	1895.4	1893.5
132.5°	1919.3	1945.3	1967.1	1985.0	1983.1
135°	2003.0	2034.9	2052.7	2072.7	2068.7
137.5°	2090.5	2114.4	2134.5	2154.3	2148.4
140°	2176.0	2192.2	2213.9	2231.9	2221.9
142.5°	2247.9	2261.9	2287.6	2303.5	2293.6
145°	2323.6	2321.5	2355.3	2369.3	2359.3
147.5°	2389.1	2383.2	2417.0	2426.9	2419.2
150°	2452.9	2439.0	2470.9	2482.7	2472.8
152.5°	2506.6	2490.7	2520.6	2532.6	2518.6
155°	2558.4	2540.6	2564.5	2576.3	2560.5
157.5°	2600.2	2584.4	2602.4	2616.3	2600.2
160°	2636.2	2624.1	2636.2	2648.0	2634.1
162.5°	2667.8	2656.0	2665.9	2679.9	2661.9
165°	2695.7	2683.9	2689.8	2703.8	2689.8
167.5°	2717.7	2705.6	2711.8	2725.8	2707.8
170°	2735.7	2723.7	2727.7	2741.6	2723.7
172.5°	2747.5	2735.7	2739.7	2753.7	2735.7
175°	2757.4	2743.5	2747.5	2761.5	2741.6
177.5°	2761.5	2747.5	2749.7	2763.6	2745.6
180°	2751.6	2751.6	2751.6	2751.6	2751.6

TEST NUMBER: P917629

CATALOG NUMBER: DFN2DIP-SQ4F0-070D100US930-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.95	8.74	8.98	9.78	11.17	7.51	8.30	8.54	9.33	10.73
	3H	9.61	10.32	10.65	11.36	12.78	9.12	9.83	10.16	10.87	12.29
	4H	10.20	10.87	11.25	11.92	13.34	9.71	10.38	10.76	11.42	12.84
	6H	10.60	11.22	11.66	12.27	13.70	10.10	10.72	11.16	11.77	13.20
	8H	10.70	11.29	11.77	12.36	13.78	10.20	10.79	11.27	11.86	13.28
	12H	10.75	11.31	11.82	12.37	13.82	10.24	10.80	11.31	11.86	13.31
4H	2H	8.41	9.08	9.46	10.12	11.54	8.05	8.72	9.11	9.77	11.19
	3H	10.27	10.83	11.34	11.90	13.34	9.86	10.42	10.93	11.50	12.93
	4H	10.99	11.50	12.06	12.56	14.02	10.56	11.07	11.63	12.14	13.59
	6H	11.50	11.94	12.58	13.03	14.48	11.07	11.51	12.15	12.60	14.04
	8H	11.65	12.06	12.73	13.14	14.61	11.21	11.62	12.29	12.71	14.17
	12H	11.72	12.09	12.82	13.19	14.66	11.27	11.64	12.37	12.74	14.21
8H	4H	11.18	11.59	12.26	12.67	14.13	10.80	11.21	11.88	12.29	13.76
	6H	11.81	12.15	12.91	13.27	14.73	11.43	11.77	12.53	12.89	14.35
	8H	12.03	12.33	13.14	13.44	14.92	11.64	11.94	12.75	13.04	14.52
	12H	12.16	12.43	13.28	13.53	15.05	11.75	12.01	12.87	13.12	14.63
12H	4H	11.16	11.53	12.26	12.63	14.09	10.79	11.16	11.89	12.26	13.73
	6H	11.84	12.14	12.95	13.24	14.72	11.47	11.77	12.58	12.87	14.35
	8H	12.08	12.34	13.20	13.44	14.96	11.70	11.96	12.81	13.06	14.58