

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912585

Luminaire Tested: DFN2DIP-TR3F0-040D060US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912585
REPORT IS A COMBINATION OF REPORTS P901836 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-040D060US850-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10358.0 lumens
Efficiency: N/A
Efficacy: 129.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 80.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912585

CATALOG NUMBER: DFN2DIP-TR3F0-040D060US850-RLLONL

Luminous Intensity Polar Plot

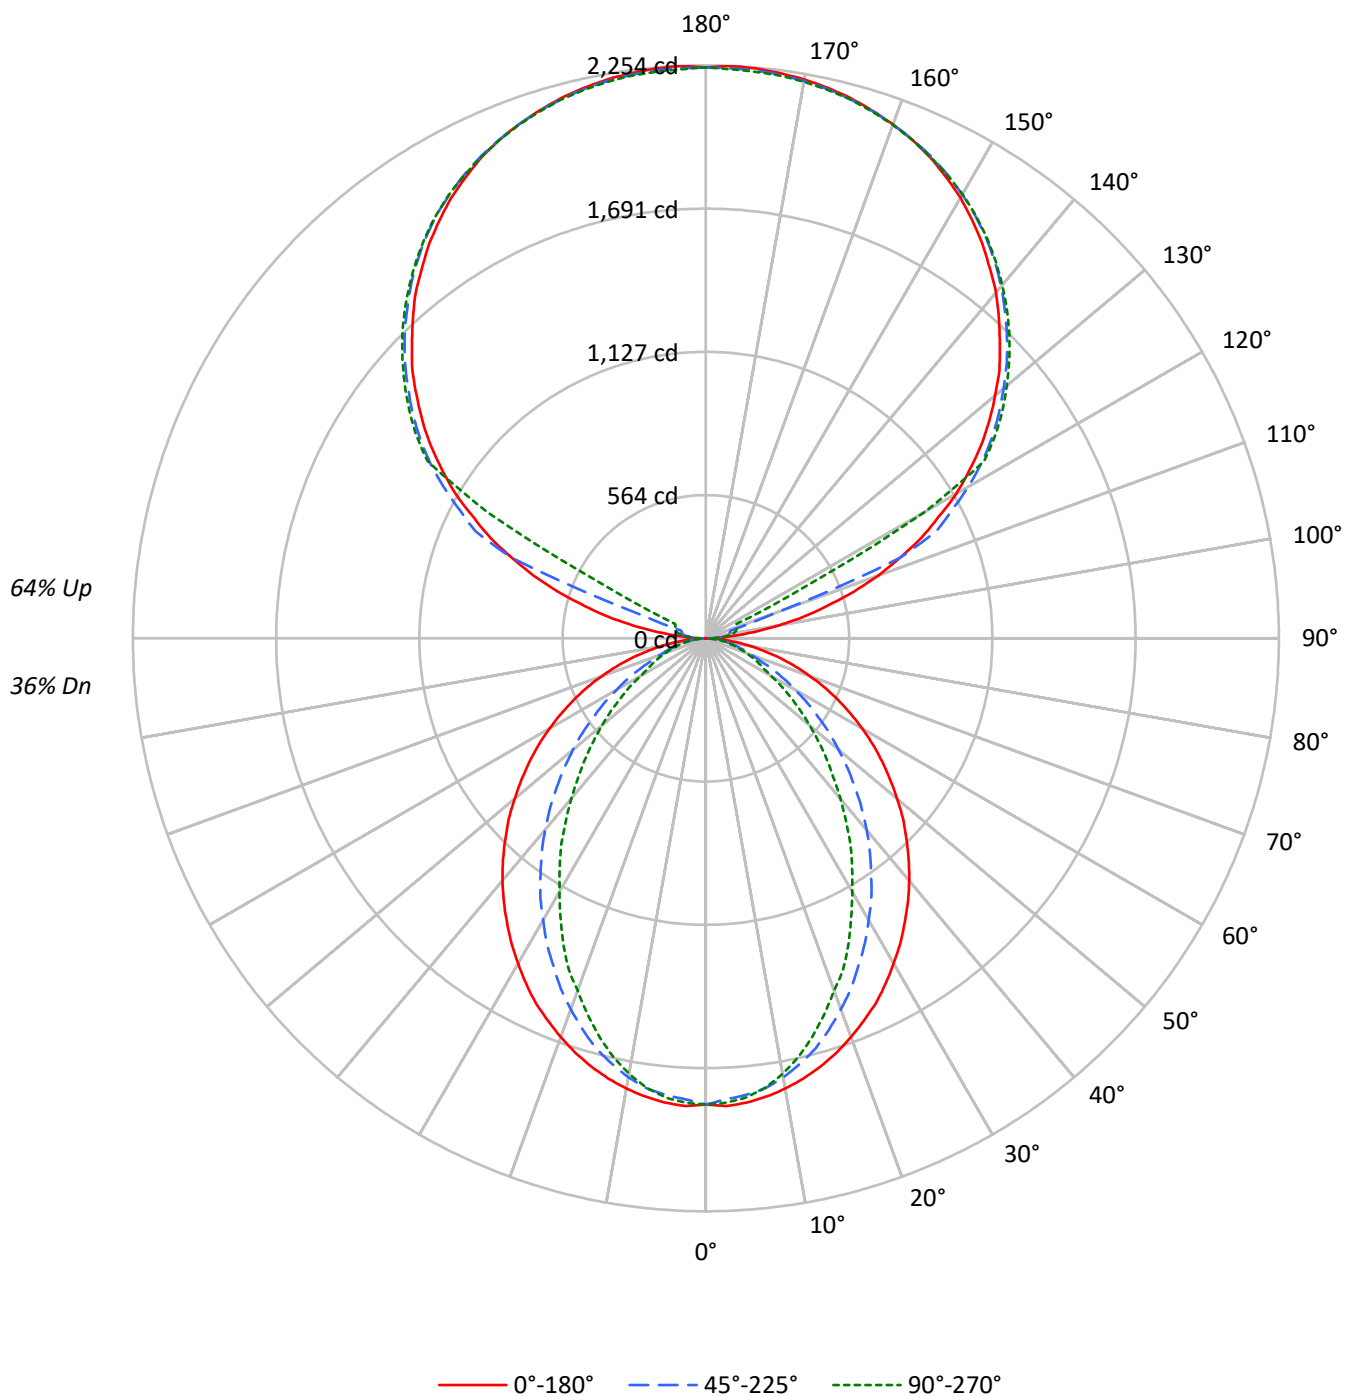

TEST NUMBER: P912585

CATALOG NUMBER: DFN2DIP-TR3F0-040D060US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44
1	95	91	87	84	86	83	80	77	67	65	63	52	51	50	39	38	38
2	87	80	74	69	78	73	68	63	59	56	53	46	44	42	35	33	32
3	79	70	63	58	72	64	58	53	52	48	45	41	38	36	31	29	28
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	25	23	21
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15
9	49	37	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14
10	46	34	27	23	42	32	25	21	26	22	18	22	18	15	17	14	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2285	2285	2285
5°	2287	2246	2261
10°	2263	2200	2186
15°	2231	2126	2071
20°	2188	2024	1930
25°	2145	1910	1794
30°	2087	1793	1623
35°	2030	1668	1472
40°	1972	1538	1299
45°	1905	1395	1142
50°	1835	1250	990
55°	1762	1096	843
60°	1678	935	692
65°	1581	771	621
70°	1463	619	560
75°	1314	541	507
80°	1100	448	434
85°	749	290	318

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1905 cd/sqm

TEST NUMBER: P912585

CATALOG NUMBER: DFN2DIP-TR3F0-040D060US850-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.8	1.7
10°-20°	471.7	4.6
20°-30°	662.3	6.4
30°-40°	721.9	7.0
40°-50°	663.5	6.4
50°-60°	521.1	5.0
60°-70°	339.2	3.3
70°-80°	174.6	1.7
80°-90°	48.5	0.5
90°-100°	74.1	0.7
100°-110°	276.0	2.7
110°-120°	732.1	7.1
120°-130°	1214.2	11.7
130°-140°	1289.8	12.5
140°-150°	1198.7	11.6
150°-160°	963.8	9.3
160°-170°	621.0	6.0
170°-180°	213.7	2.1
0°-30°	1305.8	12.6
0°-40°	2027.7	19.6
0°-60°	3212.2	31.0
0°-90°	3774.5	36.4
90°-120°	1082.2	10.4
90°-150°	4785.0	46.2
90°-180°	6583.0	63.6
0°-180°	10358.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1833	1833	1833	1833	1833	
5°	1833	1825	1804	1818	1814	174
15°	1744	1726	1669	1638	1621	491
25°	1583	1530	1420	1352	1327	728
35°	1364	1279	1133	1029	992	854
45°	1115	1004	830	712	672	861
55°	848	718	539	440	408	758
65°	572	438	289	232	227	568
75°	305	189	133	121	120	323
85°	71	36	32	32	32	82
90°	2	20	32	41	44	10
95°	106	52	63	72	70	125
105°	494	543	99	117	124	528
115°	934	962	1003	250	133	920
125°	1321	1342	1373	1384	1389	1178
135°	1635	1661	1675	1692	1688	1263
145°	1896	1895	1922	1934	1926	1186
155°	2088	2074	2093	2103	2090	962
165°	2200	2190	2195	2207	2195	622
175°	2250	2239	2242	2254	2238	214
180°	2246	2246	2246	2246	2246	

TEST NUMBER: P912585

CATALOG NUMBER: DFN2DIP-TR3F0-040D060US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1833.4	1833.4	1833.4	1833.4	1833.4
2.5°	1841.7	1833.4	1815.1	1831.8	1828.4
5°	1833.4	1825.1	1803.5	1818.4	1813.5
7.5°	1818.4	1808.6	1785.4	1791.8	1783.6
10°	1798.6	1786.9	1753.8	1748.7	1738.9
12.5°	1773.7	1758.8	1713.8	1704.0	1685.7
15°	1743.8	1725.5	1669.2	1637.7	1621.1
17.5°	1709.0	1682.4	1612.6	1576.2	1549.6
20°	1669.2	1635.9	1552.9	1511.6	1475.0
22.5°	1626.0	1587.9	1491.5	1435.2	1410.4
25°	1582.9	1529.8	1420.2	1352.3	1327.3
27.5°	1531.5	1475.0	1353.9	1275.9	1237.6
30°	1476.7	1413.5	1280.8	1196.3	1151.5
32.5°	1423.6	1347.2	1211.2	1111.7	1070.1
35°	1364.0	1279.2	1133.3	1028.7	992.1
37.5°	1305.8	1214.5	1060.2	945.6	904.3
40°	1244.4	1144.9	983.9	866.1	823.0
42.5°	1181.3	1075.2	907.6	784.7	743.4
45°	1115.0	1003.8	829.6	711.8	671.9
47.5°	1052.0	934.2	755.0	637.1	600.6
50°	982.2	864.5	681.9	567.4	532.7
52.5°	914.1	789.7	612.3	502.7	471.2
55°	847.8	718.4	539.2	439.7	408.2
57.5°	779.8	647.1	474.5	381.6	355.1
60°	710.1	577.3	406.4	321.9	295.4
62.5°	642.2	509.5	348.3	268.8	255.6
65°	572.5	437.9	288.7	232.3	227.2
67.5°	506.1	371.6	232.3	204.1	199.1
70°	436.4	307.0	192.4	175.9	169.1
72.5°	370.1	247.2	160.9	147.7	144.4
75°	305.2	189.1	132.7	121.1	119.6
77.5°	240.7	134.3	104.6	97.9	94.5
80°	180.8	96.3	79.5	73.1	73.1
82.5°	126.1	64.8	54.8	51.3	51.3
85°	71.3	36.5	31.5	31.5	31.5
87.5°	26.6	13.2	13.2	11.6	11.6
90°	1.6	19.5	32.4	40.7	43.8
92.5°	40.7	34.2	38.9	42.3	43.8
95°	105.6	51.9	63.3	71.6	69.9
97.5°	190.1	56.9	82.7	87.8	89.4
100°	287.7	65.0	92.6	105.6	108.8
102.5°	394.8	391.7	95.9	113.7	118.7
105°	493.9	542.7	99.1	116.9	123.5
107.5°	609.4	649.9	102.5	120.2	126.8
110°	720.0	753.9	284.5	122.0	128.3

TEST NUMBER: P912585

CATALOG NUMBER: DFN2DIP-TR3F0-040D060US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	823.9	853.0	825.4	125.0	130.1
115°	934.3	961.9	1002.6	250.3	133.3
117.5°	1030.2	1062.6	1090.4	857.9	432.2
120°	1137.5	1161.8	1191.2	1210.6	991.2
122.5°	1228.3	1254.4	1287.0	1296.6	1298.4
125°	1321.0	1342.2	1373.1	1384.5	1389.2
127.5°	1405.5	1428.3	1452.8	1469.0	1470.5
130°	1485.2	1511.2	1529.0	1546.9	1545.4
132.5°	1566.5	1587.6	1605.4	1620.0	1618.5
135°	1634.8	1660.8	1675.3	1691.7	1688.3
137.5°	1706.1	1725.6	1742.0	1758.2	1753.4
140°	1776.0	1789.1	1806.9	1821.5	1813.4
142.5°	1834.6	1846.0	1867.1	1880.0	1871.9
145°	1896.4	1894.6	1922.2	1933.7	1925.6
147.5°	1949.8	1945.0	1972.6	1980.7	1974.4
150°	2002.0	1990.5	2016.6	2026.3	2018.2
152.5°	2045.8	2032.8	2057.1	2067.0	2055.5
155°	2088.0	2073.5	2093.0	2102.7	2089.7
157.5°	2122.2	2109.2	2123.8	2135.3	2122.2
160°	2151.5	2141.6	2151.5	2161.1	2149.8
162.5°	2177.3	2167.7	2175.7	2187.2	2172.5
165°	2200.1	2190.5	2195.3	2206.7	2195.3
167.5°	2218.0	2208.2	2213.2	2224.7	2209.9
170°	2232.7	2222.9	2226.2	2237.5	2222.9
172.5°	2242.4	2232.7	2236.0	2247.4	2232.7
175°	2250.5	2239.1	2242.4	2253.7	2237.5
177.5°	2253.7	2242.4	2244.1	2255.5	2240.8
180°	2245.6	2245.6	2245.6	2245.6	2245.6

TEST NUMBER: P912585

CATALOG NUMBER: DFN2DIP-TR3F0-040D060US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.55	9.28	9.62	10.35	11.81	4.53	5.26	5.60	6.33	7.78
	3H	10.21	10.86	11.29	11.94	13.41	5.70	6.36	6.78	7.43	8.91
	4H	10.81	11.43	11.90	12.51	13.99	6.15	6.76	7.24	7.84	9.32
	6H	11.22	11.79	12.32	12.87	14.36	6.46	7.03	7.56	8.11	9.60
	8H	11.34	11.88	12.44	12.98	14.46	6.54	7.08	7.65	8.18	9.67
	12H	11.39	11.91	12.50	13.00	14.51	6.58	7.09	7.69	8.18	9.69
4H	2H	8.56	9.17	9.65	10.25	11.73	5.11	5.72	6.20	6.80	8.28
	3H	10.36	10.88	11.47	11.99	13.48	6.44	6.95	7.54	8.06	9.55
	4H	11.05	11.52	12.16	12.61	14.13	6.98	7.45	8.09	8.55	10.06
	6H	11.55	11.95	12.66	13.07	14.58	7.39	7.79	8.50	8.91	10.42
	8H	11.72	12.09	12.83	13.20	14.72	7.51	7.89	8.63	9.00	10.52
	12H	11.80	12.14	12.93	13.27	14.79	7.57	7.91	8.70	9.03	10.56
8H	4H	11.01	11.38	12.12	12.49	14.01	7.25	7.62	8.36	8.74	10.26
	6H	11.56	11.87	12.69	13.02	14.54	7.75	8.06	8.89	9.22	10.74
	8H	11.77	12.04	12.91	13.17	14.71	7.94	8.21	9.08	9.35	10.88
	12H	11.90	12.13	13.04	13.26	14.84	8.05	8.29	9.20	9.42	10.99
12H	4H	10.95	11.29	12.08	12.42	13.94	7.25	7.59	8.38	8.71	10.24
	6H	11.53	11.80	12.68	12.94	14.48	7.80	8.07	8.94	9.21	10.74
	8H	11.74	11.98	12.89	13.11	14.69	8.00	8.24	9.15	9.37	10.94