

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915436

Luminaire Tested: DFN2DIP-TR3F0-090D050US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915436
REPORT IS A COMBINATION OF REPORTS P900311 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-090D050US927-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10563.8 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 132
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915436

CATALOG NUMBER: DFN2DIP-TR3F0-090D050US927-FLLFLL

Luminous Intensity Polar Plot

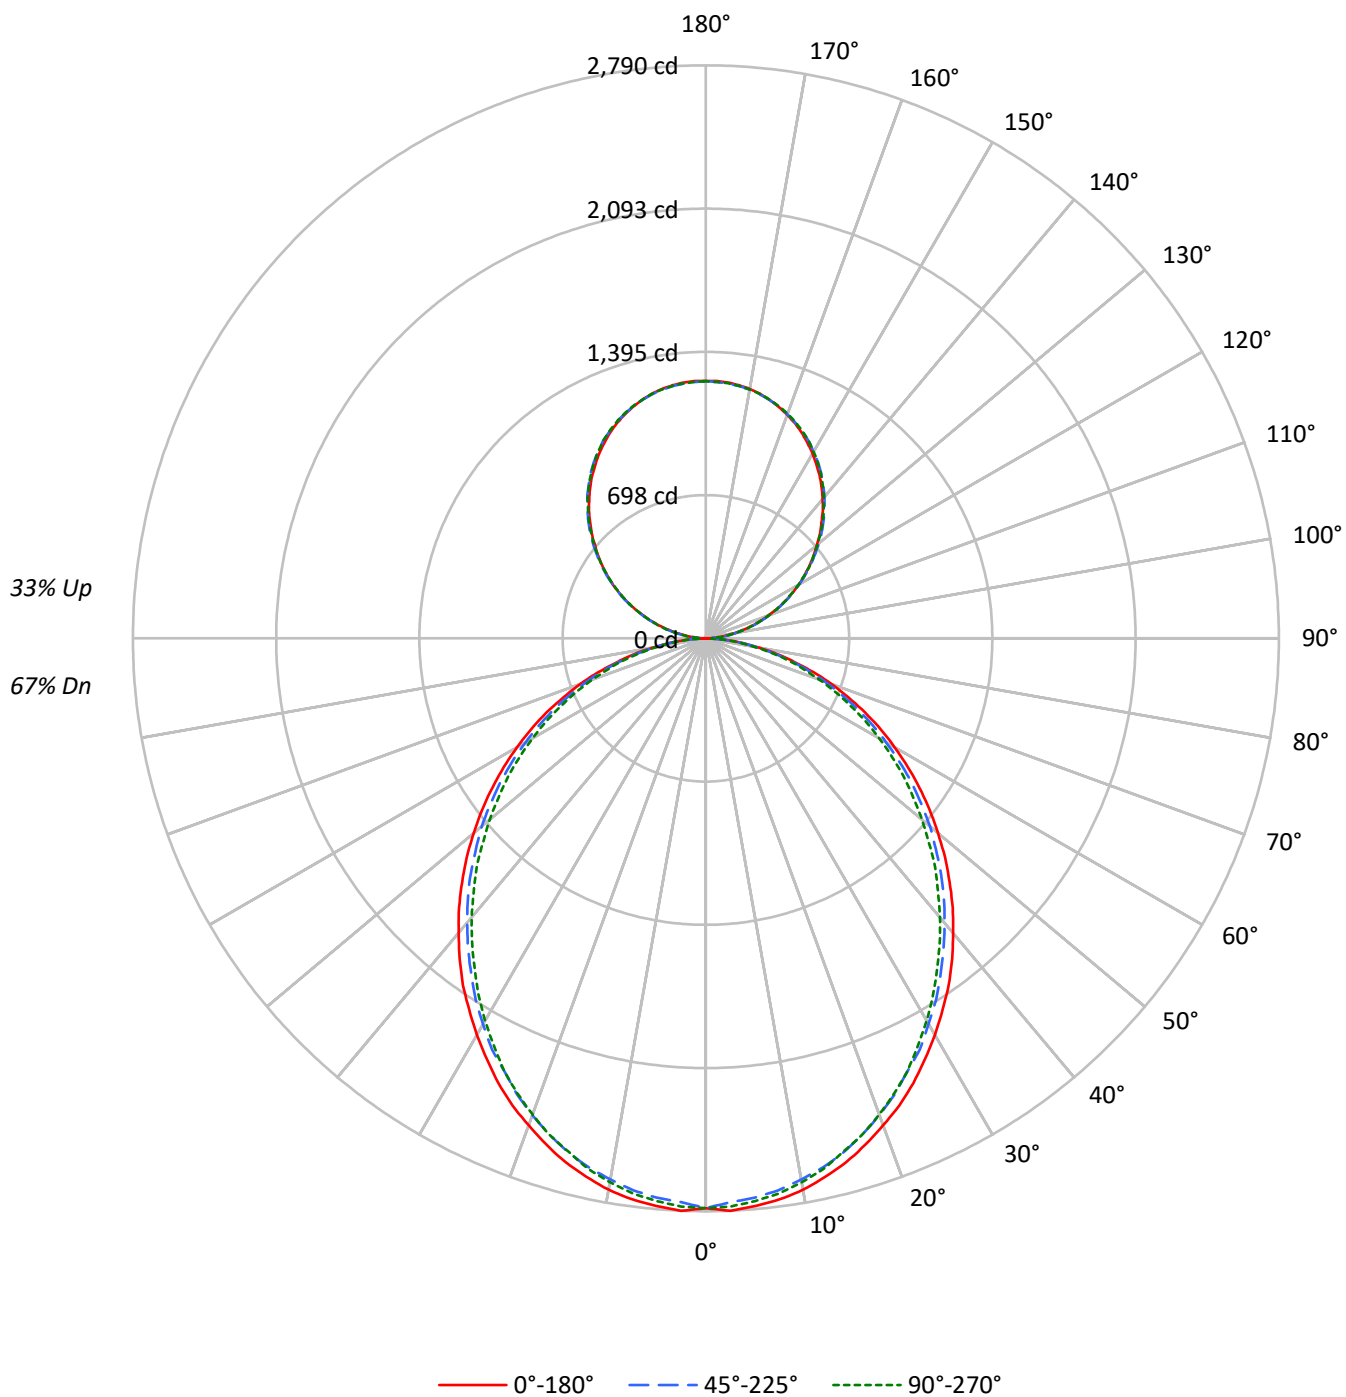

TEST NUMBER: P915436

CATALOG NUMBER: DFN2DIP-TR3F0-090D050US927-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72
1	102	97	93	90	96	92	88	85	81	79	76	72	70	68	63	62	61
2	93	85	79	73	87	80	75	70	71	67	63	63	60	57	56	53	51
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43
4	77	66	58	52	73	63	55	50	56	50	45	50	45	41	44	41	37
5	71	59	51	45	67	56	48	43	50	44	39	45	40	36	40	36	33
6	66	53	45	39	62	50	43	37	45	39	34	41	35	32	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26
8	56	44	36	30	53	42	34	29	38	32	27	34	29	25	30	26	23
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3457	3457	3457
5°	3460	3406	3429
10°	3431	3357	3381
15°	3378	3299	3306
20°	3308	3219	3229
25°	3238	3124	3141
30°	3151	3036	3030
35°	3069	2932	2912
40°	2967	2827	2800
45°	2866	2722	2685
50°	2756	2611	2552
55°	2640	2483	2429
60°	2508	2332	2288
65°	2365	2174	2123
70°	2182	1982	1943
75°	1929	1752	1775
80°	1624	1457	1459
85°	1146	960	942

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2866 cd/sqm

TEST NUMBER: P915436

CATALOG NUMBER: DFN2DIP-TR3F0-090D050US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	261.1	2.5
10°-20°	734.7	7.0
20°-30°	1079.6	10.2
30°-40°	1253.9	11.9
40°-50°	1252.4	11.9
50°-60°	1092.1	10.3
60°-70°	807.3	7.6
70°-80°	456.7	4.3
80°-90°	124.1	1.2
90°-100°	77.5	0.7
100°-110°	246.3	2.3
110°-120°	421.5	4.0
120°-130°	554.3	5.2
130°-140°	622.2	5.9
140°-150°	610.1	5.8
150°-160°	511.8	4.8
160°-170°	339.4	3.2
170°-180°	118.6	1.1
0°-30°	2075.4	19.6
0°-40°	3329.4	31.5
0°-60°	5673.8	53.7
0°-90°	7061.9	66.9
90°-120°	745.3	7.1
90°-150°	2532.0	24.0
90°-180°	3502.0	33.2
0°-180°	10563.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2774	2774	2774	2774	2774	
5°	2774	2764	2734	2756	2750	263
15°	2641	2625	2590	2601	2588	744
25°	2390	2369	2324	2329	2324	1100
35°	2062	2036	1993	1977	1963	1288
45°	1678	1659	1619	1590	1579	1295
55°	1270	1254	1222	1190	1176	1135
65°	856	840	814	790	776	847
75°	448	443	429	414	419	478
85°	109	107	104	96	93	122
90°	1	14	37	35	36	10
95°	55	66	68	68	66	61
105°	227	230	233	234	234	240
115°	423	429	427	426	423	418
125°	615	625	622	618	617	550
135°	796	807	810	809	806	615
145°	966	974	980	981	977	604
155°	1105	1108	1111	1116	1113	508
165°	1202	1201	1201	1208	1203	339
175°	1250	1247	1245	1253	1246	119
180°	1253	1253	1253	1253	1253	

TEST NUMBER: P915436

CATALOG NUMBER: DFN2DIP-TR3F0-090D050US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2774.1	2774.1	2774.1	2774.1	2774.1
2.5°	2790.3	2777.0	2747.6	2774.1	2769.1
5°	2774.1	2763.7	2734.3	2755.5	2750.4
7.5°	2755.5	2739.7	2710.2	2731.8	2726.4
10°	2726.4	2707.7	2675.7	2696.9	2689.0
12.5°	2686.1	2670.3	2638.4	2651.6	2646.3
15°	2640.9	2625.1	2590.2	2601.0	2587.7
17.5°	2584.8	2569.0	2534.2	2547.5	2534.2
20°	2523.4	2507.6	2470.2	2478.1	2467.6
22.5°	2462.3	2438.3	2403.4	2403.4	2398.0
25°	2390.1	2368.9	2323.6	2328.7	2323.6
27.5°	2310.0	2291.3	2256.8	2248.9	2235.6
30°	2230.2	2208.7	2168.8	2160.8	2150.1
32.5°	2144.8	2128.9	2086.1	2070.0	2059.3
35°	2062.1	2035.5	1992.7	1976.7	1963.3
37.5°	1968.7	1944.6	1901.9	1883.3	1869.9
40°	1872.7	1851.2	1808.5	1784.7	1774.0
42.5°	1779.3	1757.8	1715.4	1688.5	1672.7
45°	1678.0	1659.4	1619.1	1590.0	1579.3
47.5°	1579.3	1560.6	1517.8	1488.4	1472.6
50°	1475.1	1461.8	1424.4	1387.1	1373.8
52.5°	1373.8	1355.1	1320.6	1291.2	1272.5
55°	1269.9	1253.8	1221.8	1189.9	1176.5
57.5°	1165.8	1152.5	1117.7	1085.7	1074.9
60°	1061.6	1051.1	1013.8	984.4	976.4
62.5°	960.3	941.6	915.0	888.4	877.7
65°	856.4	840.3	813.6	789.6	776.3
67.5°	749.7	736.2	712.3	693.7	682.9
70°	650.9	640.2	616.2	597.5	587.0
72.5°	549.6	538.8	525.5	506.9	499.0
75°	448.1	442.9	429.4	413.5	418.9
77.5°	357.4	346.7	341.4	333.4	325.5
80°	266.9	264.0	258.6	250.7	245.4
82.5°	181.4	181.4	178.9	168.1	168.1
85°	109.2	106.7	104.2	95.9	93.4
87.5°	48.1	42.7	37.4	29.5	26.6
90°	1.1	13.6	37.0	34.8	35.9
92.5°	23.4	31.7	32.9	34.0	34.0
95°	55.1	65.8	67.6	67.6	65.8
97.5°	91.7	101.6	105.8	105.8	105.8
100°	134.0	142.8	145.8	145.8	144.7
102.5°	178.6	185.1	189.2	190.4	189.2
105°	227.4	230.4	232.7	234.5	234.5
107.5°	275.7	280.2	280.2	281.0	275.7
110°	322.5	328.6	328.6	328.6	325.5

TEST NUMBER: P915436

CATALOG NUMBER: DFN2DIP-TR3F0-090D050US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	373.1	379.5	378.4	375.4	373.1
115°	422.9	429.0	427.1	426.0	422.9
117.5°	472.5	480.8	475.5	472.5	469.4
120°	522.3	530.6	522.3	522.3	518.9
122.5°	567.6	578.2	572.9	569.9	567.6
125°	615.2	624.6	621.6	618.2	617.1
127.5°	661.6	673.4	669.2	664.6	661.6
130°	705.1	718.7	716.8	714.5	710.3
132.5°	753.8	764.4	765.2	759.9	756.8
135°	795.7	807.4	809.7	808.6	805.6
137.5°	842.6	852.0	853.9	853.1	848.6
140°	883.7	893.2	898.4	898.4	894.3
142.5°	926.0	935.5	938.5	939.6	935.5
145°	966.1	973.6	979.6	980.8	976.6
147.5°	1002.0	1011.4	1015.9	1017.8	1013.6
150°	1038.9	1045.4	1049.5	1052.9	1049.5
152.5°	1071.8	1078.2	1083.5	1087.7	1083.5
155°	1104.6	1107.6	1111.0	1116.3	1112.9
157.5°	1133.0	1135.2	1137.1	1144.7	1139.4
160°	1158.2	1160.5	1161.7	1168.1	1163.6
162.5°	1181.7	1181.7	1182.8	1190.0	1184.7
165°	1201.7	1200.6	1200.6	1208.2	1202.8
167.5°	1219.8	1216.4	1216.4	1224.0	1218.7
170°	1233.4	1230.4	1229.3	1236.8	1230.4
172.5°	1242.9	1239.8	1238.7	1246.3	1239.8
175°	1250.5	1247.4	1245.2	1252.7	1246.3
177.5°	1254.6	1251.6	1249.3	1255.7	1249.3
180°	1252.7	1252.7	1252.7	1252.7	1252.7

TEST NUMBER: P915436

CATALOG NUMBER: DFN2DIP-TR3F0-090D050US927-FLLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.95	13.99	13.75	14.81	15.82	12.53	13.56	13.32	14.38	15.39
	3H	14.62	15.55	15.43	16.38	17.42	14.15	15.08	14.96	15.91	16.95
	4H	15.21	16.09	16.04	16.92	17.97	14.74	15.62	15.57	16.46	17.50
	6H	15.61	16.42	16.45	17.27	18.33	15.14	15.95	15.98	16.80	17.86
	8H	15.72	16.49	16.56	17.35	18.41	15.25	16.02	16.10	16.88	17.95
	12H	15.77	16.50	16.62	17.36	18.45	15.29	16.03	16.15	16.89	17.98
4H	2H	13.43	14.31	14.27	15.15	16.20	13.09	13.97	13.92	14.81	15.86
	3H	15.30	16.04	16.15	16.91	17.97	14.92	15.65	15.76	16.52	17.58
	4H	16.02	16.69	16.88	17.56	18.65	15.62	16.29	16.47	17.15	18.25
	6H	16.53	17.11	17.41	18.01	19.10	16.13	16.71	17.00	17.60	18.70
	8H	16.68	17.22	17.56	18.11	19.22	16.28	16.82	17.15	17.71	18.81
	12H	16.76	17.25	17.66	18.15	19.27	16.35	16.83	17.24	17.74	18.85
8H	4H	16.23	16.77	17.10	17.65	18.76	15.87	16.41	16.74	17.30	18.40
	6H	16.85	17.30	17.76	18.23	19.34	16.49	16.94	17.40	17.87	18.98
	8H	17.07	17.47	17.98	18.39	19.51	16.70	17.10	17.62	18.02	19.15
	12H	17.20	17.55	18.12	18.47	19.64	16.82	17.17	17.74	18.09	19.26
12H	4H	16.22	16.71	17.11	17.61	18.73	15.87	16.36	16.77	17.26	18.38
	6H	16.88	17.28	17.80	18.20	19.33	16.53	16.93	17.45	17.85	18.98
	8H	17.13	17.48	18.04	18.39	19.57	16.77	17.12	17.69	18.04	19.21