

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904593

Luminaire Tested: DFN2DIP-TR4F0-050D070US830-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904593
REPORT IS A COMBINATION OF REPORTS P901946 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-050D070US830-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10537.6 lumens
Efficiency: N/A
Efficacy: 112.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 94.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904593

CATALOG NUMBER: DFN2DIP-TR4F0-050D070US830-RLLONL

Luminous Intensity Polar Plot

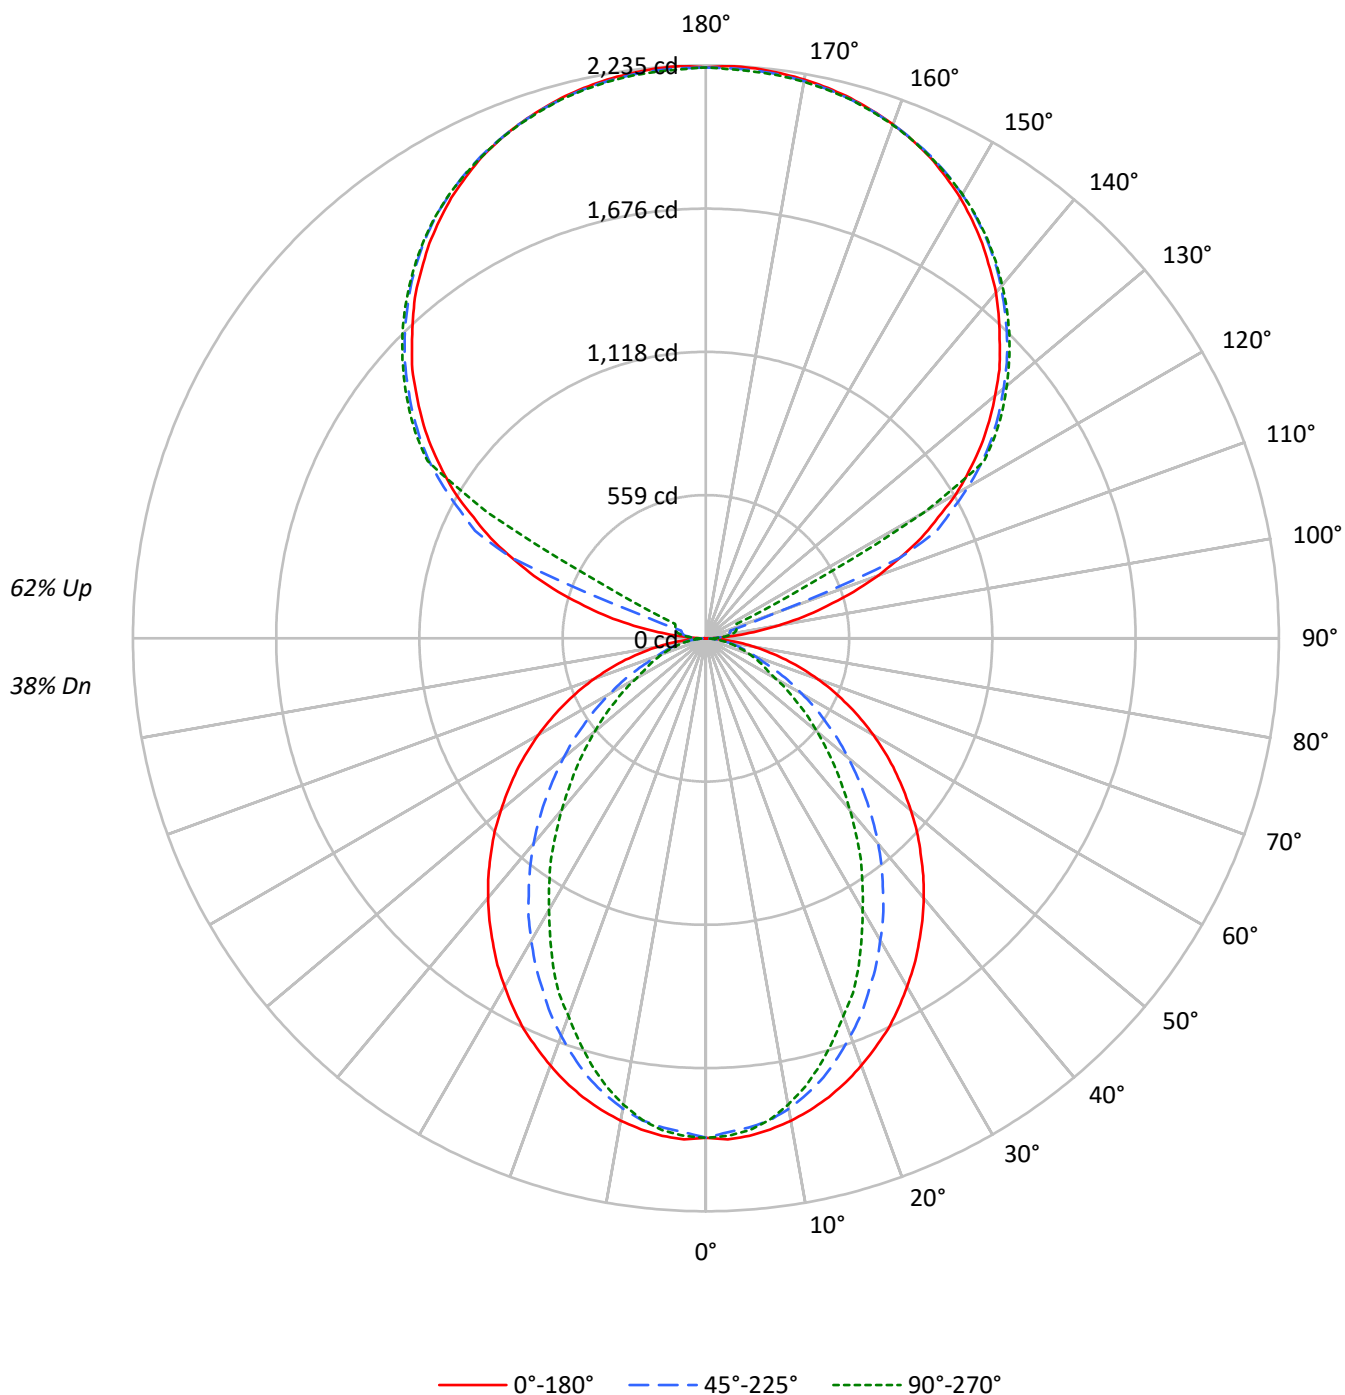

TEST NUMBER: P904593

CATALOG NUMBER: DFN2DIP-TR4F0-050D070US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45
1	95	91	88	84	87	83	80	77	68	66	64	54	52	51	40	40	39
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	35	33
3	80	71	64	58	72	65	59	54	53	49	45	42	39	37	32	30	29
4	73	63	55	50	66	57	51	46	47	42	39	38	34	32	29	27	25
5	67	56	48	43	61	51	45	40	42	37	34	34	31	28	26	24	22
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	22	20
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	18
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16
9	50	38	31	26	45	35	28	24	29	24	21	24	20	18	19	16	14
10	46	35	28	23	42	32	26	22	27	22	19	22	18	16	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1547	1547	1547
5°	1550	1523	1533
10°	1534	1493	1483
15°	1513	1444	1405
20°	1486	1375	1311
25°	1457	1299	1219
30°	1418	1221	1103
35°	1381	1137	1002
40°	1343	1050	885
45°	1298	954	779
50°	1252	856	676
55°	1204	752	577
60°	1148	643	475
65°	1084	533	427
70°	1007	429	386
75°	910	378	352
80°	769	317	305
85°	536	212	229

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1298 cd/sqm

TEST NUMBER: P904593

CATALOG NUMBER: DFN2DIP-TR4F0-050D070US830-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.5	1.7
10°-20°	501.1	4.8
20°-30°	703.6	6.7
30°-40°	766.9	7.3
40°-50°	704.9	6.7
50°-60°	553.6	5.3
60°-70°	360.3	3.4
70°-80°	185.5	1.8
80°-90°	51.3	0.5
90°-100°	73.4	0.7
100°-110°	273.7	2.6
110°-120°	725.9	6.9
120°-130°	1204.0	11.4
130°-140°	1278.9	12.1
140°-150°	1188.6	11.3
150°-160°	955.6	9.1
160°-170°	615.8	5.8
170°-180°	211.9	2.0
0°-30°	1387.2	13.2
0°-40°	2154.2	20.4
0°-60°	3412.7	32.4
0°-90°	4009.7	38.1
90°-120°	1073.0	10.2
90°-150°	4744.6	45.0
90°-180°	6528.0	61.9
0°-180°	10537.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1948	1948	1948	1948	1948	
5°	1948	1939	1916	1932	1927	185
15°	1853	1833	1773	1740	1722	522
25°	1682	1625	1509	1437	1410	773
35°	1449	1359	1204	1093	1054	907
45°	1185	1066	881	756	714	915
55°	901	763	573	467	434	805
65°	608	465	307	247	242	603
75°	324	201	141	129	127	343
85°	76	39	34	34	34	87
90°	2	19	32	40	44	10
95°	105	52	63	71	69	124
105°	490	538	98	116	122	523
115°	926	954	994	248	132	912
125°	1310	1331	1362	1373	1378	1168
135°	1621	1647	1661	1677	1674	1252
145°	1880	1879	1906	1917	1909	1176
155°	2070	2056	2075	2085	2072	954
165°	2182	2172	2177	2188	2177	616
175°	2232	2220	2224	2235	2219	212
180°	2227	2227	2227	2227	2227	

TEST NUMBER: P904593

CATALOG NUMBER: DFN2DIP-TR4F0-050D070US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1947.8	1947.8	1947.8	1947.8	1947.8
2.5°	1956.5	1947.8	1928.3	1946.1	1942.5
5°	1947.8	1939.0	1916.0	1931.8	1926.7
7.5°	1931.8	1921.4	1896.7	1903.7	1894.8
10°	1910.7	1898.4	1863.2	1857.8	1847.3
12.5°	1884.3	1868.5	1820.8	1810.3	1790.8
15°	1852.6	1833.2	1773.3	1739.8	1722.2
17.5°	1815.5	1787.3	1713.3	1674.5	1646.2
20°	1773.3	1738.0	1649.8	1605.9	1567.0
22.5°	1727.5	1686.9	1584.6	1524.8	1498.4
25°	1681.6	1625.1	1508.8	1436.6	1410.0
27.5°	1627.0	1567.0	1438.3	1355.5	1314.9
30°	1568.9	1501.8	1360.7	1270.9	1223.2
32.5°	1512.4	1431.3	1286.9	1181.0	1136.9
35°	1449.0	1359.1	1204.0	1092.9	1054.0
37.5°	1387.2	1290.2	1126.4	1004.7	960.7
40°	1322.0	1216.4	1045.2	920.1	874.3
42.5°	1255.1	1142.3	964.2	833.7	789.8
45°	1184.6	1066.4	881.4	756.1	713.8
47.5°	1117.6	992.5	802.1	676.8	638.1
50°	1043.6	918.4	724.5	602.8	565.9
52.5°	971.2	839.0	650.4	534.1	500.7
55°	900.7	763.2	572.8	467.1	433.7
57.5°	828.5	687.5	504.2	405.5	377.2
60°	754.4	613.4	431.8	342.0	313.8
62.5°	682.2	541.2	370.1	285.6	271.5
65°	608.1	465.3	306.7	246.9	241.5
67.5°	537.6	394.8	246.9	216.8	211.5
70°	463.6	326.1	204.4	186.8	179.7
72.5°	393.1	262.6	171.0	156.9	153.4
75°	324.3	200.9	141.0	128.7	127.0
77.5°	255.6	142.7	111.1	104.0	100.4
80°	192.1	102.3	84.5	77.6	77.6
82.5°	133.9	68.8	58.2	54.6	54.6
85°	75.8	38.7	33.5	33.5	33.5
87.5°	28.3	14.0	14.0	12.3	12.3
90°	1.5	19.3	32.1	40.3	43.5
92.5°	40.3	33.8	38.6	41.9	43.5
95°	104.6	51.5	62.8	71.0	69.3
97.5°	188.4	56.5	82.1	87.1	88.6
100°	285.3	64.5	91.8	104.6	107.9
102.5°	391.4	388.4	95.1	112.7	117.6
105°	489.8	538.2	98.3	115.9	122.4
107.5°	604.2	644.4	101.6	119.2	125.7
110°	713.9	747.5	282.0	120.9	127.2

TEST NUMBER: P904593

CATALOG NUMBER: DFN2DIP-TR4F0-050D070US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	817.0	845.8	818.5	123.9	128.9
115°	926.4	953.8	994.1	248.2	132.2
117.5°	1021.5	1053.7	1081.2	850.6	428.6
120°	1127.8	1152.0	1181.1	1200.4	982.9
122.5°	1218.0	1243.8	1276.2	1285.7	1287.4
125°	1309.9	1330.9	1361.5	1372.8	1377.5
127.5°	1393.6	1416.2	1440.5	1456.6	1458.1
130°	1472.6	1498.5	1516.1	1533.9	1532.4
132.5°	1553.2	1574.2	1591.9	1606.4	1604.9
135°	1620.9	1646.7	1661.1	1677.3	1674.1
137.5°	1691.7	1711.1	1727.3	1743.4	1738.6
140°	1761.0	1774.0	1791.6	1806.1	1798.1
142.5°	1819.1	1830.4	1851.2	1864.1	1856.1
145°	1880.4	1878.7	1906.0	1917.3	1909.3
147.5°	1933.3	1928.6	1956.0	1964.0	1957.7
150°	1985.0	1973.8	1999.6	2009.1	2001.1
152.5°	2028.4	2015.6	2039.8	2049.5	2038.2
155°	2070.4	2056.0	2075.3	2084.9	2072.1
157.5°	2104.2	2091.4	2105.9	2117.2	2104.2
160°	2133.4	2123.5	2133.4	2142.9	2131.6
162.5°	2159.0	2149.4	2157.4	2168.7	2154.2
165°	2181.5	2172.0	2176.7	2188.0	2176.7
167.5°	2199.3	2189.5	2194.5	2205.8	2191.3
170°	2213.8	2204.1	2207.3	2218.7	2204.1
172.5°	2223.5	2213.8	2217.1	2228.4	2213.8
175°	2231.5	2220.2	2223.5	2234.7	2218.7
177.5°	2234.7	2223.5	2225.2	2236.5	2221.9
180°	2226.7	2226.7	2226.7	2226.7	2226.7

TEST NUMBER: P904593

CATALOG NUMBER: DFN2DIP-TR4F0-050D070US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.43	8.17	8.49	9.23	10.66	3.40	4.15	4.46	5.20	6.64
	3H	9.10	9.76	10.17	10.83	12.28	4.59	5.25	5.66	6.32	7.77
	4H	9.70	10.33	10.78	11.40	12.86	5.03	5.66	6.11	6.73	8.19
	6H	10.12	10.70	11.21	11.77	13.24	5.35	5.93	6.44	7.00	8.47
	8H	10.25	10.79	11.34	11.88	13.35	5.44	5.99	6.53	7.08	8.54
	12H	10.30	10.83	11.40	11.91	13.40	5.48	6.00	6.58	7.08	8.57
4H	2H	7.44	8.07	8.52	9.13	10.59	3.99	4.62	5.08	5.69	7.15
	3H	9.26	9.78	10.35	10.88	12.35	5.33	5.85	6.42	6.95	8.42
	4H	9.95	10.43	11.05	11.51	13.01	5.88	6.36	6.97	7.44	8.94
	6H	10.46	10.87	11.56	11.98	13.46	6.29	6.70	7.40	7.81	9.30
	8H	10.63	11.01	11.74	12.12	13.62	6.42	6.80	7.53	7.90	9.41
	12H	10.72	11.07	11.84	12.18	13.69	6.48	6.83	7.60	7.94	9.45
8H	4H	9.91	10.29	11.01	11.39	12.90	6.15	6.53	7.26	7.63	9.14
	6H	10.47	10.79	11.60	11.93	13.43	6.67	6.98	7.79	8.13	9.63
	8H	10.69	10.96	11.82	12.09	13.61	6.86	7.13	7.99	8.26	9.78
	12H	10.82	11.07	11.96	12.19	13.74	6.97	7.22	8.11	8.34	9.89
12H	4H	9.86	10.20	10.98	11.32	12.82	6.15	6.50	7.27	7.61	9.12
	6H	10.45	10.72	11.58	11.85	13.37	6.72	6.99	7.85	8.12	9.64
	8H	10.66	10.91	11.80	12.03	13.58	6.92	7.17	8.06	8.29	9.84